



**i TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:**


<b>Dimensions (L x H x W):</b>	168 mm x 168 mm x 155 mm	
<b>Housing:</b>	PC/ABS-Blend	
<b>Connection:</b>	Screw terminal 0.5 - 2.5 mm <sup>2</sup>	
<b>Cable entry:</b>	Cable gland M20 x 1.5 mm (not included in assembly)	
<b>Tone types and frequencies:</b>	Selectable via DIP switch, see table on page 248	
<b>Voltage:</b>	18-30 V DC	115/230 V AC
<b>Current consumption:</b>	450 mA	130 mA (115 V) / 65 mA (230 V)
red	<b>142 000 55</b>	<b>142 000 68</b>
grey	<b>142 100 55</b>	<b>142 100 68</b>

**ACCESSORIES:**

Cable gland M20 x 1.5 mm	<b>975 444 01</b>
--------------------------	-------------------



**TECHNICAL DIAGRAM:**

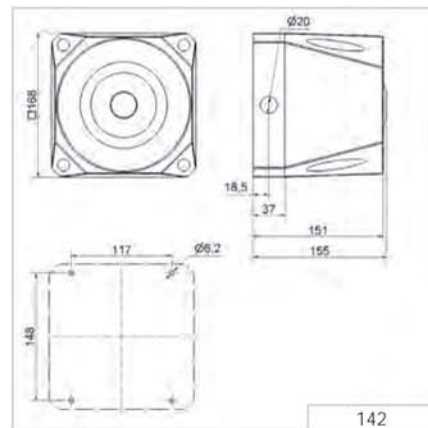

Signalisation index	
Multi-tone sounder	10

142 X00 68
142 X00 55

