

Switch Amplifier

KFA6-SR2-Ex1.W

SIL 2


- 1-channel isolated barrier
- 230 V AC supply
- Dry contact or NAMUR inputs
- Relay contact output
- Line fault detection (LFD)
- Reversible mode of operation
- Up to SIL 2 acc. to IEC 61508/IEC 61511



Function

This isolated barrier is used for intrinsic safety applications. It transfers digital signals (NAMUR sensors/mechanical contacts) from a hazardous area to a safe area. The proximity sensor or switch controls a form C changeover relay contact for the safe area load. The barrier output changes state when the input signal changes state. The normal output state can be reversed using switch S1. Switch S3 is used to enable or disable line fault detection of the field circuit. During an error condition, relays revert to their de-energized state and LEDs indicate the fault according to NAMUR NE44.

Connection

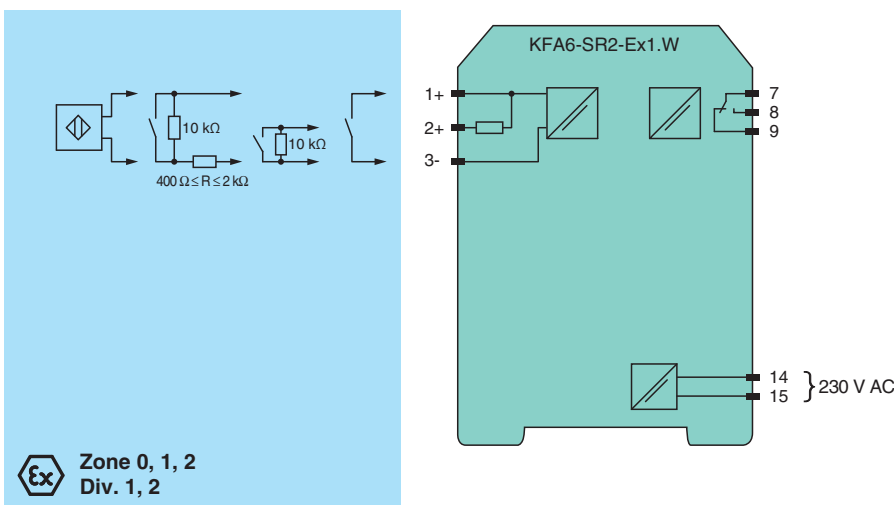

Technical Data

General specifications

Signal type Digital Input

Functional safety related parameters

Safety Integrity Level (SIL) SIL 2

Supply

Connection terminals 14, 15
 Rated voltage U_r 207 ... 253 V AC, 45 ... 65 Hz
 Power dissipation 1 W
 Power consumption max. 1 W

Input

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 103374_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
 www.pepperl-fuchs.com

USA: +1 330 486 0002
 pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
 pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
 pa-info@sg.pepperl-fuchs.com

pf PEPPERL+FUCHS

Technical Data

| | | |
|--|----------------|--|
| Connection side | | field side |
| Connection | | terminals 1+, 2+, 3- |
| Rated values | | acc. to EN 60947-5-6 (NAMUR) |
| Open circuit voltage/short-circuit current | | approx. 8 V DC / approx. 8 mA |
| Switching point/switching hysteresis | | 1.2 ... 2.1 mA / approx. 0.2 mA |
| Line fault detection | | breakage $I \leq 0.1$ mA , short-circuit $I > 6$ mA |
| Pulse/Pause ratio | | min. 20 ms / min. 20 ms |
| Output | | |
| Connection side | | control side |
| Connection | | terminals 7, 8, 9 |
| Output | | signal ; relay |
| Contact loading | | 253 V AC/2 A/cos $\phi > 0.7$; 126.5 V AC/4 A/cos $\phi > 0.7$; 40 V DC/2 A resistive load |
| Energized/De-energized delay | | approx. 20 ms / approx. 20 ms |
| Mechanical life | | 10^7 switching cycles |
| Transfer characteristics | | |
| Switching frequency | | < 10 Hz |
| Galvanic isolation | | |
| Input/Output | | reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff} |
| Input/power supply | | reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff} |
| Output/power supply | | reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff} |
| Indicators/settings | | |
| Display elements | | LEDs |
| Labeling | | space for labeling at the front |
| Directive conformity | | |
| Electromagnetic compatibility | | |
| Directive 2014/30/EU | | EN 61326-1:2013 (industrial locations) |
| Low voltage | | |
| Directive 2014/35/EU | | EN 61010-1:2010 |
| Conformity | | |
| Electromagnetic compatibility | | NE 21:2006 |
| Degree of protection | | IEC 60529:2001 |
| Input | | EN 60947-5-6:2000 |
| Ambient conditions | | |
| Ambient temperature | | -20 ... 60 °C (-4 ... 140 °F) |
| Mechanical specifications | | |
| Degree of protection | | IP20 |
| Connection | | screw terminals |
| Mass | | approx. 150 g |
| Dimensions | | 20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) , housing type B2 |
| Mounting | | on 35 mm DIN mounting rail acc. to EN 60715:2001 |
| Data for application in connection with hazardous areas | | |
| EU-type examination certificate | | PTB 00 ATEX 2081 |
| Marking | | Ⓜ II (1)G [Ex ia Ga] IIC Ⓜ II (1)D [Ex ia Da] IIIC Ⓜ I (M1) [Ex ia Ma] I |
| Input | | Ex ia |
| Voltage | U _o | 10.6 V |
| Current | I _o | 19.1 mA |
| Power | P _o | 51 mW (linear characteristic) |
| Supply | | |
| Maximum safe voltage | U _m | 253 V AC (Attention! U _m is no rated voltage.) |
| Output | | |
| Contact loading | | 253 V AC/2 A/cos $\phi > 0.7$; 126.5 V AC/4 A/cos $\phi > 0.7$; 40 V DC/2 A resistive load |
| Maximum safe voltage | U _m | 253 V AC (Attention! The rated voltage can be lower.) |


Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 103374_eng.pdf

Technical Data

| | |
|--------------------------------|---|
| Galvanic isolation | |
| Input/Output | safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V |
| Input/power supply | safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V |
| Directive conformity | |
| Directive 2014/34/EU | EN 60079-0:2012+A11:2013 , EN 60079-11:2012 |
| International approvals | |
| FM approval | |
| Control drawing | 116-0035 |
| UL approval | |
| Control drawing | 116-0145 |
| CSA approval | |
| Control drawing | 116-0047 |
| IECEX approval | IECEX PTB 11.0031 |
| Approved for | [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I |
| General information | |
| Supplementary information | Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com . |


Assembly

Front view

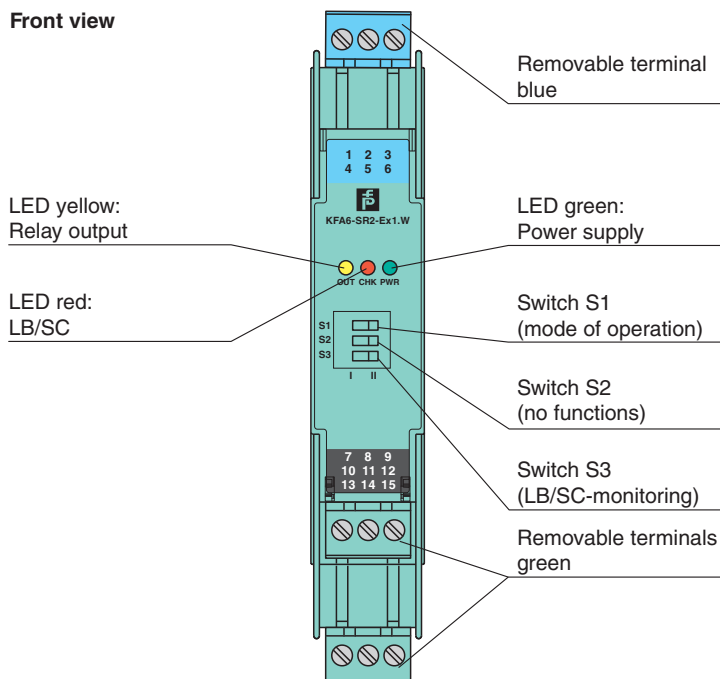

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 103374_eng.pdf

Configuration

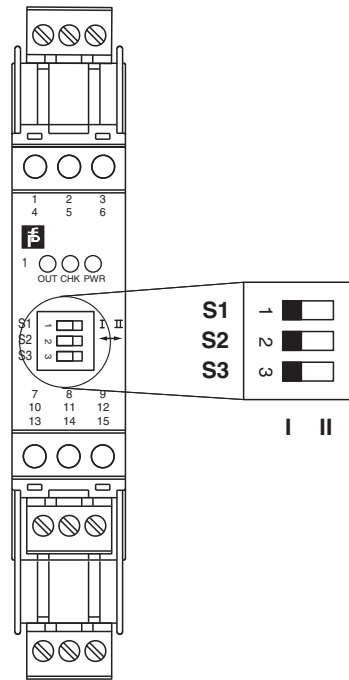

Switch position

| S | Function | | Position |
|---|--|-------------------------|----------|
| 1 | Mode of operation output (relay) energized | with high input current | I |
| | | with low input current | II |
| 2 | No function | | |
| 3 | Line fault detection | ON | I |
| | | OFF | II |

Operating states


| Control circuit | Input signal |
|---|--------------------|
| Initiator high impedance/contact opened | low input current |
| Initiator low impedance/contact closed | high input current |
| Lead breakage, lead short circuit | Line fault |

Factory setting: switch 1, 2 and 3 in position I

Characteristic Curve

Maximum switching power of output contacts

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 103374_eng.pdf

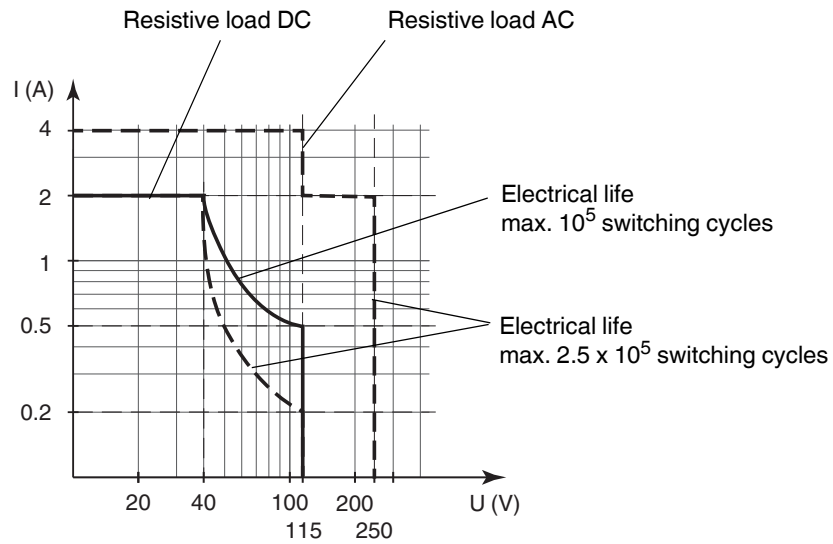

The maximum number of switching cycles is depending on the electrical load and may be higher when reduced currents and voltages are applied.

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 103374_eng.pdf