

## Flow Measurement



3/2	<b>Product overview</b>
3/2	Overview
3/9	<b>Introduction</b>
3/9	Criteria for selection of flowmeter
3/11	<b>SITRANS FM (electromagnetic)</b>
3/11	System information
3/29	SITRANS FM Vericator
3/31	<u>Transmitters</u>
3/31	- MAG 5000/6000
3/43	- MAG 6000 I/6000 I Ex
3/48	<u>Flow sensors</u>
3/48	- MAG 1100 and MAG 1100 HT
3/56	- MAG 1100 F
3/66	- MAG 3100 and MAG 3100 HT
3/82	- MAG 3100 P
3/91	- MAG 5100 W
3/104	- SITRANS FM100
3/109	- Transmitter TRANSMAG 2 with sensor MAG 911/E
3/119	Battery-operated water meter MAG 8000
3/128	- MAG 8000 for abstraction and distribution network application (7ME6810)
3/133	- MAG 8000 CT for revenue and bulk metering (7ME6820)
3/140	- MAG 8000 3G/UMTS Wireless Communication Module
3/141	- Accessories and spare parts for MAG 8000
3/144	<b>SITRANS FC (Coriolis)</b>
3/144	System information
3/155	<u>Transmitters</u>
3/155	- SITRANS FCT030
3/161	- SITRANS FCT010
3/164	- SITRANS FCT070
3/167	<u>Sensors and Flowmeter systems</u>
3/167	- SITRANS FCS300 flow sensor
3/176	- SITRANS FC330 flowmeter system
3/180	- SITRANS FC310 flowmeter system
3/183	- SITRANS FCS300 with FCT070 transmitter
3/187	- SITRANS FCS400 flow sensor
3/193	- SITRANS FC430 flowmeter for OEM customers
3/197	- SITRANS FC410 flowmeter for OEM customers
3/200	- SITRANS FCS400 with FCT070 transmitter
3/203	- SITRANS FC MASS 2100 and FC300 DN 4 sensors
3/218	- MASS 2100 / FC300 DN 4 with FCT030 transmitter
3/223	- MASS 2100 / FC300 DN 4 with FCT010 transmitter
3/227	- MASS 2100 / FC300 DN 4 with FCT070 transmitter
3/231	<u>Spare parts</u>
3/231	- Digital - Spare parts
3/236	- MASS 6000 Generation - Spare parts
3/240	- SIFLOW FC070

3/244	<b>SITRANS FS (ultrasonic)</b>
3/244	<u>Inline ultrasonic flowmeters</u>
3/245	- System information
3/252	- SITRANS FUS060 transmitter
3/259	- SITRANS FUS080/FUE080 transmitter
3/268	- SONO 3300/FUS060 flowmeter
3/273	- SONO 3100/FUS060 flowmeter
3/282	- SONOKIT flowmeter (with FUS060 or FUS080)
3/292	- SITRANS FUS380 standard flowmeter
3/301	- SITRANS FUE380 flowmeter with CT approval
3/308	- SITRANS FUS380/FUE380 dimensional drawings and circuit diagrams
3/311	- SITRANS FUE950 energy calculator
3/320	- Pt500 temperature sensor pairs
3/322	<u>Clamp-on ultrasonic flowmeters</u>
3/322	- SITRANS FS230 ultrasonic flowmeter
3/324	- SITRANS FSS200 ultrasonic flow sensor
3/329	- SITRANS FST030 transmitter, wall mount housing
3/333	- Selection and ordering data for SITRANS FS230
3/344	- SITRANS FS220 ultrasonic flowmeter
3/353	- SITRANS FST020 transmitter, wall mount housing
3/357	- Thickness gauge
3/358	- Accessories and spare parts
3/361	<b>SITRANS FX (Vortex)</b>
3/361	SITRANS FX300
3/379	SITRANS FX330
3/395	<b>SITRANS FVA</b>
3/395	SITRANS FVA250
3/405	<b>SITRANS FP (differential pressure flow measurement)</b>
3/405	Introduction
3/410	<u>SITRANS FP230/FPS200 primary elements according to ISO 5167</u>
3/413	- Orifice plate with pressure tapings
3/421	- Orifice plate with annular chamber
3/428	- Orifice meter run
3/434	- Orifice plate
3/437	- Orifice plate with orifice flange according to ASME B16.36
3/441	<u>SITRANS FP330/FPS300 averaging pitot tube</u>
3/443	- Averaging pitot tube for gas and liquids
3/450	- Averaging pitot tube for steam
3/455	- Averaging pitot tube with FASTLOK

You can download all instructions, catalogs and certificates for SITRANS F free of charge at:  
[www.siemens.com/flow-measurement](http://www.siemens.com/flow-measurement)

# Flow Measurement

## Product overview

### Overview

	Application	Description	Catalog page	Software for parameterization
<b>SITRANS FM electromagnetic flowmeters – Pulsed DC magnetic flowmeter</b>				
	Designed in robust IP67 polyamide enclosures for compact or remote mounting. 19", back of panel and front of panel enclosure program.	<b>Transmitter MAG 5000/6000</b> <ul style="list-style-type: none"> <li>• Superior signal resolution for optimum turn down ratio</li> <li>• Comprehensively self-diagnostic, for error indication and logging</li> <li>• Multi-lingual display and keypad interface</li> <li>• Communication modules: HART, Modbus, PROFIBUS, FOUNDATION Fieldbus, DeviceNet</li> <li>• Custody transfer approval: MI-001, PTB K7.2</li> </ul>	3/31	SIMATIC PDM
	Designed in robust die-cast aluminum enclosure for demanding applications and where explosion proof protection is necessary.	<b>Transmitter MAG 6000 I/6000 I Ex</b> <ul style="list-style-type: none"> <li>• Remote and compact mounting with all sensors</li> <li>• Communication modules: HART, Modbus, PROFIBUS, FOUNDATION Fieldbus, DeviceNet</li> <li>• Ex Approval: ATEX, IECEx, FM, UL, CSA</li> <li>• Multi-lingual display and touchpad keypad</li> <li>• Comprehensively self-diagnostic</li> </ul>	3/43	SIMATIC PDM
	Designed for the general industry environment. The obstructionless performance of the MAG 1100 is unaffected by the suspended solids, viscosity and temperature challenges.	<b>Flow sensors MAG 1100 and MAG 1100 HT</b> <ul style="list-style-type: none"> <li>• Metering tube DN 2 ... 100 (1/12 ... 4") flangeless design.</li> <li>• Corrosion-resistant AISI 316 stainless steel housing.</li> <li>• Highly resistant liner (ceramic or PFA) and electrodes fitting most extreme process media.</li> <li>• Temperature rating up to 200 °C (390 °F)</li> <li>• Ex Approval: ATEX, FM</li> </ul>	3/48	
	Specially designed for the food & beverage and pharmaceutical industry.	 <b>Flow sensor MAG 1100 F</b> <ul style="list-style-type: none"> <li>• AISI 316 stainless steel enclosure</li> <li>• Hygienic seal, 3A and EHEDG</li> <li>• Easy to clean</li> <li>• Supplied with connections according to your specification</li> <li>• Ex Approval: ATEX, FM</li> </ul>	3/56	
	The MAG 3100 series with its flexibility in the choice of liner, electrode and flange material allows the measurement of even the most extreme process media.	<b>Flow sensors MAG 3100 and MAG 3100 HT</b> <ul style="list-style-type: none"> <li>• For a wide range of pipe dimensions: DN 15 ... 2000 (½ ... 78")</li> <li>• Wide range of liner and electrode materials</li> <li>• High-temperature version for application with temperatures up to 180 °C (355 °F)</li> <li>• High-pressure solutions</li> </ul>	3/78	

## Overview (continued)

	Application	Description	Catalog page	Software for parameterization
	The SITRANS FM MAG 3100 P sensor is designed to meet the most common specifications within the chemical and process industries.	<b>Flow sensor MAG 3100 P</b> <ul style="list-style-type: none"> <li>• For pipe dimensions DN 15 ... 300 (½" ... 12")</li> <li>• Fully welded construction that is extremely rugged and can withstand special process conditions using extreme measurement electrodes</li> <li>• Approvals for hazardous areas: ATEX, FM, CSA, IECEx</li> <li>• Comprehensive self-diagnostic for error indication and error logging</li> <li>• Temperature resistant up to 150 °C (302 °F)</li> </ul>	3/82	
	Designed for all water and waste water applications in water plants and industrial applications.	<b>Flow sensor MAG 5100 W</b> <ul style="list-style-type: none"> <li>• Metering tube DN 15 ... 1200 (DN 2000) (½" ... 48" (78"))</li> <li>• Hard Rubber or EPDM lining</li> <li>• Integral grounding electrodes as standard</li> <li>• Increased low flow accuracy for water leak detection</li> <li>• Drinking water approvals and custody transfer approvals, OIML R 49, MI-001 and PTB K7.2</li> </ul>	3/91	
	The SITRANS FM100 is an electromagnetic flow meter for measuring and monitoring small and medium flows.	<b>Flow meter SITRANS FM100 <span style="color: orange;">NEW</span></b> <ul style="list-style-type: none"> <li>• Connection ½", ¾", 1", 2"</li> <li>• Flow- and temperature measurement</li> <li>• IO-Link communication</li> <li>• Dosing function with external control output</li> <li>• Flexible usage in different applications due to two individual configurable outputs</li> <li>• Bidirectional measuring</li> <li>• Robust stainless-steel design</li> </ul>	3/104	
<b>SITRANS FM electromagnetic flowmeters – High-power AC magnetic flowmeter</b>				
	Designed for heavy-duty applications like pulp & paper stock over 3%; heavy mining slurries and mining slurries with magnetic particles.	<b>Transmitter Transmag 2</b> <ul style="list-style-type: none"> <li>• Magnetic flowmeter with a very strong pulsed AC magnetic field</li> <li>• PROFIBUS PA or HART communication</li> <li>• Comprehensive self-test function</li> </ul>	3/109	SIMATIC PDM
	Designed for heavy-duty applications like pulp & paper stock over 3%; heavy mining slurries and mining slurries with magnetic particles.	<b>Flow sensor MAG 911/E</b> <ul style="list-style-type: none"> <li>• Metering tube: DN 15 ... DN 1000 (½" ... 40")</li> <li>• Metering tube liner: Hard Rubber, Linatex, Soft rubber, PTFE and Novolak</li> <li>• Integral smartPLUG for storing of calibration values</li> <li>• Multi-lingual display and touchpad keypad</li> <li>• Only remote version</li> </ul>	3/109	
<b>SITRANS FM electromagnetic flowmeters – Battery-operated magnetic water meter</b>				
	Battery-operated electromagnetic water meter for water applications within abstraction, distribution network and revenue metering.	<b>Water meter MAG 8000</b> <ul style="list-style-type: none"> <li>• Battery- and/or mains power operated water meter</li> <li>• Metering tube DN 25 ... 1200 (1 ... 48")</li> <li>• Remote and compact installation IP68/NEMA 6P enclosure</li> <li>• Custody transfer approval: PTB K7.2, OIML R 49 and MI-001</li> <li>• Drinking water approvals</li> <li>• Communication modules: GSM/GPRS, Modbus, Encoder</li> </ul>	3/119	SIMATIC PDM and Flow Tool

# Flow Measurement






## Product overview

### Overview (continued)

	Application	Description	Catalog page	Software for parameterization
<b>SITRANS FC mass flowmeters</b>				
	<p>Designed for a variety of liquid and gas applications in the process Industry.</p> <p>Measurement of mass flow, density, temperature and fraction.</p>	<p><b>Flowmeters FC330 (Dual tube design)</b></p> <ul style="list-style-type: none"> <li>• DN 15, DN 25, DN 50, DN 80, DN 100 and DN 150</li> <li>• Flow from 70 ... 860 000 kg/h - water</li> <li>• Pipe material: AISI 316L or Nickel-Alloy C4</li> <li>• Accuracy, typically: Flow: <math>\leq 0.1\%</math> or <math>0.2\%</math> version, Density: down to <math>\leq 0.002\text{ g/cm}^3</math></li> <li>• Liquid temperature/pressure: <math>-50 \dots +205\text{ }^\circ\text{C}</math> (<math>-58 \dots +400\text{ }^\circ\text{F}</math>) / up to 100 bar (1450 psi)</li> <li>• Approvals: ATEX, IECEx, cCSAus, CRN, PED (depending on configuration)</li> </ul>	3/176	
	<p>Designed for a variety of liquid and gas applications</p> <p>Measurement of mass flow, density, temperature</p> <p>Modbus RS 485-RTU communication for direct integration into skids, OEM and pre-assembled plant packages</p>	<p><b>Flowmeters FC310 (Dual tube design)</b></p> <ul style="list-style-type: none"> <li>• DN 15, DN 25, DN 50, DN 80, DN 100 and DN 150</li> <li>• Flow from 70 ... 860 000 kg/h</li> <li>• Pipe material: AISI 316L or Nickel-Alloy C4</li> <li>• Accuracy, typically: Flow: <math>\leq 0.1\%</math> or <math>0.2\%</math> version, Density: down to <math>\leq 0.002\text{ g/cm}^3</math></li> <li>• Liquid temperature/pressure: <math>-50 \dots +205\text{ }^\circ\text{C}</math> (<math>-58 \dots +400\text{ }^\circ\text{F}</math>) / up to 100 bar (1450 psi)</li> <li>• Approvals: ATEX, IECEx, cCSAus, Germanischer Lloyd/det Norske Veritas, Bureau Veritas, Lloyds of London, American Bureau of Shipping (depending on configuration)</li> </ul>	3/180	
	<p>Designed for a variety of liquid and gas applications</p> <p>Measurement of mass flow, density, temperature and fraction</p>	<p><b>Flowmeters FC430 (Dual tube design)</b></p> <ul style="list-style-type: none"> <li>• DN 15, DN 25, DN 50</li> <li>• Flow from 20 ... 70 700 kg/h - water</li> <li>• Pipe material: AISI 316L</li> <li>• Accuracy, typically: Flow: <math>\leq 0.1\%</math>, Density: down to <math>0.005\text{ g/cm}^3</math></li> <li>• Liquid temperature/pressure: <math>-50 \dots +200\text{ }^\circ\text{C}</math> (<math>-58 \dots +392\text{ }^\circ\text{F}</math>) / up to 100 bar (1450 psi)</li> <li>• Approvals: ATEX, IECEx, EAC Ex, cCSAus, NEPSI, CRN, PED, Germanischer Lloyd/det Norske Veritas, Bureau Veritas, Lloyds of London, American Bureau of Shipping</li> </ul>	3/193	
	<p>Designed for a variety of liquid and gas applications</p> <p>Measurement of mass flow, density, temperature</p> <p>Modbus RS-485 RTU communication for direct integration into skids, OEM and pre-assembled plant packages</p>	<p><b>Flowmeters FC410 (Dual tube design)</b></p> <ul style="list-style-type: none"> <li>• DN 15, DN 25, DN 50</li> <li>• Flow from 20 ... 70 700 kg/h</li> <li>• Pipe material: AISI 316L</li> <li>• Accuracy, typically: Flow: <math>\pm 0.1\%</math>, Density: down to <math>\pm 0.005\text{ g/cm}^3</math></li> <li>• Liquid temperature/pressure: <math>-50 \dots +200\text{ }^\circ\text{C}</math> (<math>-58 \dots +392\text{ }^\circ\text{F}</math>) / up to 100 bar (1450 psi)</li> <li>• Approvals: ATEX, IECEx, EAC Ex, cCSAus, NEPSI, Germanischer Lloyd/det Norske Veritas, Bureau Veritas, Lloyds of London, American Bureau of Shipping</li> </ul>	3/197	






## Overview (continued)

	Application	Description	Catalog page	Software for parameterization
	Designed for low flow applications	<b>Flowmeter MASS 2100 and FC300 with transmitter FCT010 or FCT030 (single tube design)</b> <ul style="list-style-type: none"> <li>• MASS 2100: DI 1.5, DI 3, DI 6, DI 15</li> <li>• FC300: DN 4</li> <li>• Flow from 0.1 ... 5600 kg/h</li> <li>• Pipe material: Stainless steel AISI 316L/ 1.4435; Hastelloy C22/2.4602</li> <li>• Accuracy, typically: <ul style="list-style-type: none"> <li>- Flow: down to 0.1 %</li> <li>- Density: down to 0.0005 g/cm<sup>3</sup></li> </ul> </li> <li>• Liquid temp./pressure: -50 ... +180°C (-58 ... +356 °F) / Up to 410 bar (5946 psi)</li> <li>• Approvals: ed according to ATEX, IECEx, c-UL-us, CRN, PED</li> </ul>	3/203	
	<p>SITRANS FCT070 can be connected to all Coriolis type Sensors FCS300; FCS400; MASS 2100 and FC300 DN4</p> <p>FCT070 can be used for machine builders and in the process industry plants. The meters are suitable for measuring on liquid and gas. With ET 200SP ST &amp; HF the SITRANS FCT070 can be installed decentralized in small stations, with fast communication to the control room.</p> <p>The faceplates for TIA-Portal and PCS 7 offer the direct full remote access to the flow meter.</p>	<b>Transmitter SITRANS FCT070 <span style="color: orange;">NEW</span></b> <ul style="list-style-type: none"> <li>• Easy integration into automation process control as TIA portal and PCS7</li> <li>• Cost effective integration of Coriolis flow meters for PLC controlled machines</li> <li>• SITRANS FCT070 is a ET 200SP technology module and can combined with all other SIMATIC ET 200S SP ST &amp; HF modules</li> <li>• Fast and trouble-free communication between the flow meter and the PLC through digital data communication with up to 10 ms update rate</li> <li>• ATEX Zone 2 FM Class 1 Div 2 approvals.</li> <li>• Included advanced batch functionality without additional modules.</li> </ul>	3/164	
<b>SITRANS FS Inline ultrasonic flowmeters</b>				
	SITRANS FST030 Inline is designed for all ultrasonic flow metering. FST030 is released for water application on SONOKIT up to all pipe sizes in dual path	<b>SITRANS FST030 transmitter</b> <ul style="list-style-type: none"> <li>• For SONOKIT up to DN 3000 and more</li> <li>• 1 or 2 path option</li> <li>• Analog output and relay</li> <li>• FDK085X6329 - HART</li> <li>• FDK085X6366 - Modbus</li> </ul>	3/329	SIMATIC PDM
	SITRANS FUS060 is a time-based transmitter designed for ultrasonic flowmetering in pipes for the F US inline industry series up to DN 3000	<b>SITRANS FUS060 transmitter</b> <ul style="list-style-type: none"> <li>• Die cast aluminum enclosure</li> <li>• Ex approved according to ATEX</li> <li>• HART communication + 1 analog output, 1 digital output for frequency or pulse and 1 relay output for alarms and flow direction</li> <li>• PROFIBUS PA communication with 1 digital output for frequency or pulse</li> </ul>	3/252	SIMATIC PDM
	SITRANS FUS080 is a time-based transmitter designed for ultrasonic flowmetering in pipes for the SONOKIT, FUS380 and FUE380 series up to DN 1200	<b>SITRANS FUS080/FUE080 transmitter</b> <ul style="list-style-type: none"> <li>• Battery or mains-powered</li> <li>• Easy one-button operation</li> <li>• Bidirectional measuring</li> <li>• IrDA optical eye communication</li> <li>• Robust polyamide enclosure</li> </ul>	3/259	SIMATIC PDM

## Flow Measurement

### Product overview

#### Overview (continued)

	Application	Description	Catalog page	Software for parameterization
	<p>The main application for SONO 3300 ultrasonic flowmeters is to measure the volume flow of:</p> <ul style="list-style-type: none"> <li>• Water and treated waste water</li> <li>• Hot water/cooling systems</li> </ul>	<p><b>SONO 3300/FUS060</b></p> <ul style="list-style-type: none"> <li>• ATEX-approved</li> <li>• DN 50 ... DN 500 (2" ... 12") steel pipes</li> <li>• PN 10 ... PN 40 or class 150 ... class 300 pressure rates</li> <li>• Flow 0.3 ... 3 200 m<sup>3</sup>/h (1.3 ... 14 089 GPM)</li> <li>• No pressure drop</li> <li>• FUS060 transmitter for separate mounting</li> <li>• Signal cables from sensor to transducer are highly protected from aggressive environment by stainless steel pipes</li> </ul>	3/268	SIMATIC PDM
	<p>The main application for SONO 3100 ultrasonic flowmeters is to measure the volume flow of:</p> <ul style="list-style-type: none"> <li>• Water and treated waste water</li> <li>• District heating systems</li> </ul>	<p><b>SONO 3100/FUS060</b></p> <ul style="list-style-type: none"> <li>• DN 100 ... DN 600 (4" ... 24")</li> <li>• Pipe in carbon steel</li> <li>• Transducers can be replaced under pressure</li> <li>• FUS060 transmitter for separate mounting</li> <li>• ATEX-approved</li> <li>• Measure of all liquids less than 350 Cst, conductive or non-conductive</li> <li>• No pressure drop</li> <li>• 1-track, 2-path; 4-path on request</li> <li>• Special material on request</li> </ul>	3/273	SIMATIC PDM
	<p>Installation of one, two or four transducer sets in existing concrete or steel pipes. Typically installed in pipes with large diameters or in hot/cold water applications</p>	<p><b>SONOKIT</b></p> <ul style="list-style-type: none"> <li>• FUS060 or FUS080 transmitter for separate mounting</li> <li>• DN 100 ... 3000 (4 ... 120")</li> <li>• Control and display unit</li> <li>• Temperature of medium: -20 ... +200 °C (-4 ... +395 °F)</li> <li>• Installation on empty pipes or pipes under pressure (hot-tap installation)</li> <li>• Standard 1-path or 2-path (4-path on request)</li> </ul>	3/282	SIMATIC PDM
	<p>Battery or mains-powered ultrasonic flowmeter for use within water-based district heating, cooling systems and utility. The FUS380 can also be used for water irrigation systems. SITRANS FUS380/FUE380 are designed to work with the SITRANS FUE950 energy calculator.</p>	<p><b>FUS380/FUE380</b></p> <ul style="list-style-type: none"> <li>• FUS380/FUE380: DN 50 ... 1200 (2 ... 48")</li> <li>• FUE380: Approved for custody transfer according to MID MI004 (according to EN 1434 Class 2, OIML R 75)</li> <li>• FUS380/FUE380: Red brass or painted carbon steel flanges and metering tube. AISI transducers</li> <li>• Water temperatures 2 ... 200 °C (35.6 ... 392 °F)</li> <li>• Battery or mains-powered</li> </ul>	3/292	SIMATIC PDM
	<p>Universal thermal energy calculator for district heating and cooling applications.</p>	<p><b>SITRANS FUE950</b></p> <ul style="list-style-type: none"> <li>• Battery or mains-powered</li> <li>• 24 periods memory</li> <li>• 2 ports for plug-in modules as data output, extra input, M-Bus, RS 232/RS 485, current output</li> <li>• Complete set with temperature sensors and pockets</li> <li>• MID heating approval, PTB K7.2 cooling approval, MI004 type approval</li> </ul>	3/311	




### Overview (continued)

Application	Description	Catalog page	Software for parameterization
<b>SITRANS FS clamp-on ultrasonic flowmeters</b>			
 <p>SITRANS FS clamp-on ultrasonic flowmeters provide highly accurate measurement while minimizing installation time and maintenance expense. These dedicated flowmeters are suitable for a wide variety of liquid applications, including those in the:</p> <ul style="list-style-type: none"> <li>• Water Industry</li> <li>• Wastewater Industry</li> <li>• HVAC Industry</li> <li>• Power Industry</li> <li>• Processing Industry</li> <li>• Hydrocarbon Industry</li> </ul>	<p><b>SITRANS FS230</b></p> <ul style="list-style-type: none"> <li>• Suitable for virtually any liquid, even those with high aeration or suspended solids</li> <li>• Hydrocarbon functions are ideal for applications carrying crude oil, refined petroleum or liquefied gas</li> <li>• Choice of single and dual path versions to suit your operating conditions and requirements.</li> <li>• Easy installation; no need to cut pipe or stop flow</li> <li>• Minimal maintenance; external sensors do not require periodic cleaning</li> <li>• Easy to read display with intuitive menu system</li> <li>• Hazardous area approvals for ATEX Zone 2, IECEx Zone 2 FMc Class I Div. 2</li> </ul>	3/322	
 <p>SITRANS FS220 basic is a fast-to-install clamp-on ultrasonic flowmeter for accurate measurements with minimal maintenance. Based on latest technology, this flow meter is ideal suitable for applications like:</p> <ul style="list-style-type: none"> <li>• Water Industry</li> <li>• Wastewater Industry</li> <li>• HVAC Industry</li> <li>• Power Industry</li> <li>• Process controls</li> </ul>	<p><b>SITRANS FS220</b></p> <ul style="list-style-type: none"> <li>• Easy installation during process condition, no need to cut pipe or stop flow</li> <li>• Minimal maintenance; external sensors do not require periodic cleaning</li> <li>• No media-contacting parts, no wear, no pressure drop, no energy loss</li> <li>• Wide turn-down ratio, very sensitive in low flow condition</li> <li>• Optional WideBeam technology ensures high performance</li> <li>• Compatible with all previously fielded transit time sensors</li> </ul>	3/344	
 <p>The thickness gauge can be used in any field application where there is a need for flow measurement. Including but not limited to:</p> <ul style="list-style-type: none"> <li>• Water and waste water</li> <li>• Energy measurement</li> <li>• Oil and gas industries</li> </ul>	<p><b>Thickness gauge</b></p> <p>The hand-held micro-processor controlled gauge is designed to measure the thickness of various metallic or non-metallic pipes.</p> <ul style="list-style-type: none"> <li>• Materials include steel, aluminum, titanium, plastics and ceramics</li> <li>• Measurements shown in millimeter or inches</li> <li>• Simple-to-read 4-digit LCD display</li> <li>• Weights 150 g (5.3 oz)</li> <li>• Battery operation for 250 h</li> </ul>	3/357	
<b>SITRANS FX Vortex flowmeter</b>			
 <p>Measurement of steam, gases and liquids in:</p> <ul style="list-style-type: none"> <li>• Chemical</li> <li>• HVAC / Power plants</li> <li>• Oil &amp; Gas</li> <li>• Food &amp; Beverage</li> <li>• Pharma</li> </ul>	<p><b>SITRANS FX300</b></p> <ul style="list-style-type: none"> <li>• Flange DN 15 ... DN 300 (½" ... 12")</li> <li>• Sandwich DN 15 ... DN 100 (½" ... 4")</li> <li>• 2-wire device 4 ... 20 mA, with integrated temperature and pressure sensors for compensation</li> <li>• HART communication</li> <li>• Medium temp.: -40 ... +240 °C (-40 ... +464 °F)</li> <li>• Medium pressure: up to 100 bar (1450 psi)</li> <li>• Hazardous area approvals: FM, CSA, ATEX</li> <li>• Compact or remote mounted transmitter</li> </ul>	3/361	

# Flow Measurement

## Product overview

### Overview (continued)

	Application	Description	Catalog page	Software for parameterization
	<p>Very versatile and flexible for use in many process applications. Flow sensors combines flow, pressure and temperature measurement into one user-friendly, two-wire device.</p> <ul style="list-style-type: none"> <li>• Measurement of saturated steam and superheated steam</li> <li>• Heat metering of steam and hot water</li> <li>• Measurement of consumption in compressed air systems</li> <li>• Evaluation of Free Air Delivery (FAD)</li> <li>• SIP and CIP processes in the food, beverage and pharmaceutical industries</li> <li>• Measurement of conductive and non-conductive liquids</li> <li>• Safety-related measurement in SIL applications (SIL2).</li> </ul>	<p><b>SITRANS FX330</b></p> <ul style="list-style-type: none"> <li>• Integrated pressure and temperature compensation</li> <li>• Temperature compensation for saturated steam included as standard</li> <li>• SIL2 certified according to IEC 61508 Edition 2</li> <li>• Use in hazardous areas</li> <li>• Integrated reduction of nominal diameter for space-saving and economic installation</li> <li>• Exchange of electronics without loss of calibration and configuration data</li> <li>• Gross and net heat calculation to support energy management</li> <li>• Remote version with cable length up to 50 m (164 ft)</li> </ul>	3/379	
<b>SITRANS FVA variable area meters</b>				
	<p>Measurement of flow of liquids and gases, also highly suitable for corrosive media, high temperatures and high pressures.</p>	<p><b>FVA250</b></p> <ul style="list-style-type: none"> <li>• All-metal variable area meter with various float materials</li> <li>• Connections: DN 15 ... DN 100 (½" ... 4")</li> <li>• Temperature of medium: -20 °C ... +300 °C (-4 ... +572 °F)</li> <li>• Optionally available with analog output or contacts</li> </ul>	3/395	
<b>SITRANS FP differential pressure flow measurement <span style="color: orange;">NEW</span></b>				
	<p>SITRANS FP product line is suitable for all kinds of applications – liquids, dry or wet gases and steam. Due to the robust though variable design it has been and still is one of the main technologies for flow measurement in various industries.</p> <p>A new digital sizing process ensures minimum effort during presales and full traceability in aftersales. The differential pressure portfolio consists of</p> <ul style="list-style-type: none"> <li>• pitot tube measuring system SITRANS FPS300</li> <li>• differential pressure sensors acc. to ISO 5167 (orifices) SITRANS FPS200</li> </ul>	<ul style="list-style-type: none"> <li>• Suitable for a vast range of different applications</li> <li>• Available as pre-mounted compact system as well as remote parts</li> <li>• Advanced intelligent sizing procedure</li> <li>• Web-based sizing and data storage enables full traceability and easy communication</li> <li>• All benefits of SITRANS P320 available</li> </ul>	3/405	

## Overview

**Criteria for selection of flowmeter**

Each method for measuring flow has specific properties, and each flow measuring point is characterized by specific requirements. The table shown below compares the properties of the various measuring instruments and thus provides assistance in selection of the optimum device.

This section of the field device catalog includes the following instruments for measuring flow:

- Electromagnetic
- Coriolis mass flow
- Ultrasonic
- Vortex volumetric- and mass flow
- Variable area meter
- Orifice plate

Measurement principle	Electromagnetic	Coriolis	Ultrasonic (inline)	Ultrasonic (clamp-on)	Vortex	Variable area meter	Orifice plate
Medium	Liquid (conductive)	Liquid or gas	Liquid	Liquid or gas	Steam/vapor, gases, liquid	Liquid or gas	Liquid, vapor, gas
Nominal size	DN 2 ... 2000 (0.08" ... 78")	1.5 ... 150 mm (0.06" ... 6")	DN 50 ... 3000 (2" ... 120")	6.4 mm ... 9.14 m (0.25" ... 360")	DN 15 ... 300 (½" ... 12")	DN 10 ... 100 (0.4" ... 4") G½" ... G3"	DN 10 ... 1000 (0.4" ... 40")
Temperature range °C (°F)	-40 ... +200 (-40 ... +392)	-50 ... +180 (-58 ... +356)	-20 ... +200 (-4 ... +392)	-40 ... +120 (-40 ... +248)	-40 ... +240 (-40 ... +464)	-20 ... +300 (-4 ... +572)	-200 ... +500 (-328 ... +932)
Max. pressure bar (psi)	160 (2 320), optional higher	Up to 410 (Up to 5 950)	40 (580)	Unlimited	100 (1 450)	100 (1 450)	315 (4 569)
Accuracy %	± 0,25 or ± 0,4	± 0,1 or ± 0,15	± 0,5 ... ± 2	0,5 ... 1,0 % of flow, for velocities greater than 0,3 m/s (1 ft/s)	± 0,75 ... ± 1	± 1,6 ... ± 2,0	± 0,5 ... ± 2
Repeatability %	0,1/0,2	0,05	0,25	0,15% of flow, for velocities greater than 0,3 m/s (1 ft/s)	0,1	0,5	0,5
Dynamic response range	1:100	1:100	1:100	1:100	1:25	1:10	1:6
Start-of-scale value m/s (ft/s)	0 (0)	0 (0)	0,1 (0.33)	0 (0)	0,4 (1.31) 2,0 (6.56)	0,2 (0.66)	Re > 500
Full-scale value				± 36/120			Re < 10 <sup>8</sup>
• For liquids m/s (ft/s)	0,25 ... 10 (0.825 ... 32.8)	10 (32.8)	10 (32.8)	± 12/40	10 (32.8)	3,5 (11.4)	3 (9.8)
• For steam/vapor, gases m/s (ft/s)		Approx. 300 (1000)		± 12/40	80 (262.5)	60 (197)	50/25 (164/82)
<b>Measured values</b>							
Volume flow	•	•	•	•	•	•	•
Sound velocity			•	•			
Sound amplitude			•	•			
Density		•		•			
Mass flow		•	•	•	•		
Bidirectional measurement	•	•	•	•			•
<b>Use</b>							
• For custody transfer	•	•	•	•			
• As batching system	•	•		•			
• In viscosity range mPa·s (cp)	0,1 ... 100 000 (0.1 ... 100 000)	0 ... 100 000 (0 ... 100 000)	0 ... 350 (0 ... 350)	0,5 ... 2800 (0.5 ... 2800)	0 ... 10 (0 ... 10)	0,5 ... 100 (0.5 ... 100)	0 ... 10 (0 ... 10)
<b>Power supply</b>	Mains or battery	Mains	Mains or battery	90... 240 V AC, 50...60 Hz, 15 VA or 9 ... 36 V DC, 10 W	2-wire	non	2-wire



# Flow Measurement

## Introduction

### Criteria for selection of flowmeter

#### Overview (continued)

#### Communication solutions

Product	HART	PROFIBUS PA	PROFIBUS DP	FOUNDATION Fieldbus H1	DeviceNet	Modbus RTU	GSM/GPRS
SITRANS FM MAG 5000	• 1) 2) 4)						
SITRANS FM MAG 6000	• 1) 2) 4) 5)	• 1) 5) 6) 7)	• 1) 5) 6) 7)	• 2) 4) 5)	• 5)	• 1) 5) 10)	
SITRANS FM MAG 5000/6000 CT <sup>8)</sup>							
SITRANS FM MAG 6000 I	• 1) 2) 4) 5)	• 1) 5) 6) 7)	• 1) 5) 6) 7)	• 2) 4) 5)	• 5)	• 1) 5) 10)	
SITRANS FM MAG 6000 I Ex	• 1) 2) 4) 5)	• 1) 5) 6) 7)		• 2) 4) 5)			
SITRANS FM TRANSMAG 2	• 1) 4)	• 1) 6)					
SITRANS FM MAG 8000						• 1) 3) 10) 11) 12)	• 14)
SITRANS F C FCT010						• 1) 10)	
SITRANS F C FCT030	• 1) 2) 4) 8)	• 1) 2) 4) 8)	• 1) 2) 4) 8)			• 1) 2) 4) 8)	
SITRANS F C MASS 6000	• 1) 2) 4) 5)	• 1) 5) 6) 7)	• 1) 5) 6) 7)	• 2) 4) 5)	• 5)	• 1) 10)	
SITRANS F C MASS 6000 Ex d	• 1) 2) 4) 5)	• 1) 5) 6) 7)		• 2) 4) 5)	• 5)		
SIFLOW FC070			• 13)			• 1) 10) 11)	
SITRANS FUS060	• 1)	• 1) 6)					
SITRANS FUS080		• 1) 8) 12)					
SITRANS FUS1010 <sup>9)</sup>						• 9) 10) 11)	
SITRANS FX300	• 1)						
SITRANS FX330	• 1)						
SITRANS P DS III Differential pressure and flow	• 1) 2)	• 1) 2) 7)		• 2)			

- 1) Supports SIMATIC PDM
- 2) Supports AMS
- 3) Supports Siemens Flow Tool
- 4) Supports HH275/375
- 5) Pluggable add-on module
- 6) Profile 2
- 7) Profile 3

- 8) CT versions are not approved with communication modules.
- 9) All wall mount models
- 10) RS 485
- 11) RS 232
- 12) IrDA (Infrared)
- 13) Connected to ET200M PROFIBUS interface
- 14) Only with 7ME6810

### Overview

SITRANS FM electromagnetic flowmeters are designed for measuring the flow of electrically conductive mediums.

The full SITRANS FM program consists of three different types of flowmeters making Siemens unique in that it covers all possible applications where electromagnetic flowmeters are a suitable match:

**Modular pulsed DC flowmeters** cover all ordinary applications within all industries. The wide variety of combinations and versions from the modular system means that ideal adaptation is possible to each measuring task and application.



SITRANS FM products

**Battery-operated water meters** (fully electronic) are the perfect match for drinking water applications like network distribution, revenue metering and irrigation where mains power is not available. In addition, it complies with the MID (EU) and OIML R 49 water meter standards and has the MCERTS certificate.



SITRANS FM MAG 8000

**High-powered flowmeters** are used for difficult applications where other flowmeters cannot stand up to the task. This flowmeter can handle liquids and heavy slurries in industries such as mining, cement and pulp and paper.



TRANSMAG 2



SITRANS FM MAG 911/E

## Flow Measurement

### SITRANS FM (electromagnetic)

#### System information

#### Benefits



##### Greater flexibility

- Wide product program
- Compact or remote installation using the same transmitter and sensor
- USM II communication platform for easy integration with all systems

##### Easier commissioning of MAG 5000, 6000, 6000 I

All SITRANS FM pulsed DC electromagnetic flowmeters feature a unique SENSORPROM memory unit which stores sensor calibration data and transmitter settings for the lifetime of the product.

At commissioning the flowmeter commences measurement without any initial programming.

The factory settings matching the sensor size are stored in the SENSORPROM unit. Also customer specified settings are downloaded to the unit. Should the transmitter be replaced, the new transmitter will upload all previous settings and resume measurement without any need for reprogramming.

Further, the "fingerprint" used in connection with the SITRANS FM Verificator is stored during the initial sensor calibration.

##### Easier service

Transmitter replacement requires no programming. SENSORPROM automatically updates all settings after initialization.

##### Room for growth

USM II the Universal Signal Module with "plug & play" simplicity, makes it easy to access and integrate the flow measurement with almost any system and bus-protocol and it ensures the flowmeter will be easy to upgrade to future communication/bus platforms.

#### Application

Electromagnetic flowmeters are suitable for measuring the flow of almost all electrically conductive liquids, pastes and slurries.

A prerequisite is that the medium must have a minimum conductivity. The temperature, pressure, density and viscosity have no influence on the result.

The main applications of the electromagnetic flowmeters can be found in the following sectors:

- Water and waste water
- Chemical industries
- Pharmaceutical industries
- Food and beverage industry
- Mining, aggregates and cements industries
- Pulp and paper industry
- Steel industry
- Power; utility and chilled water industry












The wide variety of combinations and versions from the modular system means that ideal adaptation is possible to each measuring task.

### Application (continued)

Please see Product selector on the Internet, because some constraints might be related to some of the features:

<http://www.pia-selector.automation.siemens.com>



											
	FM100	MAG 1100	MAG 1100 HT	MAG 1100 F	MAG 3100	MAG 3100 HT	MAG 3100 P	MAG 5100 W	MAG 5100 W	MAG 911/E	MAG 8000/CT
	7ME6010	7ME6110	7ME6120	7ME6140	7ME6310	7ME6320	7ME6340	7ME6520	7ME6580	7ME5610	7ME6810 7ME6820

### Industry

Water/waste water		XX			XX		X	XXX	XXX	X	XXX <sup>1)</sup>
Chemical	•	XXX	XXX	XX	XXX	XXX	XXX	X			X
Pharmaceutical	•	XX	XX	XXX	XX	XX	XX	X	X		X
Food and beverage		XX		XXX	X	X	X	X	X		X
Mining, aggregates and cement		XX			XXX			X	X	XXX	X
HPI		XX	X		XX	X	XX	X	X		X
Other	•	XX	XX	XX	XX	XX	XX	XX	XX	XXX	X

### Design

Compact	•	•		•	•	•	•	•	•		•
Remote	•	•	•	•	•	•	•	•	•	•	•
Constant field (DC)		•	•	•	•	•	•	•	•		•
Alternating field (AC)										•	
Battery-operated constant field (DC)											•

### Size

DN 2 (1/12")		•									
DN 3 (1/8")		•									
DN 6 (1/4")		•									
DN 10 (3/8")		•		•							
DN 15 (1/2")	•	•	•	•	•	•	•	•	•	•	•
DN 25 (1")	•	•	•	•	•	•	•	•	•	•	•
DN 32 (1 1/4")				• <sup>2)</sup>							
DN 40 (1 1/2")		•	•	•	•	•	•	•	•	•	•
DN 50 (2")	•	•	•	•	•	•	•	•	•	•	•
DN 65 (2 1/2")		•	•	•	•	•	•	•	•	•	•
DN 80 (3")		•	•	•	•	•	•	•	•	•	•
DN 100 (4")		•	•	•	•	•	•	•	•	•	•
DN 125 (5")				•	•	•	•	•	•	•	•
DN 150 (6")				•	•	•	•	•	•	•	•
DN 200 (8")				•	•	•	•	•	•	•	•
DN 250 (10")				•	•	•	•	•	•	•	•
DN 300 (12")				•	•	•	•	•	•	•	•
DN 350 (14")				•	•	•	•	•	•	•	•
DN 400 (16")				•	•	•	•	•	•	•	•
DN 450 (18")				•	•	•	•	•	•	•	•
DN 500 (20")				•	•	•	•	•	•	•	•
DN 600 (24")				•	•	•	•	•	•	•	•
DN 700 (28")				•	•	•	•	•	•	•	•
DN 750 (30")				•	•	•	•	•	•	•	•
DN 800 (32")				•	•	•	•	•	•	•	•
DN 900 (36")				•	•	•	•	•	•	•	•
DN 1000 (40")				•	•	•	•	•	•	•	•
DN 1050 (42")				•	•	•	•	•	•	•	•
DN 1100 (44")				•	•	•	•	•	•	•	•
DN 1200 (48")				•	•	•	•	•	•	•	•

• = available, X = can be used, XX = often used, XXX = most often used

<sup>1)</sup> Not suitable for wastewater applications

<sup>2)</sup> Only in combination with DN 32 adapter A5E02054637, A5E02218297, FDK:083G2120 and FDK:083G2160

## Flow Measurement

### SITRANS FM (electromagnetic)

#### System information

#### Application (continued)

Please see Product selector on the Internet, because some constraints might be related to some of the features:

<http://www.pia-selector.automation.siemens.com>



FM100	MAG 1100	MAG 1100 HT	MAG 1100 F	MAG 3100	MAG 3100 HT	MAG 3100 P	MAG 5100 W	MAG 5100 W	MAG 911/E	MAG 8000/ MAG 8000 CT
7ME6010	7ME6110	7ME6120	7ME6140	7ME6310	7ME6320	7ME6340	7ME6520	7ME6580	7ME5610	7ME6810 7ME6820

#### Size (continued)

DN 1400 (56")				•					•	
DN 1500 (60")				•					•	
DN 1600 (66")				•					•	
DN 1800 (72")				•					•	
DN 2000 (78")				•					•	

#### Process connection

Wafer design		•	•							
Sanitary process connections				•						
Flanges				•	•	•	•	•	•	•

#### Pressure ratings<sup>1)</sup>

EN 1092-1 PN 6				•					•	
EN 1092-1 PN 10				•	•	•	•	•	•	•
EN 1092-1 PN 16		•		•	•	•	•	•	•	•
EN 1092-1 PN 25				•	•				•	
EN 1092-1 PN 40		•	•	•	•	•	•	•	•	•
EN 1092-1 PN 63				•						
EN 1092-1 PN 100				•						
ANSI B 16.5 class 150				•	•	•	•	•	•	•
ANSI B 16.5 class 300				•	•				•	
ANSI B 16.5 class 600				•						
ASME B 16.47 class 150				•						
AWWA class D				•			•	•	•	•
AS 2129 table E				•	•					
AS 4087, PN 16				•	•		•	•		•
AS 4087, PN 21				•	•					
AS 4087, PN 35				•	•					
JIS B 2220:2004 K10				•			•	•	•	
JIS B 2220:2004 K20				•						

#### Accuracy

Flow error ± 0.2 % of rate		•	•	•	•	•	•	•		•
Flow error ± 0.4 % of rate		•	•	•	•	•	•	•		•
Flow error ± 0.5 % of rate									•	

#### Repeatability<sup>2)</sup>

0.1 %		•	•	•	•	•	•	•		
0.2 %	•								•	

#### Grounding electrodes

Grounding electrodes, incl.					•		•	•	•	(*)
-----------------------------	--	--	--	--	---	--	---	---	---	-----

• = available

<sup>1)</sup> Pressure may be limited by the liner material chosen.

<sup>2)</sup> Of actual flow for  $v \geq 0.5$  m/s (15 ft/s) and conductivity  $> 10$   $\mu$ S/cm



### Application (continued)

Please see Product selector on the Internet, because some constraints might be related to some of the features:

<http://www.pia-selector.automation.siemens.com>



FM100	MAG 1100	MAG 1100 HT	MAG 1100 F	MAG 3100	MAG 3100 HT	MAG 3100 P	MAG 5100 W	MAG 5100 W	MAG 911/E	MAG 8000/ MAG 8000 CT
7ME6010	7ME6110	7ME6120	7ME6140	7ME6310	7ME6320	7ME6340	7ME6520	7ME6580	7ME5610	7ME6810 7ME6820

### Materials/temperature:

#### Liner material/max. temperatures

NBR: 70 °C (158 °F)									•	
EPDM: 70 °C (158 °F)				•					•	•
Soft rubber: 70 °C (158 °F)				•						•
PTFE: 100 °C (212 °F)				•						
PTFE: 150 °C (302°F)						•				•
PTFE: 180 °C (356 °F)						•				•
Ebonite: 95 °C (203 °F)				•					• <sup>3)</sup>	•
Linatex: 70 °C (158 °F)				•						•
Ceramic: 150 °C (302 °F)	•		•							
Ceramic: 200 °C (392 °F)			• <sup>2)</sup>							
PFA: 100 °C (212 °F)				•						
PFA: 150 °C (302 °F)	•		•			•				
Novolak: 130 °C (266 °F)										•

#### Electrodes

Stainless steel	•			•	•					•
Hastelloy C		•		•	•	•	•	•	•	•
Platinum		•	•	•	•	(•) <sup>1)</sup>				•
Titanium				•	•					•
Tantalum				•	•	(•) <sup>1)</sup>				•
Ceramic coated stainless steel				•						
Ceramic coated Hastelloy C				•						

#### Flange/housing material

Carbon steel				•	•	•	•	•	•	•
Stainless steel/carbon steel	•			•	•					•
Polished stainless steel		•	•	•	•					

### Approvals

#### Custody transfer

Cold Water – MI-001 (EU)								•		•
Cold water approval - OIML R 49/OIML R 49 MAA										• <sup>4)</sup>
NMI 10 (Australia)								• <sup>4)</sup>		• <sup>4)</sup>
Chilled water pattern approval - PTB K 7.2								• <sup>4)</sup>		
OE 12/C 040 (Austria)								•		
Chilled water pattern approval								•		
KIWA water approval								•		•

#### Marine

ABS								•		
Bureau Veritas								•		
DNV-GL								•		
Lloyd's Register								•		

• = available

<sup>1)</sup> Only for PTFE

<sup>2)</sup> Ex sensor: 180 °C (356 °F)

<sup>3)</sup> 70 °C (158 °F)

<sup>4)</sup> For verification submit Product Variation Request (PVR)

## Flow Measurement

## SITRANS FM (electromagnetic)

## System information

## Application (continued)

Please see Product selector on the Internet, because some constraints might be related to some of the features:

<http://www.pia-selector.automation.siemens.com>



FM100	MAG 1100	MAG 1100 HT	MAG 1100 F	MAG 3100	MAG 3100 HT	MAG 3100 P	MAG 5100 W	MAG 5100 W	MAG 911/E	MAG 8000/ MAG 8000 CT
7ME6010	7ME6110	7ME6120	7ME6140	7ME6310	7ME6320	7ME6340	7ME6520	7ME6580	7ME5610	7ME6810 7ME6820

## Approvals (continued)

## Hazardous areas

ATEX – 2 GD (Zone 1/21)

IECEx Zone 1/21

FM Class I/II/III, Div 1

FM Class I, Zone 1/21

FM - Class I, Div 2

FM - Class I, Zone 2

CSA Class I, Zone 1/21

CSA - Class I, Div 2

NEPSI Zone 1

EAC Ex

## Hygienic

EHEDG

3A

EC 1935:2004

European food contact material

## Drinking water

WRAS (WR<sub>c</sub>)ANSI/NSF 61 (US) <sup>7)</sup>

ACS (FR)

Belgaqua (B)

DVGW-W270 (D)

KIWA (NL)

AS/NZS 4020 (AU)

## Other

CRN (Canada)

FM Fire Service  
(class number 1044)

MCERTS (GB)

EAC (Russia, Belarus, and  
Kazakhstan)

CPA (China)

VdS

## Verificator

Verificator compatible

• = available

1) Only in combination with MAG 5000 and MAG 6000 transmitters

2) EPDM liner

3) Only EPDM with Hastelloy electrodes

4) EPDM or PTFE liner with AISI 316 or Hastelloy electrodes

5) Only valid for DN 50 to DN 300 (2" to 12")

6) Sizes: DN 50, DN 80, DN 100, DN 150, DN 200, DN 250, and DN 300  
(2", 3", 4", 6", 8", 10", and 12") with ANSI B16.5 Class 150 flanges

7) Only DN 15 to DN 300 (½" to 12") with MAG 6000 I Ex, compact mounted

8) Only PFA liner

### Application (continued)

Please see Product selector on the Internet, because some constraints might be related to some of the features:  
<http://www.pia-selector.automation.siemens.com>



	MAG 5000	MAG 6000	MAG 6000 I	MAG 6000 I Ex	MAG 6000 + Safety barrier	TRANSMAG 2	MAG 8000/ MAG 8000 CT
	7ME6910	7ME6920	7ME6930	7ME6930	7ME6920	7ME5034	7ME6810 7ME6820

#### Industry

Water/waste water	XXX	XXX	XX	X		X	XXX
Chemical	X	XX	XX	XXX	X		X
Pharmaceutical	X	XXX	XX	XXX	X		X
Food and beverage	XX	XXX	XX				X
Mining, aggregates and cement	XX	X	XX	X		XXX	X
HPI	X	X	X	XX			X
Other	XX	XX	XX	XX		XX	X

#### Design

Compact	•	•	•	•			•
Remote	•	•	•	•	•	•	•
Constant field (DC)	•	•	•	•	•		•
Alternating field (AC)						•	
Battery-operated constant field (DC)							•

#### Enclosure transmitter

Polyamide, IP67	•	•					
Die-cast aluminum			•	•		•	
Stainless steel		•					• <sup>1)</sup>
19" rack	•	•			•		
Front panel mounting	•	•			•		
Panel mounting	•	•			•		
IP66 wall mounting	•	•	•	•	•		

#### Accuracy

Flow error ± 0.2 % of rate		•	•	•	•		•
Flow error ± 0.4 % of rate	•						•
Flow error ± 0.5 % of rate						•	

#### Repeatability<sup>3)</sup>

0.1 %	•	•	•	•	•		
0.2 %						•	

#### Communication

HART	•	•	•	•	•	•	
PROFIBUS PA		•	•	•	•	•	
PROFIBUS DP		•	•	•	•		
FOUNDATION Fieldbus H1		•	•	•	•		
DeviceNet		•	•		•		
Modbus RTU/RS 485		•	•		•		• <sup>2)</sup>
Encoder interface module (Sensus protocol) for Itron 200WP radio							•
GSM/GPRS module							•

#### Batching

Batching		•	•	•	•		
----------	--	---	---	---	---	--	--

• = available, X = can be used, XX = often used, XXX = most often used

<sup>1)</sup> IP68 enclosure

<sup>2)</sup> Modbus RTU also as serial RS 232

<sup>3)</sup> Of actual flow for  $v \geq 0.5$  m/s (1.5 ft/s) and conductivity > 10  $\mu$ S/cm

## Flow Measurement

### SITRANS FM (electromagnetic)








#### System information

#### Application (continued)

Please see Product selector on the Internet, because some constraints might be related to some of the features:

<http://www.pia-selector.automation.siemens.com>



							
	MAG 5000	MAG 6000	MAG 6000 I	MAG 6000 I Ex	MAG 6000 + Safety barrier	TRANSMAG 2	MAG 8000/MAG 8000 CT
	7ME6910	7ME6920	7ME6930	7ME6930	7ME6920	7ME5034	7ME6810 7ME6820

#### Power supply

24 V	• <sup>1)</sup>	• <sup>1)</sup>	•	•			• <sup>1)2)</sup>
115 V - 230 V	•	•	•	•	•	•	• <sup>2)</sup>
Battery							•

#### Approvals

##### Custody transfer

Cold water - MI-001 (EU)	•	•					•
Cold water approval - OIML R 49/OIML R 49 MAA							•
NMI 10 (Australia)		• <sup>5)</sup>					• <sup>5)</sup>
Chilled water pattern approval PTB K 7.2	• <sup>5)</sup>	• <sup>5)</sup>					• <sup>5)</sup>
OE12/C 040 (Austria) Chilled water pattern approval	•	•					
KIWA water approval		•					•

##### Marine

ABS	•	•					
Bureau Veritas	•	•					
DNV-GL	•	•					
Lloyd's Register	•	•					

##### Hazardous areas

ATEX - 2G GD (Zone 1/21)				•	(•) <sup>3)</sup>		
IECEX Gb Zone 1/21				•			
FM Class I/II/III, Div 1				• <sup>4)</sup>			
FM Class I, Zone 1/21				•			
FM Class I, Div 2	•	•	•				
FM Class I, Zone 2	•	•	•				
CSA Class I, Zone 1/21				•			
CSA Class I, Div 2	•	•	•				
UL/C-UL-general safety	•	•			•		
NEPSI Zone 1				•			
EAC Ex				•	•		

##### Other

FM Fire Service (1044)	•	•					•
KCs (South Korea)	•	•	•	•	•		
EAC (Russia, Belarus, Kazakhstan)	•	•	•	•	•	•	•
CPA (China)	•	•	•	•	•	•	•
VdS	•	•					
Other national approvals, see internet	•	•	•	•	•	•	•

#### Verificator

Verificator compatible	•	•					
------------------------	---	---	--	--	--	--	--

• = available

<sup>1)</sup> 12/24 V AC/DC

<sup>2)</sup> Main power with battery backup

<sup>3)</sup> Only sensor in hazardous area

<sup>4)</sup> Only with sensors sizes DN 15 to DN 300 (½" to 12") compact

<sup>5)</sup> For verification submit Product Variation Request (PVR)

For more national approvals please check our internet page

<http://support.automation.siemens.com/WWW/view/en/10806954/134200>

### Application (continued)

#### Practical examples of ordering

##### SITRANS FM compact installation




##### Example

<b>Sensor</b>	<b>7ME6310-3TC11-1JA1</b>
Pipe size	DN 100
Liner	Soft rubber
Electrodes	SS 316
Flanges	EN 1092-1, PN 16
<b>Transmitter</b>	<b>MAG 6000, Polyamide, 115 ... 230 V AC</b>
Accuracy	± 0.2 % ± 1 mm/s
Supply	230 V AC

##### Note:

MAG 5000/6000 transmitters, sensors and communication modules are packed in separate boxes, the final assembly takes place during installation at the customer's place.

##### SITRANS FM remote installation

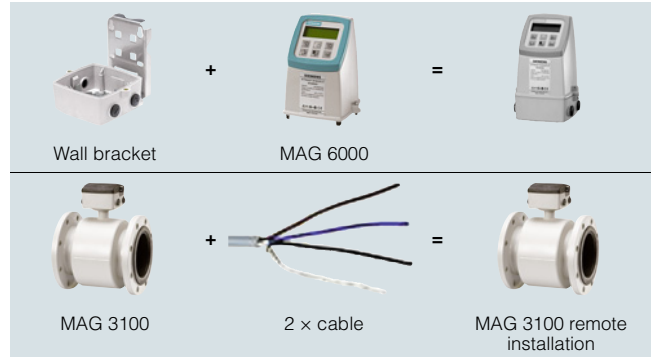

##### Example

<b>Sensor</b>	<b>7ME6310-3TC11-1AA1</b>
Pipe size	DN 100
Liner	Soft rubber
Electrodes	SS 316
Flanges	EN 1092-1, PN 16
<b>Transmitter</b>	<b>7ME6920-1AA10-0AA0</b>
Accuracy	± 0.2 % ± 1 mm/s
Supply	230 V AC
<b>Wall mounting kit</b>	<b>FDK:085U1018</b>
<b>Cable kit with sensor cable and electrode cable</b>	<b>A5E01181647</b>



## Flow Measurement

### SITRANS FM (electromagnetic)

#### System information

#### Technical specifications

##### Flowmeter Calibration and traceability

To ensure continuous accurate measurement, flowmeters must be calibrated. The calibration is conducted at Siemens facilities with traceable instruments referring directly to the physical unit of measurement according to the International System of Units (SI).

Therefore, the calibration certificate ensures recognition of the test results worldwide, including the US (NIST traceability).



Siemens offers accredited calibrations assured to ISO 17025 in the flow range from 0.0001 m<sup>3</sup>/h to 10 000 m<sup>3</sup>/h.

The calibration follows the ISO 4185 performing calibrations under two methods: Static Weighing and Reference meter. Providing a measurement uncertainty of  $\pm 0.1\%$ .

Siemens accredited laboratories are recognized by ILAC MRA (International Laboratory Accreditation Corporation - Mutual Recognition Arrangement) ensuring international traceability and recognition of the test results worldwide.

A calibration certificate is shipped with every sensor and calibration data are stored in the SENSORPROM memory unit.

##### Flowmeter uncertainty

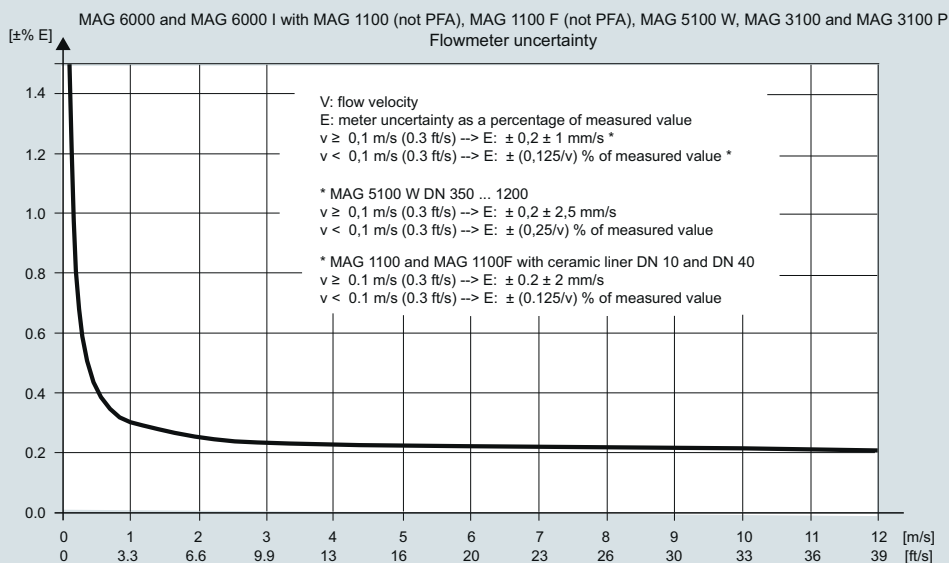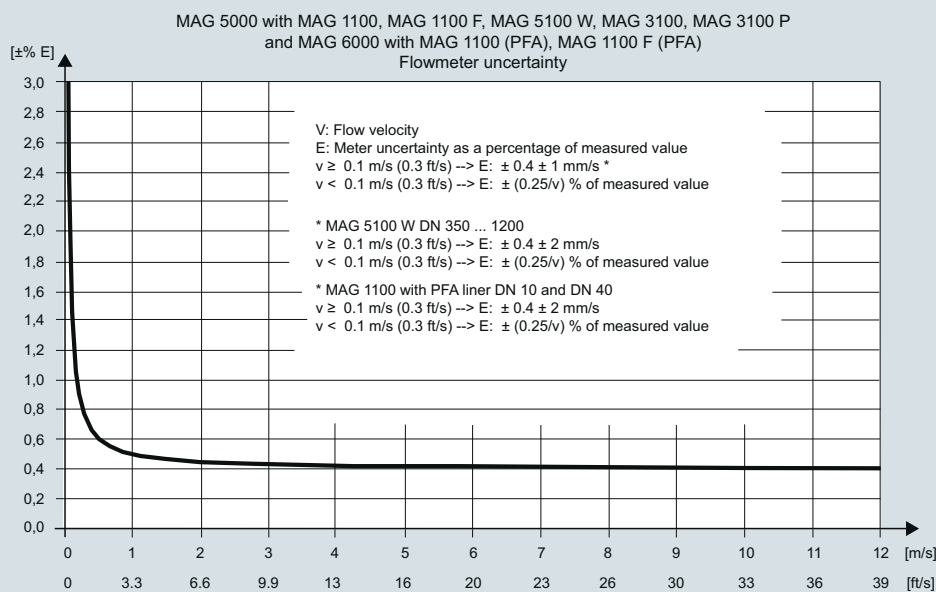

### Technical specifications (continued)

#### Calibration reference conditions

Reference conditions (ISO 9104 and DIN EN 29104)	
Temperature medium	20 °C ± 10 K (68 °F ± 18 °F)
Temperature ambient	25 °C ± 10 K (77 °F ± 18 °F)
Supply voltage	$U_n \pm 1\%$
Warming-up time	30 minutes
Incorporation in conductive pipe section	
• Inlet section	10 x DN (DN ≤ 1200/48") 5 x DN (DN > 1200/48")
• Outlet section	5 x DN (DN ≤ 1200/48") 3 x DN (DN > 1200/48")
Flow conditions	Developed flow profile
Additions in the event of deviations from reference conditions	
Current output	As pulse output (± 0,1 % of actual flow +0,05 % FSO)
Effect of ambient temperature	
• Display frequency/pulse output	< ± 0,003 %/K act.
• Current output	< ± 0,005 %/K act.
Effect of supply voltage	< 0,005 % of measuring value on 1 % change
Repeatability	± 0,1 % of actual flow for $v \geq 0,5$ m/s (1.5 ft/s) and conductivity > 10 μS/cm
Certificates	
• EN 10204-2.1	Certificate of conformity, stating that the delivered parts are made of the material quality that was ordered. Available as Z option C15.
• EN 10204-2.2	Test report certificate, a non batch specific material analysis of the ordered material. Available as Z option C14.
• EN 10204-3.1	Material analysis certificate, a batch specific analysis of the material issued by an independent inspector. Certification covers all pressure containing and wetted parts. Available as Z option C12.

#### Calibration test point

Test points for default calibration at 25% and 90% of factory  $Q_{max}$ .

Size	$Q_{max}$	90%	25%
mm	m <sup>3</sup> /h	m <sup>3</sup> /h	m <sup>3</sup> /h
2	0.055	0.0495	0.01375
3	0.127	0.1143	0.03175
6	0.5	0.45	0.125
10	1.4	1.26	0.35
15	3	2.7	0.75
25	9	8.1	2.25
40	23	20.7	5.75
50	35	31.5	8.75
65	60	54	15
80	90	81	22.5
100	140	126	35
125	220	198	55
150	320	288	80
200	550	495	137.5
250	900	810	225
300	1300	1170	325
350	1700	1530	425
400	2250	2025	562.5
450	2800	2520	700
500	2800	2520	700
600	2800	2520	700
700	6000	5400	1500
750	6000	5400	1500
800	6000	5400	1500
900	6000	5400	1500
1000	6000	5400	1500
1050	6000	5400	1500
1100	6000	5400	1500
1200	6000	5400	1500
1400	7000	6300	1750
1500	7000	6300	1750
1600	7000	6300	1750
1800	7000	6300	1750
2000	7000	6300	1750

## Flow Measurement

### SITRANS FM (electromagnetic)

#### System information

#### Technical specifications (continued)

##### Technical specifications PROFIBUS PA/DP

###### General specifications

PROFIBUS device profile	3.00 Class B
Certified	No
MS0 connections	1
MS1 connections	1
MS2 connections	2

##### Electrical specification DP

###### Physical layer specifications

Applicable standard	IEC 61158/EN 50170
Physical Layer (Transmission technology)	RS 485
Transmission speed	≤ 1.5 Mbits/s
Number of stations	Up to 32 per line segment, (maximum total of 126)

###### Cable specification (Type A)

Cable design	Two-wire twisted pair
Shielding	CU shielding braid or shielding braid and shielding foil
Impedance	35 up to 165 Ω at frequencies from 3 ... 20 MHz
Cable capacity	< 30 pF per meter
Core diameter	> 0,34 mm <sup>2</sup> , corresponds to AWG 22
Resistance	< 110 Ω per km
Signal attenuation	Max. 9 dB over total length of line section
Max. bus length	200 m at 1500 kbit/s, up to 1.2 km at 93.75 kbit/s. Extendable by repeaters

##### Electrical specification PA

###### Physical layer specifications

Applicable standard	IEC 61158/EN 50170
Physical Layer (Transmission technology)	IEC-61158-2
Transmission speed	31.25 Kbits/second
Number of stations	Up to 32 per line segment, (maximum total of 126)
Max. basic current [I <sub>B</sub> ]	14 mA
Fault current [I <sub>FDE</sub> ]	0 mA
Bus voltage	9 ... 32 V (non Ex)

###### Preferred cable specification (Type A)

Cable design	Two wire twisted pair
Conductor area (nominal)	0,8 mm <sup>2</sup> (AWG 18)
Loop resistance	44 Ω/km
Impedance	100 Ω ± 20 %
Wave attenuation at 39 kHz	3 dB/km
Capacitive asymmetry	2 nF/km
Bus termination	Passive line termination at both
Max. bus length	Up to 1,9 km. Extendable by repeaters

###### IS (Intrinsic Safety) data

Required sensor electronics	Compact or remote mounted SITRANS FM MAG 6000 I Ex
FISCO	YES
Max. U <sub>I</sub>	17,5 V
Max. I <sub>I</sub>	380 mA
Max. P <sub>I</sub>	5,32 V
Max. L <sub>I</sub>	0 μH
Max. C <sub>I</sub>	0 nF

###### FISCO cable requirements

Loop resistance R <sub>C</sub>	15 ... 150 Ω/km
Loop inductance L <sub>C</sub>	0,4 ... 1 mH/km
Capacitance C <sub>C</sub>	80 ... 200 nF/km
Max. Spur length in IIC and IIB	30 m
Max. Trunk length in IIC	1 km
Max. Trunk length in IIB	5 km

##### PROFIBUS parameter support

The following parameters are accessible using a MS0 relationship from a Class 1 Master. MS0 specifies cyclic Data Exchange between a Master and a Slave.

###### Cyclic services

Input (Master view)	Parameter	MAG 6000/MAG 6000 I
	Mass flow	
	Volume flow	✓
	Temperature	
	Density	
	Fraction A	
	Fraction B	
	Pct Fraction A	
	Totalizer 1	✓
	Totalizer 2 <sup>1)</sup>	✓
	Batch progress <sup>1)</sup>	✓
	Batch setpoint	✓
	Batch compensation	✓
	Batch status (running ...)	✓
Output (Master view)		
	Set Totalizer 1+2	✓
	Set Mode Totalizer 1+2	✓
	Batch control (start, stop ...)	✓
	Batch setpoint	✓
	Batch compensation	✓

<sup>1)</sup> Value returned is dependent on the BATCH function.


When ON, Batch progress is returned.

When OFF, TOTALIZER 2 is returned.

### Technical specifications (continued)

#### Flow and speed chart

##### Metric

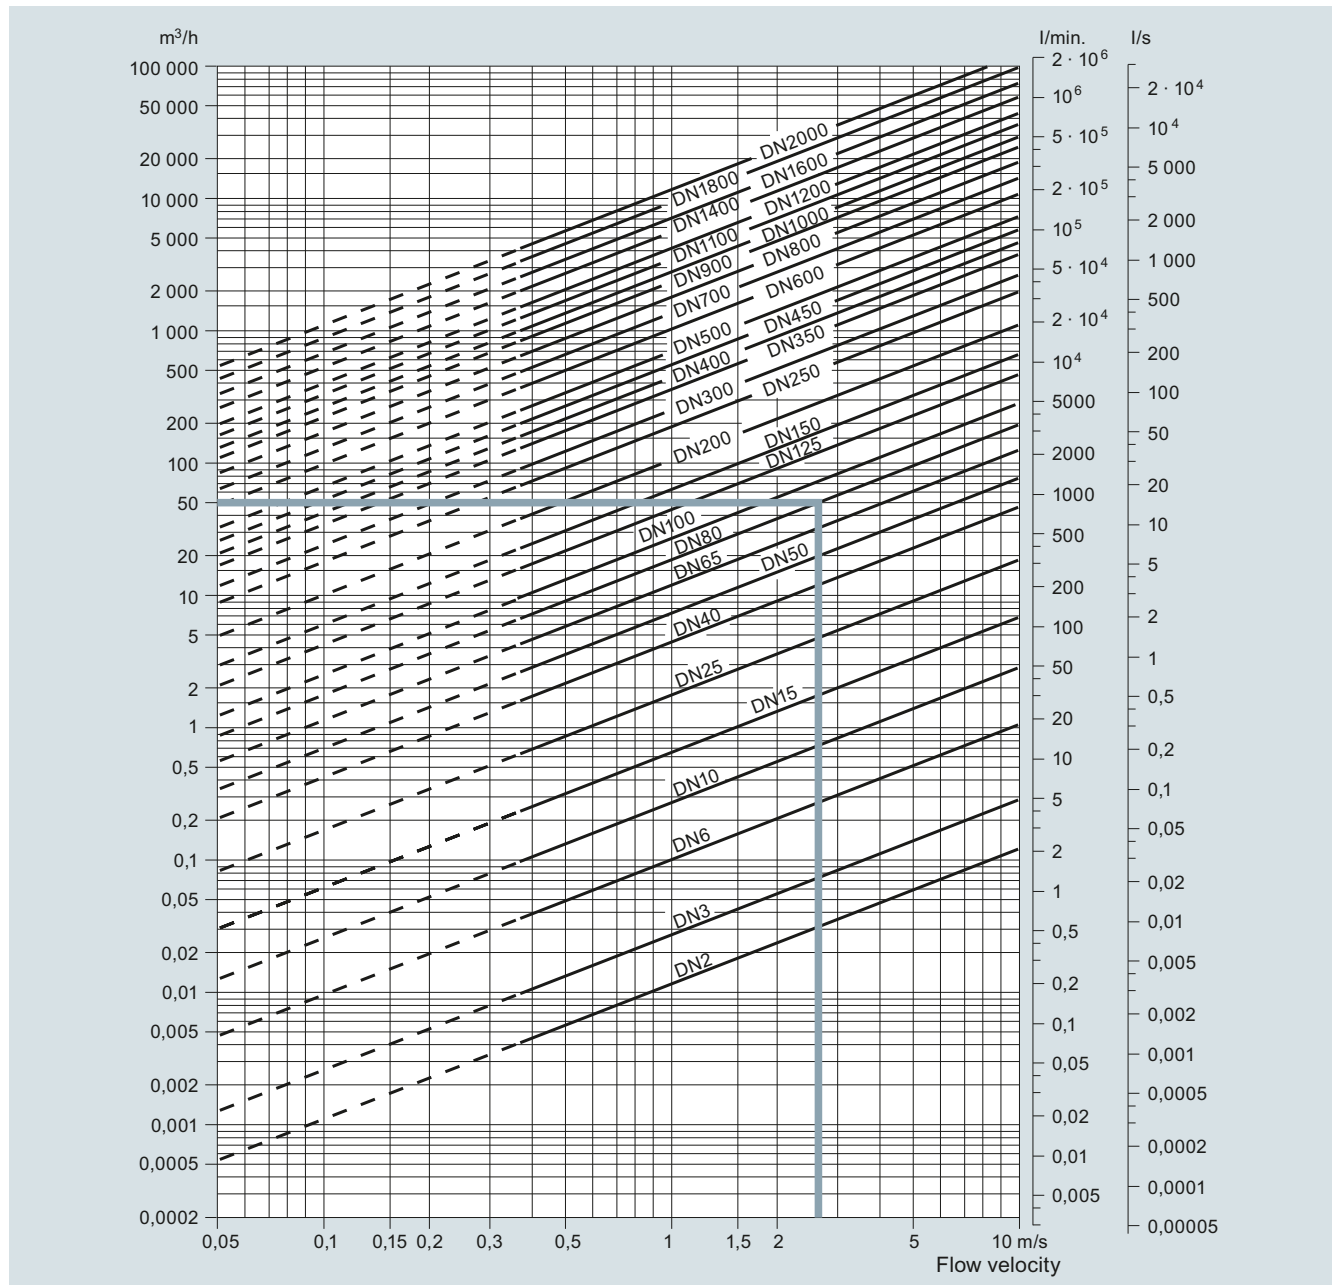

Sizing table (DN 2 ... DN 2000)

The table shows the relationship between flow velocity  $v$ , flow quantity  $Q$  and sensor dimension  $DN$ .

#### Guidelines for selection of sensor

Min. measuring range: 0 ... 0.25  $\text{m/s}$

Max. measuring range: 0 ... 10  $\text{m/s}$

Normally the sensor size is selected so that nominal flow velocity  $v$  lies within the measuring range 1 to 3  $\text{m/s}$ .

#### Example:

Flow quantity of  $50 \text{ m}^3/\text{h}$  and a sensor dimension of DN 80 gives a flow velocity of 2.7  $\text{m/s}$ , which is within the recommended measuring range of 1 to 3  $\text{m/s}$ .

Flow velocity calculation formula	Units
$v = 1273.24 \cdot Q/DN^2$ or	$v$ : [ $\text{m/s}$ ], $Q$ : [ $\text{l/s}$ ], $DN$ : [ $\text{mm}$ ]
$v = 353.68 \cdot Q/DN^2$	$v$ : [ $\text{m/s}$ ], $Q$ : [ $\text{m}^3/\text{h}$ ], $DN$ : [ $\text{mm}$ ]

For more information visit:

<https://new.siemens.com/global/en/products/automation/process-instrumentation/flow-measurement/electromagnetic.html>

# Flow Measurement


SITRANS FM (electromagnetic)

## System information

### Technical specifications (continued)

Imperial

3

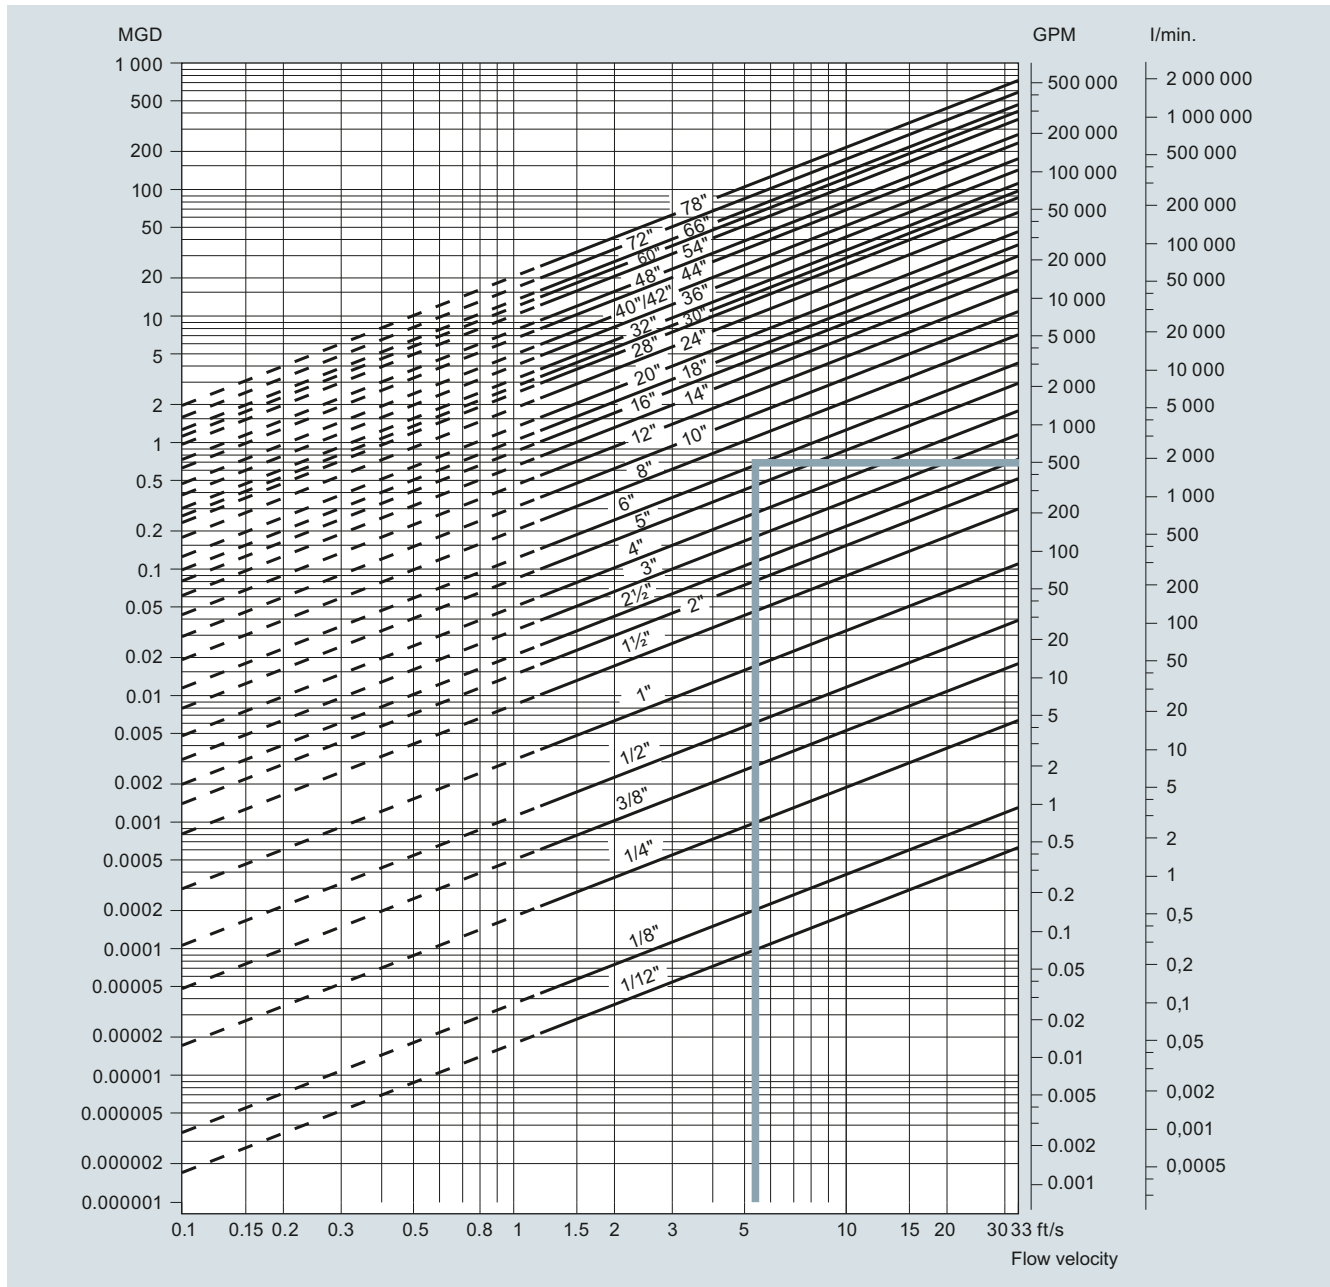

Sizing table (1/12" ... 78")

The table shows the relationship between flow velocity  $v$ , flow quantity  $Q$  and sensor dimension size.

**Guidelines for selection of sensor**

Min. measuring range: 0 ... 0.8 ft/s

Max. measuring range: 0 ... 33 ft/s

Normally the sensor size is selected so that nominal flow velocity  $v$  lies within the measuring range 3 to 10 ft/s.

Example:

Flow quantity of 500 GPM and a sensor dimension of 6" gives a flow velocity of 5.6 ft/s, which is within the recommended measuring range of 3 to 10 ft/s.

Flow velocity calculation formula	Units
$v = 0.408 \cdot Q / (\text{Pipe I.D.})^2$ or	$v$ : [ft/s], $Q$ : [GPM], Pipe I.D.: [inch]
$v = 283.67 \cdot Q / (\text{Pipe I.D.})^2$	$v$ : [ft/s], $Q$ : [MGD], Pipe I.D.: [inch]

For more information visit:  
<https://new.siemens.com/global/en/products/automation/process-instrumentation/flow-measurement/electromagnetic.html>




### Technical specifications (continued)

#### Installation conditions


##### Vibrations

Strong vibrations should be avoided.

In applications with strong vibrations, remote mounting of the transmitter is recommended.

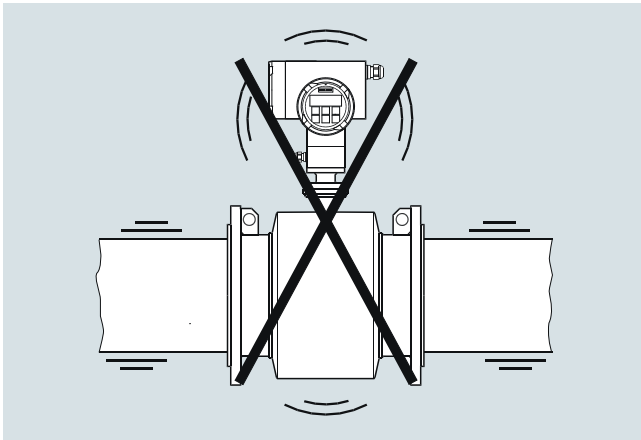



The sensor must always be completely filled with liquid.

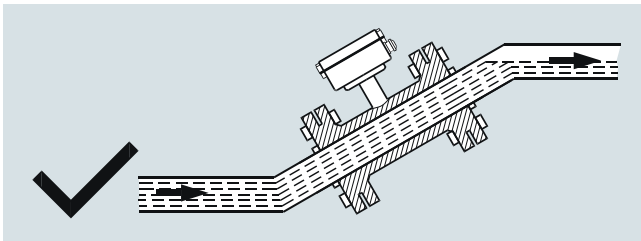

Install in pipelines which are always full


The sensor must always be completely filled with liquid. Therefore avoid:

- Installation at the highest point in the pipe system
- Installation in vertical pipes with free outlet

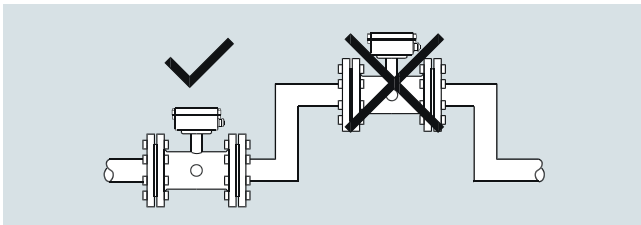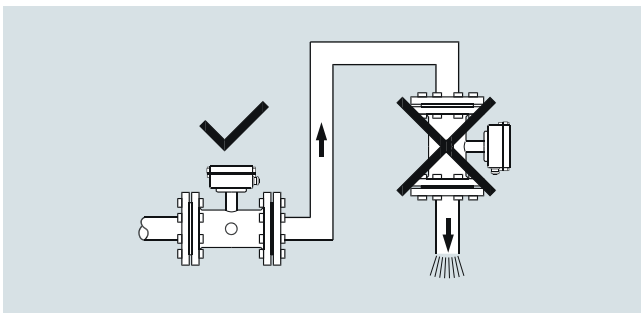

Do not install in pipelines which can run empty


For partially filled pipes or pipes with downward flow and free outlet the flowmeter should be located in a U-Tube.

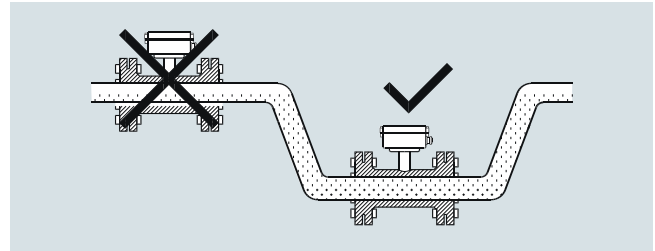

Install in U-tubes when pipe is partially filled

##### Installation in vertical pipes


Recommended flow direction: upwards. This minimizes the effect on the measurement of any gas/air bubbles in the liquid.

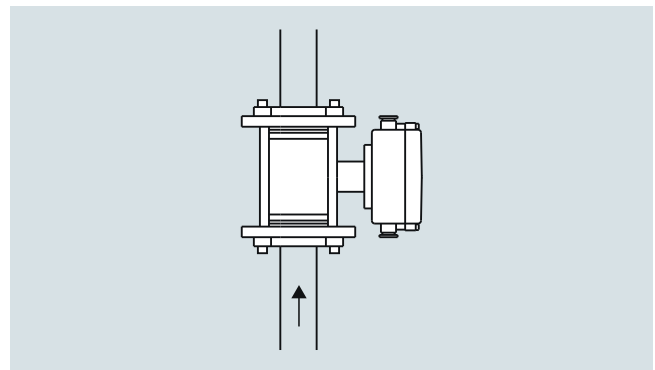

Install in vertical pipes with upward flow direction

##### Installation in horizontal pipes

The sensor must be mounted as shown in the below figure. Do not mount the sensor as shown in the lower figure. This will position the electrodes at the top where there is possibility for air bubbles and at the bottom where there is possibility for mud, sludge, sand etc.

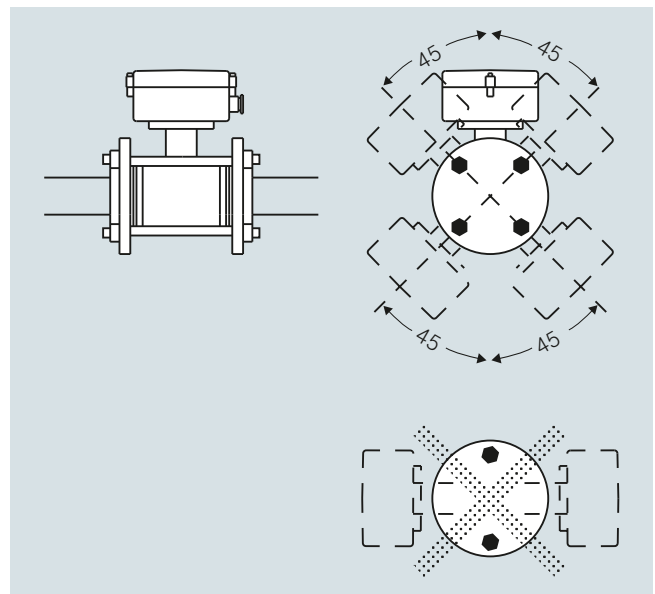

## Flow Measurement


### SITRANS FM (electromagnetic)

#### System information

#### Technical specifications (continued)


##### Measuring abrasive liquids and liquids containing particles

Recommended installation is in a vertical/inclined pipe to minimize the wear and deposits in the sensor.

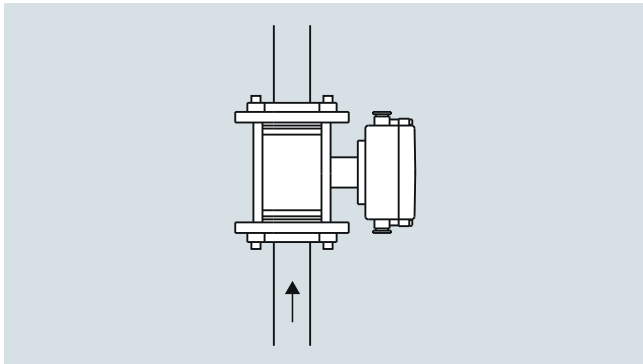

Install in vertical pipelines with upward flow direction if measuring abrasive liquids

##### Inlet and outlet conditions

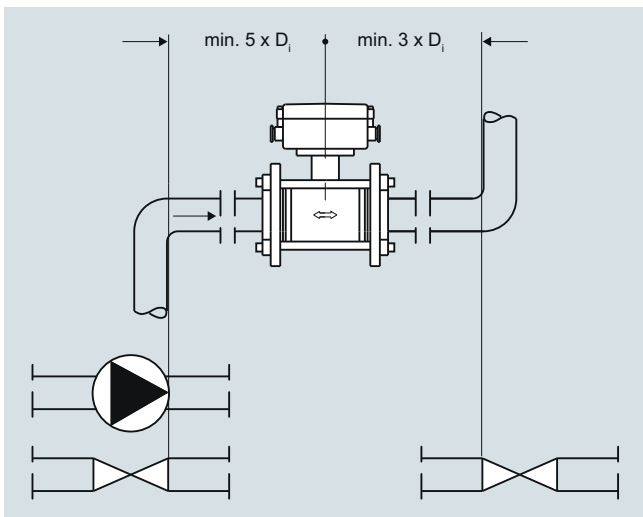

Recommended straight pipe lengths up and downstream for installations between elbows, pumps and valves


To achieve maximum accurate flow measurement it is essential to have straight pipe lengths up and downstream. Practical experience has proved that the MAG 5100 W and MAG 8000 are capable to operate in non-optimal piping arrangements and still provide acceptable accuracy even with zero diameters upstream and downstream of straight run pipe.

It is also important to center the flowmeter in relation to pipe flange and gaskets.

##### Ambient temperature-Installation

Temperature changes can cause expansion or contraction in the pipe system. To avoid damage on the sensor use of proper gasket and torque should be ensured. For more information see sensor instruction.

##### Potential equalization

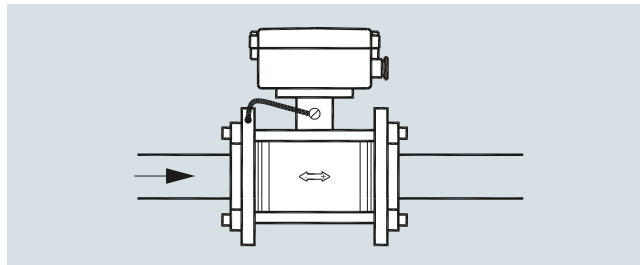


##### Potential equalization


The electrical potential of the liquid must always be equal to the electrical potential of the sensor. This can be achieved in different ways depending on the application:

- Wire jumper between sensor and adjacent flange (MAG 1100, MAG 3100)
- Direct metallic contact between sensor and fittings (MAG 1100 F)
- Built-in grounding electrodes (MAG 3100, MAG 5100 W)
- Optional grounding/protection flanges/rings (MAG 1100, MAG 3100, MAG 8000)
- Optional graphite gaskets on MAG 1100 (standard for MAG 1100 High Temperature)
- MAG 8000 installed in plastic or coated pipes: two grounding rings to be used.

##### Grounding

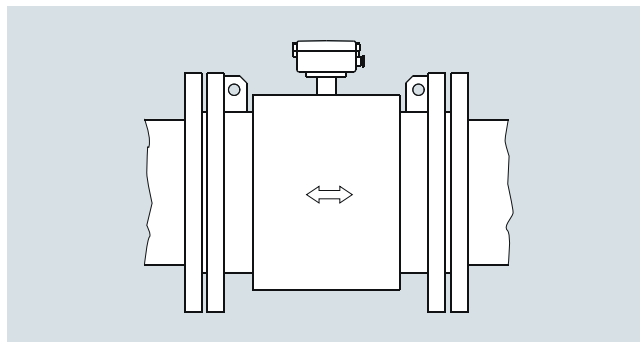


MAG 3100 and MAG 5100 W: with grounding electrodes in conductive and non-conductive pipes (no further action necessary)

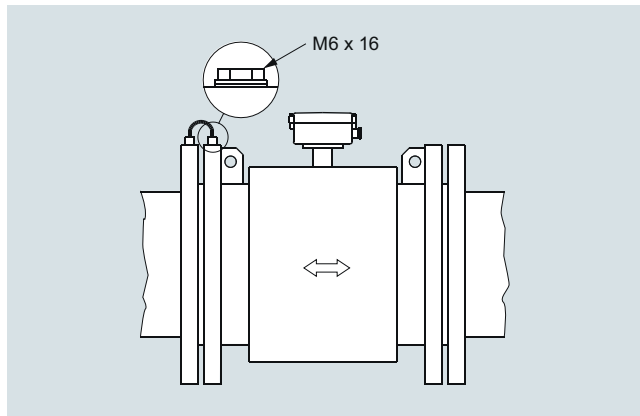

MAG 1100 and MAG 3100; without grounding electrodes in conductive pipes (MAG 1100 use graphite gasket)


**Technical specifications (continued)**

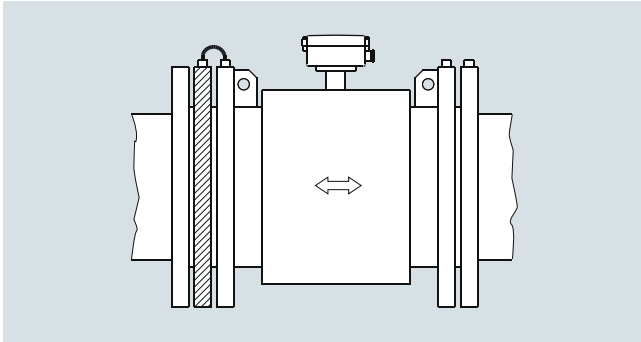

Without grounding electrodes in non-conductive pipes use grounding ring(MAG 1100 use graphite gasket)


MAG 1100 F grounding via process connections. MAG 8000 grounding see the section about MAG 8000.

Vacuum

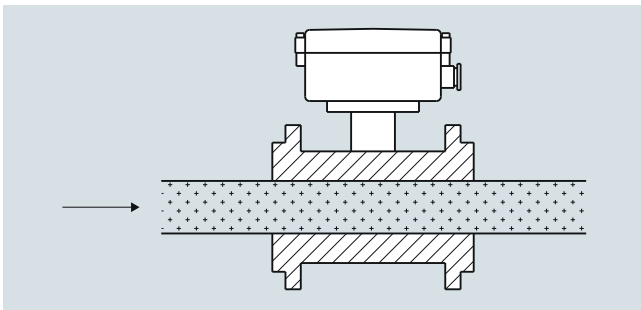


In order to prevent damages of liner when operating meters under vacuum please take note of the information "Operating pressure" given in section "Technical specification".

Installation in large pipes

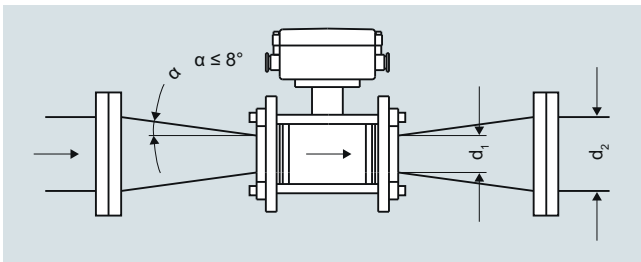

Reduction in nominal pipe diameter

The flowmeter can be installed between two reducers (e.g. DIN 28545). Assuming that at 8° the following pressure drop curve applies. The curves are applicable to water.

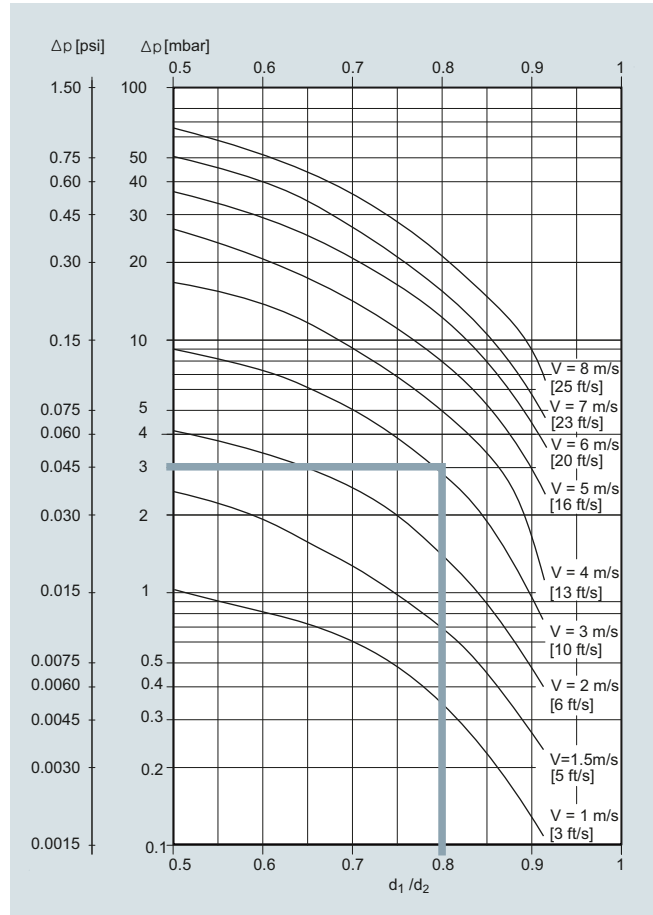


Pressure drop as function of diameter reduction between reducers

Example:

Flow velocity (v) of 3 m/s (10 ft/s) in a sensor with a diameter reduction DN 100 (4") to DN 80 (3") ( $d_1/d_2 = 0.8$ ) gives a pressure drop of 2.9 mbar (0.04 psi).

Ambient temperature

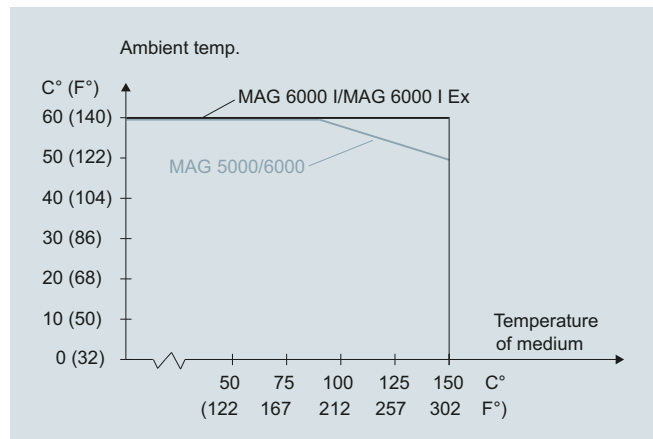

Max. ambient temperature as a function of temperature of medium

The transmitter can be installed either compact or remote.

With compact installation the temperature of medium must be according to the graph.

## Flow Measurement

### SITRANS FM (electromagnetic)

#### System information

#### Technical specifications (continued)

##### Sensor cables and conductivity of medium

Compact installation:

Liquids with an electrical conductivity  $\geq 5 \mu\text{S/cm}$ .

##### Note for MAG 1100 sizes DN 2 and DN 3:

- The media conductivity must be  $\geq 30 \mu\text{S/cm}$

##### Note for MAG 8000:

- The media conductivity must be  $\geq 20 \mu\text{S/cm}$

##### Empty pipe detection

The installation has to fulfill the following limitations for usage of the empty pipe detection function:


- Media conductivity  $\geq 20 \mu\text{S/cm}$
- Length of cable at remote installation  $\leq 50 \text{ m}$  (150 ft)
- Special shield cable must be used

##### Note for MAG 1100 sizes DN 2 and DN 3:


- Empty pipe detection is not available

##### Note for MAG 5000/6000 CT:


- Empty pipe detection is not available

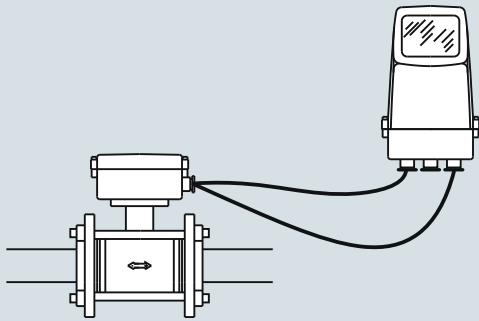

Remote installation

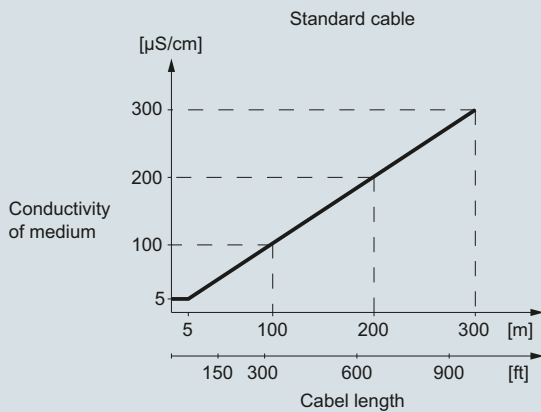

Minimum conductivity of medium (using standard electrode cable)

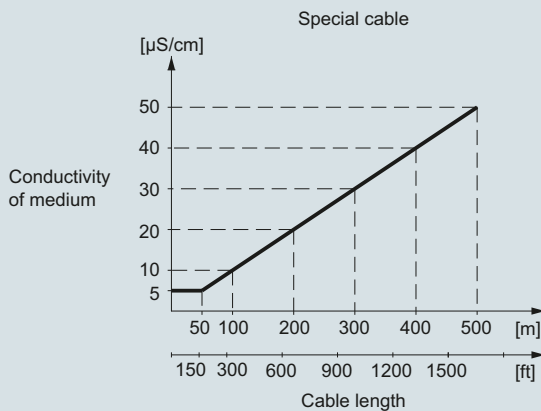

Minimum conductivity of medium (using special electrode cable)

### Function

All electromagnetic flowmeters are based on Faraday's law of induction:

$$U_M = B \cdot v \cdot d \cdot k$$


$U_M$  = Measured voltage induced in the medium perpendicular to the magnetic field and the flow direction. The voltage is tapped at two point electrodes.

$B$  = Magnetic flux density which permeates the flowing medium perpendicular to the flow direction.

$v$  = flow velocity of medium

$d$  = internal diameter of metering tube

$k$  = proportionality factor or sensor constant

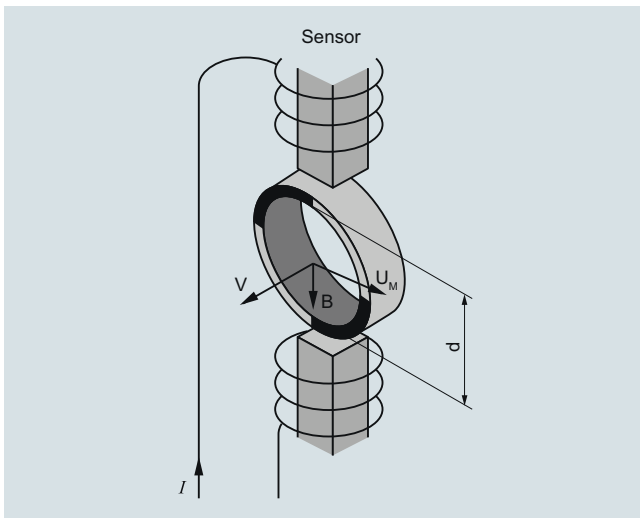

Function and measuring principle of electromagnetic measurement

An electromagnetic flowmeter generally consists of a magnetically non-conducting metering tube with an internal electrically non-conducting surface, magnet coils connected in series and mounted diametrically on the tube, and at least two electrodes which are inserted through the pipe wall and are in contact with the measured medium. The magnet field coils through which the current passes generate a pulsed electromagnetic field with the magnetic flux density  $B$  perpendicular to the pipe axis.

This magnetic field penetrates the magnetically non-conducting metering tube and the medium flowing through it, which must have a minimum electrical conductivity.

According to Faraday's law of induction, a voltage  $U_M$  is generated in an electrically conducting medium, and is proportional to the flow velocity  $v$  of the medium, the magnetic flux density  $B$ , and the distance between the electrodes  $d$  (internal diameter of pipe).

The signal voltage  $U_M$  is tapped by the electrodes which are in contact with the medium, and passed through the insulating pipe wall. The signal voltage  $U_M$  which is proportional to the flow velocity is converted by an associated transmitter into appropriate standard signals such as 4 to 20 mA.

### SITRANS FM diagnostics

The diagnostic functions are all internal tools in the meter:

- Identification in clear text and error log
- Error categories: function; warning; permanent and fatal errors
- Transmitter self-check including all outputs and the accuracy
- Sensor check: coil and electrode circuit test
- Overflow
- Empty pipe: partial filling; low conductivity; electrode fouling

### SITRANS FM Verificator (MAG 5000 and 6000)

The SITRANS FM Verificator is an external tool designed for MAG 5000 and MAG 6000 with MAG 1100, MAG 1100 F, MAG 3100, MAG 3100 P or MAG 5100 W sensors to verify the entire product, the installation and the application.

The goal is to improve operation, reduce downtime and maintain measurement accuracy as long as possible.

The SITRANS FM Verificator is highly advanced and carries out the complex verification and performance check of the entire flowmeter system, according to unique SIEMENS patented principles. The whole verification test is automated and easy to operate so there is no opportunity for human error or influence. The system is traceable to international standards and tested by WRc (Water Research Council).



SITRANS FM Verificator

- Stand alone Verificator to measure a number of selected parameters in the flow sensor and a transmitter which affects the integrity of the flow measurement.
- Up to 20 measurements can be stored in the Verificator.
- The Verificator can be connected via a serial cable to a PC enabling download of the data. A Windows program enables printing and management of verificator reports.

### Verification - Steps

Verification of a SITRANS FM flowmeter consists of the following test routines:

1. Transmitter test
2. Flowmeter and cable insulation test
3. Sensor magnetism test

## Flow Measurement


### SITRANS FM (electromagnetic)

#### SITRANS FM Verificator

##### Function (continued)

###### 1. Transmitter test

The transmitter test is the traditional way of on-site testing on the market and checks the complete electronic system from signal input to output.

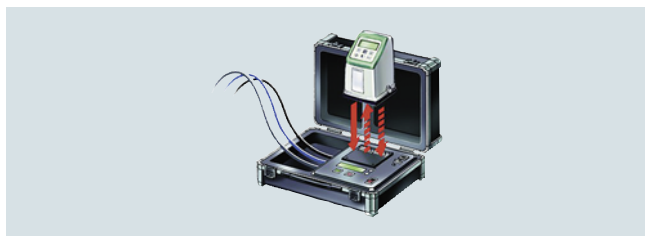


Transmitter test

Using the excitation power output, which is generated to drive the magnetic field of the sensor, the verificator simulates flow signal to the transmitter input. By measuring the transmitter outputs the verificator calculates its accuracy against defined values. Test includes:

- Excitation power to drive the magnetic field
- Signal function from signal input to output
- Signal processing – gain, offset and linearity
- Test of analogue and frequency output

###### 2. Insulation test

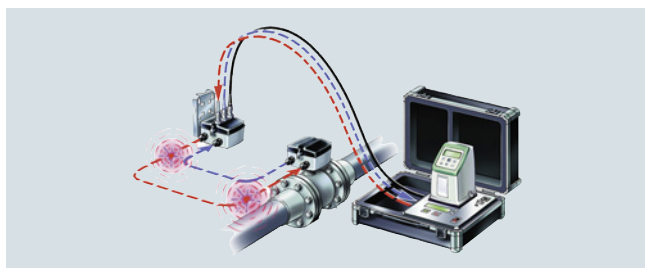


Flowmeter insulation test

The verification test of the flowmeter insulation is a “cross-talk” test of the entire flowmeter which ensures that the flow signal generated in the sensor is not affected by any external influences.

In the “cross-talk” test the verificator generates a high voltage disturbance within the coil circuit and then looks for any “cross-talk” induced in the flow signal circuit. By generating dynamic disturbances close-coupled to the flow signal, the flowmeter is tested for noise immunity to a maximum level:

- EMC influence on the flow signal
- Moisture in sensor, connection and terminal box
- Non-conductive deposit coating the electrodes within the sensor
- Missing or poor grounding, shielding and cable connection

###### 3. Sensor magnetism test

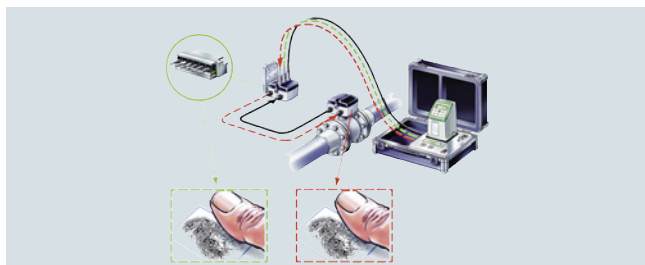

Sensor magnetism test

The verification of the sensor magnetism is a “boost” test of the magnetic field coil. The test ensures that the magnetism behaviour is like the first time, by comparing the current sensor magnetism with the “fingerprint” which was determined during initial calibration and stored in the SENSORPROM memory unit.

In the “boost” test the verificator changes the magnetic field in certain pattern and with high voltage to get quick stable magnetic condition. This unique test is fulfilled without any interference or compensation of surrounding temperature or interconnecting cabling.

- Changes in dynamic magnetic behaviour
- Magnetic influence inside and outside the sensor
- Missing or poor coil wire and cable connection

##### Certificate

The test certificate generated by a PC contains:

- Test result with passed or failed
- Installation specification
- Flowmeter specification and configuration
- Verificator specification with date of calibration ensuring traceability to international standards.

MAGFLO® Verification Certificate						
<b>Customer:</b>			<b>MAGFLO® Identification:</b>			
Name	_____		TAG No./Name	0		
Address	_____		Sensor Code No.	7ME634		
	_____		Sensor Serial No.	057701H142		
	_____		Transmitter Code No.	7ME692		
Phone	_____		Transmitter Serial No.	109418N080		
Email	_____		Location	_____		
<b>Results:</b>			Verification file name or No. FT-103FT2801			
			Transmitter <u>Passed</u>			
			Sensor Insulation <u>Passed</u>			
			Magnetic Circuit <u>Passed</u>			
<b>Velocity</b>		<b>Current Output</b>		<b>Frequency Output</b>		
Theoretical	Theoretical	Actual	Deviation	Theoretical	Actual	Deviation
0.5m/s	4.800mA	4.802mA	0.25%	0.500kHz	0.501kHz	0.11%
1.0m/s	5.600mA	5.601mA	0.08%	1.000kHz	1.001kHz	0.07%
3.0m/s	8.800mA	8.804mA	0.08%	3.000kHz	3.004kHz	0.14%
			Current Output 4-20mA		Frequency Output 0-10kHz	
<b>Transmitter Settings:</b>			<b>Sensor Details:</b>			
Basic	Qmax.	2.00000 m <sup>3</sup> /h				
	Flow Direction	Positive				
	Low flow Cut-off	1.50%				
	Empty Pipe	ON				
Output	Current Output	ON (4-20mA)				
	Time Constant	5.0 Sec.				
	Relay Output	Error Level				
	Digital Output	Pulse				
	Frequency Range	N/A				
	Time Constant	N/A				
	Volume/pulse	1.0 l/p				
	Pulse width	0.51999998 sec.				
	Pulse polarity	Positiv				
Totalizer 1 value before test	819442.93213 l					
Totalizer 1 value after test	819458.92334 l					
Totalizer 2 value before test	693.87579 l					
Totalizer 2 value after test	693.88145 l					
Operating time in days	1068					
	Size	DN 15 1/2 IN				
	Cal. Factor	0.16531426				
	Correction Factor	1.0				
	Excitation Freq.	12.5Hz				
<b>Verifier Details (083F5060)</b>						
	Serial No.	107920N490				
	Device No.	94683				
	Software Version	1.40				
	PC-Software Version	5.01				
	Cal. date	2015.10.26				
	ReCal. date	2016.10.26				
<b>Comments</b>						
These tests verify that the flowmeter is functioning within 2% deviation of the original test parameters.						
Verification is traceable to National and International Standards.						
Date and signature _____						
2016.10.26						

##### Description

SITRANS FM Verificator

11 ... 30 V DC, 11 ... 24 V AC, 115 ... 230 V, 50 Hz

11 ... 30 V DC, 11 ... 24 V AC, 115 ... 230 V, 60 Hz

##### Article No.

**FDK:083F5060**

**FDK:083F5061**

##### Note:

It is mandatory to have the Verificator returned to the factory once a year for check and re-verification.

### Overview



Transmitter MAG 5000/6000 compact version (left) and 19" insert version (right)

The MAG 5000 and 6000 are transmitters engineered for high performance, easy installation, commissioning and maintenance. The transmitters evaluate the signals from the SITRANS FM sensors type MAG 1100, MAG 1100 F, MAG 3100, MAG 3100 P and MAG 5100 W.

Transmitter types:

- MAG 5000: Max. measuring error  $\pm 0.4\% \pm 1 \text{ mm/s}$  (incl. sensor)
- MAG 6000: Max. measuring error  $\pm 0.2\% \pm 1 \text{ mm/s}$  (incl. sensor, see also sensor specifications) and with additional features such as: "plug & play" add-on bus modules; integrated batch functions.

### Benefits

- Superior signal resolution for optimum turn down ratio
- Digital signal processing with many possibilities
- Automatic reading of SENSORPROM data for easy commissioning
- User configurable operation menu with password protection
- 3 lines, 20 characters display in 11 languages
- Flow rate in various units
- Totalizer for forward, reverse and net flow as well as additional information available
- Multiple functional outputs for process control, minimum configuration with analogue, pulse/frequency and relay output (status, flow direction, limits)
- Comprehensive self-diagnostic for error indication and error logging (see SITRANS FM diagnostics)
- Batch control (MAG 6000 only)
- Custody transfer approval: MI-001 for cold water, PTB K 7.2 and OE12/C 040 for chilled water
- MAG 6000 with add-on bus modules for HART, FOUNDATION Fieldbus H1, DeviceNet, Modbus RTU/RS485, PROFIBUS PA and DP

### Application

The SITRANS FM flowmeters are suitable for measuring the flow of almost all electrically conductive liquids, pastes and slurries. The main applications can be found in:

- Water and waste water
- Chemical and pharmaceutical industries
- Food and beverage industries
- Power generation and utility

### Design

The transmitter is designed as either IP67 NEMA 4X/6 enclosure for compact or wall mounting or 19" version as a 19" insert as a base to be used in:

- 19" rack systems
- Front panel mounting IP65/NEMA 2
- Panel mounting IP20/NEMA 1
- Wall mounting IP66/NEMA 4X

Several options on 19" versions are available such as:

- Transmitters mounted in safe area for Ex ATEX approved flow sensors (incl. barriers)
- Transmitters with electrode cleaning unit on request

## Flow Measurement

### SITRANS FM (electromagnetic) Transmitters

#### MAG 5000/6000

#### Function


The MAG 5000/6000 are transmitters with a built-in alphanumeric display in several languages. The transmitters evaluate the signals from the associated electromagnetic sensors and also fulfil the task of a power supply unit which provides the magnet coils with a constant current.

Further information on connection, mode of operation and installation can be found in the data sheets for the sensors.


#### Displays and controls

Operation of the transmitter can be carried out using:

- Control and display unit
- HART communicator
- PC/laptop and SIMATIC PDM software via HART communication
- PC/laptop and SIMATIC PDM software using PROFIBUS or Modbus communication

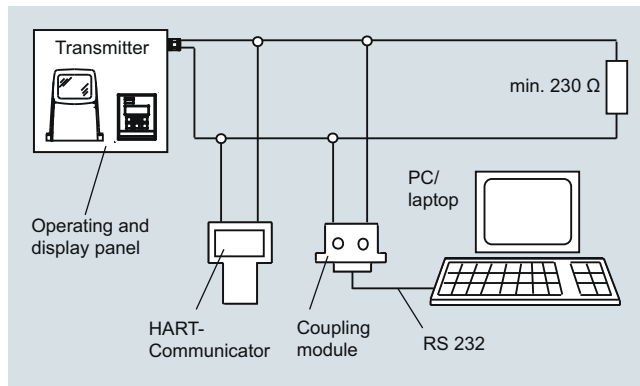

HART communication

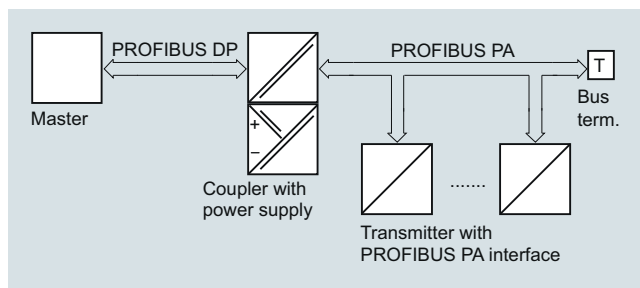

PROFIBUS PA communication



### Technical specifications

<b>Mode of operation and design</b>	
Measuring principle	Electromagnetic with pulsed constant field
Empty pipe	Detection of empty pipe (special cable required in remote mounted installation)
Excitation frequency	Depend on sensor size
Electrode input impedance	$> 1 \times 10^{14} \Omega$
<b>Input</b>	
Digital input	11 ... 30 V DC, $R_i = 4.4 \text{ k}\Omega$
• Activation time	50 ms
• Current	$I_{11 \text{ V DC}} = 2.5 \text{ mA}$ , $I_{30 \text{ V DC}} = 7 \text{ mA}$
<b>Output</b>	
Current output	
• Signal range	0 ... 20 mA or 4 ... 20 mA
• Load	$< 800 \Omega$
• Time constant	0.1 ... 30 s, adjustable
Digital output	
• Frequency	0 ... 10 kHz, 50 % duty cycle (uni/bidirectional)
• Pulse (active)	24 V DC, 30 mA, $1 \text{ k}\Omega \leq R_i \leq 10 \text{ k}\Omega$ , short-circuit-protected (power supplied from flowmeter)
• Pulse (passive)	3 ... 30 V DC, max. 110 mA, $200 \Omega \leq R_i \leq 10 \text{ k}\Omega$ powered from connected equipment
• Time constant	0.1 ... 30 s, adjustable
Relay output	
• Time constant	Changeover relay, same as current output
• Load	42 V AC/2 A, 24 V DC/1 A
<b>Low flow cut off</b>	0 ... 9.9 % of maximum flow
<b>Galvanic isolation</b>	All inputs and outputs are galvanically isolated
<b>Max. measuring error (incl. sensor and zero point) (for detailed accuracy specifications see "System information")</b>	
• MAG 5000	$\pm 0.4 \% \pm 1 \text{ mm/s}$
• MAG 6000	$\pm 0.2 \% \pm 1 \text{ mm/s}$
<b>Rated operation conditions</b>	
Ambient temperature	
• Operation	<ul style="list-style-type: none"> <li>Display version: -20 ... +60 °C (-4 ... +140 °F)</li> <li>Blind version: -20 ... +60 °C (-4 ... +140 °F)</li> <li>Custody transfer (CT) version: -20 ... +50 °C (-4 ... +122 °F)</li> </ul>
• Storage	-40 ... +70 °C (-40 ... +158 °F)
<b>Mechanical load (vibration)</b>	
Compact version	18 ... 1000 Hz, 3.17 g RMS, sinusoidal in all directions to IEC 68-2-36
19" insert	1 ... 800 Hz, 1 G, sinusoidal in all directions to IEC 68-2-36
<b>Degree of protection</b>	
Compact version	IP67/NEMA 4X/6 to IEC 529 and DIN 40050 (1 mH <sub>2</sub> O 30 min.)
19" insert	IP20/NEMA 1 to IEC 529 and DIN 40050
<b>EMC performance</b>	
	IEC/EN 61326-1 (all environments) IEC/EN 61326-2-5
<b>Display and keypad</b>	
Totalizer	Two eight-digit counters for forward, net or reverse flow

<b>Display</b>	
	Background illumination with alpha-numeric text, 3 x 20 characters to indicate flow rate, totalized values, settings and faults; Reverse flow indicated by negative sign
Time constant	Time constant as current output time constant
<b>Design</b>	
Enclosure material	Fiber glass reinforced polyamide; stainless steel AISI 316/1.4436 (IP65)
• Compact version	Standard 19" insert of aluminium/steel (DIN 41494), width: 21 TE, height: 3 HE
• 19"-insert	IP20/NEMA 1; Aluminium
• Back of panel	IP20/NEMA 1 (prepared for IP65/NEMA 2 display side); ABS plastic
• Panel mounting	IP66/NEMA 4X; ABS plastic
• Wall mounting	
<b>Dimensions</b>	
• Compact version	See dimensional drawings
• 19" insert	See dimensional drawings
<b>Weight</b>	
• Compact version	0.75 kg (2 lbs)
• 19" insert	See dimensional drawings
<b>Power supply</b>	
	<ul style="list-style-type: none"> <li>115 ... 230 V AC +10 % -15 %, 50 ... 60 Hz</li> <li>11 ... 30 V DC or 11 ... 24 V AC</li> </ul>
<b>Power consumption</b>	
	<ul style="list-style-type: none"> <li>230 V AC: 17 VA</li> <li>24 V AC: 9 VA, <math>I_N = 380 \text{ mA}</math>, <math>I_{ST} = 8 \text{ A}</math> (30 ms)</li> <li>12 V DC: 11 W, <math>I_N = 920 \text{ mA}</math>, <math>I_{ST} = 4 \text{ A}</math> (250 ms)</li> <li>24 V DC: 8.4 VA, <math>I_N = 350 \text{ mA}</math>, <math>I_{ST} = 4 \text{ A}</math> (10 ms)</li> </ul>
	$I_{ST} = 4 \text{ A}$ (250 ms): For solar panel please secure stable current supply
<b>Certificates and approvals</b>	
General purpose	<ul style="list-style-type: none"> <li>CE (LVD, EMC, PED, RoHS)</li> <li>UL (c-UL-us)</li> </ul>
Hazardous area	<ul style="list-style-type: none"> <li>FM, CSA</li> <li>- NI Class I Div. 2 Groups A, B, C, D</li> </ul>
Custody transfer	<ul style="list-style-type: none"> <li>Cold water: MI-001</li> <li>Chilled water</li> <li>- PTB K 7.2 (Germany)</li> <li>- OE 12/C 040 (Austria)</li> </ul>
Marine (only for remote version with MAG 5100 W, DN 50 ... DN 300)	<ul style="list-style-type: none"> <li>ABS</li> <li>Bureau Veritas</li> <li>DNV-GL</li> <li>Lloyd's Register</li> </ul>
Others	<ul style="list-style-type: none"> <li>CPA (China)</li> <li>EAC (Russia, Belarus, Kazakhstan)</li> <li>KCs (South Korea)</li> </ul>
<b>Communication</b>	
Standard	HART 5.2 optional
• MAG 5000	Optional as add-on modules:
• MAG 6000	<ul style="list-style-type: none"> <li>HART 5.2</li> <li>Modbus RTU/RS 485,</li> <li>FOUNDATION Fieldbus H1</li> <li>DeviceNet,</li> <li>PROFIBUS PA</li> <li>PROFIBUS DP</li> </ul>


## Flow Measurement

### SITRANS FM (electromagnetic) Transmitters

#### MAG 5000/6000





#### Technical specifications (continued)

##### Safety barrier (e/ia)




	<b>Application</b>	<b>For use with MAG 5000/6000 19" and MAG 1100 Ex/MAG 3100 Ex</b>		
	<b>Ex approval</b>	MAG 1100 Ex [EEx e ia] IIB ATEX, EAC Ex MAG 3100 Ex [EEx e ia] IIC ATEX, EAC Ex		
	<b>Cable parameter</b>	Group	Capacity in $\mu\text{F}$	Inductance in mH
	Electrode	IIC	$\leq 4.1$	$\leq 80$
		IIB	$\leq 45$	$\leq 87$
		IIA	$\leq 45$	$\leq 87$
	<b>Ambient temperature</b>			
	• During operation	-20 ... +50 °C (-4 ... +122 °F)		
	• During storage	-20 ... +70 °C (-4 ... +158 °F)		
	<b>Enclosure</b>			
	• Material	Standard 19" insert in aluminum/steel (DIN 41494)		
	• Width	21 TE (4.75")		
	• Height	3 HE (5.25")		
	• Rating	IP20/NEMA 1 to EN 60529		
	• Mechanical load	1 g, 1 ... 800 Hz sinusoidal in all directions to EN 60068-2-36		

#### Selection and ordering data








##### Transmitter MAG 5000

Description	Article No.	
Transmitter MAG 5000 Blind for compact and wall mounting; IP67/NEMA 4X/6, fibre glass reinforced polyamide		
• 11 ... 30 V DC/11 ... 24 V AC	<b>7ME6910-1AA30-0AA0</b>	
• 115 ... 230 V AC, 50/60 Hz	<b>7ME6910-1AA10-0AA0</b>	
Transmitter MAG 5000 Display for compact and wall mounting; IP67/NEMA 4X, fibre glass reinforced polyamide		
• 11 ... 30 V DC/11 ... 24 V AC	<b>7ME6910-1AA30-1AA0</b>	
• 115 ... 230 V AC, 50/60 Hz	<b>7ME6910-1AA10-1AA0</b>	
• 115 ... 230 V AC, 50/60 Hz, with HART	<b>7ME6910-1AA10-1BA0</b>	
Transmitter MAG 5000 CT for compact and wall mounting, approved for custody transfer, without verification (no approval marks - only a complete flowmeter can be verified, i.e. sensor together with the transmitter); IP67/NEMA 4X/6, fibre glass reinforced polyamide		
• 11 ... 30 V DC/11 ... 24 V AC	<b>7ME6910-1AA30-1AD0</b>	
• 115 ... 230 V AC, 50/60 Hz	<b>7ME6910-1AA10-1AD0</b>	
Transmitter MAG 5000 for 19" rack and wall mounting		
• 11 ... 30 V DC/11 ... 24 V AC	<b>7ME6910-2CA30-1AA0</b>	
• 115 ... 230 V AC, 50/60 Hz	<b>7ME6910-2CA10-1AA0</b>	

##### Transmitter MAG 6000

Description	Article No.	
Transmitter MAG 6000 Blind for compact and wall mounting; IP67/NEMA 4X/6, fibre glass reinforced polyamide		
• 11 ... 30 V DC/11 ... 24 V AC	<b>7ME6920-1AA30-0AA0</b>	
• 115 ... 230 V AC, 50/60 Hz	<b>7ME6920-1AA10-0AA0</b>	
Transmitter MAG 6000 Display for compact and wall mounting; IP67/NEMA 4X, fibre glass reinforced polyamide		
• 11 ... 30 V DC/11 ... 24 V AC	<b>7ME6920-1AA30-1AA0</b>	
• 115 ... 230 V AC, 50/60 Hz	<b>7ME6920-1AA10-1AA0</b>	
Transmitter MAG 6000 for compact and wall mounting; IP65/NEMA 4, stainless steel AISI 316/1.4436 (only for sensor with stainless steel terminal box) (for remote version order stainless steel terminal box separately)		
• 11 ... 30 V DC/11 ... 24 V AC	<b>7ME6920-1QA30-1AA0</b>	
• 115 ... 230 V AC, 50/60 Hz	<b>7ME6920-1QA10-1AA0</b>	

### Selection and ordering data (continued)

Description	Article No.	
<p>Transmitter MAG 6000 CT for compact and wall mounting, approved for custody transfer, without verification (no approval marks - only a complete flowmeter can be verified, i.e. sensor together with the transmitter); IP67/NEMA 4X/6, fibre glass reinforced polyamide</p> <ul style="list-style-type: none"> <li>• 11 ... 30 V DC/11 ... 24 V AC</li> <li>• 115 ... 230 V AC, 50/60 Hz</li> </ul>	<p><b>7ME6920-1AA30-1AD0</b></p> <p><b>7ME6920-1AA10-1AD0</b></p>	
<p>Transmitter MAG 6000 SV for compact and wall mounting; special excitation frequency 44 Hz for Batch application DN ≤ 25/1" IP67/NEMA 4X/6, fibre glass reinforced polyamide</p> <ul style="list-style-type: none"> <li>• 11 ... 30 V DC/11 ... 24 V AC</li> <li>• 115 ... 230 V AC, 50/60 Hz</li> </ul>	<p><b>7ME6920-1AB30-1AA0</b></p> <p><b>7ME6920-1AB10-1AA0</b></p>	
<p>Transmitter MAG 6000 for 19" rack and wall mounting</p> <ul style="list-style-type: none"> <li>• 11 ... 30 V DC/11 ... 24 V AC</li> <li>• 115 ... 230 V AC, 50/60 Hz</li> </ul>	<p><b>7ME6920-2CA30-1AA0</b></p> <p><b>7ME6920-2CA10-1AA0</b></p>	
<p>Transmitter MAG 6000 SV for 19" rack and wall mounting; special excitation frequency 44 Hz for Batch application DN ≤ 25/1"</p> <ul style="list-style-type: none"> <li>• 11 ... 30 V DC/11 ... 24 V AC</li> <li>• 115 ... 230 V AC, 50/60 Hz</li> </ul>	<p><b>7ME6920-2CB30-1AA0</b></p> <p><b>7ME6920-2CB10-1AA0</b></p>	
<p>MAG 6000 19" insert, complete mounted with IP66/NEMA 4X wall mounting enclosure in ABS plastic; 115 ... 230 V AC, 50/60 Hz; cable gland PG13.5</p>	<b>7ME6920-2EA10-1AA0</b>	
<p>MAG 6000 19" insert with safety barrier for Ex-approved sensors, complete mounted with IP66/NEMA 4X wall mounting enclosure in ABS plastic, 115 ... 230 V AC, 50/60 Hz; cable gland PG13.5</p> <ul style="list-style-type: none"> <li>• For ATEX 2G D sensors</li> </ul>	<b>7ME6920-2MA11-1AA0</b>	
<p>MAG 6000 SV 19" insert, complete mounted with IP66/NEMA 4X wall mounting enclosure in ABS plastic, special excitation frequency 44 Hz for Batch application DN ≤ 25/1"; cable gland PG13.5</p> <ul style="list-style-type: none"> <li>• 11 ... 30 V DC/11 ... 24 V AC</li> <li>• 115 ... 230 V AC, 50/60 Hz</li> </ul>	<p><b>7ME6920-1EB30-1AA0</b></p> <p><b>7ME6920-1EB10-1AA0</b></p>	


### Operating instructions for SITRANS FM MAG 5000/6000

Description	Article No.
For SITRANS FM MAG 5000/6000 IP67	<b>A5E02338368</b>
<ul style="list-style-type: none"> <li>• English</li> <li>• German</li> </ul>	<b>A5E02944982</b>
For SITRANS FM MAG 5000/6000 19"	<b>A5E02082880</b>
<ul style="list-style-type: none"> <li>• English</li> </ul>	

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/processinstrumentation/documentation>

### Communication modules for MAG 6000

Description	Article No.	
HART (not for MAG 6000 I)	<b>FDK:085U0226</b>	
Modbus RTU/RS485	<b>FDK:085U0234</b>	
PROFIBUS PA Profile 3	<b>FDK:085U0236</b>	
PROFIBUS DP Profile 3	<b>FDK:085U0237</b>	
DeviceNet	<b>FDK:085U0229</b>	
FOUNDATION Fieldbus H1	<b>A5E02054250</b>	

### Operating instructions for SITRANS F add-on modules

Description	Article No.
HART	<b>A5E03089708</b>
<ul style="list-style-type: none"> <li>• English</li> </ul>	
PROFIBUS PA/DP	<b>A5E00726137</b>
<ul style="list-style-type: none"> <li>• English</li> <li>• German</li> </ul>	<b>A5E01026429</b>
Modbus	<b>A5E00753974</b>
<ul style="list-style-type: none"> <li>• English</li> <li>• German</li> </ul>	<b>A5E03089262</b>
FOUNDATION Fieldbus	<b>A5E02318728</b>
<ul style="list-style-type: none"> <li>• English</li> <li>• German</li> </ul>	<b>A5E02488856</b>
DeviceNet	<b>A5E03089720</b>
<ul style="list-style-type: none"> <li>• English</li> </ul>	

This device is shipped with Safety Notes and a DVD containing further SITRANS FM literature.

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/processinstrumentation/documentation>













## Flow Measurement

### SITRANS FM (electromagnetic) Transmitters

#### MAG 5000/6000

#### Selection and ordering data (continued)

#### Accessories for MAG 5000 and MAG 6000

Description	Article No.		Description	Article No.	
Accessory kit for remote use of sensor with two 5-pin terminal blocks	<b>A5E34827189</b>		Low-noise electrode coaxial cable for low conductivity and high vibration levels, 3 × 0.13 mm <sup>2</sup> , Temperature range -25 °C ... +85 °C (-13 °F ... +185 °F)	<b>A5E02272692</b> <b>A5E02272723</b> <b>A5E02272730</b>	
Wall mounting unit for MAG 5000/6000 with IP67/NEMA 4X/6, terminal box in polyamide <sup>2)</sup>	<b>FDK:085U1018</b> <b>FDK:085U1053</b>		Cable kit including standard coil cable (3 × 1.5 mm <sup>2</sup> /18 gage, single shielded with PVC jacket) and special electrode cable <sup>1)</sup> (3 × 0.25 mm <sup>2</sup> , double shielded with PVC jacket). Temperature range -30 °C ... +70 °C (-22 °F ... +158 °F)	<b>A5E02296329</b> <b>A5E01181647</b> <b>A5E02296464</b> <b>A5E01181656</b> <b>A5E02296490</b> <b>A5E02296494</b> <b>A5E01181686</b> <b>A5E02296498</b> <b>A5E01181689</b> <b>A5E01181691</b> <b>A5E01181699</b> <b>A5E01181703</b> <b>A5E01181705</b>	
Special wall mounting unit for MAG 5000/6000 IP67/NEMA 4X/6, mounting bracket in stainless steel AISI 316 (1.4401), terminal box in polyamide	<b>A5E36699702</b> <b>A5E36699938</b>		Potting kit for IP68/NEMA 6P sealing of sensor junction box	<b>FDK:085U0220</b>	
Sun lid for MAG 5000/6000 transmitter (Frame and lid)	<b>A5E02328485</b>		19" safety barrier (21 TE) <sup>1)</sup> [EEx e ia] IIC for MAG 1100 Ex sensors 12 ... 24 V, 115 ... 230 V and MAG 3100 Ex sensors, incl. back plate (A5E02559810)	<b>FDK:083F5034</b>	
Standard coil or electrode cable, 3 × 1.5 mm <sup>2</sup> /18 gage, single shielded with PVC jacket; Temperature range -30 °C ... +70 °C (-22 °F ... +158 °F)	<b>A5E02296523</b> <b>FDK:083F0121</b> <b>FDK:083F0210</b> <b>A5E02297309</b> <b>FDK:083F0211</b> <b>A5E02297317</b> <b>FDK:083F0212</b> <b>FDK:083F0213</b> <b>FDK:083F3052</b> <b>FDK:083F3053</b> <b>FDK:083F3054</b>		Front panel mounting enclosure IP65/NEMA 2 in ABS plastic for 19" insert (21 TE)	<b>FDK:083F5030</b>	
Special electrode cable <sup>1)</sup> (empty pipe detection or low conductivity), 3 × 0.25 mm <sup>2</sup> double shielded with PVC jacket, Temperature range -30 °C ... +70 °C (-22 °F ... +158 °F)	<b>FDK:083F3020</b> <b>FDK:083F3095</b> <b>FDK:083F3094</b> <b>FDK:083F3093</b> <b>FDK:083F3092</b> <b>FDK:083F3056</b> <b>FDK:083F3057</b> <b>FDK:083F3058</b>		Front panel mounting enclosure IP65/NEMA 2 in ABS plastic for 19" insert (42 TE)	<b>FDK:083F5031</b>	

<sup>1)</sup> Safety cables cannot be used with 19" safety barrier

<sup>2)</sup> For stainless steel wall mounting kit, order:  
- M20: FDK:085U1018 and A5E00836867  
- ½ NPT: FDK:085U1053 and A5E00836868

**Selection and ordering data** (continued)

Description	Article No.	
Panel mounting enclosure IP20/NEMA 1 in aluminum for 19" insert (21 TE)	<b>FDK:083F5032</b>	
Panel mounting enclosure IP20/NEMA 1 in aluminum for 19" insert (42 TE)	<b>FDK:083F5033</b>	
Wall mounting enclosure IP66/NEMA 4X in ABS plastic for 19" insert (cable glands and connection board not included).  • 21 TE	<b>FDK:083F5037</b>	
  • 42 TE	<b>FDK:083F5038</b>	
Front cover (7TE) for panel mounting enclosure	<b>FDK:083F4525</b>	
Sun shield for MAG 5000/6000 transmitter in remote design	<b>A5E01209496</b>	
Sun Shield for MAG 5000/6000 transmitter in compact design on MAG 3100 (DN 15 ... 2000 (1/2" ... 78") or MAG 5100 W (DN 150 ... 1200 (6" ... 48"))	<b>A5E01209500</b>	

**Spare parts**

Description	Article No.	
Connection board (for polyamide terminalbox) • 12 ... 24 V • 115 ... 230 V	<b>A5E02559817</b> <b>A5E02559816</b>	
Connection board (for stainless steel terminalbox) • 12 ... 24 V • 115 ... 230 V	<b>A5E02604280</b> <b>A5E02604272</b>	
Connection board MAG 5000/6000 19" insert for panel mounting enclosure, 12 ... 24 V/115 ... 230 V	<b>A5E02559809</b>	
Connection board MAG 5000/6000 19" insert with safety barrier for panel mounting enclosure, 12 ... 24 V/115 ... 230 V	<b>A5E02559810</b>	
Connection board MAG 5000/6000 19" insert with safety barrier for panel mounting enclosure, 12 ... 24 V/115 ... 230 V (only for sensors produced before October 2007)	<b>A5E02559811</b>	
Connection board MAG 5000/6000 19" insert with cleaning unit for panel mounting enclosure, 12 ... 24 V/115 ... 230 V	<b>FDK:083F4123</b>	
SENSORPROM memory unit (Sensor code and serial numbers must be specified on order) • 2 kB (for MAG 5000/6000/6000 I) - 1 pc. - 10 pcs. • 250 B (for MAG 2500/3000)	<b>FDK:085U1005</b> <b>FDK:083F5052</b> <b>FDK:085U1008</b>	
Display unit for MAG 5000/6000 • Black neutral front	<b>FDK:085U1038</b>	
  • SIEMENS front	<b>FDK:085U1039</b>	
HW key	<b>On request</b>	







## Flow Measurement

### SITRANS FM (electromagnetic) Transmitters

#### MAG 5000/6000


#### Selection and ordering data (continued)

Description	Article No.	
Cable glands (polyamide), 4 pcs. • M20 • ½" NPT • PG 13.5, 2 pcs.	<b>A5E00822490</b> <b>A5E00822501</b> <b>FDK:083G0228</b>	 ½" NPT    M20
Sealing screws for sensor/transmitter, 2 pcs.	<b>FDK:085U0221</b>	
Terminal box, in polyamide, inclusive lid, terminal blocks, gasket and screws • M20 • ½" NPT	<b>FDK:085U1050</b> <b>FDK:085U1052</b>	
Terminal box lid, in polyamide	<b>FDK:085U1003</b>	
Terminal box, in stainless steel, inclusive lid, terminal blocks, gasket and screws, for MAG 6000 in stainless steel and for all Ex sensors • M20 • ½" NPT	<b>A5E00836867</b> <b>A5E00836868</b>	
Terminal box (3A) for MAG 1100 F in polyamide, inclusive lid, terminal blocks, gasket and screws • M20 • ½" NPT	<b>A5E00822478</b> <b>A5E00822479</b>	
Gasket for terminal box lid in polyamide or for MAG 5000/ 6000 IP67/ NEMA 4X/6 enclosure in poly- amide (5 pcs.)	<b>A5E37086797</b>	
Spare part kit for remote use of sensor with twenty 5-pin termi- nal blocks	<b>A5E34346873</b>	
Display frame in polyamide for MAG 5000/6000 IP67/ NEMA 4X/6 (5 pcs.)	<b>A5E43491675</b>	
Connection board MAG 5000/6000 19" insert for wall mounting enclosure, 12 ... 24 V/115 ... 230 V	<b>A5E02559813</b>	


Description	Article No.	
Connection board MAG 5000/6000 19" insert with safety barrier for wall mounting enclosure, 12 ... 24 V/115 ... 230 V	<b>A5E02559814</b>	
Connection board MAG 5000/6000 19" insert with safety barrier for wall mounting enclosure, 12 ... 24 V/115 ... 230 V (only for sen- sors produced before October 2007)	<b>A5E02559812</b>	
Connection board MAG 5000/6000 19" insert with cleaning unit for wall mounting enclosure, 12 ... 24 V/115 ... 230 V	<b>A5E02559815</b>	
SENSORPROM programmer with RS 232 interface	<b>FDK:083H4246</b>	

**Dimensional drawings**

**Transmitter IP67/NEMA 4X/6 compact polyamide**

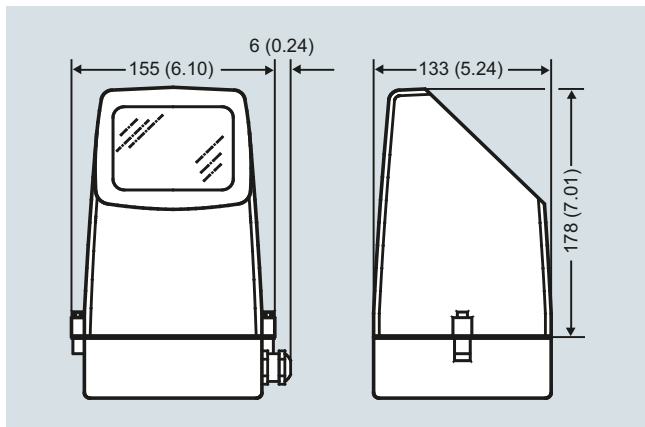


Transmitter compact mounted, dimensions in mm (inch)

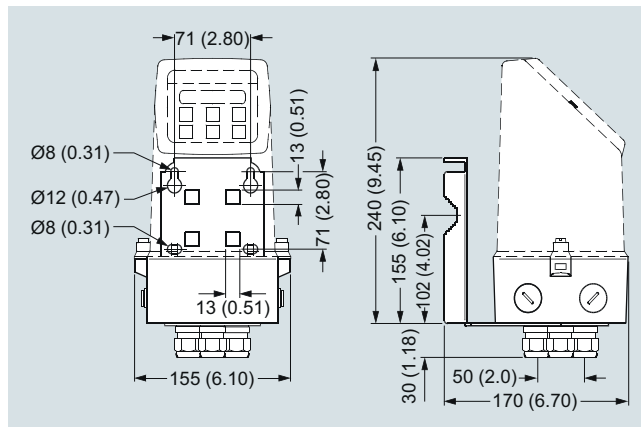

Transmitter wall mounted, dimensions in mm (inch)

**Transmitter, 19" IP20/NEMA 1 standard unit**

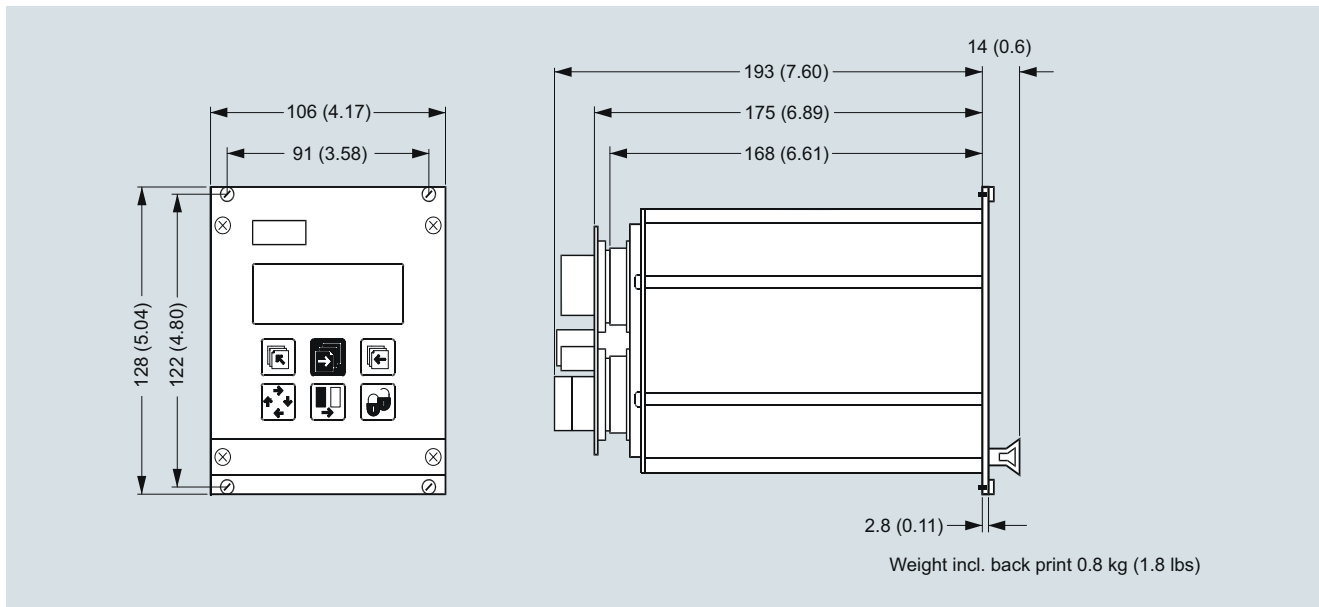

Dimensions in mm (inch)


### Flow Measurement

SITRANS FM (electromagnetic)  
Transmitters

MAG 5000/6000


#### Dimensional drawings (continued)

##### Transmitter, wall mounting IP66/NEMA 4X, 21 TE

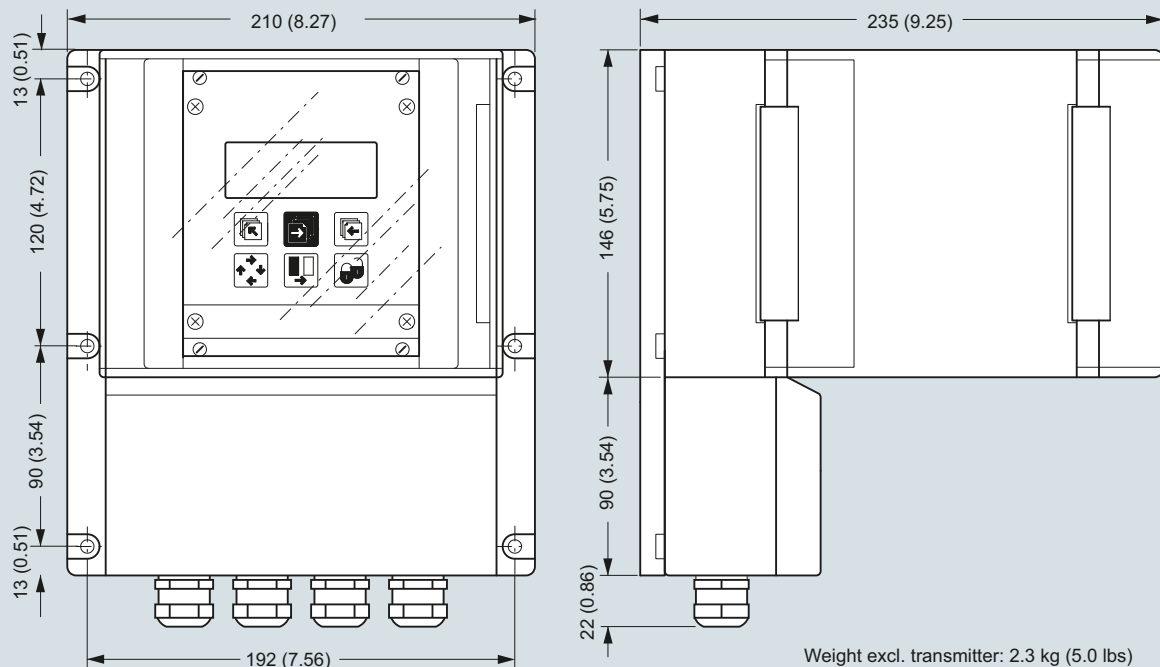

Dimensions in mm (inch)

##### Transmitter, wall mounting IP66/NEMA 4X, 42 TE

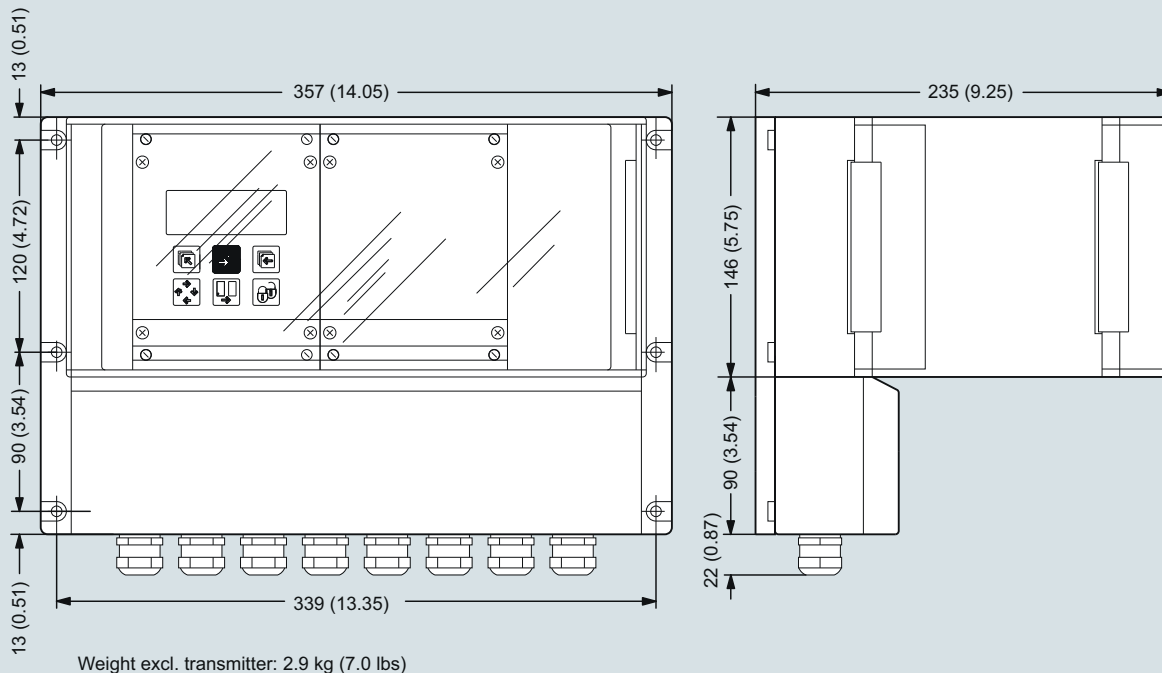


Dimensions in mm (inch)




**Dimensional drawings** (continued)

**Transmitter, front panel mounting IP65/NEMA 2, 21 TE**

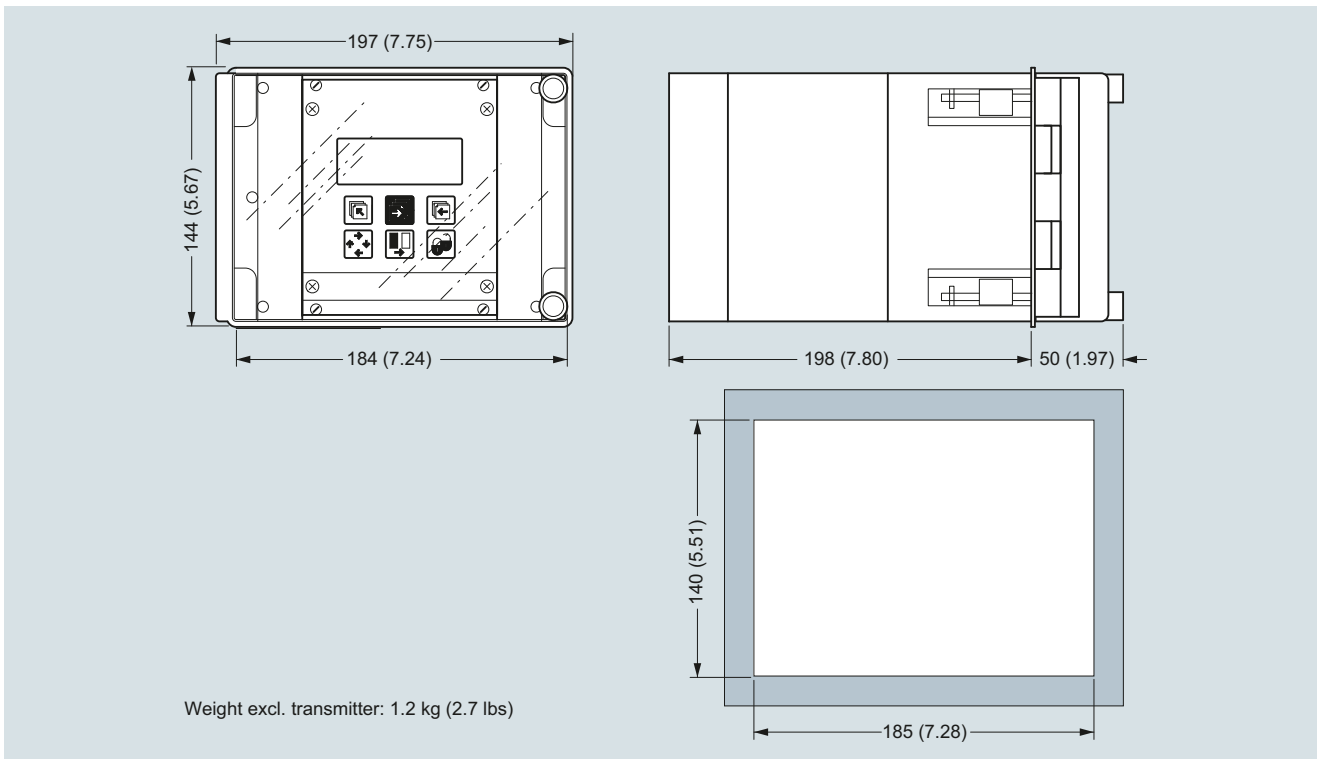

Dimensions in mm (inch)

**Transmitter, front panel mounting IP65/NEMA 2, 42 TE**

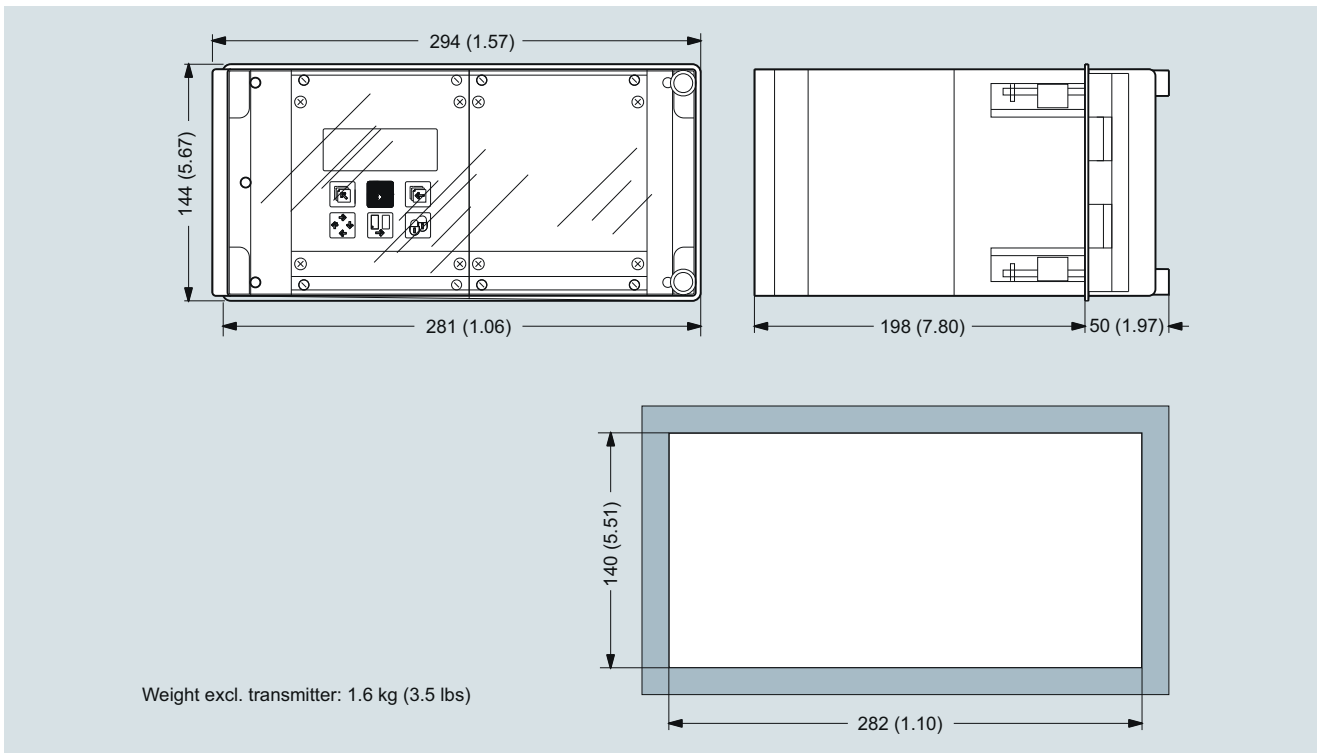

Dimensions in mm (inch)


## Flow Measurement

SITRANS FM (electromagnetic)  
Transmitters

MAG 5000/6000

### Dimensional drawings (continued)


#### Transmitter, panel mounting IP20/NEMA 1, 21 TE

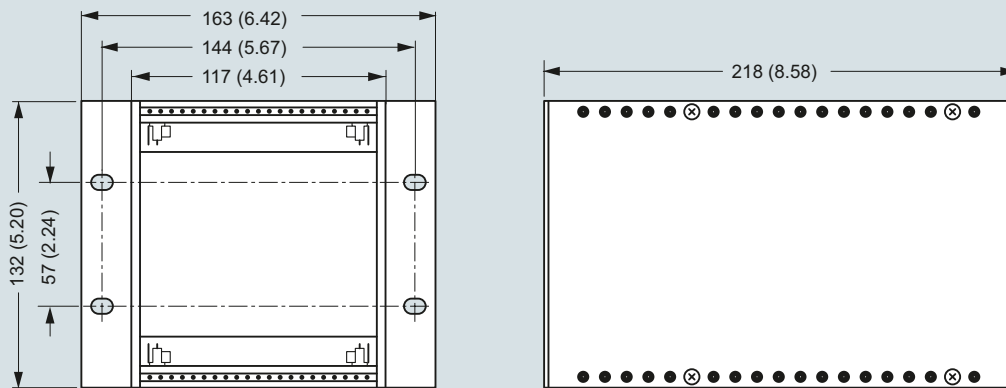

Weight: 0.7 kg (1.6 lbs)

Dimensions in mm (inch)

#### Transmitter, panel mounting IP20/NEMA 1, 42 TE

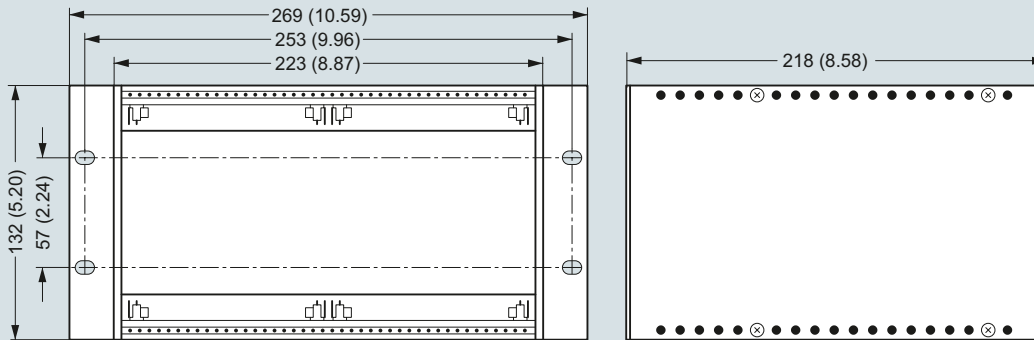

Weight: 0.9 kg (2.0 lbs)

Dimensions in mm (inch)

### Overview



The SITRANS FM MAG 6000 I/MAG 6000 I Ex de transmitter is designed for the demands in the process industry. The robust die cast aluminum housing provides superb protection, even in the most harsh industrial environments. Full input and output functionality is given even in the Ex version.

### Benefits

- Full range of Ex-rated flowmeters with intrinsically safe rated input and outputs
- For compact or remote installation
- HART, FOUNDATION Fieldbus H1, DeviceNet, PROFIBUS PA and DP, Modbus RTU/RS485 add-on communication modules available
- Superior signal resolution for optimum turn down ratio
- Digital signal processing with many possibilities
- Automatic reading of SENSORPROM data for easy commissioning
- User configurable operation menu with password protection
  - 3 lines, 20 characters display in 11 languages
  - Flow rate in various units
  - Totalizer for forward, reverse and net flow as well as much more information available
- Multiple functional outputs for process control, minimum configuration with analogue, pulse/frequency and relay output (status, flow direction, limits)
- Comprehensive self-diagnostic for error indication and error logging
- Batch control
- MAG 6000 I NAMUR: compliant with NAMUR NE 21, NE 32, NE 43, NE 53 and NE 70

### Design

The transmitter is designed for either compact or remote installation in non-hazardous or hazardous areas (compact mounted transmitter to be ordered together with the sensor).

### Function

The following functions are available:

- Flow rate
- 2 measuring ranges
- 2 totalizers
- Low flow cut-off
- Flow direction
- Error system
- Operating time
- Uni-/bidirectional flow
- Limit switches and pulse output
- Batch control

The MAG 6000 I/6000 I Ex de is a microprocessor-based transmitter with a built-in alphanumeric display in several languages. The transmitters evaluate the signals from the associated electromagnetic sensors and also fulfil the task of a power supply unit which provides the magnet coils with a constant current.

Further information on connection, mode of operation and installation can be found in the data sheets for the sensors.

### Displays and keypads

Operation of the transmitter can be carried out using:

- Keypad and display unit
- HART communicator
- PC/laptop and SIMATIC PDM software via HART communication
- PC/laptop and SIMATIC PDM software using PROFIBUS or Modbus communication

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Transmitters

#### MAG 6000 I/6000 I Ex

#### Technical specifications

##### Mode of operation and design

Measuring principle	Electromagnetic with pulsed constant field
Empty pipe	Detection of empty pipe (special cable required in remote mounted installation)
Excitation frequency	Depend on sensor size
Electrode input impedance	$> 1 \times 10^{14} \Omega$

##### Input

Digital input	11 ... 30 V DC, $R_i = 4.4 \text{ k}\Omega$
• Activation time	50 ms
• Current	$I_{11 \text{ V DC}} = 2.5 \text{ mA}$ , $I_{30 \text{ V DC}} = 7 \text{ mA}$

##### Output

Current output	
• Signal range	4 ... 20 mA (active/passive)
• Load	$< 560 \Omega$
• Time constant	0.1 ... 30 s, adjustable
Digital output	
• Frequency	0 ... 10 kHz, 50 % duty cycle (uni-/bidirectional)
• Time constant	0.1 ... 30 s, adjustable
• Pulse (passive)	3 ... 30 V DC, max. 110 mA (30 mA Ex version), $200 \Omega \leq R_i \leq 10 \text{ k}\Omega$ (powered from connected equipment)
• Time constant	0.1 ... 30 s, adjustable
Relay output	
• Time constant	Changeover relay, same as current output
• Load	42 V AC/2 A, 24 V DC/1 A

<b>Low flow cut off</b>	0 ... 9.9 % of maximum flow
-------------------------	-----------------------------

<b>Galvanic isolation</b>	All inputs and outputs are galvanic isolated.
---------------------------	---

##### Max. measuring error

MAG 6000 I/MAG 6000 I Ex (incl. sensor)	$\pm 0.2 \% \pm 1 \text{ mm/s}$
---	---------------------------------

##### Rated operation conditions

Ambient temperature	
• Operation	-25 ... +60 °C (-13 ... +140 °F)
- MAG 6000 I	-25 ... +60 °C (-13 ... 140 °F)
- MAG 6000 I Ex	-40 ... +70 °C (-40 ... +158 °F)
• Storage	-40 ... +70 °C (-40 ... +158 °F)
Mechanical load	18 ... 1000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36

Transmitter: 1.14 g RMS

Degree of protection	IP67/NEMA 4X to IEC 529 and DIN 40050 (1 mH <sub>2</sub> O 30 min.)
----------------------	---

EMC performance	IEC/EN 61326-1 (all environments) IEC/EN 61326-2-5 NAMUR NE 21
-----------------	--

##### Display and keypad

Totalizer	Two eight-digit counters for forward, net or reverse flow
Display	Background illumination with alpha-numeric text, 3 x 20 characters to indicate flow rate, totalized values, settings and faults; Reverse flow indicated by negative sign
Keypad	Capacitive touch keypad with LED light for feedback indication
Time constant	Time constant as current output time constant

##### Design

Enclosure material	Die cast aluminum, with corrosion resistant Basic Polyester powder coating (min. 60 μm)
• Wall mounting	Wall mounting bracket enclosed for remote version
Dimensions	See dimensional drawings
Weight	See dimensional drawings

##### Power supply

Standard transmitter:	18 ... 90 V DC; 115 ... 230 V AC; 50 ... 60 Hz
• Ex transmitter:	18 ... 30 V DC
• Ex transmitter:	115 ... 230 V AC; 50 ... 60 Hz
• Ex transmitter NAMUR:	18 ... 30 V DC; 115 ... 230 V AC; 50 ... 60 Hz
Power consumption	• 230 V AC: 20 VA • 24 V DC: 9.6 W, $I_N = 0.4 \text{ A}$ , $I_{ST} = 1 \text{ A}$ (3 ms)

##### Certificates and approvals

General purpose	• CE (LVD, EMC, PED, RoHS)
Hazardous areas	• ATEX, IECEx, FM, CSA, EAC Ex, NEPSI - Zone 1 Ex d e [ia] ia IIC T6 Gb • ATEX, IECEx, CSA - Zone 21 Ex tD A21 IP67 T85 °C • FM - XP IS Class I Div. 1 Groups A, B, C, D - DIP Class II+III Div. 1 Groups E, F, G
Others	• CPA (China) • EAC (Russia, Belarus, Kazakhstan) • KCs (South Korea)

##### Cable entries

MAG 6000 I	
• Power supply and outputs	2 x M20 (HART)/M25 (PROFIBUS) or 2 x 1/2" NPT (HART)
• Sensor connection	2 x M16 or 2 x 1/2" NPT
MAG 6000 I Ex ATEX 2GD	
• Power supply and outputs	2 x M20
• Sensor connection	2 x M16

##### Communication

Standard versions	HART, Modbus RTU/RS 485, FOUNDATION Fieldbus H1, DeviceNet, PROFIBUS PA, PROFIBUS DP add-on modules
Ex versions	HART, PROFIBUS PA (not for Ex version)

<sup>1)</sup> Applicable for: Compact mounted MAG 6000 I Ex on MAG 3100 (sizes DN 15 ... DN 300 (1/2" ... 12")).

### Selection and ordering data

### Article No.

<b>SITRANS FM Transmitter MAG 6000 I</b>	7ME6930-
Remote with standard wall mounting bracket, local display, die cast aluminum	2 B A - 1 A
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
<b>Supply voltage</b>	
Standard transmitter: 18 ... 90 V DC; 115 ... 230 V AC, 50 ... 60 Hz	2
Standard transmitter (NAMUR): 18 ... 30 V DC; 115 ... 230 V AC, 50 ... 60 Hz	3
Ex transmitter: 18 ... 30 V DC	4
Ex transmitter: 115 ... 230 V AC, 50 ... 60 Hz	5
Ex transmitter (NAMUR): 18 ... 30 V DC; 115 ... 230 V AC, 50 ... 60 Hz	6
<b>Ex approval</b>	
Standard sensor: FM Class I, Div 2, CSA Class I, Div 2	0
Ex sensor: Hazardous area (ATEX 2 GD; FM Class I, Zone 1; CSA Class I, Zone 1)	2
<b>Communication</b>	
None	A
HART	B
PROFIBUS PA Profile 3	F
PROFIBUS DP Profile 3 (not for Ex version)	G
Modbus RTU/RS 485 (not for Ex version)	E
FOUNDATION Fieldbus H1	J
<b>Cable gland entries</b>	
Metric	0
½" NPT	2
<b>Further design</b>	Order code
Please add "-Z" to Article No. and specify Order code(s) and plain text	
Tag name plate, stainless steel (specify in plain text)	Y17
Tag name plate, plastic (self adhesive)	Y18
Special version (specify in plain text)	Y99

### Operating instructions for SITRANS FM MAG 6000 I

Description	Article No.
• English	A5E02083319
• German	A5E02210835

All literature is available to download for free, in a range of languages, at  
<http://www.siemens.com/processinstrumentation/documentation>

### Communication modules for MAG 6000 I (All standard outputs can still be used)

Description	Article No.
HART (only for MAG 6000 I/Ex)	FDK:085U0321
Modbus RTU/RS 485 <sup>1)</sup>	FDK:085U0234
PROFIBUS PA Profile 3	FDK:085U0236
PROFIBUS DP Profile 3 <sup>1)</sup>	FDK:085U0237
DeviceNet <sup>1)</sup>	FDK:085U0229
FOUNDATION Fieldbus H1	A5E02054250



<sup>1)</sup> Not for Ex versions

### Operating instructions for SITRANS F add-on modules

Description	Article No.
HART	
• English	A5E03089708
PROFIBUS PA/DP	
• English	A5E00726137
• German	A5E01026429
Modbus	
• English	A5E00753974
• German	A5E03089262
FOUNDATION Fieldbus	
• English	A5E02318728
• German	A5E02488856
DeviceNet, Englisch	A5E03089720

All literature is available to download for free, in a range of languages, at  
<http://www.siemens.com/processinstrumentation/documentation>





## Flow Measurement

### SITRANS FM (electromagnetic) Transmitters




#### MAG 6000 I/6000 I Ex

#### Selection and ordering data (continued)

##### Accessories for MAG 6000 I/6000 I Ex

Description	Article No.	
Standard coil or electrode cable, 3 × 1.5 mm <sup>2</sup> / 18 gage, single shielded with PVC jacket Temperature range: -30 ... +70 °C (-22 ... +158 °F) <ul style="list-style-type: none"> <li>• 5 m (16.5 ft)</li> <li>• 10 m (33 ft)</li> <li>• 20 m (65 ft)</li> <li>• 30 m (98 ft)</li> <li>• 40 m (131 ft)</li> <li>• 50 m (164 ft)</li> <li>• 60 m (197 ft)</li> <li>• 100 m (328 ft)</li> <li>• 150 m (492 ft)</li> <li>• 200 m (656 ft)</li> <li>• 500 m (1640 ft)</li> </ul>	<b>A5E02296523</b> <b>FDK:083F0121</b> <b>FDK:083F0210</b> <b>A5E02297309</b> <b>FDK:083F0211</b> <b>A5E02297317</b> <b>FDK:083F0212</b> <b>FDK:083F0213</b> <b>FDK:083F3052</b> <b>FDK:083F3053</b> <b>FDK:083F3054</b>	
Special electrode cable (empty pipe detection or low conductivity), 3 × 0.25 mm <sup>2</sup> , double shielded with PVC jacket Temperature range: -30 ... +70 °C (-22 ... +158 °F) <ul style="list-style-type: none"> <li>• 10 m (33 ft)</li> <li>• 20 m (65 ft)</li> <li>• 40 m (131 ft)</li> <li>• 60 m (197 ft)</li> <li>• 100 m (328 ft)</li> <li>• 150 m (492 ft)</li> <li>• 200 m (656 ft)</li> <li>• 500 m (1640 ft)</li> </ul>	<b>FDK:083F3020</b> <b>FDK:083F3095</b> <b>FDK:083F3094</b> <b>FDK:083F3093</b> <b>FDK:083F3092</b> <b>FDK:083F3056</b> <b>FDK:083F3057</b> <b>FDK:083F3058</b>	
Cable kit including standard coil cable (3 × 1.5 mm <sup>2</sup> / 18 gage, single shielded with PVC jacket) and special electrode cable (3 × 0.25 mm <sup>2</sup> , double shielded with PVC jacket) Temperature range: -30 ... +70 °C (-22 ... +158 °F) <ul style="list-style-type: none"> <li>• 5 m (16.5 ft)</li> <li>• 10 m (33 ft)</li> <li>• 15 m (49 ft)</li> <li>• 20 m (65 ft)</li> <li>• 25 m (82 ft)</li> <li>• 30 m (98 ft)</li> <li>• 40 m (131 ft)</li> <li>• 50 m (164 ft)</li> <li>• 60 m (197 ft)</li> <li>• 100 m (328 ft)</li> <li>• 150 m (492 ft)</li> <li>• 200 m (656 ft)</li> <li>• 500 m (1640 ft)</li> </ul>	<b>A5E02296329</b> <b>A5E01181647</b> <b>A5E02296464</b> <b>A5E01181656</b> <b>A5E02296490</b> <b>A5E02296494</b> <b>A5E01181686</b> <b>A5E02296498</b> <b>A5E01181689</b> <b>A5E01181691</b> <b>A5E01181699</b> <b>A5E01181703</b> <b>A5E01181705</b>	
Low noise electrode coax cable for low conductivity and high vibration levels, 3 × 0.13 mm <sup>2</sup> Temperature range -25 °C ... +85 °C (-13 °F ... +185 °F) <ul style="list-style-type: none"> <li>• 2 m (6.6 ft)</li> <li>• 5 m (16.5 ft)</li> <li>• 10 m (33 ft)</li> </ul>	<b>A5E02272692</b> <b>A5E02272723</b> <b>A5E02272730</b>	

##### Spare parts

Description	Article No.	
Display unit	<b>FDK:085U3122</b>	
Accessory bag including cable gland inserts and connectors for sensor cables	<b>FDK:085U3144</b>	
Display lid (Ex) in die-cast aluminum, with corrosion resistant coating (min. 60 µm)	<b>7ME5933-0AC01</b>	
Blind lid for sensor cables connection compartment (only remote version) in die-cast aluminum, with corrosion resistant coating (min. 60 µm) incl. O-ring seal	<b>7ME5933-0AC02</b>	
Blind lid (mains supply, input/outputs) in die-cast aluminum, with corrosion resistant coating (min. 60 µm)	<b>7ME5933-0AC03</b>	
Safety clamp	<b>7ME5933-0AC06</b>	
Standard wall-mounting bracket, stainless steel AISI 316L/1.4404	<b>7ME5933-0AC04</b>	
Special wall-mounting bracket, BI 2.5 DIN 59382 X6Cr17	<b>7ME5933-0AC05</b>	


### Selection and ordering data (continued)

#### Complete spare part PCB unit

Description	Article No.
MAG 6000 I std. (not for Ex), 18 ... 30 V DC; 115 ... 230 V AC Spare PCBA	<b>FDK:085U3123</b>
MAG 6000 I std. (NAMUR), 18 ... 30 V DC; 115 ... 230 V AC Spare PCBA	<b>A5E31426892</b>
MAG 6000 I Ex (NAMUR), 18 ... 30 V DC; 115 ... 230 V AC Spare PCBA for use with Ex sensors with increased safety e (for Ex sensors: 7ME6110, 7ME6120, 7ME6140, 7ME6310, 7ME6320, 7ME6340) (for 7ME6330 > DN300) <sup>1)</sup>	<b>A5E31426877</b>
MAG 6000 I Ex d 115 ... 230 V AC Spare PCBA for use with ATEX sensors with increased safety e	<b>A5E01013127 <sup>1)</sup></b>
MAG 6000 I Ex d 18 ... 30 V DC Spare PCBA for use with ATEX sensors with increased safety e	<b>A5E01013340 <sup>1)</sup></b>



### Dimensional drawings

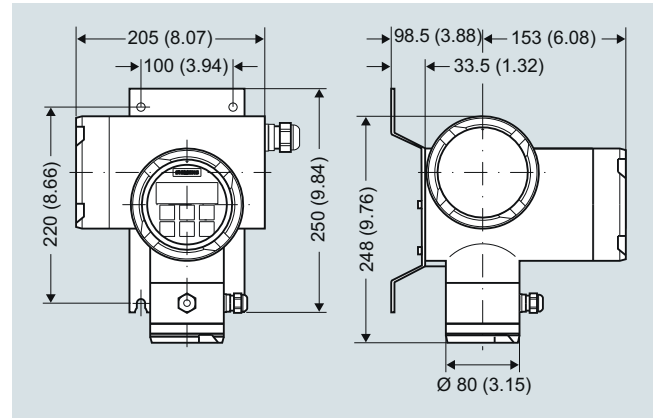

SITRANS FM transmitter MAG 6000 I with wall-mounting bracket, dimensions in mm (inch)

<sup>1)</sup> Spare pcba for MAG 6000 I Ex produced after 12/2012.

Please use online Product selector to get latest updates.

Product selector link:

<http://www.pia-selector.automation.siemens.com>

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 1100 and MAG 1100 HT

#### Overview



The SITRANS FM MAG 1100 is an electromagnetic flow sensor in a compact wafer design designed for flow applications in the process industry.

#### Benefits

- Sensor sizes: DN 2 ... 100 ( $\frac{1}{12}$ " ... 4")
- Compact wafer design meets EN 1092, DIN and ANSI flange standards
- Corrosion resistant AISI 316 stainless steel sensor housing
- Highly resistant liner and electrodes fitting most extreme process media
- Temperature rating up to 200 °C (392 °F)
- Hose proof IP67/NEMA 4X enclosure rating
- Designed that patented in-situ verification can be conducted. Using SENSORPROM fingerprints.

#### Application

The main applications of the SITRANS FM electromagnetic flow sensors can be found in the following fields:

- Process industry
- Chemical industry
- Pharmaceutical industry
- Water treatment like e.g. chemical dosing

#### Design

- Compact or remote mounting possible
- Easy "plug & play" field changeability of transmitter
- Simple on site upgrade to IP68/NEMA 6P terminal box
- ATEX 2G D version
- FM Class I Div 2

#### Mode of operation

The flow measuring principle is based on Faraday's law of electromagnetic induction according to which the sensor converts the flow into an electrical voltage proportional to the velocity of the flow.

#### Integration

The complete flowmeter consists of a flow sensor and an associated transmitter SITRANS FM MAG 5000, 6000 or 6000 I. The flexible communication concept USM II simplifies integration and update to a variety of fieldbus systems such as HART, FOUNDATION Fieldbus H1, DeviceNet, PROFIBUS DP and PA, Modbus RTU/RS 485.



### Technical specifications

Version	MAG 1100	MAG 1100 HT (High temperature)
<b>Measuring principle</b>	Electromagnetic induction	Electromagnetic induction
<b>Excitation frequency (Mains supply: 50 Hz/60 Hz)</b>	DN 2 ... 65 (1/12" ... 2 1/2"): 12.5 Hz/15 Hz DN 80, 100 (3", 4"): 6.25 Hz/7.5 Hz	DN 15 ... 50 (1/2" ... 2"): 12.5 Hz/15 Hz DN 80, 100 (3", 4"): 6.25 Hz/7.5 Hz
<b>Process connection</b>		
Nominal size		
• MAG 1100 (Ceramic)	DN 2 ... DN 100 (1/12" ... 4")	DN 15 ... DN 100 (1/2" ... 4")
• MAG 1100 (PFA)	DN 10 ... DN 100 (3/8" ... 4")	
Mating flanges	EN 1092-1 (DIN 2501), ANSI B 16.5 class 150 and 300 or equivalent  Option: DN 2 ... 10 (1/12" ... 3/8"): G 1/2"/NPT 1/2" pipe connection adapters	EN 1092-1 (DIN 2501), ANSI B 16.5 class 150 and 300 or equivalent
<b>Rated operating conditions</b>		
<u>Ambient conditions</u>		
<u>Ambient temperature</u>		
• Standard sensor	-40 ... +100 °C (-40 ... +212 °F)	-40 ... +100 °C (-40 ... +212 °F)
• Ex sensor	-20 ... +60 °C (-4 ... +140 °F)	-20 ... +60 °C (-4 ... +140 °F)
• Compact with transmitter MAG 5000/6000	-20 ... +60 °C (-4 ... +140 °F)	
• Compact with transmitter MAG 6000 I	-20 ... +60 °C (-4 ... +140 °F)	
• Compact with transmitter MAG 6000 I Ex	-20 ... +60 °C (-4 ... 140 °F)	
<u>Temperature of medium</u>		
• MAG 1100 (Ceramic)	-20 ... +150 °C (-4 ... +302 °F)	-20 ... +200 °C (-4 ... +392 °F)
• MAG 1100 Ex (Ceramic)	-20 ... +150 °C (-4 ... +302 °F)	-20 ... +180 °C (-4 ... +356 °F)
• MAG 1100 (PFA)	-30 ... +130 °C (-22 ... +266 °F) Suitable for steam sterilization at 150 °C (302 °F)	
<u>Temperature shock</u>		
• MAG 1100 (Ceramic)		
- Duration ≤ 1 min, followed by 10 min rest	• DN 2, 3 (1/12", 1/8") No limitations  • DN 6, 10, 15, 25: Max. ΔT ≤ 80 °C/min (1/4", 3/8", 1/2", 1": Max. ΔT ≤ 144 °F/min)  • DN 40, 50, 65: Max. ΔT ≤ 70 °C/min (1 1/2", 2", 2 1/2"): Max. ΔT ≤ 126 °F/min  • DN 80, 100: Max. ΔT ≤ 60 °C/min (3", 4"): Max. ΔT ≤ 108 °F/min  Max. ± 100 °C (212 °F) momentarily	• DN 15, 25: Max. ΔT ≤ 80 °C/min (1/2", 1": Max. ΔT ≤ 144 °F/min)  • DN 40, 50: Max. ΔT ≤ 70 °C/min (1 1/2", 2": Max. ΔT ≤ 126 °F/min)  • DN 80, 100: Max. ΔT ≤ 60 °C/min (3", 4": Max. ΔT ≤ 108 °F/min)
• MAG 1100 (PFA)		
<u>Operating pressure</u>		
• MAG 1100 (Ceramic)	• DN 2 ... 65: 40 bar (1/12" ... 2 1/2": 580 psi) • DN 80: 37.5 bar (3": 540 psi) • DN 100: 30 bar (4": 435 psi)  Vacuum: 1 x 10 <sup>-6</sup> bar <sub>abs</sub> (1.5 x 10 <sup>-5</sup> psi <sub>abs</sub> ) 20 bar (290 psi)	• DN 15 ... 50: 40 bar (1/2" ... 2": 580 psi) • DN 80: 37.5 bar (3": 540 psi) • DN 100: 30 bar (4": 435 psi)  Vacuum: 1 x 10 <sup>-6</sup> bar <sub>abs</sub> (1.5 x 10 <sup>-5</sup> psi <sub>abs</sub> )
• MAG 1100 (PFA)	Vacuum: 0.02 bar <sub>abs</sub> (0.3 psi <sub>abs</sub> ) DN 80 ... DN 100: CO <sub>2</sub> pressure max. 7 bar (101.5 psi)	
<u>Mechanical load (vibration)</u>	• 18 ... 1000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36 • Sensor: 3.17 g RMS • Sensor with compact MAG 5000/6000 mounted transmitter: 3.17 g RMS • Sensor with compact MAG 6000 I/6000 I Ex mounted transmitter: 1.14 g RMS • For compact installation with the MAG 6000 I, transmitter to be supported to avoid tension on sensor part.	• 18 ... 1000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36 • Sensor: 3.17 g RMS
<u>Enclosure rating (standard)</u>	IP67 to EN 60529 (NEMA 4X), 1 mH <sub>2</sub> O for 30 min	IP67 to EN 60529 (NEMA 4X), 1 mH <sub>2</sub> O for 30 min
EMC	2014/30/EU	2014/30/EU

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 1100 and MAG 1100 HT

#### Technical specifications (continued)

Version	MAG 1100	MAG 1100 HT (High temperature)
<b>Design</b>		
Weight	See Dimensional drawings	See Dimensional drawings
<b>Material</b>		
• Enclosure		
- MAG 1100	Stainless steel AISI 316L/1.4404	Stainless steel AISI 316L/1.4404
• Terminal box		
- Standard	Fibre glass reinforced polyamide (not for Ex)	Stainless steel AISI 316/1.4436
- Option	Stainless steel AISI 316/1.4436	
• Fixing studs	Stainless steel AISI 304/1.4301, Number and size to EN 1092-1:2001	Stainless steel AISI 304/1.4301, Number and size to EN 1092-1:2001
• Gaskets		
- Standard	EPDM (max. 150 °C, PN 40 (max. 302 °F, 600 psi))	Graphite (max. 200 °C, PN 40 (max. 392 °F, 600 psi))
- Option	<ul style="list-style-type: none"> <li>• Graphite (max. 200 °C, PN 40 (max. 392 °F, 600 psi))</li> <li>• PTFE (max. 130 °C, PN 25 (max. 266 °F, 300 psi))</li> <li>• Stainless steel, AISI 316 /1.4436</li> <li>• Hastelloy C22/2.4602</li> <li>• PVDF</li> </ul>	
• Pipe connection adapters: DN 2, 3, 6 and 10 (1/12", 1/8", 1/4" and 3/8")		
<b>Liner</b>		
• MAG 1100 (Ceramic)	<ul style="list-style-type: none"> <li>• DN 2, 3 (1/12", 1/8"): Zirconium oxide (ZrO<sub>2</sub>) (ceramic)</li> <li>• DN 6 ... 100 (1/4" ... 4"): Aluminum oxide Al<sub>2</sub>O<sub>3</sub> Reinforced PFA (not for Ex)</li> </ul>	DN 15 ... 100 (1/2", 4"): Aluminum oxide Al <sub>2</sub> O <sub>3</sub>
• MAG 1100 (PFA)		
<b>Electrodes</b>		
• MAG 1100 (Ceramic)	<ul style="list-style-type: none"> <li>• DN 10 ... 100 (3/8" ... 4"): Platinum with gold/Titanium brazing alloy</li> <li>• DN 2 ... 6 (1/12" ... 1/4"): Platinum</li> <li>• DN 10 ... 15 (3/8" ... 1/2"): Hastelloy C276/2.4819</li> <li>• DN 25 ... 100 (1" ... 4"): Hastelloy C22/2.4602</li> </ul>	Platinum with gold/Titanium brazing alloy
• MAG 1100 (PFA)		
<b>Cable entries</b>	<ul style="list-style-type: none"> <li>• Remote installation 2 x M20 or 2 x 1/2" NPT</li> <li>• Compact installation <ul style="list-style-type: none"> <li>- MAG 5000/MAG 6000: 4 x M20 or 4 x 1/2" NPT</li> <li>- MAG 6000 I: 2 x M25 (for supply/output)</li> <li>- MAG 6000 I Ex: 2 x M25 (for supply/output)</li> </ul> </li> </ul>	Remote installation 2 x M20 or 2 x 1/2" NPT
<b>Certificates and approvals</b>		
Calibration		
• Default calibration	Zero-point, 2 x 25 %, 2 x 90 %	Zero-point, 2 x 25 %, 2 x 90 %
• Special calibration	5-point calibration: 20 %, 40 %, 60 %, 80 %, 100 % of factory Q <sub>max</sub> 10-point calibration: ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory Q <sub>max</sub> Matched-pair calibration: default, 5-point or 10-point	
Hazardous areas		
• MAG 1100 F (Ceramic)		
- Ex-sensor in compact or remote version with MAG 6000 I Ex	<ul style="list-style-type: none"> <li>• ATEX, EAC Ex <ul style="list-style-type: none"> <li>- Zone 1 Ex d e ia IIB T6 Gb</li> </ul> </li> <li>• ATEX <ul style="list-style-type: none"> <li>- Zone 21 Ex tD A21 IP67</li> </ul> </li> <li>• FM <ul style="list-style-type: none"> <li>- NI Class I Div. 2 Groups A, B, C, D</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• ATEX, EAC Ex <ul style="list-style-type: none"> <li>- Zone 1 Ex d e ia IIB T6 Gb</li> </ul> </li> <li>• ATEX <ul style="list-style-type: none"> <li>- Zone 21 Ex tD A21 IP67</li> </ul> </li> <li>• FM <ul style="list-style-type: none"> <li>- NI Class I Div. 2 Groups A, B, C, D</li> </ul> </li> </ul>
- Standard sensor in compact or remote version with MAG 5000/6000/6000 I		
• MAG 1100 F (PFA)		
- Standard sensor in compact or remote version with MAG 5000/6000/6000 I	<ul style="list-style-type: none"> <li>• FM <ul style="list-style-type: none"> <li>- NI Class I Div. 2 Groups A, B, C, D</li> </ul> </li> </ul>	
Pressure equipment	<ul style="list-style-type: none"> <li>• PED – 2014/68/EU</li> <li>• CRN (only PFA)</li> </ul>	<ul style="list-style-type: none"> <li>• PED – 2014/68/EU</li> </ul>
Others	<ul style="list-style-type: none"> <li>• EAC (Russia, Belarus, Kazakhstan)</li> </ul>	<ul style="list-style-type: none"> <li>• EAC (Russia, Belarus, Kazakhstan)</li> </ul>

For technical specification for transmitter - please see section about transmitters.

Selection and ordering data	Article No.	Order code
<b>Sensor SITRANS FM MAG 1100</b> EPDM gaskets included ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	↗ 7ME6110- A 0 -	<b>Additional information</b> Please add "-Z" to Article No. and specify Order code(s) and plain text.
<b>Diameter</b> DN 2 (1/12") DN 3 (1/8") DN 6 (1/4") DN 10 (3/8") DN 15 (1/2") DN 25 (1") DN 40 (1 1/2") DN 50 (2") DN 65 (2 1/2") DN 80 (3") DN 100 (4")	1 D 1 H 1 M 1 R 1 V 2 D 2 R 2 Y 3 F 3 M 3 T	<b>Certificates</b> • Material certificate according to EN 10204-3.1 • Factory certificate according to EN 10204-2.2 • Factory certificate according to EN 10204-2.1 <b>Special calibration</b> • 5-point calibration <sup>1)</sup> • 10-point calibration <sup>2)</sup> • Default (2 × 25 % and 2 × 90 %) matched-pair calibration • 5-point, matched-pair calibration <sup>1)</sup> • 10-point, matched-pair calibration <sup>2)</sup> <b>Terminal blocks</b> • Factory mounted terminal blocks <b>Country specific label</b> • CRN (Canadian Registration Number)
<b>Liner material</b> PFA - DN 10 ... 100 (3/8" ... 4") Ceramic	1 2	Tag name plate, stainless steel (specify in plain text) Tag name plate, plastic (self adhesive) Customer-specific transmitter setting
<b>Electrode material</b> Hastelloy C (only with PFA liner) Platinum (only with ceramic liner)	1 2	<b>Factory mounted sensor cables</b> • Sensor cables wired (specify Article No. for sensor cables and order cables separately) • Sensor cables wired and IP68 sealing (specify Article No. for sensor cables and order cables separately)
<b>Transmitter</b> Standard sensor for remote transmitter (order transmitter separately) Ex sensor for remote transmitter (order transmitter separately) MAG 6000 I, Aluminum 18 ... 90 V DC, 115 ... 230 V AC MAG 6000 I, Aluminum 18 ... 30 V DC, Ex MAG 6000 I, Aluminum 115 ... 230 V AC, Ex MAG 6000 Polyamide, 11 ... 30 V DC/11 ... 24 V AC MAG 6000, Polyamide, 115 ... 230 V AC MAG 5000, Polyamide, 11 ... 30 V DC/11 ... 24 V AC MAG 5000, Polyamide, 115 ... 230 V AC	A B C D E H J K L	<b>Additional calibrations</b> • Accredited matched-pair calibration acc. to ISO/IEC 17025: 2005 • Customer-specified calibration up to 10 points • Customer-witnessed calibration Any of above calibration
<b>Communication</b> No communication, add-on possible HART PROFIBUS PA Profile 3 (only MAG 6000/MAG 6000 I) PROFIBUS DP Profile 3 (not for Ex) (only MAG 6000/MAG 6000 I) Modbus RTU/RS 485 (not for Ex) (only MAG 6000/MAG 6000 I) FOUNDATION Fieldbus H1 (only MAG 6000/MAG 6000 I)	A B F G E J	On request <sup>3)</sup> On request <sup>3)</sup> On request <sup>3)</sup>
<b>Cable glands/terminal box</b> Metric: Polyamide terminal box or MAG 6000 I compact 1/2" NPT: Polyamide terminal box or MAG 6000 I compact Metric: Stainless steel terminal box 1/2" NPT: Stainless steel terminal box	1 2 3 4	<sup>1)</sup> 20 %, 40 %, 60 %, 80 %, 100 % of factory Q <sub>max</sub> <sup>2)</sup> Ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory Q <sub>max</sub> <sup>3)</sup> Product Variation Request (PVR)

<sup>1)</sup> Quick ship only in combination with Ceramic liner

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 1100 and MAG 1100 HT

#### Selection and ordering data

#### Article No.

Selection and ordering data	Article No.
<b>Sensor SITRANS FM MAG 1100 HT High Temperature</b> Ceramic liner, Platinum electrode, Graphite gaskets included ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	<b>7ME6120-</b> <b>A 2 0 - 2 A</b>
<b>Diameter</b> DN 15 (½") DN 25 (1") DN 40 (1½") DN 50 (2") DN 80 (3") DN 100 (4")	<b>1 V</b> <b>2 D</b> <b>2 R</b> <b>2 Y</b> <b>3 M</b> <b>3 T</b>
<b>Transmitter</b> Standard sensor for remote transmitter (order transmitter separately) Ex sensor for remote transmitter (order transmitter separately)	<b>A</b> <b>B</b>
<b>Cable glands/terminal box</b> Metric: Stainless steel terminal box ½" NPT: Stainless steel terminal box	<b>3</b> <b>4</b>
<b>Additional information</b> Please add "-Z" to Article No. and specify Order code(s) and plain text.	Order code
<b>Certificates</b> <ul style="list-style-type: none"> <li>Material certificate according to EN 10204-3.1</li> <li>Factory certificate according to EN 10204-2.2</li> <li>Factory certificate according to EN 10204-2.1</li> </ul>	<b>C12</b> <b>C14</b> <b>C15</b>
<b>Special calibration</b> <ul style="list-style-type: none"> <li>5-point calibration<sup>1)</sup></li> <li>10-point calibration<sup>2)</sup></li> <li>Default (2 × 25 % and 2 × 90 %) matched-pair calibration</li> <li>5-point, matched-pair calibration<sup>1)</sup></li> <li>10-point, matched-pair calibration<sup>2)</sup></li> </ul>	<b>D01</b> <b>D06</b> <b>D11</b> <b>D15</b> <b>D18</b>
<b>Terminal blocks</b> <ul style="list-style-type: none"> <li>Factory mounted terminal blocks</li> </ul> Tag name plate, stainless steel (specify in plain text) Tag name plate, plastic (self adhesive) Customer-specific transmitter setting	<b>N02</b> <b>Y17</b> <b>Y18</b> <b>Y20</b>
<b>Factory mounted sensor cables</b> <ul style="list-style-type: none"> <li>Sensor cables wired (specify Article No. for sensor cables and order cables separately)</li> <li>Sensor cables wired and IP68 sealing (specify Article No. for sensor cables and order cables separately)</li> </ul>	<b>Y40</b> <b>Y41</b>
<b>Additional calibrations</b> <ul style="list-style-type: none"> <li>Accredited matched-pair calibration acc. to ISO/IEC 17025: 2005</li> <li>Customer-specified calibration up to 10 points</li> <li>Customer-witnessed calibration</li> </ul> Any of above calibration	<b>On request<sup>3)</sup></b> <b>On request<sup>3)</sup></b> <b>On request<sup>3)</sup></b>

<sup>1)</sup> 20 %, 40 %, 60 %, 80 %, 100 % of factory Q<sub>max</sub>

<sup>2)</sup> Ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory Q<sub>max</sub>

<sup>3)</sup> Product Variation Request (PVR)


#### Operating instructions for SITRANS FM MAG 1100

Description	Article No.
• English	<b>A5E02435647</b>

All literature is available to download for free, in a range of languages, at <https://www.siemens.com/processinstrumentation/documentation>

#### Accessories

Description	Article No.
Potting kit for IP68/ NEMA 6P sealing of sensor junction box	<b>FDK:085U0220</b>



### Selection and ordering data

#### Accessories for MAG 1100 sensor

##### Pipe connection 1/2" external thread

For DN 2 ... 10 (1/12" ... 3/8") sensor, material: Stainless steel AISI 316L 2 pcs. pipe connections, 2 pcs. EPDM gaskets, 12 pcs. M4x12 screws

- R $\frac{1}{2}$ " ISO 7-1 tapered thread
- 1/2" NPT thread

For DN 2 ... 10 (1/12" ... 3/8") sensor, material: Hastelloy C, 2 pcs. pipe connections, 2 pcs. PTFE gaskets, 12 pcs. M4x12 screws

- R $\frac{1}{2}$ " ISO 7-1 tapered thread
- 1/2" NPT thread

For DN 2 ... 10 (1/12" ... 3/8") sensor, material PVDF (Kynar 1000) 2 pcs. pipe connections (max. 70 °C, PN 8 bar/max 158 °F, 116 PSI), 1 pc. grounding ring 1), 1 pc. grounding wire, 3 pcs. PTFE gaskets, 2 pcs. space rings, 6 pcs. M4x12 and 6 pcs. M4x20 screws

- R $\frac{1}{2}$ " ISO 7-1 tapered thread incl. grounding ring
- 1/2" NPT thread incl. grounding ring

##### EPDM gaskets

Material: EPDM; each set includes: 2 pcs. EPDM gaskets, 1 pc. grounding wire, 1 pc. M6 screw, 1 pc. nut, 1 pc. washer, 1 pc. bolt grounding plate

- DN 2 ... 10 (1/12" ... 3/8")
- DN 15 (1/2")
- DN 25 (1")
- DN 40 (1 1/2")
- DN 50 (2")
- DN 65 (2 1/2")
- DN 80 (3")
- DN 100 (4")

##### PTFE gaskets

Material: PTFE; each set includes: 2 pcs. gaskets, 2 pcs. grounding wires, 3 pcs. M6 screws (DN 2 ... DN 10: 12 pcs. M4x14)

- DN 2 ... 10 (1/12" ... 3/8")
- DN 15 (1/2")
- DN 25 (1")
- DN 40 (1 1/2")
- DN 50 (2")
- DN 65 (2 1/2")
- DN 80 (3")
- DN 100 (4")

##### Graphite gaskets

Material: Graphite; conductive, each set includes: 2 pcs. gaskets (can also be used as grounding ring)

- DN 2 ... 10 (1/12" ... 3/8")
- DN 15 (1/2")
- DN 25 (1")
- DN 40 (1 1/2")
- DN 50 (2")
- DN 65 (2 1/2")
- DN 80 (3")
- DN 100 (4")

### Article No.



**FDK:083G0080**  
**FDK:083G4330**

**FDK:083G4332**  
**FDK:083G4331**

**A5E01018395**  
**A5E01018400**



**FDK:083G3116**  
**FDK:083G3117**  
**FDK:083G3119**  
**FDK:083G3121**  
**FDK:083G3122**  
**FDK:083G3123**  
**FDK:083G3124**  
**FDK:083G3125**



**FDK:083G0156**  
**FDK:083G0157**  
**FDK:083G0159**  
**FDK:083G0161**  
**FDK:083G0162**  
**FDK:083G0163**  
**FDK:083G0164**  
**FDK:083G0165**



**FDK:083G0116**  
**FDK:083G0117**  
**FDK:083G0119**  
**FDK:083G0121**  
**FDK:083G0122**  
**FDK:083G0123**  
**FDK:083G0124**  
**FDK:083G0125**

##### Grounding ring (stainless steel)

Material: AISI 316/1.4436; each set includes: 1 pc. grounding ring<sup>1)</sup>, 3 pcs. PTFE gaskets, 1 pc. earth wire, 1 pc. M6 screw

- DN 2 ... 10 (1/12" ... 3/8")
- DN 15 (1/2")
- DN 25 (1")
- DN 40 (1 1/2")
- DN 50 (2")
- DN 65 (2 1/2")
- DN 80 (3")
- DN 100 (4")

##### Grounding ring (Hastelloy C)

Material: Hastelloy C22/2.4602; each set includes: 1 pc. grounding ring<sup>1)</sup>, 3 pcs. PTFE gaskets, 1 pc. earth wire, 1 pc. M6 screw

- DN 2 ... 10 (1/12" ... 3/8")
- DN 15 (1/2")
- DN 25 (1")
- DN 40 (1 1/2")
- DN 50 (2")
- DN 65 (2 1/2")
- DN 80 (3")
- DN 100 (4")

##### Grounding ring (Tantalum)

Material: Tantalum; each set includes: 1 pc. grounding ring<sup>1)</sup>, 3 pcs. PTFE gaskets, 1 pc. earth wire, 1 pc. M6 screw

- DN 2 ... 10 (1/12" ... 3/8")

- DN 15 (1/2")
- DN 25 (1")
- DN 40 (1 1/2")
- DN 50 (2")
- DN 65 (2 1/2")
- DN 80 (3")
- DN 100 (4")

##### Studs and nuts

for DN 100 PN 25/40, 8 pcs. M20 studs, 16 pcs. M20 nuts

Material: AISI 304/1.4305

- DN 100 (4")

##### Mounting kit

Material: Stainless steel 300 series, each kit includes: 1 pc. clamp block, 1 pc. clamp, 1 pc. bracket, 4 pcs. M8x20 screw, 2 pcs. M8 nut, 6 pcs. M8 split lockwasher, 2 pcs. M6 U-bolts


- DN 2 ... 100 (1/12" ... 4")



**FDK:083G0686**  
**FDK:083G0687**  
**FDK:083G0689**  
**FDK:083G0691**  
**FDK:083G0692**  
**FDK:083G0693**  
**FDK:083G0694**  
**FDK:083G0695**



**FDK:083G3256**  
**FDK:083G3257**  
**FDK:083G3259**  
**FDK:083G3261**  
**FDK:083G3262**  
**FDK:083G3263**  
**FDK:083G3264**  
**FDK:083G3265**




**A5E01181599**



**A5E01181606**  
**A5E01181610**  
**A5E01181613**  
**A5E01181615**  
**A5E01181616**  
**A5E01181619**  
**A5E01181622**



**FDK:083G0226**



**A5E38288519**

<sup>1)</sup> Thickness of grounding ring is 2 mm (0.08 inch), material Hastelloy C22/2.4602.

## Flow Measurement


SITRANS FM (electromagnetic)

Flow sensors

### MAG 1100 and MAG 1100 HT

#### Dimensional drawings

Sensor MAG 1100, compact/remote

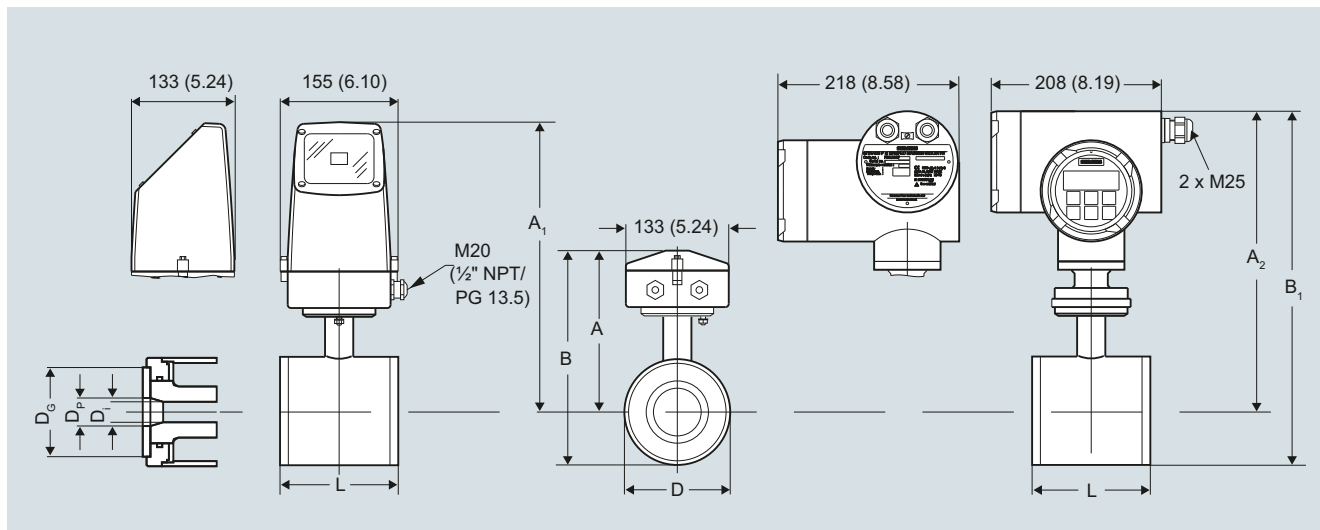

Dimensions in mm (inch)

**Important note: For compact installation with MAG 6000 I/Ex - transmitter to be supported to avoid tension on the sensor part**

Size DN	A <sup>1)</sup> [mm]	B <sup>1)</sup> [mm]	A <sub>1</sub> /A <sub>2</sub> <sup>3)</sup> [mm]	B <sub>1</sub> [mm]	D [mm]	D <sub>i</sub> [mm]	D <sub>i</sub> (PFA) [mm]	D <sub>P</sub> [mm]	D <sub>G</sub> [mm]	Weight <sup>2)</sup> [kg]
2	161	186	315	340	48.7	2		17.3	34	2.2
3	161	186	315	340	48.7	3		17.3	34	2.2
6	161	186	315	340	48.7	6		17.3	34	2.2
10	161	186	315	340	48.7	10	10	13.6	34	2.2
15	161	186	315	340	48.7	15	16	17.3	40	2.2
25	169	201	323	354	63.5	25	26	28.5	56	2.7
40	179	221	333	375	84.0	40	38	43.4	75	3.4
50	188	239	342	393	101.6	50	50	54.5	90	4.2
65	198	258	351	412	120.9	65	66	68.0	112	5.5
80	204	270	357	424	133.0	80	81	82.5	124	7.0
100	217	296	370	450	159.0	100	100	107.1	150	10.0

Size [inch]	A <sup>1)</sup> [inch]	B <sup>1)</sup> [inch]	A <sub>1</sub> /A <sub>2</sub> <sup>3)</sup> [inch]	B <sub>1</sub> [inch]	D [inch]	D <sub>i</sub> [inch]	D <sub>i</sub> (PFA) [inch]	D <sub>P</sub> [inch]	D <sub>G</sub> [inch]	Weight <sup>2)</sup> [lbs]
1/12	6.34	7.33	12.40	13.39	1.92	0.08		0.68	1.34	4.8
1/8	6.34	7.33	12.40	13.39	1.92	0.12		0.68	1.34	4.8
1/4	6.34	7.33	12.40	13.39	1.92	0.24		0.68	1.34	4.8
3/8	6.34	7.33	12.40	13.39	1.92	0.39	0.39	0.53	1.34	4.8
1/2	6.34	7.33	12.40	13.39	1.92	0.59	0.63	0.68	1.57	4.8
1	6.66	7.92	12.72	13.94	2.50	0.98	1.02	1.12	2.20	5.9
1 1/2	7.05	8.70	13.11	14.76	3.31	1.57	1.50	1.71	2.95	7.5
2	7.40	9.41	13.47	15.47	4.00	1.97	1.97	2.15	3.54	9.2
2 1/2	7.80	10.16	13.82	16.22	4.76	2.56	2.60	2.68	4.41	12
3	8.03	10.63	14.06	16.70	5.24	3.15	3.19	3.25	4.88	15
4	8.54	11.65	14.57	17.72	6.26	3.94	3.94	4.22	5.91	22

<sup>1)</sup> 14.5 mm (0.571") shorter when the stainless steel terminal box is used (Ex or high temperature 200 °C (392 °F) version).

<sup>2)</sup> With transmitter MAG 5000 or MAG 6000 installed, weight is increased by approximately 0.8 kg (1.8 lb).  
With MAG 6000 I weight is increased with 5.5 kg (12.1 lbs).

<sup>3)</sup> A<sub>2</sub> is 3 mm (0.12") shorter than A<sub>1</sub>


### Dimensional drawings (continued)

The total built-in length "L" [mm]/[inch] before assembling depends on the gasket selected.

Size DN	Inch	EPDM		Graphite		PTFE (Teflon)		Without gasket		Grounding ring	
		[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]
2 ... 10 <sup>1)</sup>	1/12 ... 3/8	64	2.52	66	2.60	70	2.75	64	2.52	77	3.03
15	1/2	65	2.56	66	2.60	70	2.75	64	2.52	77	3.03
25	1	80	3.15	81	3.19	85	3.35	79	3.10	92	3.62
40	1 1/2	95	3.74	96	3.78	100	3.94	94	3.70	107	4.21
50	2	105	4.13	106	4.17	110	4.33	104	4.05	117	4.61
65	2 1/2	130	5.12	131	5.15	135	5.31	129	5.05	142	5.60
80	3	155	6.10	156	6.14	160	6.30	154	6.00	167	6.57
100	4	185	7.28	186	7.31	190	7.48	184	7.20	197	7.76

<sup>1)</sup> Mounting between two flanges

### Sensor MAG 1100 DN 2 ... 10 (1/12" ... 3/8") with adapters

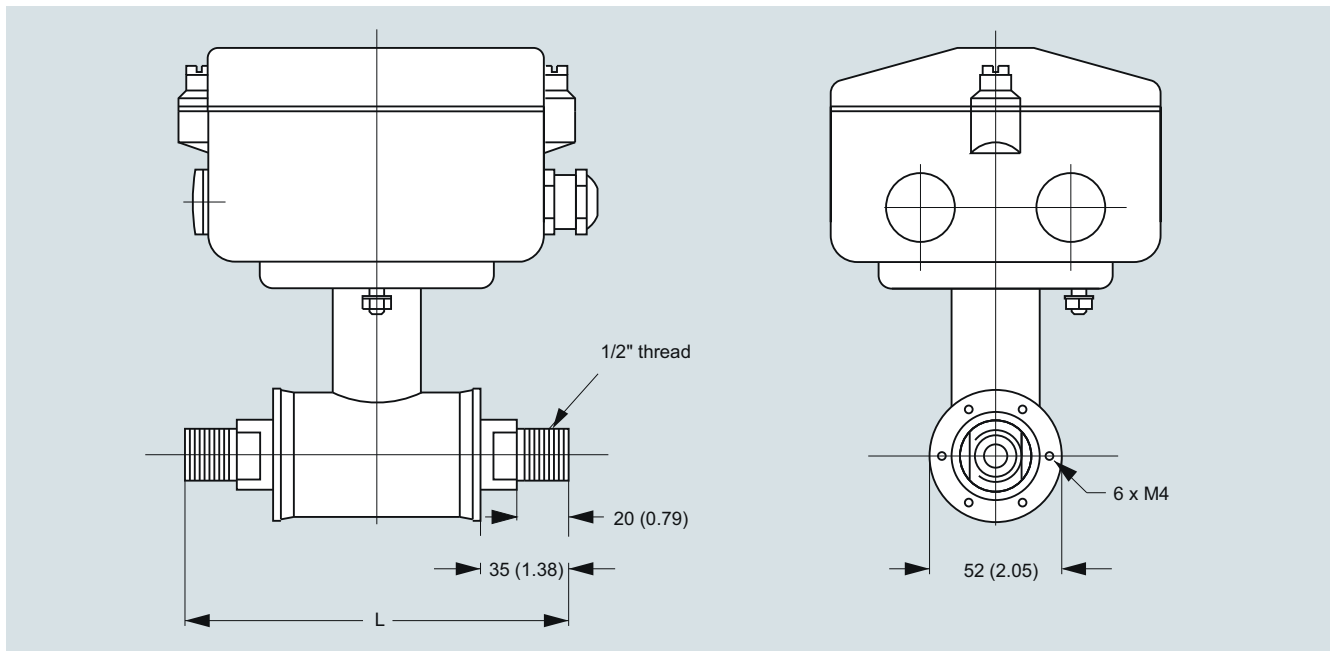

The MAG 1100 DN 2, 3, 6 and 10 (1/12", 1/8", 1/4" and 3/8") are prepared for assembly with the 1/2" pipe connections. Dimensions in mm (inch)

The length "L" varies dependent on the gasket choice.

Stainless steel and Hastelloy pipe connections								PVDF pipe connections	
Without gasket		EPDM		Graphite		PTFE		PTFE	
[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]
150	5.9	150	5.9	152	6.0	156	6.1	133	5.2

### Important note:

For compact installation with the MAG 6000 I, transmitter to be supported to avoid tension on sensor part.

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 1100 F

#### Overview



The electromagnetic sensor SITRANS FM MAG 1100 F is designed to meet applications in the food and beverage industry.

#### Benefits

- Sensor sizes: DN 10 to DN 100 (3/8" to 4")
- AISI 316 stainless steel enclosure
- Sensor: Hygienic connection, 3A approval and EHEDG certified
- Sanitary design for CIP/SIP cleaning
- Easy commissioning, the SENSORPROM unit automatically updates settings
- Hose proof IP67/NEMA 4X enclosure rating
- Designed that patented in-situ verification can be conducted. Using SENSORPROM fingerprints.

#### Application

The main applications of the SITRANS FM electromagnetic sensors can be found in the following fields:

- Food industry
- Beverage industry
- Pharmaceutical industry

#### Design

- Unique mechanical design with a wide range of customer specified sanitary connection
- Compact or remote mounting possible easy "plug & play" field changeable
- Simple on site upgrade to IP68/NEMA 6P terminal box
- ATEX 2G D version for hazardous areas (ceramic liner)


#### Mode of operation

The flow measuring principle is based on Faraday's law of electromagnetic induction according to which the sensor converts the flow into an electrical voltage proportional to the velocity of the flow.


#### Integration

The complete flowmeter consists of a sensor and an associated transmitter SITRANS FM MAG 5000, 6000 and 6000 I. The flexible communication concept USM II simplifies integration and update to a variety of fieldbus systems such as PROFIBUS DP and PA, Modbus RTU/RS 485, HART, FOUNDATION Fieldbus H1, DeviceNet.

#### Pressure/temperature curve; material AISI 316L/1.4404

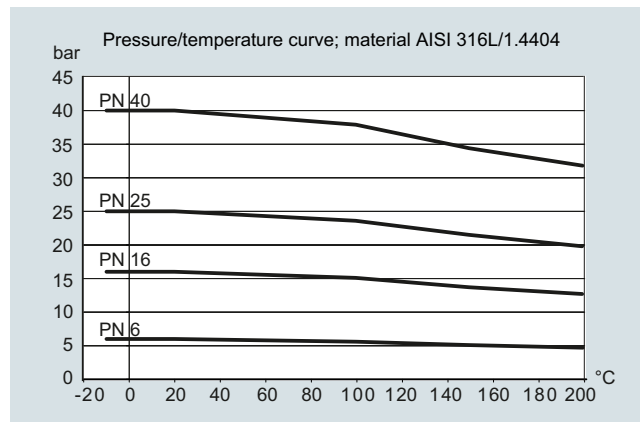

#### Pressure/temperature curve; material AISI 316L/1.4404

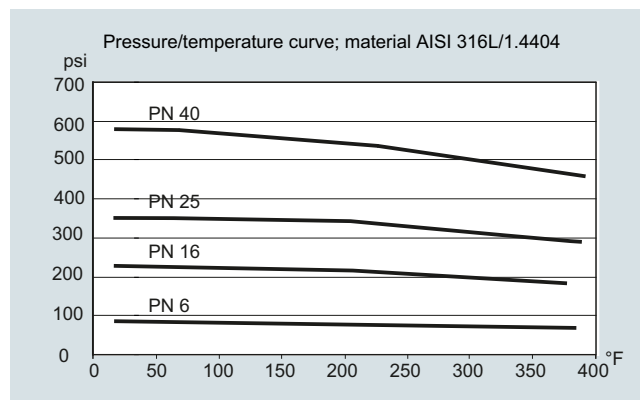



### Technical specifications

<b>Measuring principle</b>	Electromagnetic induction	<b>Design</b>	
Excitation frequency (Mains supply: 50 Hz/60 Hz)	DN 10 ... 65 (1/4" ... 2 1/2"): 12.5 Hz/15 Hz DN 80 ... 100 (3", 4"): 6.25 Hz/7.5 Hz	Weight	See Dimensional drawings
<b>Process connection</b>		<b>Material</b>	
Nominal size	DN 10 ... DN 100 (3/8" ... 4")	Enclosure	
Process connection	Hygienic adapters available for: <ul style="list-style-type: none"> <li>• Direct welding onto pipe</li> <li>• Clamp fitting</li> <li>• Threaded fitting</li> </ul>	• MAG 1100 F	Stainless steel AISI 316L/1.4404
<b>Rated operating conditions</b>		Terminal box (remote version only)	
<b>Ambient conditions</b>		• Standard	Fibre glass reinforced polyamide
Ambient temperature		• Option	Stainless steel AISI 316/1.4436
• Sensor	-40 ... +100 °C (-40 ... +212 °F)	• Ex ATEX (remote version only)	Stainless steel AISI 316/1.4436
• Ex sensor	-20 ... +60 °C (-4 ... +140 °F)	<b>Liner</b>	
• Compact with transmitter MAG 5000/6000	-20 ... +60 °C (-4 ... +140 °F)	MAG 1100 F (Ceramic)	Aluminum oxide Al <sub>2</sub> O <sub>3</sub> (ceramics)
• Compact with transmitter MAG 6000 I	-20 ... +60 °C (-4 ... +140 °F)	MAG 1100 F (PFA)	Reinforced PFA (teflon) (not for Ex)
• Compact with transmitter MAG 6000 I Ex	-10 ... +60 °C (14 ... 140 °F)	<b>Electrodes</b>	
<b>Temperature of medium</b>		MAG 1100 F (Ceramic)	Platinum with gold/Titanium brazing alloy
MAG 1100 F (Ceramic)	-20 ... +150 °C (-4 ... +302 °F) Suitable for steam sterilization	MAG 1100 F (PFA)	<ul style="list-style-type: none"> <li>• DN 10 ... 15 (3/8" ... 1/2"): Hastelloy C276/2.4819</li> <li>• DN 25 ... 100 (1" ... 4"): Hastelloy C22/2.4602</li> </ul>
MAG 1100 F (PFA)	-30 ... +130 °C (-22 ... +266 °F) Suitable for steam sterilization at 150 °C (302 °F)	<b>Cable entries</b>	<ul style="list-style-type: none"> <li>• Remote installation 2 x M20 or 2 x 1/2" NPT</li> <li>• Compact installation <ul style="list-style-type: none"> <li>- MAG 5000/MAG 6000: 4 x M20 or 4 x 1/2" NPT</li> <li>- MAG 6000 I: 2 x M25 (for supply/output)</li> <li>- MAG 6000 I Ex: 2 x M25 (for supply/output)</li> </ul> </li> </ul>
<b>Temperature shock</b>		<b>Certificates and approvals</b>	
MAG 1100 F		Calibration	
• Duration ≤ 1 min, followed by 10 min rest	<ul style="list-style-type: none"> <li>• DN 10, 15, 25: Max. ΔT ≤ 80 °C/min (3/8", 1/2", 1": Max. ΔT ≤ 144 °F/min)</li> <li>• DN 40, 50, 65: Max. ΔT ≤ 70 °C/min (1 1/2", 2", 2 1/2": Max. ΔT ≤ 126 °F/min)</li> <li>• DN 80, 100: Max. ΔT ≤ 60 °C/min (3", 4": Max. ΔT ≤ 108 °F/min)</li> </ul>	• Default calibration	Zero-point, 2 x 25 %, 2 x 90 %
MAG 1100 F (PFA)	Max. ± 100 °C (212 °F) momentarily	Hazardous areas	
<b>Operating pressure</b>		• MAG 1100 F (Ceramic)	
MAG 1100 F (Ceramic)	DN 10 ... 65: 40 bar (3/8" ... 2 1/2": 580 psi) DN 80: 25 bar (3": 363 psi) DN 100: 25 bar (4": 363 psi)	- Ex-sensor in compact or remote version with MAG 6000 I Ex	<ul style="list-style-type: none"> <li>• ATEX, EAC Ex <ul style="list-style-type: none"> <li>- Zone 1 Ex d e ia IIB T6 Gb</li> </ul> </li> <li>• ATEX <ul style="list-style-type: none"> <li>- Zone 21 Ex tD A21 IP67</li> </ul> </li> <li>• FM <ul style="list-style-type: none"> <li>- NI Class I Div. 2 Groups A, B, C, D</li> </ul> </li> </ul>
MAG 1100 F (PFA)	Vacuum: 1 x 10 <sup>-6</sup> bar <sub>abs</sub> (1.5 x 10 <sup>-5</sup> psi <sub>abs</sub> ) 20 bar (290 psi) Vacuum: 0.02 bar <sub>abs</sub> (0.3 psi <sub>abs</sub> ) DN 80 ... DN 100: CO <sub>2</sub> pressure max. 7 bar (101.5 psi)	- Standard sensor in compact or remote version with MAG MAG 5000/6000/6000 I Ex	• FM <ul style="list-style-type: none"> <li>- NI Class I Div. 2 Groups A, B, C, D</li> </ul>
<b>Mechanical load (vibration)</b>		• MAG 1100 F (PFA)	
	18 ... 1 000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36	- Standard sensor in compact or remote version with MAG MAG 5000/6000/6000 I Ex	• FM <ul style="list-style-type: none"> <li>- NI Class I Div. 2 Groups A, B, C, D</li> </ul>
	Sensor: 3.17 g RMS	Hygienic	
	Sensor with compact MAG 5000/6000 mounted transmitter: 3.17 grms	• MAG 1100 F (Ceramic)	<ul style="list-style-type: none"> <li>• 3A (remote version with Polyamide terminal box)</li> <li>• 3A (remote version with Polyamide terminal box)</li> <li>• EHEDG (remote version with Polyamide terminal box, DN 25 ... 100/1 ... 4")</li> <li>• Hygienic EC 1935:2004 European food contact material</li> </ul>
	Sensor with compact MAG 6000 I/MAG 6000 I Ex mounted transmitter: 1.14 grms	• MAG 1100 F (PFA)	
	For compact installation with the MAG 6000 I/MAG 6000 I Ex, transmitter to be supported to avoid tension on sensor part.	Pressure equipment	PED - 2014/68/EU
<b>Enclosure rating</b>		Others	<ul style="list-style-type: none"> <li>• EAC (Russia, Belarus, Kazakhstan)</li> <li>• KCC (South Korea)</li> </ul>
IP67 to EN 60529 (NEMA 4X), 1 mH <sub>2</sub> O for 30 min			
EMC	2014/30/EU		

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 1100 F

#### Technical specifications (continued)

##### Accessories

##### Weld-in adapter

Adapter for welding onto dairy pipe, stainless steel 1.4404	Tri-Weld ISO 2037, DIN 11850, SMS 3008, BS 4825-1
• DN 10, 15, 25, 40, 50 and 65 (3/8", 1/2", 1", 1 1/2", 2" and 2 1/2")	PN 40 (600 psi)
• DN 8 and DN 100 (3" and 4")	PN 25 (350 psi)

##### Clamp adapter

	Tri-Clamp, ISO 2852, DIN 32676, SMS 3016, BS 4825-3
DN 10, 15, 25, 40 and 50 (3/8", 1/2", 1", 1 1/2" and 2")	PN 16 (200 psi)
DN 65, 80 and 100 (2 1/2", 3" and 4")	PN 10 (150 psi)

##### Thread adapter

DIN 11851	
• DN 10, 15, 25, and 40 (3/8", 1/2", 1", and 1 1/2")	PN 40 (600 psi)
• DN 50, 65, 80 and 100 (2", 2 1/2", 3" and 4")	PN 25 (350 psi)
ISO 2853, BS 4825-4	
• DN 10, 15, 25, 40, 50, 65 and 80 (3/8", 1/2", 1", 1 1/2", 2", 2 1/2" and 3")	PN 16 (200 psi)
SMS 1145	
• DN 25, 40, 50, 65 and 80 (1", 1 1/2", 2", 2 1/2" and 3")	PN 6 (80 psi)

##### Design

##### Material

Adapter	Stainless steel AISI 316/1.4436
Gasket	
• MAG 1100 F (Ceramic)	FKM/FPM with stainless steel insert (AISI 304/1.4301) (-20 ... +150 °C (-4 ... +302 °F))
	EPDM (-20 ... +150 °C (-4 ... +302 °F))
• MAG 1100 F (PFA)	EPDM (-20 ... +150 °C (-4 ... +302 °F))
	NBR (-20 ... +100 °C (-4 ... +212 °F))

##### Note:

When combined sensor and adapter, the operating pressure is the lower rated of the pair.

#### Selection and ordering data

#### Article No.

##### Sensor SITRANS FM MAG 1100 F

7ME6140-

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

##### Diameter

DN 10 (3/8")	1 R
DN 15 (1/2")	1 V
DN 25 (1")	2 D
DN 40 (1 1/2")	2 R
DN 50 (2")	2 Y
DN 65 (2 1/2")	3 F
DN 80 (3")	3 M
DN 100 (4")	3 T

##### Process connections

None (not suitable for 3A approval)

##### Weld in

DIN 11850  
ISO 2037 (SMS 3008)  
Tri-Weld/BS 4825-1

##### Clamp type

DIN 32676  
ISO 2852 (SMS 3016)  
Tri-Clamp/BS 4825-3

##### Threaded type

DIN 11851  
SMS 1145<sup>1)</sup>

##### Liner material

PFA  
Ceramic

##### Gasket material<sup>1)</sup>

EPDM flat gasket (3A)	0
FPM/FKM (3A) (only with ceramic liner)	2
EPDM-P gasket (only for PFA) (EHEDG, 3A)	3

##### Electrode material

Hastelloy C (only with PFA liner)	1
Platinum (only with ceramic liner)	2

##### Transmitter

Standard sensor for remote transmitter (order transmitter separately), 3A approved	A
Ex sensor for remote transmitter (order transmitter separately) 3A approved	B
MAG 6000 I, Alu.18 ... 90 V DC, 115 ... 230 V AC	C
MAG 6000 I, Aluminum 18 ... 30 V DC, Ex	D
MAG 6000 I, Aluminum 115 ... 230 V AC, Ex	E
MAG 6000, Polyamide, 11 ... 30 V DC/11 ... 24 V AC	H
MAG 6000, Polyamide, 115 ... 230 V AC	J
MAG 5000, Polyamide, 11 ... 30 V DC/11 ... 24 V AC	K
MAG 5000, Polyamide, 115 ... 230 V AC	L

#### Selection and ordering data

#### Article No.

Sensor SITRANS FM MAG 1100 F

7ME6140-

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Communication

No communication, add-on possible

HART

PROFIBUS PA Profile 3 (only MAG 6000/MAG 6000 I)

PROFIBUS DP Profile 3 (not for Ex) (only MAG 6000/MAG 6000 I)

Modbus RTU/RS 485 (not for Ex) (only MAG 6000/MAG 6000 I)

FOUNDATION Fieldbus H1 (only MAG 6000/MAG 6000 I)

#### Cable glands/terminal box

Metric: Polyamide terminal box or MAG 6000 I compact

½" NPT: Polyamide terminal box or MAG 6000 I compact

Metric: Stainless steel terminal box

½" NPT: Stainless steel terminal box

1) SMS 1145 standard is not approved by 3A

#### Additional information

Please add "-Z" to Article No. and specify Order code(s) and plain text.

#### Certificates

- Pressure test certificate according to EN 10204-3.1 **C01**
- Material certificate according to EN 10204-3.1 **C12**
- Factory certificate according to EN 10204-2.2 **C14**
- Factory certificate according to EN 10204-2.1 **C15**

#### Terminal blocks

- Factory mounted terminal blocks **N02**

Tag name plate, stainless steel (specify in plain text) **Y17**

Tag name plate, plastic (self adhesive) **Y18**

Customer-specific transmitter setting **Y20**

#### Factory mounted sensor cables

- Sensor cables wired (specify Article No. for sensor cables and order cables separately) **Y40**
- Sensor cables wired and IP68 sealing (specify Article No. for sensor cables and order cables separately) **Y41**

#### Additional calibrations

- Matched-pair calibration **On request<sup>1)</sup>**
- Accredited matched-pair calibration acc. to ISO/IEC 17025: 2005 **On request<sup>1)</sup>**
- Customer-specified calibration up to 10 points **On request<sup>1)</sup>**
- Customer-witnessed calibration **On request<sup>1)</sup>**
- Any of above calibration

1) Product Variation Request (PVR)

#### Operating instructions for SITRANS FM MAG 1100 F

#### Description

#### Article No.

- English

**A5E02435647**

All literature is available to download for free, in a range of languages, at <https://www.siemens.com/processinstrumentation/documentation>

#### Accessories

#### Description

#### Article No.

Potting kit for IP68/ NEMA 6P sealing of sensor junction box

**FDK:085U0220**



## Flow Measurement

SITRANS FM (electromagnetic)

Flow sensors

### MAG 1100 F

#### Selection and ordering data

Article No.

Article No.


#### Accessories for MAG 1100 F sensor

##### Weld-in connection fittings for use with P gaskets (Stainless steel)

Material: AISI 316L (1.4404)  
Only for liner PFA  
2 pcs. fittings  
2 pcs. clamps (to join flow sensor and fitting),  
P gaskets not included

##### DIN 11850<sup>1)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)



10 <sup>2)</sup>	13	1.5	10	<b>A5E02054630</b>
15 <sup>2)</sup>	19	1.5	15	<b>A5E02054633</b>
20	23	1.5	15	<b>A5E02054634</b>
25	29	1.5	25	<b>A5E02054635</b>
32	35	1.5	25	<b>A5E02054637</b>
40	41	1.5	40	<b>A5E02054638</b>
50	53	1.5	50	<b>A5E02054640</b>
65	70	2.0	65	<b>A5E02054643</b>
80	85	2.0	80	<b>A5E02054644</b>
100	104	2.0	100	<b>A5E02054646</b>

##### ISO 2037<sup>1)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)

12.7	12.7	1.0	10	<b>A5E03727946</b>
17.2	17.2	1.0	15	<b>A5E03728098</b>
25	25	1.6	25	<b>A5E02196073</b>
33	33.7	1.6	25	<b>A5E02196074</b>
38	38	1.6	40	<b>A5E02196075</b>
40	40	1.6	40	<b>A5E02196076</b>
51	51	1.6	50	<b>A5E02196077</b>
63.5	63.5	1.6	65	<b>A5E02196078</b>
76.1	76.1	1.6	80	<b>A5E02196080</b>
101.6	101.6	2.0	100	<b>A5E02196082</b>

##### Tri-Weld (BS 4825-1)<sup>1)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)


12.7	12.7	1.2	10	<b>A5E02199113</b>
19.05	19.05	1.2	15	<b>A5E02199114</b>
25.4	25.4	1.6	25	<b>A5E02199115</b>
38.1	38.1	1.6	40	<b>A5E02199116</b>
50.8	50.8	1.6	50	<b>A5E02199117</b>
63.5	63.5	1.6	65	<b>A5E02199118</b>
76.2	76.2	1.6	80	<b>A5E02199119</b>
101.6	101.6	2.0	100	<b>A5E02199120</b>

##### Clamp-type connection fittings for use with P gaskets (Stainless steel)

Material: AISI 316L (1.4404)  
Only for liner PFA  
2 pcs. fittings  
2 pcs. clamps (to join flow sensor and fitting),  
P gaskets not included

##### DIN 32676<sup>1)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)



10	34	10	10	<b>A5E02211143</b>
15	34	16	15	<b>A5E02211144</b>
25	50.5	22.6	25	<b>A5E02211146</b>
40	50.5	38	40	<b>A5E02211147</b>
50	64	50	50	<b>A5E02211148</b>
65	91	66	65	<b>A5E02211151</b>
80	106	81	80	<b>A5E02211152</b>
100	119	100	100	<b>A5E02211153</b>

##### ISO 2852<sup>1)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)

25	50.5	22.6	25	<b>A5E02213581</b>
33.7	50.5	31.3	25	<b>A5E02213582</b>
38	50.5	35.6	40	<b>A5E02213583</b>
51	64	48.6	50	<b>A5E02213584</b>
63.5	77.5	60.3	65	<b>A5E02213585</b>
76.1	91	72.9	80	<b>A5E02213586</b>
101.6	119	97.6	100	<b>A5E02213587</b>

##### Tri-Clamp (BS 4825-3)<sup>1)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)

12.7	25.4	9.5	10	<b>A5E02213596</b>
19.05	25.4	15.85	15	<b>A5E02213597</b>
25.4	50.5	22.2	25	<b>A5E02213598</b>
38.1	50.5	34.9	40	<b>A5E02213599</b>
50.8	64	47.6	50	<b>A5E02213600</b>
63.5	77.5	60.3	65	<b>A5E02213601</b>
76.2	91	73	80	<b>A5E02213602</b>
101.6	119	97.6	100	<b>A5E02213603</b>

D<sub>o</sub>: Outer diameter

D<sub>i</sub>: Inner diameter

<sup>1)</sup> Suitable for EHEDG

<sup>2)</sup> Not suitable for EHEDG

## Selection and ordering data

## Article No.


## Article No.

#### Threaded type connection fittings for use with P gaskets (Stainless steel)

Material: AISI 316L (1.4404)  
 Only for liner PFA  
 2 pcs. fittings  
 2 pcs. clamps (to join flow sensor and fitting),  
 P gaskets not included

##### DIN 11851<sup>1)</sup>


Adapter			Sensor
DN (mm)	D <sub>O</sub> (mm)	D <sub>T</sub> (mm)	DN (mm)



10	28	10	10	<b>A5E02218293</b>
15	34	16	15	<b>A5E02218294</b>
20	44	20	15	<b>A5E02218295</b>
25	52	26	25	<b>A5E02218296</b>
32	58	32	25	<b>A5E02218297</b>
40	65	38	40	<b>A5E02218298</b>
50	78	50	50	<b>A5E02218299</b>
65	95	66	65	<b>A5E02218300</b>
80	110	81	80	<b>A5E02218301</b>
100	130	100	100	<b>A5E02218302</b>

##### SMS 1145<sup>1)</sup>

Adapter			Sensor
DN (mm)	D <sub>O</sub> (mm)	D <sub>I</sub> (mm)	DN (mm)



25	40	22.6	25	<b>A5E02218310</b>
38	60	35.6	40	<b>A5E02218312</b>
51	70	48.6	50	<b>A5E02218313</b>
63.5	85	60.3	65	<b>A5E02218314</b>
76	98	72	65	<b>A5E02218315</b>


D<sub>O</sub>: Outer diameterD<sub>I</sub>: Inner diameter<sup>1)</sup> Suitable for EHEDG

#### Weld-in connection fittings for use with flat gaskets (Stainless steel)

Material: AISI 316L (1.4404)  
 For liner PFA and ceramic  
 2 pcs. fittings  
 2 pcs. clamps (to join flow sensor and fitting),  
 Flat gaskets not included

##### DIN 11850<sup>1)</sup>

Adapter			Sensor
DN (mm)	D <sub>O</sub> (mm)	D <sub>T</sub> (mm)	DN (mm)



10	13	1.5	10	<b>FDK:083G2116</b>
15	19	1.5	15	<b>FDK:083G2117</b>
20	23	1.5	15	<b>FDK:083G2118</b>
25	29	1.5	25	<b>FDK:083G2119</b>
32	35	1.5	25	<b>FDK:083G2120</b>
40	41	1.5	40	<b>FDK:083G2121</b>
50	53	1.5	50	<b>FDK:083G2122</b>
65	70	2.0	65	<b>FDK:083G2123</b>
80	85	2.0	80	<b>FDK:083G2124</b>
100	104	2.0	100	<b>FDK:083G2125</b>

##### ISO 2037<sup>1)</sup>

Adapter			Sensor
DN (mm)	D <sub>O</sub> (mm)	D <sub>T</sub> (mm)	DN (mm)

12.7	12.7	1.0	10	<b>A5E03720273</b>
17.2	17.2	1.0	15	<b>FDK:083G2107</b>
25	25.6	1.6	25	<b>FDK:083G2109</b>
33.7	33.7	1.6	25	<b>FDK:083G2100</b>
38	38	1.6	40	<b>FDK:083G2111</b>
40	40	1.6	40	<b>FDK:083G2101</b>
51	51	1.6	50	<b>FDK:083G2112</b>
63.5	63.5	1.6	65	<b>FDK:083G2113</b>
76.1	76.1	1.6	80	<b>FDK:083G2114</b>
101.6	101.6	2.0	100	<b>FDK:083G2115</b>
114.3	118.3	2.0	100	<b>FDK:083G2105</b>

##### Tri-Weld (BS 4825-1)<sup>1)</sup>

Adapter			Sensor
DN (mm)	D <sub>O</sub> (mm)	D <sub>T</sub> (mm)	DN (mm)

12.7	12.7	1.2	10	<b>FDK:083G2276</b>
19.05	19.05	1.2	15	<b>FDK:083G2277</b>
25.4	25.4	1.6	25	<b>FDK:083G2279</b>
38	38.1	1.6	40	<b>FDK:083G2281</b>
50.8	50.8	1.6	50	<b>FDK:083G2282</b>
63.5	63.5	1.6	65	<b>FDK:083G2283</b>
76.2	76.2	1.6	80	<b>FDK:083G2284</b>
101.6	101.6	2.0	100	<b>FDK:083G2285</b>

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 1100 F

#### Selection and ordering data

#### Article No.

#### Article No.


#### Clamp-type connection fittings for use with flat gaskets (Stainless steel)

Material: AISI 316L (1.4404)  
For liner PFA and ceramic  
2 pcs. fittings  
2 pcs. clamps (to join flow sensor and fitting),  
Flat gaskets not included

#### DIN 32676<sup>1)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)

10	34	10	10
15	34	16	15
25	50.5	26	25
40	50.5	38	40
50	64	50	50
65	91	66	65
80	106	81	80
100	119	100	100



**FDK:083G2186**

**FDK:083G2187**

**FDK:083G2179**

**FDK:083G2181**

**FDK:083G2182**

**FDK:083G2183**

**FDK:083G2184**

**FDK:083G2185**

#### ISO 2852<sup>1)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)

25	50.5	22.6	25
33.7	50.5	31.3	25
38	50.5	35.6	40
51	64	48.6	50
63.5	77.5	60.3	65
76.1	91	72.9	80
101.6	119	97.6	100

**FDK:083G2189**

**FDK:083G2190**

**FDK:083G2191**

**FDK:083G2192**

**FDK:083G2193**

**FDK:083G2194**

**FDK:083G2195**

#### Tri-Clamp (BS 4825-3)<sup>1)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)

12.7	25.4	9.5	10
19.05	25.4	15.85	15
25.4	50.5	22.2	25
38.1	50.5	34.9	40
50.8	64	47.6	50
63.5	77.5	60.3	65
76.2	91	73	80
101.6	119	97.6	100

**FDK:083G2286**

**FDK:083G2287**

**FDK:083G2289**

**FDK:083G2291**

**FDK:083G2292**

**FDK:083G2293**

**FDK:083G2294**

**FDK:083G2295**

<sup>1)</sup> D<sub>o</sub>: Outer diameter

<sup>2)</sup> D<sub>i</sub>: Inner diameter

<sup>3)</sup> <sup>1)</sup> Suitable for 3A


#### Threaded type connection fittings for use with flat gaskets (Stainless steel)

Material: AISI 316L (1.4404)  
For liner PFA and ceramic  
2 pcs. fittings  
2 pcs. clamps (to join flow sensor and fitting),  
Flat gaskets not included

#### DIN 11851<sup>1)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)

10	28	10	10
15	34	16	15
20	44	20	15
25	52	26	25
32	58	32	25
40	65	38	40
50	78	50	50
65	95	66	65
80	110	81	80
100	130	100	100



**FDK:083G2156**

**FDK:083G2157**

**FDK:083G2158**

**FDK:083G2159**

**FDK:083G2160**

**FDK:083G2161**

**FDK:083G2162**

**FDK:083G2163**


**FDK:083G2164**

**FDK:083G2165**

#### ISO 2853<sup>1)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)

25	37	22.6	25
38	51	35.6	40
51	64	48.6	50
63.5	78	60.3	65
76.1	91	72.9	80



**FDK:083G2149**

**FDK:083G2151**

**FDK:083G2152**

**FDK:083G2153**

**FDK:083G2154**

#### BS 4825-4<sup>1)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)


101.6	126	97.6	100
-------	-----	------	-----

**FDK:083G2145**

#### SMS 1145<sup>2)</sup>

Adapter		Sensor	
DN (mm)	D <sub>o</sub> (mm)	D <sub>i</sub> (mm)	DN (mm)

25	40	22.6	25
38	60	35.6	40
51	70	48.6	50
63.5	85	60.3	65
76	98	72	65



**FDK:083G2139**

**FDK:083G2141**

**FDK:083G2142**

**FDK:083G2143**

**FDK:083G2144**

D<sub>o</sub>: Outer diameter

D<sub>i</sub>: Inner diameter

<sup>1)</sup> Suitable for 3A

<sup>2)</sup> Not suitable for 3A

**Selection and ordering data****Article No.****Spare parts for MAG 1100 F sensor****Gaskets**

(delivered in pairs, to be placed between flow sensor and adapter)

MAG 1100 F (PFA) - P gaskets

Rubber: EPDM

• DN 10	<b>A5E02055286</b>
• DN 15	<b>A5E02055287</b>
• DN 25	<b>A5E02055290</b>
• DN 40	<b>A5E02055291</b>
• DN 50	<b>A5E02055292</b>
• DN 65	<b>A5E02055293</b>
• DN 80	<b>A5E02055295</b>
• DN 100	<b>A5E02055297</b>

MAG 1100 F (ceramic) - Flat gaskets

Rubber: FKM/FPM

• DN 10	<b>A5E00915707</b>
• DN 15	<b>A5E00915764</b>
• DN 25	<b>A5E00915771</b>
• DN 40	<b>A5E00915773</b>
• DN 50	<b>A5E00915775</b>
• DN 65	<b>A5E00915780</b>
• DN 80	<b>A5E00915782</b>
• DN 100	<b>A5E00915784</b>

MAG 1100 F (PFA, ceramic) - Flat gaskets

Rubber: EPDM

• DN 10	<b>FDK:083G2206</b>
• DN 15	<b>FDK:083G2207</b>
• DN 25	<b>FDK:083G2209</b>
• DN 40	<b>FDK:083G2211</b>
• DN 50	<b>FDK:083G2212</b>
• DN 65	<b>FDK:083G2213</b>
• DN 80	<b>FDK:083G2214</b>
• DN 100	<b>FDK:083G2215</b>

Rubber: NBR

• DN 10	<b>FDK:083G2216</b>
• DN 15	<b>FDK:083G2217</b>
• DN 25	<b>FDK:083G2219</b>
• DN 40	<b>FDK:083G2221</b>
• DN 50	<b>FDK:083G2222</b>
• DN 65	<b>FDK:083G2223</b>
• DN 80	<b>FDK:083G2224</b>
• DN 100	<b>FDK:083G2225</b>

## Flow Measurement


SITRANS FM (electromagnetic)

Flow sensors

### MAG 1100 F

#### Dimensional drawings

Sensor MAG 1100 F compact/remote

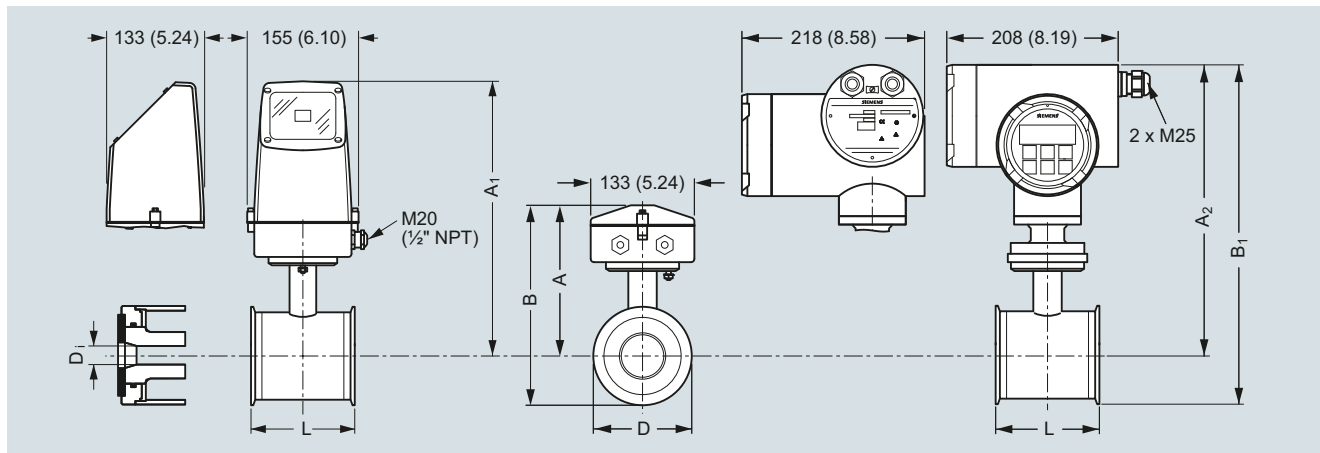

Dimensions in mm (inch)

#### Important note:

For compact installation with MAG 6000 I/Ex - Supports the transmitter to avoid tension on the sensor part.

Size DN	L [mm]	A [mm]	A <sub>1</sub> <sup>3)</sup> [mm]	B <sup>2)</sup> [mm]	B <sub>1</sub> [mm]	D [mm]	D <sub>i</sub> (Al <sub>2</sub> O <sub>3</sub> ) [mm]	D <sub>i</sub> PFA [mm]	Weight <sup>1)</sup> [kg]
10	64	161	315	193.7	344.7	64.0	10	10	2.2
15	64	161	315	193.7	344.7	64.0	15	16	2.2
25	79	169	323	207.5	359.0	77.5	25	26	2.7
40	94	179	333	228.0	379.0	91.0	40	38	3.4
50	104	188	342	247.7	398.7	119.0	50	50	4.2
65	131	197.5	351	262.6	413.6	130.0	65	66	5.5
80	156	204	357	281.0	432.0	155.0	80	81	7.0
100	186	217	370	308.0	459.0	183.0	100	100	10.0

Size [inch]	L [inch]	A [inch]	A <sub>1</sub> <sup>3)</sup> [inch]	B <sup>2)</sup> [inch]	B <sub>1</sub> [inch]	D [inch]	D <sub>i</sub> (Al <sub>2</sub> O <sub>3</sub> ) [inch]	D <sub>i</sub> PFA [inch]	Weight <sup>1)</sup> [lb]
3/8	2.52	6.34	12.40	7.62	13.57	2.52	0.39	0.39	4.8
1/2	2.52	6.34	12.40	7.62	13.57	2.52	0.59	0.63	4.8
1	3.11	6.66	12.72	8.17	14.13	3.05	0.98	1.02	4.9
1 1/2	3.70	7.05	13.11	8.98	14.92	3.58	1.57	1.50	7.5
2	4.09	7.40	13.47	9.75	15.70	4.68	1.97	1.97	9.2
2 1/2	5.16	7.78	13.82	10.34	16.28	5.12	2.56	2.60	12.0
3	6.14	8.03	14.06	11.06	17.01	6.10	3.15	3.19	15.0
4	7.32	8.54	14.57	12.13	18.07	7.20	3.94	3.94	22.0

<sup>1)</sup> With transmitter MAG 5000 or MAG 6000 compact, weight is increased by approximately 0.8 kg (1.8 lb).

With MAG 6000 I weight is increased with 5.5 kg ( 12.1 lbs)


<sup>2)</sup> 14.5 mm (0.571") shorter when the stainless steel terminal box is used (always Ex version).

<sup>3)</sup> A<sub>2</sub> is 3 mm (0.12") shorter than A<sub>1</sub>



### Dimensional drawings (continued)

#### Sensor MAG 1100 F compact/separate – built-in length

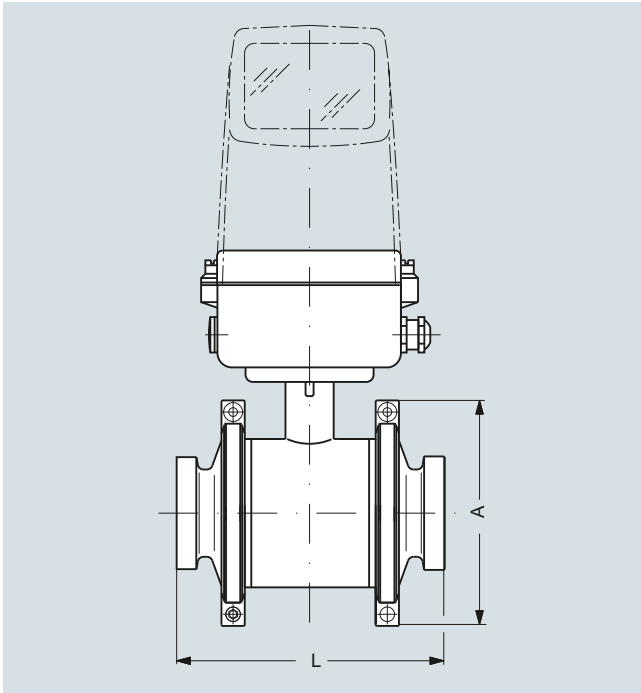

Size		A		L <sup>1)</sup>	
DN	Inch	[mm]	[inch]	[mm]	[inch]
10	3/8	99	3.90	146	5.75
15	1/2	99	3.90	146	5.75
25	1	113	4.45	161	6.34
40	1 1/2	126	4.96	176	6.93
50	2	154	6.06	186	7.32
65	2 1/2	165	6.50	223	8.78
80	3	200	7.87	258	10.16
100	4	225	8.86	288	11.34

<sup>1)</sup> The total built-in length "L" is independent of the adapter type selected.

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 3100 and MAG 3100 HT

#### Overview



The SITRANS FM MAG 3100 is an electromagnetic flow sensor in a large variety that meets the demands of almost every flow application.

#### Benefits

- Wide range of sizes: DN 15 to DN 2000 ( $\frac{1}{2}$ " to 78")
- The flexible design is for all applications not covered by the standard industry-specific sensors: MAG 1100, MAG 1100 F, MAG 3100 P and MAG 5100 W
- Wide pressure range: PN 6 to PN 100
- ANSI Class 150/300, AS 2129, AS 4087, JIS K10 and K20. On request up to 690 bar (10 000 psi)
- Wide range of electrode and liner material to fit even the most extreme process media
- Fully welded construction provides a ruggedness that suits the toughest applications and environments.
- Easy commissioning, the SENSORPROM unit automatically updates settings.
- Designed to allow patented SITRANS FM in-situ verification using the SENSORPROM fingerprints.

#### Application

The main applications of the SITRANS FM electromagnetic flow sensors can be found in the following fields:

- Process industry
- Chemical industry
- Steel industry
- Mining
- Utility
- Power generation and distribution
- Oil and gas/HPI
- Water and waste water

#### Design

- Compact or remote mounting possible
- Easy "plug & play" field changeability of transmitter
- ATEX and FM/CSA versions
- High temperature sensor for applications with temperatures up to 180 °C (356 °F)
- Meets EEC directives: PED, 2014/68/EU pressure directive for EN 1092-1 flanges
- Built-in length according to ISO 20456, the standard includes sizes up to DN 400
- Onsite or factory upgrade to IP68/NEMA 6P of a standard sensor.

#### Mode of operation

The flow measuring principle is based on Faraday's law of electromagnetic induction according to which the sensor converts the flow into an electrical voltage proportional to the velocity of the flow.


#### Integration

The complete flowmeter consists of a flow sensor and an associated transmitter MAG 5000, 6000 and 6000 I.


The flexible communication concept USM II simplifies integration and update to a variety of fieldbus systems such as HART, FOUNDATION Fieldbus H1, DeviceNet, PROFIBUS DP and PA, Modbus RTU/RS485.

**Integration** (continued)


**Pressure/temperature curve;**  
**material AISI 316L/1.4404 AS 2129, Class E**

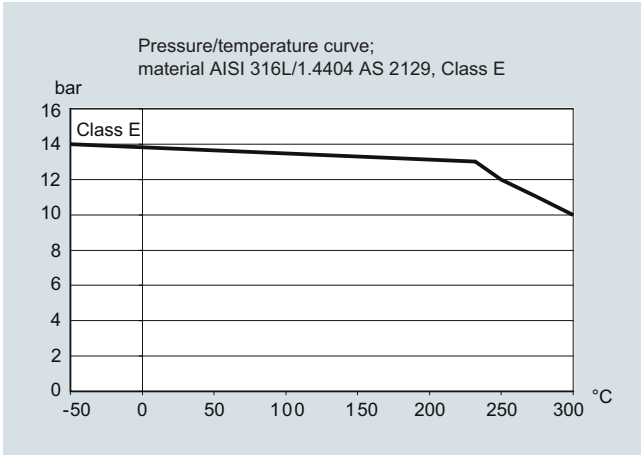


**Pressure/temperature curve - JIS 2200**

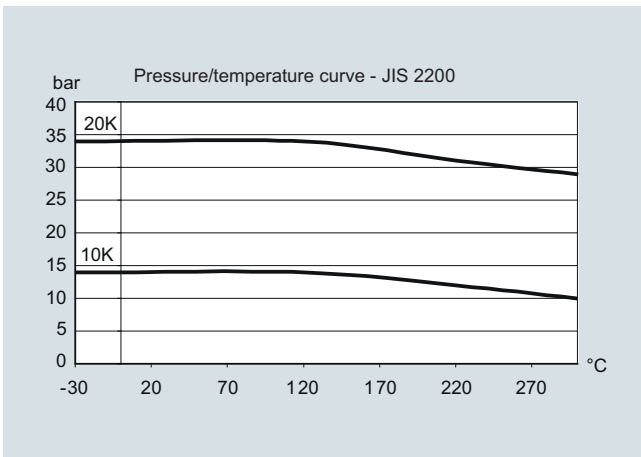


**Pressure/temperature curve to EN (DIN) flanges,**  
**material A 105 carbon steel**

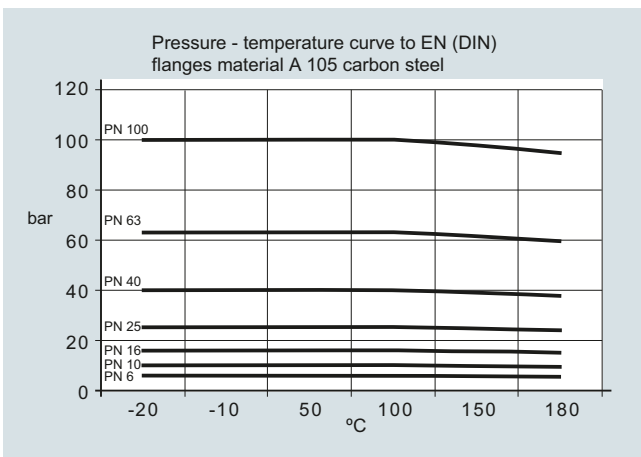


**Pressure/temperature curve to EN (DIN) flanges AISI 304**

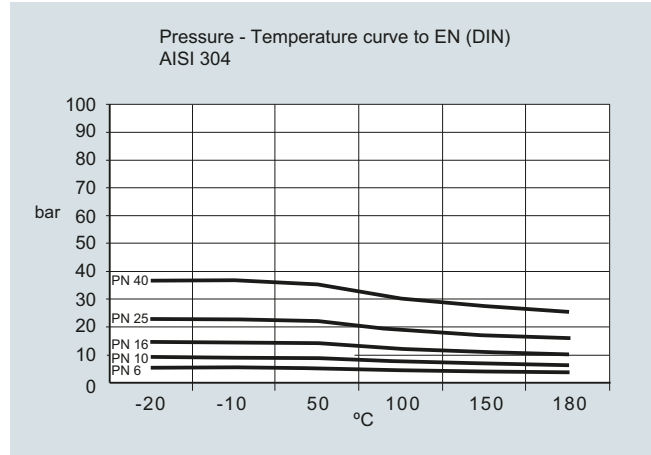

**Pressure/temperature curve to EN (DIN) flanges AISI 316**

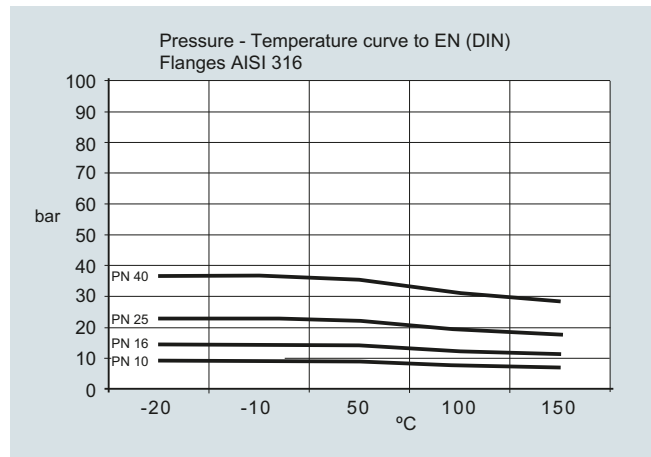

**Pressure/temperature curve to ANSI B16.5 flanges**

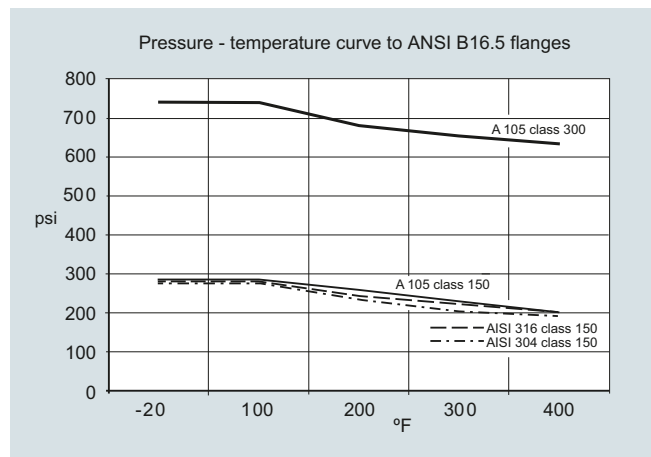

**Note:** The pressure-temperature curves only assist in the selection of a system. No responsibility is taken for the correctness of the information. For further information on PED standard see Pressure Equipment Directive in Appendix (chapter 10).

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 3100 and MAG 3100 HT

#### Technical specifications

Version	MAG 3100	MAG 3100 HT (High Temperature)
Product characteristic	Flexible product program	Flexible product program
Nominal size	DN 15 ... DN 2000 (½" ... 78")	DN 15 ... DN 300 (½" ... 12")
Measuring principle	Electromagnetic induction	Electromagnetic induction
Excitation frequency (Mains supply: 50 Hz/60 Hz)	<ul style="list-style-type: none"> <li>• DN 15 ... 65 (½" ... 2½"): 12.5 Hz/15 Hz</li> <li>• DN 80 ... 150 (3" ... 6"): 6.25 Hz/7.5 Hz</li> <li>• DN 200 ... 1200 (8" ... 48"): 3.125 Hz/3.75 Hz</li> <li>• DN 1400 ... 2000 (54" ... 78"): 1.5625 Hz/1.875 Hz</li> </ul>	<ul style="list-style-type: none"> <li>• DN 15 ... 65 (½" ... 2½"): 12.5 Hz/15 Hz</li> <li>• DN 80 ... 150 (3" ... 6"): 6.25 Hz/7.5 Hz</li> <li>• DN 200 ... 300 (8" ... 12"): 3.125 Hz/3.75 Hz</li> </ul>
<b>Process connection</b>		
Flanges	<p>EN 1092-1, raised face<sup>1)</sup> (EN 1092-1, DIN 2501 &amp; BS 4504 have the same mating dimensions)</p> <ul style="list-style-type: none"> <li>• DN 65 ... 2000 (2½" ... 78"): PN 6 (87 psi)</li> <li>• DN 200 ... 2000 (8" ... 78"): PN 10 (145 psi)</li> <li>• DN 65 ... 2000 (2½" ... 78"): PN 16 (232 psi)</li> <li>• DN 200 ... 600 (8" ... 24"): PN 25 (362 psi)</li> <li>• DN 15 ... 600 (½" ... 24"): PN 40 (580 psi)</li> <li>• DN 50 ... 300 (2" ... 12"): PN 63 (913 psi)</li> <li>• DN 25 ... 300 (1" ... 12"): PN 100 (1450 psi)</li> </ul> <p>ANSI B16.5 (~BS 1560), raised face:</p> <ul style="list-style-type: none"> <li>• ½" ... 24": Class 150 (20 bar (290 psi))</li> <li>• ½" ... 24": Class 300 (50 bar (725 psi))</li> <li>• ½" ... 18": Class 600 (100 bar (1450 psi))</li> </ul> <p>AWWA C-207, flat face 28" ... 78": Class D (10 bar)</p> <p>AS 2129, raised face ½" ... 48": Table E</p> <p>AS 4087, raised face:</p> <ul style="list-style-type: none"> <li>• PN 16 (DN 50 ... 1200, 16 bar (232 psi))</li> <li>• PN 21 (DN 50 ... 600, 21 bar (304 psi))</li> <li>• PN 35 (DN 50 ... 600, 35 bar (508 psi))</li> </ul> <p>JIS B 2220:2004</p> <ul style="list-style-type: none"> <li>• K10 (1" ... 24")</li> <li>• K20 (1" ... 24")</li> </ul> <p>Other flanges and pressure ratings on request</p>	<p>EN 1092-1, raised face (EN 1092-1, DIN 2501 &amp; BS 4504 have the same mating dimensions)</p> <ul style="list-style-type: none"> <li>• DN 15 ... 300 (½" ... 12"): PN 40 (580 psi)</li> <li>• DN 65 ... 300 (2½" ... 12"): PN 16 (232 psi)</li> <li>• DN 200 ... 300 (8" ... 12"): PN 10 (145 psi)</li> <li>• DN 200 ... 300 (8" ... 12"): PN 25 (362 psi)</li> </ul> <p>ANSI B16.5 (~BS 1560), raised face:</p> <ul style="list-style-type: none"> <li>• ½" ... 12": Class 150 (20 bar (290 psi))</li> <li>• ½" ... 12": Class 300 (50 bar (725 psi))</li> </ul> <p>AS 2129, raised face ½" ... 12": Table E</p> <p>Other flanges and pressure ratings on request</p>
<b>Rated operation conditions</b>		
Ambient temperature (conditions also dependent on liner characteristics)		
<ul style="list-style-type: none"> <li>• Standard sensor</li> <li>• Ex sensor</li> </ul>	<p>-40 ... +100 °C (-40 ... +212 °F)</p> <p>-20 ... +60 °C (-4 ... +140 °F)</p>	<p>-40 ... +100 °C (-40 ... +212 °F)</p> <p>For medium temperature up to 150 °C (302 °F): -20 ... +60 °C (-4 ... +140 °F)</p> <p>For medium temperature 150 ... 180 °C (302 ... 356 °F): -20 ... +50 °C (-4 ... +122 °F)</p>
<ul style="list-style-type: none"> <li>• Compact with transmitter <ul style="list-style-type: none"> <li>- MAG 5000/6000</li> <li>- MAG 6000 I</li> <li>- MAG 6000 I Ex</li> </ul> </li> </ul>	<p>-20 ... +60 °C (-4 ... +140 °F)</p> <p>-20 ... +60 °C (-4 ... +140 °F)</p> <p>-20 ... +60 °C (-4 ... +140 °F)</p>	<p>-20 ... +60 °C (-4 ... +140 °F)</p> <p>-20 ... +60 °C (-4 ... +140 °F)</p> <p>-20 ... +60 °C (-4 ... +140 °F)</p>

#### Technical specifications (continued)

Version	MAG 3100	MAG 3100 HT (High Temperature)
<b>Operating pressure</b> [abs. bar] (maximum operating pressure decreases with increasing operating temperature and with stainless steel flanges)	<ul style="list-style-type: none"> <li>• Softrubber 0.01 ... 100 bar (0.15 ... 1450 psi)</li> <li>• EPDM 0.01 ... 40 bar (0.15 ... 580 psi)</li> <li>• Linatex 0.01 ... 40 bar (0.15 ... 580 psi)</li> <li>• Ebonite 0.01 ... 100 bar (0.15 ... 1450 psi)</li> <li>• PTFE               <ul style="list-style-type: none"> <li>- DN ≤ 300 (≤ 12"): 0.3 ... 50 bar (4 ... 725 psi)</li> <li>- 350 ≤ DN ≤ 600 (14" ≤ DN ≤ 24"): 0.3 ... 40 bar (4 ... 580 psi)</li> </ul> </li> <li>• PFA               <ul style="list-style-type: none"> <li>- DN 15 ... 150 (½" ... 6"): Vacuum 0.02 ... 50 bar (0.29 ... 725 psi)</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• PTFE Teflon               <ul style="list-style-type: none"> <li>- DN 15 ... 300 (½" ... 12"): 0.3/0.6 ... 50 bar (4/8 ... 725 psi) (180 °C (356 °F)). Factory mounted grounding rings type E in stainless steel and stainless steel terminal box. Can only be used with remote transmitter.</li> </ul> </li> <li>• PFA               <ul style="list-style-type: none"> <li>- DN 15 ... 150 (½" ... 6"): Vacuum 0.02 ... 50 bar (0.29 ... 725 psi)</li> </ul> </li> </ul>
Enclosure rating	IP67 to EN 60529/NEMA 6P/10, 1 mH <sub>2</sub> O for 30 min Option: IP68 to EN 60529/NEMA 6P,10 mH <sub>2</sub> O cont.	IP67 to EN 60529/NEMA 4X/6, 1 mH <sub>2</sub> O for 30 min Option: IP68 to EN 60529/NEMA 6P,10 mH <sub>2</sub> O cont.
Pressure drop at 3 m/s	As straight pipe	
Test pressure	1.5 x PN (where applicable)	
Mechanical load (vibration)	18 ... 1000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36 Sensor: 3.17 g RMS Sensor with compact MAG 5000/6000 mounted transmitter: 3.17 g RMS Sensor with compact MAG 6000 I/6000 I Ex mounted transmitter: 1.14 g RMS	18 ... 1000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36 Sensor: 3.17 g RMS Sensor with compact MAG 5000/6000 mounted transmitter: 3.17 g RMS Sensor with compact MAG 6000 I/6000 I Ex mounted transmitter: 1.14 g RMS
Temperature of medium	<ul style="list-style-type: none"> <li>• Soft rubber 0 ... +70 °C (32 ... 158 °F)</li> <li>• EPDM -10 ... +70 °C (14 ... 158 °F)</li> <li>• Linatex (rubber) -40 ... +70 °C (-40 ... +158 °F) (for temperatures below -20 °C (-4 °F) AISI 304 or 316 flanges must be used)</li> <li>• Ebonite 0 ... 95 °C (32 ... 203 °F)</li> <li>• PTFE -20 ... +100 °C (-4 ... +212 °F)</li> <li>• PFA -20 ... +100 °C (-4 ... +212 °F)</li> </ul>	<ul style="list-style-type: none"> <li>• PTFE -20 ... +130 °C (-4 ... +266 °F)</li> <li>• PTFE -20 ... +180 °C (-4 ... +356 °F) Factory mounted grounding rings type E in stainless steel and stainless steel terminal box. Can only be used with remote transmitter.</li> <li>• PFA -20 ... +150 °C (-4 ... +300 °F)</li> </ul>
EMC	2014/30/EU	2014/30/EU
<b>Design</b>		
Weight	See dimensional drawings	
Flange and housing material	Carbon steel ASTM A 105, with corrosion resistant coating of category C4 or C5 according to ISO 12944-2 or Stainless steel AISI 304/1.4301 flanges and carbon steel housing, with corrosion resistant coating of category C4 or C5 according to ISO 12944-2 or Stainless steel AISI 316L/1.4404 flanges and housing, polished	Carbon steel ASTM A 105, with corrosion resistant coating of category C4 according to ISO 12944-2 or Stainless steel AISI 304/1.4301 flanges and carbon steel housing, with corrosion resistant coating of category C4 according to ISO 12944-2 or Stainless steel AISI 316L/1.4404 flanges and housing, polished
Measuring pipe material	Stainless steel AISI 304/1.4301	Stainless steel AISI 304/1.4301
Electrode material	<ul style="list-style-type: none"> <li>• Stainless steel AISI 316Ti/1.4571</li> <li>• Hastelloy C276/2.4819 (PFA: Hastelloy C22/2.4602)</li> <li>• Platinum</li> <li>• Titanium</li> <li>• Tantalum</li> <li>• Ceramic coated stainless steel</li> <li>• Ceramic coated Hastelloy C</li> </ul>	<ul style="list-style-type: none"> <li>• Stainless steel AISI 316Ti/1.4571</li> <li>• Hastelloy C276/2.4819 (PFA: Hastelloy C22/2.4602)</li> <li>• Platinum</li> <li>• Titanium</li> <li>• Tantalum</li> </ul>
Grounding electrode material	<ul style="list-style-type: none"> <li>• Soft rubber, EPDM, Linatex, Ebonite: grounding electrodes built-in by default for stainless steel and Hastelloy C.</li> <li>• PTFE: optional in Stainless steel, Hastelloy C, Titanium, Platinum or Tantalum</li> <li>• PFA: optional in Hastelloy, Tantalum or Platinum</li> <li>• Ceramic coated stainless steel and Hastelloy C276: grounding electrodes built-in by default</li> </ul>	<ul style="list-style-type: none"> <li>• PTFE: no grounding electrodes</li> <li>• PFA: optional in Hastelloy, Tantalum or Platinum</li> </ul>

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 3100 and MAG 3100 HT

#### Technical specifications (continued)

Version	MAG 3100	MAG 3100 HT (High Temperature)
<b>Design (continued)</b>		
Terminal box (remote version only)	<ul style="list-style-type: none"> <li>Standard fibre glass reinforced polyamide</li> <li>Option Stainless steel AISI 316/1.4436</li> <li>Ex Stainless steel AISI 316/1.4436</li> </ul>	<ul style="list-style-type: none"> <li>Standard fibre glass reinforced polyamide (max. 150 °C (302 °F))</li> <li>Stainless steel AISI 316/1.4436</li> <li>Ex Stainless steel AISI 316/1.4436</li> </ul>
Cable entries	<ul style="list-style-type: none"> <li>Remote installation 2 x M20 or 2 x ½" NPT</li> <li>Compact installation</li> <li>MAG 5000/MAG 6000: 4 x M20 or 4 x ½" NPT</li> <li>MAG 6000 I: 2 x M25 or 2 x ½" NPT (for supply/output)</li> <li>MAG 6000 I Ex: 2 x M25 or 2 x ½" NPT (for supply/output)</li> </ul>	<ul style="list-style-type: none"> <li>Remote installation 2 x M20 or 2 x ½" NPT</li> </ul>
<b>Certificates and approvals</b>		
Calibration		
<ul style="list-style-type: none"> <li>Default calibration</li> <li>Special calibration</li> </ul>	Zero-point, 2 x 25 % and 2 x 90 % (default) 5-point calibration: 20%, 40%, 60%, 80%, 100% of factory Q <sub>max</sub> 10-point calibration: ascending and descending at 20%, 40%, 60%, 80%, 100% of factory Q <sub>max</sub> Matched pair calibration: default, 5-point or 10-point	Zero-point, 2 x 25 % and 2 x 90 %
Hazardous areas <sup>2)</sup>		
<ul style="list-style-type: none"> <li>Ex-sensor in compact or remote version with MAG 6000 I Ex</li> </ul>	<ul style="list-style-type: none"> <li>ATEX, FM, CSA, IECEx, EAC Ex, NEPSI               <ul style="list-style-type: none"> <li>Zone 1 Ex d e ia IIC T6 Gb<sup>4)</sup></li> <li>Zone 1 Ex e ia IIC T6 Gb<sup>5)</sup></li> </ul> </li> <li>ATEX, FM, CSA, IECEx               <ul style="list-style-type: none"> <li>Zone 21 Ex tD A21 IP67</li> </ul> </li> <li>FM               <ul style="list-style-type: none"> <li>XP IS Class I Div. 1 Groups A, B, C, D<sup>6)</sup></li> <li>DIP Class II+III Div. 1 Groups E, F, G<sup>6)</sup></li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>ATEX, FM, CSA, IECEx, EAC Ex, NEPSI               <ul style="list-style-type: none"> <li>Zone 1 Ex d e ia IIC T6 Gb<sup>4)</sup></li> <li>Zone 1 Ex e ia IIC T6 Gb<sup>5)</sup></li> </ul> </li> <li>ATEX, FM, CSA, IECEx               <ul style="list-style-type: none"> <li>Zone 21 Ex tD A21 IP67</li> </ul> </li> <li>FM               <ul style="list-style-type: none"> <li>XP IS Class I Div. 1 Groups A, B, C, D<sup>6)</sup></li> <li>DIP Class II+III Div. 1 Groups E, F, G<sup>6)</sup></li> </ul> </li> </ul>
<ul style="list-style-type: none"> <li>Standard sensor with/without MAG 5000/6000/6000 I</li> </ul>	<ul style="list-style-type: none"> <li>FM               <ul style="list-style-type: none"> <li>NI Class I Div. 2 Groups A, B, C, D</li> <li>NI Class I Zone 2 Groups IIC</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>FM               <ul style="list-style-type: none"> <li>NI Class I Div. 2 Groups A, B, C, D</li> <li>NI Class I Zone 2 Groups IIC</li> </ul> </li> </ul>
Drinking water	EPDM liner: <ul style="list-style-type: none"> <li>WRAS (WRc, BS690 cold water, GB)</li> <li>NSF/ANSI Standard 617) (Cold water, US)</li> <li>ACS listed (F)</li> <li>DVGW W270 (D)</li> <li>Belgaqua (B)</li> <li>MCERTS (GB) (EPDM or PTFE lining with AISI 316 or Hastelloy electrodes)</li> </ul>	
Pressure equipment	<ul style="list-style-type: none"> <li>PED conforming: All EN1092-1 flanges               <ul style="list-style-type: none"> <li>2014/68/EU<sup>3)</sup></li> </ul> </li> <li>CRN</li> </ul>	<ul style="list-style-type: none"> <li>PED conforming: All EN1092-1 flanges               <ul style="list-style-type: none"> <li>2014/68/EU<sup>3)</sup></li> </ul> </li> <li>CRN</li> </ul>
Others	<ul style="list-style-type: none"> <li>EAC (Russia, Belarus, Kazakhstan)</li> <li>KCC (South Korea)</li> <li>CMC/CPA (China)</li> </ul>	<ul style="list-style-type: none"> <li>EAC (Russia, Belarus, Kazakhstan)</li> <li>KCC (South Korea)</li> </ul>

Technical specification for transmitter - please see section about transmitters.

<sup>1)</sup> PN 6-40: DN ≤ 600 type 01 (SORF); DN > 600 type 11 (WNRF); PN 63-100: type 11 (WNRF)

<sup>2)</sup> Not for sensors with 300 µm coating.

<sup>3)</sup> For sizes larger than 600 mm (24") in PN 16 PED conformity is available as a cost-added option. The basic unit will carry the LVD (Low Voltage Directive) and EMC approval. All products sold outside of EU and EFTA are excluded from the Pressure Equipment directive, also products sold into certain market sectors are excluded. These include

a) Meters used in networks for the supply, distribution and discharge of water.

b) Meters used in pipelines for the conveyance of any fluid from offshore to onshore.

c) Meters used in the extraction of petroleum or gas, including christmas tree and manifold equipment.

d) Any meter mounted on a ship or mobile offshore platform. For further information on the PED standard and requirements see Pressure Equipment Directive in Appendix (chapter 10).

<sup>4)</sup> In remote version with sensor size DN 15 ... DN 300 (½" ... 12")

<sup>5)</sup> In remote version with sensor size DN 350 ... DN 2000 (14" ... 48")

<sup>6)</sup> In compact version with sensor size DN 15 ... DN 300 (½" ... 12")

<sup>7)</sup> Has to be ordered with the meter. It is not possible to order the certificate afterwards.

## Selection and ordering data

## Article No.

## Article No.

Sensor SITRANS FM MAG 3100	7ME6310-	Ord. code
<a href="#">Click on the Article No. for the online configuration in the PIA Life Cycle Portal.</a>		
<b>Diameter</b>		
DN 15 (½") (PTFE and PFA liner)	1 V	
DN 25 (1")	2 D	
DN 32 (1¼")	2 H	
DN 40 (1½")	2 R	
DN 50 (2")	2 Y	
DN 65 (2½")	3 F	
DN 80 (3")	3 M	
DN 100 (4")	3 T	
DN 125 (5")	4 B	
DN 150 (6")	4 H	
DN 200 (8")	4 P	
DN 250 (10")	4 V	
DN 300 (12")	5 D	
DN 350 (14")	5 K	
DN 400 (16")	5 R	
DN 450 (18")	5 Y	
DN 500 (20")	6 F	
DN 600 (24")	6 P	
DN 700 (28")	6 Y	
DN 750 (30") (AWWA and AS 2129 only)	7 D	
DN 800 (32")	7 H	
DN 900 (36")	7 M	
DN 1000 (40")	7 R	
DN 1050 (42") (AWWA only)	7 U	
DN 1100 (44") (AWWA only)	7 V	
DN 1200 (48")	8 B	
DN 1400 (54")	8 F	
DN 1500 (60")	8 K	
DN 1600 (66")	8 P	
DN 1800 (72")	8 T	
DN 2000 (78")	8 Y	
<b>Flange norm and pressure rating</b>		
<u>EN 1092-1</u>		
PN 6 (DN 65 ... 2000 (2½" ... 78"))	A	
PN 10 (DN 200 ... 2000 (8" ... 78"))	B	
PN 16 (DN 65 ... 1200 (2½" ... 48"))	C	
PN 16, non-PED (DN 700 ... 2000 (28" ... 78"))	D	
PN 25 (DN 200 ... 600 (8" ... 24"))	E	
PN 40 (DN 15 ... 600 (½" ... 24"))	F	
PN 63 (DN 50 ... 300 (2" ... 12"))	G	
PN 100 (DN 25 ... 300 (1" ... 12"))	H	
<u>ANSI B16.5</u>		
Class 150 (½" ... 24")	J	
Class 300 (½" ... 24")	K	
Class 600 (½" ... 18")	U	
<u>AWWA C-207</u>		
Class D (28" ... 78")	L	
<u>AS</u>		
2129, table E	M	
4087, PN 16 (DN 50 ... 1200 (2" ... 48")) (Not PTFE and PFA)	N	
4087, PN 21 (DN 50 ... 600 (2" ... 24")) (Not PTFE and PFA)	P	
4087, PN 35 (DN 50 ... 600 (2" ... 24")) (Not PTFE and PFA)	Q	
<u>JIS B 2220:2004</u>		
K10 (1" ... 24")	R	
K20 (1" ... 24")	S	

Sensor SITRANS FM MAG 3100	7ME6310-	Ord. code
<b>Flange material and coating</b>		
Carbon steel flanges ASTM A 105, corrosion-resistant coating of category C4	1	
Stainless steel flanges, AISI 304/1.4301, corrosion-resistant coating of category C4	2	
Stainless steel flanges and sensor body, AISI 316L/1.4404, polished	3	
Carbon steel flanges ASTM A 105, 300 mm corrosion-resistant coating of category C5	4	
Stainless steel flanges, AISI 304/1.4301, 300 mm corrosion-resistant coating of category C5	5	
<b>Liner material</b>		
Soft rubber	1	
EPDM	2	
PTFE (DN ≤ 300, PN ≤ 50 bar / ≤ 12", PN ≤ 725 psi), PTFE (350 ≤ DN ≤ 600, PN ≤ 40 bar / 14" ≤ DN ≤ 24", PN ≤ 580 psi)	3	
Ebonite	4	
Linatex (PN ≤ 40 bar (580 psi) DN ≤ 600 (24"))	5	
PFA (DN 15 ... 150 (½" ... 6")) (PN ≤ 40 bar (580 psi))	7	
<b>Electrode material</b>		
(Grounding electrodes not for pressure rating PN 100)		
AISI 316Ti/1.4571 (not for PFA)	1	
Hastelloy C276/2.4819 (PFA liner: Hastelloy C22/2.4602)	2	
Platinum (DN ≤ 300 (12")) (not for Ebonite)	3	
Titanium (not for PFA) (DN ≤ 600/24")	4	
Tantalum (DN ≤ 600/24") (not for Ebonite)	5	
Hastelloy C incl. grounding electrodes (only PFA and PTFE)	6	
Platinum incl. grounding electrodes (only PFA and PTFE)	7	
Tantalum incl. grounding electrodes (only PFA and PTFE)	8	
Ceramic coated stainless steel	9	N O A
Ceramic coated Hastelloy C	9	N O B
AISI 316Ti incl. grounding electrodes (only PTFE)	9	N O C
Titanium incl. grounding electrodes (only PTFE)	9	N O D
<b>Transmitter</b>		
Standard sensor for remote transmitter (order transmitter separately)	A	
Ex sensor for remote transmitter (order transmitter separately)	B	
MAG 6000 I, Alu.18 ... 90 V DC, 115 ... 230 V AC	C	
MAG 6000 I Alu. 18 ... 30 V DC, Ex	D	
MAG 6000 I Alu. 115 ... 230 V, Ex	E	
MAG 6000 Polyamide, 11... 30 V DC / 11...24 V AC	H	
MAG 6000, Polyamide, 115 ... 230 V AC	J	
MAG 5000, Polyamide, 11... 30 V DC / 11...24 V AC	K	
MAG 5000, Polyamide, 115 ... 230 V AC	L	
<b>Communication</b>		
No communication, add-on possible		A
HART		B
PROFIBUS PA Profile 3 (only MAG 6000/MAG 6000 I)		F
PROFIBUS DP Profile 3 (not for Ex) (only MAG 6000/MAG 6000 I)		G
Modbus RTU/RS 485 (not for Ex) (only MAG 6000/MAG 6000 I)		E
FOUNDATION Fieldbus H1 (only MAG 6000/MAG 6000 I)		J

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 3100 and MAG 3100 HT

#### Selection and ordering data

#### Article No.

Sensor SITRANS FM MAG 3100	7ME6310-	Ord. code
<b>Cable glands/terminal box</b>		
Metric: Polyamide terminal box or MAG 6000 I compact		1
½" NPT: Polyamide terminal box or MAG 6000 I compact		2
Metric: Stainless steel terminal box		3
½" NPT: Stainless terminal box		4
<b>Additional information</b>		Order code
Please add "-Z" to Article No. and specify Order code(s) and plain text.		
<b>Certificates</b>		
• Pressure test certificate according to EN 10204-3.1		<b>C01</b>
• Material certificate according to EN 10204-3.1		<b>C12</b>
• Factory certificate according to EN 10204-2.2		<b>C14</b>
• Factory certificate according to EN 10204-2.1		<b>C15</b>
<b>Special calibration</b>		
• 5-point calibration for DN 15 ... DN 200 <sup>1)</sup>		<b>D01</b>
• 5-point calibration for DN 250 ... DN 600 <sup>1)</sup>		<b>D02</b>
• 5-point calibration for DN 700 ... DN 1200 <sup>1)</sup>		<b>D03</b>
• 10-point calibration for DN 15 ... DN 200 <sup>2)</sup>		<b>D06</b>
• 10-point calibration for DN 250 ... DN 600 <sup>2)</sup>		<b>D07</b>
• 10-point calibration for DN 700 ... DN 1200 <sup>2)</sup>		<b>D08</b>
• Default (2 × 25 % and 2 × 90 %) match-pair calibration for DN 15 ... DN 200		<b>D11</b>
• Default (2 × 25 % and 2 × 90 %) match-pair calibration for DN 250 ... DN 600		<b>D12</b>
• Default (2 × 25 % and 2 × 90 %) match-pair calibration for DN 700 ... DN 1200		<b>D13</b>
• 5-point, matched-pair calibration for DN 15 ... DN 200 <sup>1)</sup>		<b>D15</b>
• 5-point, matched-pair calibration for DN 250 ... DN 600 <sup>1)</sup>		<b>D16</b>
• 5-point, matched-pair calibration for DN 700 ... DN 1200 <sup>1)</sup>		<b>D17</b>
• 10-point, matched-pair calibration for DN 15 ... DN 200 <sup>2)</sup>		<b>D18</b>
• 10-point, matched-pair calibration for DN 250 ... DN 600 <sup>2)</sup>		<b>D19</b>
• 10-point, matched-pair calibration for DN 700 ... DN 1200 <sup>2)</sup>		<b>D20</b>
<b>Terminal blocks</b>		
• Factory mounted terminal blocks		<b>N02</b>
<b>Country specific label</b>		
• CRN (Canadian Registration Number)		<b>H25</b>
Tag name plate, stainless steel (specify in plain text)		<b>Y17</b>
Tag name plate, plastic (self adhesive)		<b>Y18</b>
Customer-specific transmitter setting		<b>Y20</b>
<b>Factory mounted sensor cables</b>		
• Sensor cables wired (specify Article No. for sensor cables and order cables separately)		<b>Y40</b>
• Sensor cables wired and IP68 sealing (specify Article No. for sensor cables and order cables separately)		<b>Y41</b>
<b>Additional calibrations</b>		
• Accredited matched-pair calibration acc. to ISO/IEC 17025: 2005		<b>On request<sup>3)</sup></b>
• Customer-specified calibration up to 10 points		<b>On request<sup>3)</sup></b>
• Customer-witnessed calibration		<b>On request<sup>3)</sup></b>
• Any of above calibration		

<sup>1)</sup> 20 %, 40 %, 60 %, 80 %, 100 % of factory  $Q_{max}$

<sup>2)</sup> Ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory  $Q_{max}$

<sup>3)</sup> Product Variation Request (PVR)

#### Operating instructions for SITRANS FM MAG 3100

Description	Article No.
• English	<b>A5E03005599</b>
• German	<b>A5E03086288</b>

All literature is available to download for free, in a range of languages, at <http://www.siemens.com/processinstrumentation/documentation>

#### Accessories

Description	Article No.
Potting kit for IP68/NEMA 6P sealing of sensor junction box	<b>FDK-085U0220</b>



Please use online Product selector to get latest updates.

Product selector link:

<http://www.pia-selector.automation.siemens.com>



Selection and ordering data	Article No.	Article No.
<b>Sensor SITRANS FM MAG 3100 HT (High Temperature)</b> ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	7ME6320-	7ME6320-
<b>Diameter</b> DN 15 (½") DN 25 (1") DN 40 (1½") DN 50 (2") DN 65 (2½") DN 80 (3") DN 100 (4") DN 125 (5") DN 150 (6") DN 200 (8") DN 250 (10") DN 300 (12")	1 V 2 D 2 R 2 Y 3 F 3 M 3 T 4 B 4 H 4 P 4 V 5 D	<b>Communication</b> No communication, add-on possible HART PROFIBUS PA Profile 3 (only MAG 6000/MAG 6000 I) PROFIBUS DP Profile 3 (only MAG 6000/MAG 6000 I) Modbus RTU/RS 485 (only MAG 6000/MAG 6000 I) FOUNDATION Fieldbus H1 (only MAG 6000/MAG 6000 I)
<b>Flange norm and pressure rating</b> EN 1092-1 PN 10 (DN 200 ... 300 (8" ... 12")) PN 16 (DN 65 ... 300 (2½" ... 12")) PN 25 (DN 200 ... 300 (8" ... 12")) PN 40 (DN 15 ... 300 (½" ... 12")) ANSI B16.5 Class 150 (½" ... 12") Class 300 (½" ... 12") AS 2129, table E	B C E F J K M	<b>Cable glands/terminal box</b> Metric: Polyamide terminal box (max. 150 °C (302 °F)) or MAG 6000 I compact ½" NPT: Polyamide terminal box (max. 150 °C (302 °F)) or MAG 6000 I compact Metric: Stainless steel terminal box ½" NPT: Stainless steel terminal box
<b>Flange material</b> Carbon steel flanges ASTM A 105 Stainless steel flanges, AISI 304/1.4301 Stainless steel flanges and sensor body, AISI 316L/1.4404, polished	1 2 3	<b>Additional information</b> Please add "-Z" to Article No. and specify Order code(s) and plain text.
<b>Liner material</b> PTFE (150 °C (302 °F)) PTFE including type E protection rings AISI 316/1.4436 (180 °C (356 °F)) PFA (150 °C (302 °F)) (DN 15 ... 150 (½" ... 6"))	2 3 7	<b>Order code</b> <b>Certificates</b> • Pressure test certificate according to EN 10204-3.1 • Material certificate according to EN 10204-3.1 • Factory certificate according to EN 10204-2.2 • Factory certificate according to EN 10204-2.1
<b>Electrode material</b> AISI 316Ti/1.4571 (not for PFA) Hastelloy C276/2.4819 (PFA liner: Hastelloy C22/2.4602) Platinum Titanium (not for PFA) Tantalum Hastelloy C22/2.4602 incl. grounding electrodes (only PFA) Platinum incl. grounding electrodes (only PFA) Tantalum incl. grounding electrodes (only PFA)	1 2 3 4 5 6 7 8	<b>Terminal blocks</b> • Factory mounted terminal blocks <b>Country specific label</b> • CRN (Canadian Registration Number)
<b>Transmitter</b> Standard sensor for remote transmitter (Order transmitter separately) Ex sensor for remote transmitter (Order transmitter separately) MAG 6000 I, Alu. 18 ... 90 V DC, 115 ... 230 V AC MAG 6000 I, Alu. 18 ... 30 V DC, Ex MAG 6000 I, Alu. 115 ... 230 V AC, Ex MAG 6000, Polyamide, 11 ... 30 V DC/11 ... 24 V AC MAG 6000, Polyamide, 115 ... 230 V AC MAG 5000, Polyamide, 11 ... 30 V DC/11 ... 24 V AC MAG 5000, Polyamide, 115 ... 230 V AC	A B C D E H J K L	Tag name made, stainless steel (specify in plain text) Tag name plate, plastic (self adhesive) Customer-specific transmitter setting <b>Factory mounted sensor cables</b> • Sensor cables wired (specify Article No. for sensor cables and order cables separately) • Sensor cables wired and IP68 sealing (specify Article No. for sensor cables and order cables separately) <b>Additional calibrations</b> • Matched-pair calibration • Accredited matched-pair calibration acc. to ISO/IEC 17025: 2005 • Customer-specified calibration up to 10 points • Customer-witnessed calibration Any of above calibration
		<b>On request<sup>1)</sup></b> <b>On request<sup>1)</sup></b> <b>On request<sup>1)</sup></b> <b>On request<sup>1)</sup></b>
		<sup>1)</sup> Product Variation Request (PVR).

## Flow Measurement

SITRANS FM (electromagnetic)

Flow sensors

### MAG 3100 and MAG 3100 HT

#### Selection and ordering data


Article No.

#### Accessories for MAG 3100 and MAG 3100 HT sensor

##### Grounding and protection ring - Type C (Stainless steel)<sup>1)</sup>

- Material AISI 304
- For all liners except PTFE and PFA
- 1 pc.

Type C



Size DN	Nominal pressure					
	PN 6	PN 10	PN 16	PN 25	PN 40	AS 2129 Table E
	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
DN 25					FDK:083N8361	FDK:083N8361
DN 40					FDK:083N8362	FDK:083N8362
DN 50					FDK:083N8344	FDK:083N8344
DN 65	FDK:083N8345		FDK:083N8345		FDK:083N8345	FDK:083N8346
DN 80	FDK:083N8347		FDK:083N8347		FDK:083N8347	FDK:083N8347
DN 100	FDK:083N8070		FDK:083N8025		FDK:083N8025	FDK:083N8025
DN 125	FDK:083N8071		FDK:083N8071		FDK:083N8071	FDK:083N8071
DN 150	FDK:083N8072		FDK:083N8008		FDK:083N8073	FDK:083N8008
DN 200	FDK:083N8074	FDK:083N8011	FDK:083N8011	FDK:083N8011	FDK:083N8075	FDK:083N8011
DN 250	FDK:083N8078	FDK:083N8013	FDK:083N8013	FDK:083N8013	FDK:083N8079	FDK:083N8013
DN 300	FDK:083N8080	FDK:083N8012	FDK:083N8012	FDK:083N8081	FDK:083N8082	FDK:083N8012
DN 350	FDK:083N8083	FDK:083N8039	FDK:083N8039	FDK:083N8084	FDK:083N8085	FDK:083N8039
DN 400	FDK:083N8099	FDK:083N8100	FDK:083N8100	FDK:083N8101	FDK:083N8102	FDK:083N8100
DN 450	FDK:083N8103	FDK:083N8103	FDK:083N8104	FDK:083N8104	FDK:083N8105	FDK:083N8104
DN 500	FDK:083N8107	FDK:083N8107	FDK:083N8108	FDK:083N8108	FDK:083N8109	FDK:083N8108
DN 600	FDK:083N8111	FDK:083N8111	FDK:083N8112	FDK:083N8112		FDK:083N8113
DN 700	FDK:083N8300	FDK:083N8294	FDK:083N8294			FDK:083N8372
DN 750						
DN 800	FDK:083N8303	FDK:083N8304	FDK:083N8304			FDK:083N8373
DN 900	FDK:083N8306	FDK:083N8307	FDK:083N8307			FDK:083N8396
DN 1000	FDK:083N8309	FDK:083N8310	FDK:083N8310			FDK:083N8397
DN 1100		FDK:083N8367	FDK:083N8367			FDK:083N8367
DN 1200	FDK:083N8312	FDK:083N8313	FDK:083N8313			FDK:083N8398
DN 1400	FDK:083N8467	FDK:083N8468	FDK:083N8469			
DN 1500	FDK:083N8471	FDK:083N8472	FDK:083N8473			
DN 1600	FDK:083N8475	FDK:083N8476	FDK:083N8477			
DN 1800	FDK:083N8479	FDK:083N8480	FDK:083N8481			
DN 2000	FDK:083N8483	FDK:083N8484	FDK:083N8485			

<sup>1)</sup> Also for MAG 5100 W (7ME6520 > DN 300/12 inch and 7ME6580).

Size Inch	ANSI			
	Class 150	Class 300	JIS K10	JIS K20
	Article No.	Article No.	Article No.	Article No.
1"	FDK:083N8361	FDK:083N8361	FDK:083N8361	FDK:083N8361
1½"	FDK:083N8362	FDK:083N8362	FDK:083N8362	FDK:083N8362
2"	FDK:083N8344	FDK:083N8344	FDK:083N8344	FDK:083N8344
2½"	FDK:083N8345	FDK:083N8345	FDK:083N8345	FDK:083N8345
3"	FDK:083N8347	FDK:083N8347	FDK:083N8347	FDK:083N8347
4"	FDK:083N8025	FDK:083N8025	FDK:083N8070	FDK:083N8025
5"	FDK:083N8071	FDK:083N8071	FDK:083N8071	FDK:083N8071
6"	FDK:083N8008	FDK:083N8073	FDK:083N8008	FDK:083N8008
8"	FDK:083N8011	FDK:083N8076	FDK:083N8011	FDK:083N8011
10"	FDK:083N8013	FDK:083N8079	FDK:083N8013	FDK:083N8079
12"	FDK:083N8012	FDK:083N8082	FDK:083N8012	FDK:083N8081
14"	FDK:083N8039	FDK:083N8085	FDK:083N8083	FDK:083N8039
16"	FDK:083N8100	FDK:083N8102	FDK:083N8100	FDK:083N8101
18"	FDK:083N8104	FDK:083N8106	FDK:083N8103	FDK:083N8104
20"	FDK:083N8107	FDK:083N8110	FDK:083N8107	FDK:083N8108
24"	FDK:083N8113	FDK:083N8114	FDK:083N8111	FDK:083N8112

Size Inch	AWWA C-207
	Article No.
28"	FDK:083N8302
30"	FDK:083N8366
32"	FDK:083N8305
36"	FDK:083N8308
40"	FDK:083N8311
42"	FDK:083N8394
44"	FDK:083N8395
48"	FDK:083N8314
54"	FDK:083N8470
60"	FDK:083N8474
66"	FDK:083N8478
72"	FDK:083N8482
78"	FDK:083N8486


#### Selection and ordering data (continued)

##### Grinding and protection ring - Type E (Stainless steel)

- Material: AISI 316
- For all PTFE liners
- 1 pc. incl. straps and screws

##### Note:

For MAG 3100 HT High temperature version 7ME6320... for PTFE 180 °C (356 °C) versions - grounding ring type E is included and factory mounted.



Size DN	Nominal pressure					
	PN 6	PN 10	PN 16	PN 25	PN 40	AS2129, Table E
	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
DN 15					FDK:083N8365	FDK:083N8365
DN 25					FDK:083N8271	FDK:083N8272
DN 40					FDK:083N8278	FDK:083N8280
DN 50					FDK:083N8282	FDK:083N8281
DN 65	FDK:083N8284		FDK:083N8285		FDK:083N8286	FDK:083N8284
DN 80	FDK:083N8288		FDK:083N8289		FDK:083N8290	FDK:083N8293
DN 100	FDK:083N8116		FDK:083N8117		FDK:083N8118	FDK:083N8117
DN 125	FDK:083N8120		FDK:083N8121		FDK:083N8122	FDK:083N8121
DN 150	FDK:083N8124		FDK:083N8125		FDK:083N8126	FDK:083N8128
DN 200	FDK:083N8129	FDK:083N8130	FDK:083N8130	FDK:083N8131	FDK:083N8132	FDK:083N8134
DN 250	FDK:083N8135	FDK:083N8136	FDK:083N8137	FDK:083N8138	FDK:083N8139	FDK:083N8143
DN 300	FDK:083N8144	FDK:083N8144	FDK:083N8145	FDK:083N8146	FDK:083N8147	FDK:083N8151
DN 350	FDK:083N8152	FDK:083N8153	FDK:083N8154	FDK:083N8155	FDK:083N8156	FDK:083N8153
DN 400	FDK:083N8160	FDK:083N8161	FDK:083N8162	FDK:083N8163	FDK:083N8164	FDK:083N8161
DN 450	FDK:083N8168	FDK:083N8169	FDK:083N8170	FDK:083N8171	FDK:083N8172	FDK:083N8176
DN 500	FDK:083N8177	FDK:083N8178	FDK:083N8179	FDK:083N8180	FDK:083N8181	FDK:083N8185
DN 600	FDK:083N8186	FDK:083N8187	FDK:083N8188	FDK:083N8189		A5E32710253

Size Inch	ANSI			
	Class 150	Class 300	JIS K10	JIS K20
	Article No.	Article No.	Article No.	Article No.
½"	FDK:083N8365	FDK:083N8365		
1"	FDK:083N8272	FDK:083N8272	FDK:083N8271	FDK:083N8271
1½"	FDK:083N8279	FDK:083N8279	FDK:083N8278	FDK:083N8278
2"	FDK:083N8283	FDK:083N8283	FDK:083N8282	FDK:083N8282
2½"	FDK:083N8287	FDK:083N8287	FDK:083N8285	FDK:083N8285
3"	FDK:083N8291	FDK:083N8292	FDK:083N8288	FDK:083N8289
4"	FDK:083N8118	FDK:083N8119	FDK:083N8116	FDK:083N8117
5"	FDK:083N8122	FDK:083N8123	FDK:083N8121	FDK:083N8122
6"	FDK:083N8126	FDK:083N8127	FDK:083N8125	FDK:083N8126
8"	FDK:083N8370	FDK:083N8133	FDK:083N8130	FDK:083N8370
10"	FDK:083N8140	FDK:083N8141	FDK:083N8137	FDK:083N8139
12"	FDK:083N8148	FDK:083N8149	FDK:083N8144	FDK:083N8146
14"	FDK:083N8157	FDK:083N8158	FDK:083N8152	FDK:083N8154
16"	FDK:083N8165	FDK:083N8166	FDK:083N8160	FDK:083N8165
18"	FDK:083N8173	FDK:083N8174	FDK:083N8169	FDK:083N8171
20"	FDK:083N8182	FDK:083N8183	FDK:083N8178	FDK:083N8180
24"	FDK:083N8190	FDK:083N8191	A5E32709738	A5E32710253

##### Note:

For use as protection ring order 2 pcs.  
For use as grounding ring order 1 pc.

**Flow Measurement**


SITRANS FM (electromagnetic)

Flow sensors

**MAG 3100 and MAG 3100 HT****Selection and ordering data****Article No.****Grounding and protecting ring - Type E (Hastelloy)<sup>1)</sup>**

- Material: Hastelloy C276
- For all PTFE liners
- 1 pc. incl. straps and screws

Type E




Size DN	Nominal pressure			Size Inch	ANSI	
	PN 6 Article No.	PN 16 Article No.	PN 40 Article No.		Class 150 Article No.	Class 300 Article No.
DN 15			FDK:083N8487	½"	FDK:083N8487	FDK:083N8487
DN 25			FDK:083N8488	1"	FDK:083N8489	FDK:083N8489
DN 40			FDK:083N8490	1½"	FDK:083N8491	FDK:083N8491
DN 50			FDK:083N8492	2"	FDK:083N8493	FDK:083N8493
DN 65	FDK:083N8494	FDK:083N8495	FDK:083N8496	2½"	FDK:083N8497	FDK:083N8497
DN 80	FDK:083N8498	FDK:083N8499	FDK:083N8500	3"	FDK:083N8501	FDK:083N8502
DN 100	FDK:083N8503	FDK:083N8504	FDK:083N8505	4"	FDK:083N8506	FDK:083N8507

<sup>1)</sup> Also for MAG 5100 W (7ME6580).

**Grounding ring - Type Flat ring (Stainless steel)**


- Material: AISI 316
- For all liners (PTFE max. 150 °C (302 °F))
- 1 pc. incl. straps and screws

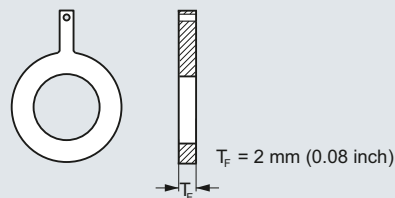

Size DN	Nominal pressure			Size Inch	ANSI	
	PN 10 Article No.	PN 16 Article No.	PN 40 Article No.		Class 150 Article No.	Class 300 Article No.
DN 15			A5E01191968	½"	A5E01191969	
DN 25			A5E01150880	1"	A5E01150022	A5E01150378
DN 40			A5E01191952	1½"	A5E01191961	
DN 50		A5E01192006	A5E01150918	2"	A5E01151121	A5E01151194
DN 65		A5E01191940	A5E01191954	2½"	A5E01191962	
DN 80		A5E01152876	A5E01152876	3"	A5E01152910	A5E01153422
DN 100		A5E01158875	A5E01159072	4"	A5E01159146	A5E01159628
DN 125		A5E01191941	A5E01191956	5"	A5E01191963	
DN 150		A5E01191943	A5E01191957	6"	A5E01191964	
DN 200	A5E01191951	A5E01191944	A5E01191958	8"	A5E01191965	
DN 250	A5E01191950	A5E01191946	A5E01191959	10"	A5E01191966	
DN 300	A5E01191949	A5E01191947	A5E01191960	12"	A5E01191967	

**Selection and ordering data** (continued)**Grounding ring - Type Flat ring (Hastelloy)**


- Material: Hastelloy C276
- For all liners (PTFE max. 150 °C (302 °F))
- 1 pc. incl. straps and screws

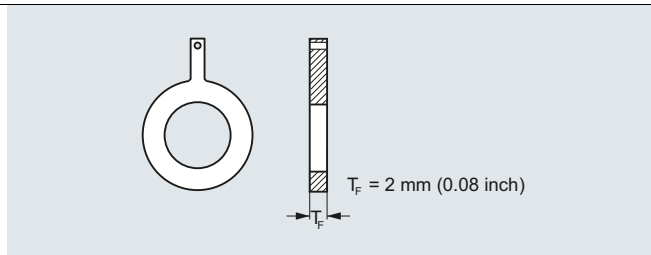

Size DN	Nominale pressure			Size Inch	ANSI	
	PN 6 Article No.	PN 16 Article No.	PN 40 Article No.		Class 150 Article No.	Class 300 Article No.
DN 15			A5E01191981	½"	A5E01191989	
DN 25			A5E01150882	1"	A5E01150028	A5E01150379
DN 40			A5E01191982	1½"	A5E01191990	
DN 50			A5E01150922	2"	A5E01151124	A5E01151197
DN 65		A5E01191971	A5E01191983	2½"	A5E01191991	
DN 80		A5E01152889	A5E01152889	3"	A5E01152913	A5E01153424
DN 100		A5E01158886	A5E01159074	4"	A5E01159150	A5E01159629
DN 125		A5E01191973	A5E01191984	5"	A5E01191992	
DN 150		A5E01191974	A5E01191985	6"	A5E01191993	
DN 200	A5E01191978	A5E01191975	A5E01191986	8"	A5E01191994	
DN 250	A5E01191979	A5E01191976	A5E01191987	10"	A5E01191995	
DN 300	A5E01191980	A5E01191977	A5E01191988	12"	A5E01191996	

**Grounding ring - Type Flat ring (Tantalum)**

- Material: Tantalum
- For all liners (PTFE max. 150 °C (302 °F))
- 1 pc. incl. straps and screws

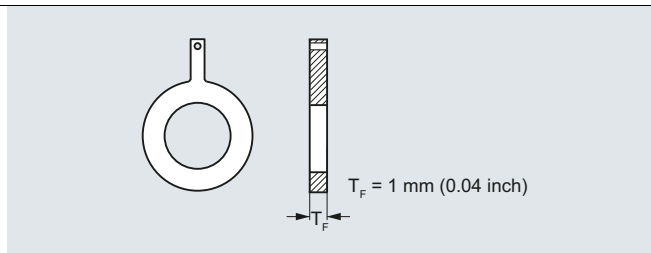

Size DN	Nominale pressure		Size Inch	ANSI	
	PN 16 Article No.	PN 40 Article No.		Class 150 Article No.	Class 300 Article No.
DN 15		A5E01192007	½"	A5E01192010	
DN 25		A5E01150883	1"	A5E01150030	A5E01150381
DN 40		A5E01192008	1½"	A5E01192011	
DN 50		A5E01150926	2"	A5E01151129	A5E01151199
DN 65	A5E01192005	A5E01192009	2½"	A5E01192012	
DN 80	A5E01152890	A5E01152890	3"	A5E01152916	A5E01153427
DN 100	A5E01158891	A5E01159076	4"	A5E01159156	A5E01159631

## Flow Measurement


SITRANS FM (electromagnetic)

Flow sensors

### MAG 3100 and MAG 3100 HT

#### Dimensional drawings

#### MAG 3100 and MAG 3100 HT sensor with compact or remote transmitter

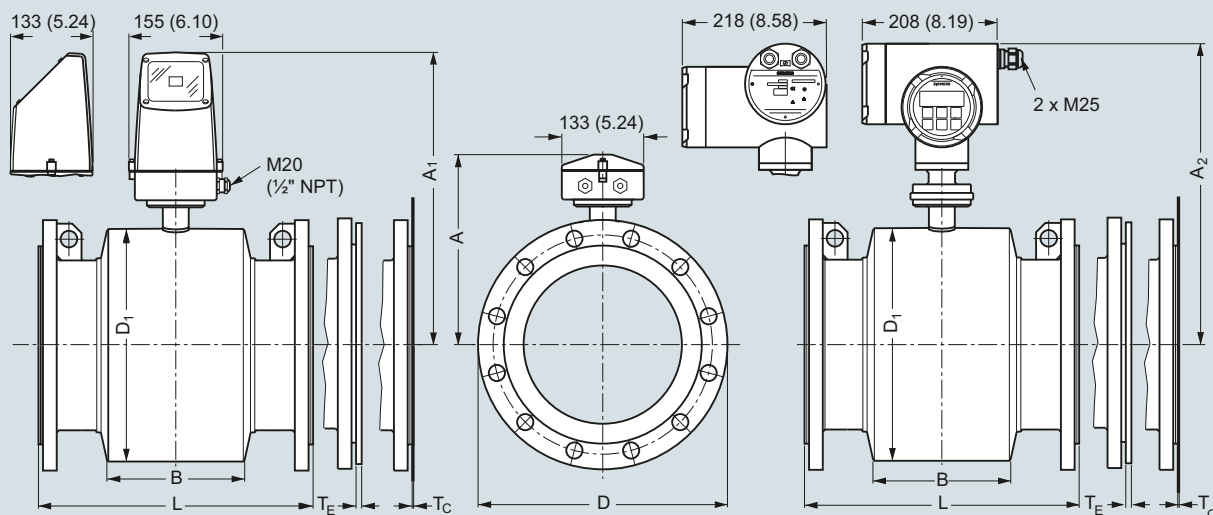

Dimensions in mm (inch)

Metric

DN	A <sup>1)</sup>	A <sub>1</sub>	A <sub>2</sub>	B	D <sub>1</sub>	L <sup>2)3)</sup>						ANSI 16.5		
						EN 1092-1-201	PN 6, 10	PN 16/PN 16 non-PED	PN 25	PN 40	PN 63	PN 100	Class 150	Class 300
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
15	187	341	338	59	104	-	-	-	200	-	-	200	200	
25	187	341	338	59	104	-	-	-	200	-	260	200	200	
40	197	351	348	82	124	-	-	-	200	-	280	200	200	
50	205	359	356	72	139	-	-	-	200	276	300	200	200	
65	212	366	363	72	154	200	200/-	-	200	320	350	200	272	
80	222	376	373	72	174	200	200/-	-	272 <sup>4)</sup>	323	340	272 <sup>4)</sup>	272 <sup>4)</sup>	
100	242	396	393	85	214	250	250/-	-	250	380	400	250	310	
125	255	409	406	85	239	250	250/-	-	250	420	450	250	335	
150	276	430	427	85	282	300	300/-	-	300	415	450	300	300	
200	304	458	455	137	338	350	350/-	350	350	480	530	350	350	
250	332	486	483	157	393	450	450/-	450	450	550	620	450	450	
300	357	511	508	157	444	500	500/-	500	500	600	680	500	500	
350	362	516	513	270	451	550	550/-	550	550	-	-	550	550	
400	387	541	538	270	502	600	600/-	600	600	-	-	600	600	
450	418	572	569	310	563	600	600/-	600	600	-	-	600	640	
500	443	597	594	350	614	600	600/-	625	680	-	-	600	730	
600	494	648	645	320	715	600	600/-	750	800	-	-	600	860	
700	544	698	695	450	816	700	875/700	800	-	-	-	800	-	
750	571	725	722	556	869	-	-/-	-	-	-	-	950	-	
800	606	760	757	560	927	800	1000/800	900	-	-	-	900	-	
900	653	807	804	630	1032	900	1125/900	1000	-	-	-	1100	-	
1000	704	858	855	670	1136	1000	1250/1000	1100	-	-	-	1100	-	
1050	704	858	855	670	1136	-	-/-	-	-	-	-	-	-	
1100	755	904	901	770	1238	-	-/-	-	-	-	-	-	-	
1200	810	964	961	792	1348	1200	1500/1200	1300	-	-	-	1400	-	
1400	925	1079	1076	1000	1574	1400	-/1400	-	-	-	-	-	-	
1500	972	1126	1123	1020	1672	1500	-/1500	-	-	-	-	-	-	
1600	1025	1179	1176	1130	1774	1600	-/1600	-	-	-	-	-	-	
1800	1123	1277	1274	1250	1974	1800	-/1800	-	-	-	-	-	-	
2000	1223	1377	1374	1375	2174	2000	-/2000	-	-	-	-	-	-	

1) 14.5 mm shorter with stainless steel terminal box (Ex and high temperature version)

2) When grounding rings are used, the thickness of the grounding ring must be added to the built-in length

3) Tolerances on built-in length (PN 6, PN 10, PN 16, PN 25 and PN 40):

DN 15 to DN 200: +0/-3 mm, DN 250 to DN 400: +0/-5 mm, DN 450 to DN 600: +5/-5 mm, DN 700 to DN 2000: +10/-10 mm

Tolerances on built-in length (PN 63 and PN 100): All sizes +8/-8 mm

4) Not according to ISO 20456

**Dimensional drawings** (continued)

DN	L <sup>1)2)</sup>	AWWA C-207 Class D	JIS K10	JIS K20	T <sub>C</sub> <sup>3)</sup>	T <sub>E</sub> <sup>3)</sup>	T <sub>F</sub> <sup>3)</sup>	Weight <sup>4)</sup>
[mm]	AS 2129 E AS 4087 PN 16, 21, 35 [mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
15	200	-	200	200	-	6	2	4
25	200	-	200	200	1.2	6	2	5
40	200	-	200	240	1.2	6	2	8
50	200	-	200	240	1.2	6	2	9
65	200	-	200	272	1.2	6	2	11
80	200 <sup>5)</sup>	-	200 <sup>9)</sup>	272 <sup>9)</sup>	1.2	6	2	12
100	250	-	250	310	1.2	6	2	16
125	250	-	250	335	1.2	6	2	19
150	300	-	300	300	1.2	6	2	27
200	350	-	350	350	1.2	8	2	40
250	450	-	450	450	1.2	8	2	60
300	500	-	500	500	1.6	8	2	80
350	550	-	550	550	1.6	8	-	110
400	600	-	600	600	1.6	10	-	125
450	600	-	600	640	1.6	10	-	175
500	600 <sup>6)</sup>	-	600	680	1.6	10	-	200
600	600 <sup>7)</sup>	-	600	800	1.6	10	-	287
700	700 <sup>8)</sup>	700	-	-	2.0	-	-	330
750	750 <sup>8)</sup>	750	-	-	2.0	-	-	360
800	800 <sup>8)</sup>	800	-	-	2.0	-	-	450
900	900 <sup>8)</sup>	900	-	-	2.0	-	-	530
1000	1000 <sup>8)</sup>	1000	-	-	2.0	-	-	660
1050	-	1000	-	-	2.0	-	-	660
1100	-	1100	-	-	2.0	-	-	1140
1200	1200 <sup>6)</sup>	1200	-	-	2.0	-	-	1180
1400	-	1400	-	-	2.0	-	-	1600
1500	-	1500	-	-	3.0	-	-	2460
1600	-	1600	-	-	3.0	-	-	2525
1800	-	1800	-	-	3.0	-	-	2930
2000	-	2000	-	-	3.0	-	-	3665

1) When grounding rings are used, the thickness of the grounding ring must be added to the built-in length.

2) Tolerances on built-in length (PN 6, PN 10, PN 16, PN 25 and PN 40):

DN 15 to DN 200: +0/-3 mm, DN 250 to DN 400: +0/-5 mm, DN 450 to DN 600: +5/-5 mm, DN 700 to DN 2000: +10/-10 mm  
 Tolerances on built-in length (PN 63 and PN 100): All sizes +8/-8 mm

3) T<sub>C</sub> = Protection ring type C, T<sub>E</sub> = Grounding ring type E (included and factory mounted for 180 °C PTFE liner), T<sub>F</sub> = Grounding ring Type Flat ring

4) Weights are approx. (for PN 16) without transmitter.

5) PN 35 DN 80 = 272 mm (not according to ISO 20456)

6) PN 35 DN 500 = 680 mm

7) PN 35 DN 600 = 750 mm

8) Not AS 4087 PN 21 or PN 35

9) Not according to ISO 20456

D = Outside diameter of flange, see flange tables

## Flow Measurement

SITRANS FM (electromagnetic)

Flow sensors

### MAG 3100 and MAG 3100 HT

#### Dimensional drawings (continued)

Imperial

DN	A <sup>1)</sup>	A <sub>1</sub>	A <sub>2</sub>	B	D <sub>1</sub>	L <sup>2)3)</sup>						ANSI 16.5/ASME B16.47 <sup>4)</sup>		
						EN 1092-1-201						Class 150	Class 300	Class 600
[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	PN 6, 10	PN 16/PN 16 non-PED	PN 25	PN 40	PN 63	PN 100	[inch]	[inch]	[inch]
½	7.36	13.31	13.25	2.32	4.09	-	-	-	7.87	-	-	7.87	7.87	-
1	7.36	13.31	13.25	2.32	4.09	-	-	-	7.87	-	10.24	7.87	7.87	11.02
1½	7.76	13.70	13.64	3.23	4.88	-	-	-	7.87	-	11.02	7.87	7.87	12.60
2	8.07	14.01	13.95	2.83	5.47	-	-	-	7.87	10.87	11.81	7.87	7.87	12.99
2½	8.35	14.29	14.23	2.83	6.06	7.87	7.87/-	-	7.87	12.60	13.78	7.87	10.71	on request
3	8.74	14.69	14.63	2.83	6.85	7.87	7.87/-	-	10.71 <sup>5)</sup>	12.72	13.39	10.71 <sup>5)</sup>	10.71 <sup>5)</sup>	13.78
4	9.53	15.47	15.41	3.35	8.43	9.84	9.84/-	-	9.84	14.96	-	9.84	12.20	18.11
5	10.04	15.98	15.92	3.35	9.41	9.84	9.84/-	-	9.84	16.54	-	9.84	13.10	18.90
6	10.87	16.81	16.75	5.39	11.10	11.81	11.81/-	-	11.81	16.34	-	11.81	11.81	19.68
8	11.97	17.91	17.85	5.39	13.31	13.78	13.78/-	13.78	13.78	18.90	-	13.78	13.78	23.62
10	13.07	19.02	18.96	6.18	15.47	17.72	17.72/-	17.72	17.72	-	-	17.72	17.72	23.62
12	14.05	20.00	19.94	6.18	17.48	19.69	19.69/-	19.69	19.69	-	-	19.69	19.69	27.56
14	14.25	20.20	20.14	10.63	17.76	21.65	21.65/-	21.65	21.65	-	-	21.65	21.65	-
16	15.24	21.18	21.12	10.63	19.76	23.62	23.62/-	23.62	23.62	-	-	23.62	23.62	-
18	16.45	22.40	22.34	12.20	22.16	23.62	23.62/-	23.62	23.62	-	-	23.62	23.62	-
20	17.44	23.39	23.33	13.78	24.17	23.62	23.62/-	24.61	26.77	-	-	23.62	28.70	-
24	19.45	25.39	25.33	12.59	28.15	23.62	23.62/-	29.53	31.50	-	-	23.62	33.80	-
28	21.42	27.36	27.30	17.72	32.13	27.56	34.45/27.56	31.50	-	-	-	31.50	-	-
30	22.48	28.43	28.37	21.89	34.21	-	-	-	-	-	-	37.41	-	-
32	23.86	29.80	29.74	22.05	36.50	31.50	39.37/31.50	35.44	-	-	-	35.44	-	-
36	25.71	31.65	31.59	24.80	40.63	35.43	44.29/35.43	39.38	-	-	-	43.32	-	-
40	27.72	33.85	33.79	26.38	44.72	39.37	49.21/39.37	43.32	-	-	-	43.32	-	-
42	27.72	33.85	33.79	26.38	44.72	-	-	-	-	-	-	-	-	-
44	29.72	35.67	35.61	30.31	48.74	-	-	-	-	-	-	-	-	-
48	31.89	37.83	37.77	31.18	53.07	47.24	59.06/47.24	51.19	-	-	-	55.12	-	-
54	36.42	42.36	42.30	39.37	61.97	55.12	-/55.12	-	-	-	-	-	-	-
60	38.27	44.21	44.15	40.15	65.83	59.06	59.06/59.06	-	-	-	-	-	-	-
66	40.35	46.30	46.24	44.49	69.84	62.99	-/62.99	-	-	-	-	-	-	-
72	44.21	50.16	50.10	49.21	77.72	70.87	-/70.87	-	-	-	-	-	-	-
78	48.15	54.09	54.03	54.13	85.59	78.74	-/78.74	-	-	-	-	-	-	-

<sup>1)</sup> 0.571 inch shorter with stainless steel terminal box (Ex and high temperature version)

<sup>2)</sup> When grounding rings are used, the thickness of the grounding ring must be added to the built-in length

<sup>3)</sup> Tolerances on built-in length (PN 6, PN 10, PN 16, PN 25 and PN 40):

½" to 8": +0/-0.12", 10" to DN 16": +0/-0.20", 18" to DN 24": +0.20/-0.20", 28" to DN 78": +0.39/-0.39"

Tolerances on built-in length (PN 63 and PN 100): All sizes +0.31"/-0.31"

<sup>4)</sup> ANSI 16.5 for DN ≤ 24"; ASME B16.47 for DN ≥ 28"

<sup>5)</sup> Not according to ISO 20456



**Dimensional drawings** (continued)

DN	L <sup>1)2)</sup>	AS 2129 E AS 4087 PN 16, 21, 35	AWWA C-207 Class D	JIS K10	JIS K20	T <sub>C</sub> <sup>3)</sup>	T <sub>E</sub> <sup>3)</sup>	T <sub>F</sub> <sup>3)</sup>	Weight <sup>4)</sup>
[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[lb]
½	7.87	-	7.87	7.87	-	0.24	0.08	9	
1	7.87	-	7.87	7.87	0.05	0.24	0.08	11	
1½	7.87	-	7.87	9.44	0.05	0.24	0.08	17	
2	7.87	-	7.87	9.44	0.05	0.24	0.08	20	
2½	7.87	-	7.87	10.70	0.05	0.24	0.08	24	
3	7.875)	-	7.878)	10.709)	0.05	0.24	0.08	26	
4	9.84	-	9.84	12.20	0.05	0.24	0.08	35	
5	9.84	-	9.84	13.18	0.05	0.24	0.08	42	
6	11.81	-	11.81	11.81	0.05	0.24	0.08	60	
8	13.78	-	13.77	13.77	0.05	0.31	0.08	88	
10	17.72	-	17.71	17.71	0.05	0.31	0.08	132	
12	19.69	-	19.68	19.68	0.06	0.31	0.08	176	
14	21.65	-	21.65	21.65	0.06	0.31	-	242	
16	23.62	-	23.62	23.62	0.06	0.39	-	275	
18	23.62	-	23.62	25.19	0.06	0.39	-	385	
20	23.626)	-	23.62	26.77	0.06	0.39	-	440	
24	23.627)	-	23.62	31.49	0.06	0.39	-	633	
28	27.568)	27.56	-	-	0.08	-	-	728	
30	29.538)	29.52	-	-	0.08	-	-	794	
32	31.807)	31.50	-	-	0.08	-	-	992	
36	35.438)	35.43	-	-	0.08	-	-	1168	
40	39.378)	39.37	-	-	0.08	-	-	1455	
42	-	39.37	-	-	0.08	-	-	1455	
44	-	43.31	-	-	0.08	-	-	2513	
48	47.248)	47.24	-	-	0.08	-	-	2601	
54	-	55.12	-	-	0.12	-	-	3528	
60	-	59.06	-	-	0.12	-	-	5423	
66	-	63.00	-	-	0.12	-	-	5566	
72	-	70.87	-	-	0.12	-	-	6460	
78	-	78.74	-	-	0.12	-	-	8080	

1) When grounding rings are used, the thickness of the grounding ring must be added to the built-in length.

2) Tolerances on built-in length (PN 6, PN 10, PN 16, PN 25 and PN 40):  
 ½" to 8": +0/-0.12", 10" to 16": +0/-0.20", 18" to 24": +0.2/-0.2", 28" to 78": +0.39/-0.39"  
 Tolerances on built-in length (PN 63 and PN 100): All sizes +0.31"/-0.31"

3) T<sub>C</sub> = Protection ring type C, T<sub>E</sub> = Grounding ring type E (included and factory mounted for 180 °C PTFE liner), T<sub>F</sub> = Grounding ring Type Flat ring

4) Weights are for ANSI 150 without transmitter.

5) PN 35 DN 80 = 10.07 inch

6) PN 35 DN 500 = 26.77 inch

7) PN 35 DN 600 = 2.53 inch

8) Not AS 4087 PN 21 or PN 35

9) Not according to ISO 20456

D = Outside diameter of flange, see flange tables

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 3100 P

#### Overview



The SITRANS FM MAG 3100 P is designed to meet the most common specifications within chemical and process industries.

#### Benefits

- DN 15 to DN 300 (½" to 12")
- Included in Quick Ship Program (delivery time see PIA LCP)
- Most used flowmeter in the chemical and process industries with PTFE/PFA liner and Hastelloy electrodes
- Excellent chemical resistance
- Full scope of global approvals for hazardous areas:
  - ATEX, FM, CSA, IECEx
  - 24 V and 115/230 V Ex compact and remote
  - intrinsically safe ia analog output
- Comprehensive self-diagnostic for error indication and error logging
- Fully welded construction provides a ruggedness that suits the toughest applications and environments.
- Easy commissioning, the SENSORPROM unit automatically updates settings.
- MAG 6000 I full NAMUR compliance
  - compliant with NE 21, NE 32, NE 43, NE 53 and NE70

#### Application

The main applications of the SITRANS FM electromagnetic flow sensors can be found in the following fields:

- Chemical industry
- Process industry
- Pulp and paper
- Industrial waste water

#### Design

- Compact or remote mounting possible
- Easy "plug & play" field changeability of transmitter
- High temperature sensor for applications with temperatures up to 150 °C (302 °F)
- Meets EEC directives: PED, 2014/68/EU pressure directive for EN 1092-1 flanges
- Build-in length according to ISO 20456
- Onsite or factory upgrade to IP68/NEMA 6P of a standard sensor.

#### Mode of operation


The flow measuring principle is based on Faraday's law of electromagnetic induction according to which the sensor converts the flow into an electrical voltage proportional to the velocity of the flow.

## Integration


The complete flowmeter consists of a flow sensor and an associated transmitter MAG 5000, 6000 and 6000 I.

The flexible communication concept USM II simplifies integration and update to a variety of fieldbus systems such as HART, FOUNDATION Fieldbus H1, DeviceNet, PROFIBUS DP and PA, Modbus RTU/RS 485.

### **Pressure-temperature curve to EN (DIN) flanges, material A 105 carbon steel**

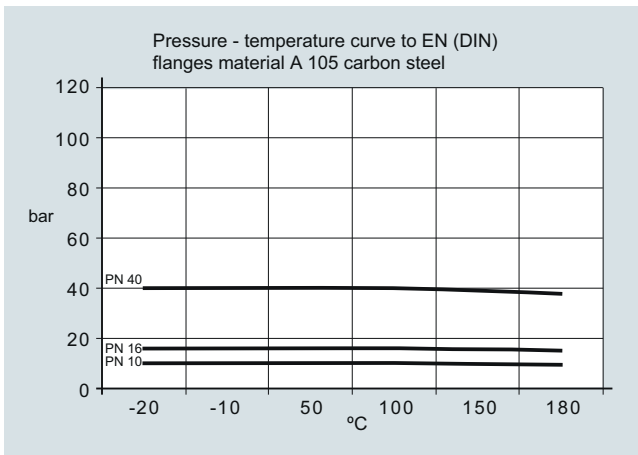

### **Pressure-temperature curve to ANSI B16.5 flanges**

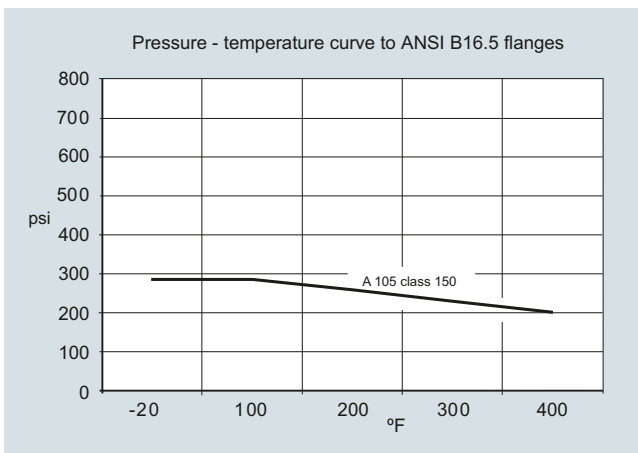

**Note:** The pressure-temperature curves only assist in the selection of a system. No responsibility is taken for the correctness of the information. For exact data please refer to the PED requirements. For further information on the PED standard and requirements, see Pressure Equipment Directive in Appendix (chapter 10).

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 3100 P

#### Technical specifications

<b>Product characteristic</b>	Chemical and process industry-oriented (Included in Quick Ship Program)	<b>Design</b>	
Nominal size	<ul style="list-style-type: none"> <li>• PTFE: DN 15 ... 300 (½" ... 12")</li> <li>• PFA: DN 15 ... 150 (½" ... 6")</li> </ul>	Weight	See dimensional drawings
Measuring principle	Electromagnetic induction	Flange and housing material	Carbon steel ASTM A 105, with corrosion resistant coating of category C4 according to ISO 12944-2
Excitation frequency (Mains supply: 50 Hz/60 Hz)	<ul style="list-style-type: none"> <li>• DN 15 ... 65 (½" ... 2½"): 12.5 Hz/15 Hz</li> <li>• DN 80 ... 150 (3" ... 6"): 6.25 Hz/7.5 Hz</li> <li>• DN 200 ... 300 (8" ... 12"): 3.125 Hz/3.75 Hz</li> </ul>	Measuring pipe material	Stainless steel AISI 304/1.4301
		Electrode material	PTFE: Hastelloy C276/2.4819, Platinum, Tantalum PFA: Hastelloy C22/2.4602
		Grounding electrode material	Optional in Hastelloy C22/2.602
		Terminal box (remote version only)	<ul style="list-style-type: none"> <li>• Standard fibre glass reinforced polyamide</li> <li>• Option Stainless steel AISI 316/1.4436</li> <li>• Ex sensor: Stainless steel AISI 316/1.4436</li> </ul>
<b>Process connection</b>		Cable entries	<ul style="list-style-type: none"> <li>• Remote installation 2 x M20 or 2 x ½" NPT</li> <li>• Compact installation               <ul style="list-style-type: none"> <li>- MAG 5000/MAG 6000: 4 x M20 or 4 x ½" NPT</li> <li>- MAG 6000 I: 2 x M25 or 2 x ½" NPT (for supply/output)</li> <li>- MAG 6000 I Ex de: 2 x M25 or 2 x ½" NPT (for supply/output)</li> </ul> </li> </ul>
Flanges	EN 1092-1, raised face <sup>1)</sup> (EN 1092-1, DIN 2501 & BS 4504 have the same mating dimensions) <ul style="list-style-type: none"> <li>• DN 15 ... 50 (½" ... 2"): PN 40 (580 psi)</li> <li>• DN 65 ... 300 (2½" ... 12"): PN 16 (232 psi)</li> <li>• DN 200 ... 300 (8" ... 12"): PN 10 (145 psi)</li> </ul> ANSI B16.5 (~BS 1560), raised face <ul style="list-style-type: none"> <li>• ½" ... 12": Class 150 (20 bar (290 psi))</li> </ul>		
<b>Rated operation conditions</b>		<b>Certificates and approvals</b>	
<b>Ambient temperature</b> (conditions also dependent on liner characteristics)		Calibration	
<ul style="list-style-type: none"> <li>• Standard Sensor</li> <li>• Ex sensor</li> <li>• Compact with transmitter               <ul style="list-style-type: none"> <li>- MAG 5000/6000</li> <li>- MAG 6000 I</li> <li>- MAG 6000 I Ex</li> </ul> </li> </ul>	-40 ... +100 °C (-40 ... +212 °F) -20 ... +60 °C (-4 ... +140 °F) -20 ... +60 °C (-4 ... +140 °F) -20 ... +60 °C (-4 ... +140 °F) -20 ... +60 °C (-4 ... +140 °F)	<ul style="list-style-type: none"> <li>• Default calibration</li> </ul>	Zero-point, 2 x 25 % and 2 x 90 %
<b>Operating pressure</b> [abs. bar] (maximum operating pressure decreases with increasing operating temperature and with stainless steel flanges)	<ul style="list-style-type: none"> <li>• PTFE Teflon               <ul style="list-style-type: none"> <li>- DN 15 ... 300 (½" ... 12"): 0.3 ... 40 bar (4 ... 580 psi)</li> </ul> </li> <li>• PFA               <ul style="list-style-type: none"> <li>- DN 15 ... 150 (½" ... 6"): Vacuum 0.02 ... 50 bar (0.29 ... 725 psi)</li> </ul> </li> </ul>	Hazardous areas <ul style="list-style-type: none"> <li>• Ex-sensor in compact or remote version with MAG 6000 I Ex</li> </ul>	<ul style="list-style-type: none"> <li>• ATEX, FM, CSA, IECEx, EAC Ex, NEPSI               <ul style="list-style-type: none"> <li>- Zone 1 Ex de ia IIC T6 Gb</li> </ul> </li> <li>• ATEX, FM, CSA, IECEx               <ul style="list-style-type: none"> <li>- Zone 21 Ex tD A21 IP67</li> </ul> </li> <li>• FM               <ul style="list-style-type: none"> <li>- XP IS Class I Div. 1 Groups A, B, C, D<sup>2)</sup></li> <li>- DIP Class II+III Div. 1 Groups E, F, G<sup>2)</sup></li> </ul> </li> <li>• FM               <ul style="list-style-type: none"> <li>- NI Class I Div. 2 Groups A, B, C, D</li> <li>- NI Class I Zone 2 Groups IIC</li> </ul> </li> </ul>
Enclosure rating	IP67 to EN 60529/NEMA 4X/6, 1 mH <sub>2</sub> O for 30 min  Option: IP68 to EN 60529/NEMA 6P, 10 mH <sub>2</sub> O cont. (not for Ex)	Pressure equipment	PED, CRN
Pressure drop at 3 m/s	As straight pipe	Others	<ul style="list-style-type: none"> <li>• EAC (Russia, Belarus, Kazakhstan)</li> <li>• KCC (South Korea)</li> </ul>
Test pressure	1.5 x PN (where applicable)		
Mechanical load (Vibration)	<ul style="list-style-type: none"> <li>• 18 ... 1000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36</li> <li>• Sensor: 3.17 g RMS</li> <li>• Sensor with compact MAG 5000/6000 mounted transmitter: 3.17 g RMS</li> <li>• Sensor with compact MAG 6000 I/6000 I Ex mounted transmitter: 1.14 g RMS</li> </ul>		
Temperature of medium	<ul style="list-style-type: none"> <li>• PTFE -20 ... +130 °C (-4 ... +266 °F)</li> <li>• PFA -20 ... +150 °C (-4 ... +302 °F)</li> </ul>		
EMC	2014/30/EU		

<sup>1)</sup> DN ≤ 600 type 01 (SORF); DN > 600 type 11 (WNRF)

<sup>2)</sup> In compact version only.

**Technical specifications** (continued)

**Available Options for the SITRANS MAG 3100 P**

The MAG 3100P is designed to meet the most common specifications within chemical and process industries. Therefore not all options are available. If you miss a few options please check out or product MAG 3100 which is covering many more options.

Available Options for Liner PTFE with Platinum electrodes

Diameter		Connection			
MAG 3100 P	Order code	EN 1092-1, PN 10	EN 1092-1, PN 16	EN 1092-1, PN 40	AISI B 16.5, class 150
DN 15, ½"	1V			•	
DN 25, 1"	2D			•	•
DN 40, 1 ½"	2R			•	
DN 50, 2"	2Y			•	•
DN 65, 2 ½"	3F				
DN 80, 3"	3M		•		
DN 100, 4"	3T		•		
DN 125, 5"	4B		•		
DN 150, 6"	4H		•		
DN 200, 8"	4P				
DN 250, 10"	4V				
DN 300, 12"	5D				

Available Options for Liner PTFE with Tantalum electrodes

Diameter		Connection			
MAG 3100 P	Order code	EN 1092-1, PN 10	EN 1092-1, PN 16	EN 1092-1, PN 40	AISI B 16.5, class 150
DN 15, ½"	1V			•	
DN 25, 1"	2D			•	•
DN 40, 1 ½"	2R			•	
DN 50, 2"	2Y			•	•
DN 65, 2 ½"	3F		•		
DN 80, 3"	3M		•		•
DN 100, 4"	3T		•		•
DN 125, 5"	4B				
DN 150, 6"	4H		•		
DN 200, 8"	4P		•		
DN 250, 10"	4V		•		
DN 300, 12"	5D				

Available Options for Liner PTFE with Hastelloy C electrodes  
incl. grounding electrodes

Diameter		Connection			
MAG 3100 P	Order code	EN 1092-1, PN 10	EN 1092-1, PN 16	EN 1092-1, PN 40	AISI B 16.5, class 150
DN 15, ½"	1V			•	
DN 25, 1"	2D			•	•
DN 40, 1 ½"	2R			•	
DN 50, 2"	2Y			•	•
DN 65, 2 ½"	3F		•		
DN 80, 3"	3M		•		•
DN 100, 4"	3T		•		•
DN 125, 5"	4B				
DN 150, 6"	4H		•		•
DN 200, 8"	4P				•
DN 250, 10"	4V				•
DN 300, 12"	5D				

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 3100 P

#### Selection and ordering data

#### Article No.

#### Order code

<b>Sensor SITRANS FM MAG 3100 P (Short delivery time)</b>	➤	<b>7ME6340-</b>
➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
<b>Diameter</b>		
DN 15 (½")	1 V	
DN 25 (1")	2 D	
DN 40 (1½")	2 R	
DN 50 (2")	2 Y	
DN 65 (2½")	3 F	
DN 80 (3")	3 M	
DN 100 (4")	3 T	
DN 125 (5")	4 B	
DN 150 (6")	4 H	
DN 200 (8")	4 P	
DN 250 (10")	4 V	
DN 300 (12")	5 D	
<b>Flange norm and pressure rating</b>		
EN 1092-1		
PN 10 (DN 200 ... 300 (8" ... 12"))	B	
PN 16 (DN 65 ... 300 (2½" ... 12"))	C	
PN 40 (DN 15 ... 50 (½" ... 2"))	F	
ANSI B16.5		
Class 150 (½" ... 12")	J	
<b>Flange material</b>		
Carbon steel flanges ASTM A 105	1	
<b>Liner material</b>		
PTFE (150 °C (302 °F))	3	
PFA (150 °C (302 °F)) (DN 15 ... 150 (½" ... 6"))	7	
<b>Electrode material</b>		
Hastelloy C	2	
Platinum	3	
Tantalum	5	
Hastelloy C incl. grounding electrodes	6	
<b>Transmitter</b>		
Standard sensor for remote transmitter (Order transmitter separately)	A	
Ex sensor for remote transmitter (Order transmitter separately)	B	
MAG 6000 I, Aluminum, 18 ... 90 V DC, 115 ... 230 V AC	C	
MAG 6000 I, Aluminum, 18 ... 30 V DC, Ex	D	
MAG 6000 I, Aluminum, 115 ... 230 V AC, Ex	E	
MAG 6000, Polyamide, 11 ... 30 V DC/11 ... 24 V AC	H	
MAG 6000, Polyamide, 115 ... 230 V AC	J	
MAG 5000, Polyamide, 11 ... 30 V DC/11 ... 24 V AC	K	
MAG 5000, Polyamide, 115 ... 230 V AC	L	
<b>Communication</b>		
No communication, add-on possible	A	
HART	B	
PROFIBUS PA Profile 3 (only MAG 6000/MAG 6000 I)	F	
PROFIBUS DP Profile 3 (not for Ex) (only MAG 6000/MAG 6000 I)	G	
Modbus RTU/RS 485 (not for Ex) (only MAG 6000/MAG 6000 I)	E	
FOUNDATION Fieldbus H1 (only MAG 6000/6000 I)	J	
<b>Cable glands/terminal box</b>		
Metric: Polyamide terminal box or MAG 6000 I compact	1	
½" NPT: Polyamide terminal box or MAG 6000 I compact	2	
Metric: Stainless steel terminal box	3	
½" NPT: Stainless steel terminal box	4	

#### Additional information

Please add "-Z" to Article No. and specify Order code(s) and plain text.

#### Certificates

- Factory certificate according to EN 10204-2.2
- Factory certificate according to EN 10204-2.1

**C14**  
**C15**

#### Terminal blocks

- Factory mounted terminal blocks

**N02**

#### Country specific label

- CRN (Canadian Registration Number)

**H25**

Tag name plate, stainless steel (specify in plain text)

**Y17**

Tag name plate, plastic (self adhesive)

**Y18**

Customer-specific transmitter setting

**Y20**

#### Factory mounted sensor cables

- Sensor cables wired (specify Article No. for sensor cables and order cables separately)
- Sensor cables wired and IP68 sealing (specify Article No. for sensor cables and order cables separately)

**Y40**

**Y41**

#### Additional calibrations

- Matched-pair calibration
  - Accredited matched-pair calibration acc. to ISO/IEC 17025: 2005
  - Customer-specified calibration up to 10 points
  - Customer-witnessed calibration
- Any of above calibration

**On request<sup>1)</sup>**

**On request<sup>1)</sup>**

**On request<sup>1)</sup>**

**On request<sup>1)</sup>**

<sup>1)</sup> Product Variation Request (PVR).

#### Operating instructions for SITRANS FM MAG 3100 P

#### Description

#### Article No.

- English
- German

**A5E03005599**

**A5E03086288**

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/processinstrumentation/documentation>

#### Accessories

#### Description

#### Article No.

Potting kit for IP68/NEMA 6P sealing of sensor junction box

**FDK-085U0220**



Please use online Product selector to get latest updates.


Product selector link:

<http://www.pia-selector.automation.siemens.com>

**Selection and ordering data** (continued)

**Accessories for MAG 3100 P sensor**
**Grounding and protection ring - Type E (Stainless steel)**

- Material: AISI 316
- For liner PTFE
- 1 pc. incl. straps and screws




Size DN	Nominal pressure			Size Inch	ANSI <sup>1)</sup> Class 150 Article No.
	PN 10 Article No.	PN 16 Article No.	PN 40 Article No.		
DN 15			<b>FDK:083N8365</b>	½"	<b>FDK:083N8365</b>
DN 25			<b>FDK:083N8271</b>	1"	<b>FDK:083N8272</b>
DN 40			<b>FDK:083N8278</b>	1½"	<b>FDK:083N8279</b>
DN 50			<b>FDK:083N8282</b>	2"	<b>FDK:083N8283</b>
DN 65		<b>FDK:083N8285</b>		2½"	<b>FDK:083N8287</b>
DN 80		<b>FDK:083N8289</b>		3"	<b>FDK:083N8291</b>
DN 100		<b>FDK:083N8117</b>		4"	<b>FDK:083N8118</b>
DN 125		<b>FDK:083N8121</b>		5"	<b>FDK:083N8122</b>
DN 150		<b>FDK:083N8125</b>		6"	<b>FDK:083N8126</b>
DN 200	<b>FDK:083N8130</b>	<b>FDK:083N8130</b>		8"	<b>FDK:083N8370</b>
DN 250	<b>FDK:083N8136</b>	<b>FDK:083N8137</b>		10"	<b>FDK:083N8140</b>
DN 300	<b>FDK:083N8144</b>	<b>FDK:083N8145</b>		12"	<b>FDK:083N8148</b>

For use as protection ring order 2 pcs.

For use as grounding ring order 1 pc.

**Grounding and protection ring - Type E (Hastelloy)**

- Material: Hastelloy C276
- For liner PTFE
- 1 pc. incl. straps and screws



Size DN	Nominal pressure		Size Inch	ANSI <sup>1)</sup> Class 150 Article No.
	PN 16 Article No.	PN 40 Article No.		
DN 15		<b>FDK:083N8487</b>	½"	<b>FDK:083N8487</b>
DN 25		<b>FDK:083N8488</b>	1"	<b>FDK:083N8489</b>
DN 40		<b>FDK:083N8490</b>	1½"	<b>FDK:083N8491</b>
DN 50		<b>FDK:083N8492</b>	2"	<b>FDK:083N8493</b>
DN 65	<b>FDK:083N8495</b>		2½"	<b>FDK:083N8497</b>
DN 80	<b>FDK:083N8499</b>		3"	<b>FDK:083N8501</b>
DN 100	<b>FDK:083N8504</b>		4"	<b>FDK:083N8506</b>

<sup>1)</sup> For dimensions of MAG 3100 P see Dimensional drawings.


**Flow Measurement**

SITRANS FM (electromagnetic)

Flow sensors

**MAG 3100 P****Selection and ordering data** (continued)**Grounding ring - Type Flat ring (Stainless steel)**

- Material: AISI 316
- For liner PTFE and PFA
- 1 pc. incl. straps and screws

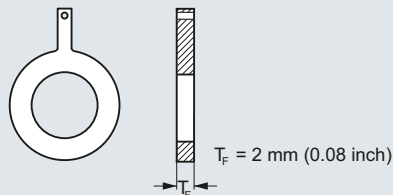


Size DN	Nominale pressure			Size Inch	ANSI <sup>1)</sup> Class 150 Article No.
	PN 10 Article No.	PN 16 Article No.	PN 40 Article No.		
DN 15			<b>A5E01191968</b>	½"	<b>A5E01191969</b>
DN 25			<b>A5E01150880</b>	1"	<b>A5E01150022</b>
DN 40			<b>A5E01191952</b>	1½"	<b>A5E01191961</b>
DN 50			<b>A5E01150918</b>	2"	<b>A5E01151121</b>
DN 65		<b>A5E01191940</b>		2½"	<b>A5E01191962</b>
DN 80		<b>A5E01152876</b>		3"	<b>A5E01152910</b>
DN 100		<b>A5E01158875</b>		4"	<b>A5E01159146</b>
DN 125		<b>A5E01191941</b>		5"	<b>A5E01191963</b>
DN 150		<b>A5E01191943</b>		6"	<b>A5E01191964</b>
DN 200	<b>A5E01191951</b>	<b>A5E01191944</b>		8"	<b>A5E01191965</b>
DN 250	<b>A5E01191950</b>	<b>A5E01191946</b>		10"	<b>A5E01191966</b>
DN 300	<b>A5E01191949</b>	<b>A5E01191947</b>		12"	<b>A5E01191967</b>

<sup>1)</sup> For dimensions of MAG 3100 P see Dimensional drawings.

**Grounding ring - Type Flat ring (Hastelloy)**


- Material: Hastelloy C276
- For liner PTFE and PFA
- 1 pc. incl. straps and screws

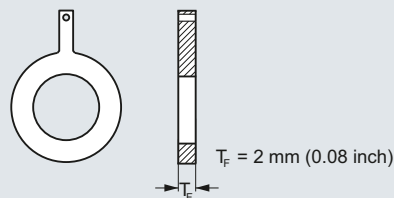

Size DN	Nominale pressure			Size Inch	ANSI <sup>1)</sup> Class 150 Article No.
	PN 10 Article No.	PN 16 Article No.	PN 40 Article No.		
DN 15			<b>A5E01191981</b>	½"	<b>A5E01191989</b>
DN 25			<b>A5E01150882</b>	1"	<b>A5E01150028</b>
DN 40			<b>A5E01191982</b>	1½"	<b>A5E01191990</b>
DN 50			<b>A5E01150922</b>	2"	<b>A5E01151124</b>
DN 65		<b>A5E01191971</b>		2½"	<b>A5E01191991</b>
DN 80		<b>A5E01152889</b>		3"	<b>A5E01152913</b>
DN 100		<b>A5E01158886</b>		4"	<b>A5E01159150</b>
DN 125		<b>A5E01191973</b>		5"	<b>A5E01191992</b>
DN 150		<b>A5E01191974</b>		6"	<b>A5E01191993</b>
DN 200	<b>A5E01191978</b>	<b>A5E01191975</b>		8"	<b>A5E01191994</b>
DN 250	<b>A5E01191979</b>	<b>A5E01191976</b>		10"	<b>A5E01191995</b>
DN 300	<b>A5E01191980</b>	<b>A5E01191977</b>		12"	<b>A5E01191996</b>

<sup>1)</sup> For dimensions of MAG 3100 P see Dimensional drawings.

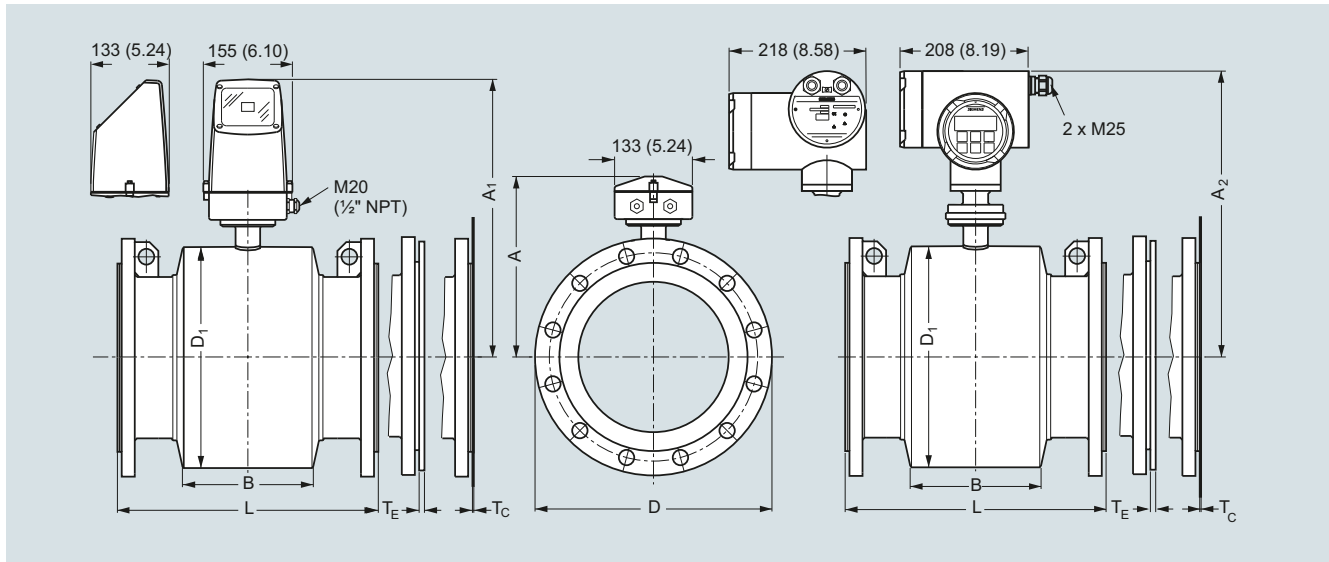

**Dimensional drawings**
**MAG 3100 P sensor with compact or remote transmitter**


Dimensions in mm (inch)

**Metric**

DN	A <sup>1)</sup>	A <sub>1</sub>	A <sub>2</sub>	B	D1	L <sup>2)</sup>			ANSI 16.5 Class 150	T <sub>E</sub> <sup>3)</sup>	T <sub>F</sub> <sup>3)</sup>	Weight <sup>4)</sup>
						EN 1092-1-201 PN 10	PN 16	PN 40				
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
15	187	341	338	59	104	-	-	200	200	6	2	4
25	187	341	338	59	104	-	-	200	200	6	2	5
40	197	351	348	82	124	-	-	200	200	6	2	8
50	205	359	356	72	139	-	-	200	200	6	2	9
65	212	369	366	72	154	-	200/-	-	200	6	2	11
80	222	376	373	72	174	-	200/-	-	272 <sup>5)</sup>	6	2	12
100	242	396	393	85	214	-	250/-	-	250	6	2	16
125	255	409	406	85	239	-	250/-	-	250	6	2	19
150	276	430	427	85	282	-	300/-	-	300	6	2	27
200	304	458	455	137	338	350	350/-	-	350	8	2	40
250	332	486	483	157	393	450	450/-	-	450	8	2	60
300	357	511	508	157	444	500	500/-	-	500	8	2	80

1) 14.5 mm shorter with stainless steel terminal box (Ex and high temperature version)

2) When grounding rings are used, the thickness of the grounding ring must be added to the built-in length.

 3) T<sub>E</sub> = Grounding ring Type E, T<sub>F</sub> = Grounding ring Type Flat ring

4) Weights are approx. (for PN 16) without transmitter

5) Not according to ISO 20456

- not available

D = Outside diameter of flange, see flange tables

**Flow Measurement**

SITRANS FM (electromagnetic)

Flow sensors

**MAG 3100 P****Dimensional drawings** (continued)

Imperial

DN	A <sup>1)</sup>	A <sub>1</sub>	A <sub>2</sub>	B	D1	L <sup>2)</sup>			ANSI 16.5 Class 150	T <sub>E</sub> <sup>3)</sup>	T <sub>F</sub> <sup>3)</sup>	Weight <sup>4)</sup>
						EN 1092-1-201 PN 10	PN 16	PN 40				
[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[lbs]
½	7.36	13.4	13.34	2.32	4.09	-	-	7.87	7.87	0.24	0.08	9
1	7.36	13.4	13.34	2.32	4.09	-	-	7.87	7.87	0.24	0.08	11
1½	7.76	13.8	13.74	3.23	4.88	-	-	7.87	7.87	0.24	0.08	17
2	8.07	14.1	14.04	2.83	5.47	-	-	7.87	7.87	0.24	0.08	20
2½	8.35	14.4	14.34	2.83	6.06	-	7.87/-	-	7.87	0.24	0.08	24
3	8.74	14.8	14.74	2.83	6.85	-	7.87/-	-	10.71 <sup>5)</sup>	0.24	0.08	26
4	9.53	15.6	15.54	3.35	8.43	-	9.84/-	-	9.84	0.24	0.08	35
5	10.04	16.1	16.04	3.35	9.41	-	9.84/-	-	9.84	0.24	0.08	42
6	10.87	16.9	16.84	3.35	11.10	-	11.81/-	-	11.81	0.24	0.08	60
8	11.97	18.0	17.94	5.39	13.31	13.78	13.78/-	-	13.78	0.31	0.08	88
10	13.07	19.1	19.04	6.18	15.47	17.72	17.72/-	-	17.72	0.31	0.08	132
12	14.05	20.1	20.04	6.18	17.48	19.69	19.69/-	-	19.69	0.31	0.08	176

1) 0.571 inch shorter with stainless steel terminal box (Ex and high temperature version)

2) When grounding rings are used, the thickness of the grounding ring must be added to the built-in length.

3) T<sub>E</sub> = Grounding ring Type E, T<sub>F</sub> = Grounding ring Type Flat ring

4) Weights are for ANSI 150 without transmitter.

5) Not according to ISO 20456

D = Outside diameter of flange, see flange tables

## Overview



The SITRANS FM MAG 5100 W is an electromagnetic flow sensor designed to meet ground water, drinking water, waste water, sewage or sludge applications.

## Benefits

- DN 15 to DN 1200/2000 (½" to 48"/78")
- Stock program of MAG 5100 W secures short delivery time
- Connection flanges EN 1092-1 (DIN 2501), ANSI, AWWA, AS and JIS
- NBR Hard Rubber and Ebonite Hard Rubber liner for all water applications
- EPDM liner with drinking water approvals
- Hastelloy integrated grounding and measuring electrodes
- Increased low flow accuracy for water leak detection, due to coned liner design.
- Drinking water approvals
- Suitable for direct burial and constant flooding
- Custody transfer approvals
- Built-in length according to ISO 20456; the standard includes sizes up to DN 400.
- Easy commissioning, SENSORPROM unit automatically uploads calibration values and settings.
- Designed so patented in-situ verification can be conducted. Using SENSORPROM fingerprint.
- Custody transfer option for water billing, with type approval after OIML R 49 and verified according to MI-001 - 0D inlet/0D outlet installation
  - Pattern approval OIML R 49
  - Conform to ISO 4064 and EN 14154 for mechanical flowmeters
  - PTB K7.2
  - Kiwa water approval
- FM Fire Service Meter (Class Number 1044) for automatic fire protection systems.
- Meets EEC directives: PED 2014/68/EU pressure directive for EN 1092-1 flanges
- Simple onsite or factory upgrade to IP68/NEMA 6P of a standard sensor
- Type approval of marine equipment (ABS, Bureau Veritas, DNV-GL, Lloyd's Register)

## Application

The main applications of the SITRANS FM electromagnetic flow sensors can be found in the following fields:

- Water abstraction
- Water treatment
- Water distribution network (leak detection management)
- Custody transfer water meters
- Irrigation
- Waste water treatment
- Filtration plant (e.g. reverse osmosis and ultra filtration)
- Industrial water applications

## Mode of operation

The flow measuring principle is based on Faradays law of electromagnetic induction according to which the sensor converts the flow into an electrical voltage proportional to the velocity of the flow.

## Integration

The complete flow meter consists of a flow sensor and an associated transmitter SITRANS FM MAG 5000, MAG 6000 or MAG 6000 I.

The flexible communication concept USM II simplifies integration and update to a variety of fieldbus systems, e.g. HART, DeviceNet, PROFIBUS DP and PA, FOUNDATION Fieldbus H1 or Modbus RTU/RS 485.

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 5100 W

#### Technical specifications

Product characteristic	MAG 5100 W (7ME6520) Mainly for the European market EPDM or NBR lining	MAG 5100 W (7ME6580) Mainly for the non-European market Ebonite lining
Design and nominal size	Coned sensor (octagon liner): DN 15 ... 40 (½" ... 1½") Coned sensor: DN 50 ... 300 (2" ... 12") Full bore sensor: DN 350 ... 1200 (14" ... 48")	Full bore sensor: DN 25 ... 2 000 (1" ... 78")
<b>Measuring principle</b>	Electromagnetic induction	Electromagnetic induction
Excitation frequency (Mains supply: 50/60 Hz)	DN 15 ... 65 (½" ... 2½"): 12.5 Hz/15 Hz DN 80 ... 150 (3" ... 6"): 6.25 Hz/7.5 Hz DN 200 ... 300 (8" ... 12"): 3.125 Hz/3.75 Hz DN 350 ... 1200 (14" ... 48"): 1.5625 Hz/1.875 Hz	DN 25 ... 65 (1" ... 2½"): 12.5 Hz/15 Hz DN 80 ... 150 (3" ... 6"): 6.25 Hz/7.5 Hz DN 200 ... 300 (8" ... 12"): 3.125 Hz/3.75 Hz DN 350 ... 2000 (14" ... 78"): 1.5625 Hz/1.875 Hz
<b>Process connection</b>		
Flanges <sup>1)</sup>		
• EN 1092-1	PN 10 (145 psi): DN 200 ... 300 (8" ... 12") Flat face  PN 10 (145 psi): DN 350 ... 1200 (14" ... 48") Raised face <sup>3)</sup> PN 16 (232 psi): DN 50 ... 300 (2" ... 12") Flat face <sup>3)</sup> PN 16 (232 psi): DN 350 ... 1200 (14" ... 48") Raised face PN 40 (580 psi): DN 15 ... 40 (½" ... 1½") Flat face Class 150: ½" ... 12" Flat face; 14" ... 24" raised face Class D: 28" ... 48", Flat face PN 16 (232 psi): DN 50 ... DN 300 (2" ... 12") Flat Face; DN 350 ... DN 1200 (14" ... 48") Raised face K10 (1" ... 24")	Raised face <sup>3)</sup> (EN 1092-1, DIN 2501 and BS 4504 have the same mating dimensions) PN 6 (87 psi): DN 1400 ... 2000 (54" ... 78") PN 10 (145 psi): DN 200 ... 2000 (8" ... 78") PN 16 (232 psi): DN 65 ... 600 (2½" ... 24") PN 40 (580 psi): DN 25 ... 50 (1" ... 2") Class 150: 1" ... 24"; Raised face  Class D: 28" ... 78", Flat face PN 16 (232 psi): DN 50 ... DN 1200 (2" ... 48") Raised face  K10 (1" ... 24")
• ANSI B16.5		
• AWWA C-207		
• AS4087		
• JIS B 2220:2004		
<b>Rated Operation conditions</b>		
Ambient temperature		
• Sensor	-40 ... +70 °C (-40 ... +158 °F)	-40 ... +70 °C (-40 ... +158 °F)
• Compact with transmitter MAG 5000/6000 <sup>4)</sup>	-20 ... +60 °C (-4 ... +140 °F)	-20 ... +60 °C (-4 ... +140 °F)
Operating pressure (Abs) [abs. bar] (Maximum operating pressure depending on flange standard, decreases with increasing operating temperature)	DN 15 ... 40 (½" ... 1½"): 0.01 ... 40 bar (0.15 ... 580 psi) DN 50 ... 300 (2" ... 12"): 0.03 ... 20 bar (0.44 ... 290 psi) DN 350 ... 1200 (14" ... 48"): 0.01 ... 16 bar (0.15 ... 232 psi)	DN 25 ... 50 (1" ... 2"): 0.01 ... 40 bar (0.15 ... 580 psi) DN 65 ... 1200 (2½" ... 48"): 0.01 ... 16 bar (0.15 ... 232 psi) DN 1400 ... 2000 (54" ... 78"): 0.01 ... 10 bar (0.15 ... 145 psi)
Enclosure rating		
• Standard	IP67 to EN 60529/NEMA 4X/6 (1 mH <sub>2</sub> O for 30 min)	IP67 to EN 60529/NEMA 4X/6 (1 mH <sub>2</sub> O for 30 min)
• Option	IP68 to EN 60529/NEMA 6P (10 mH <sub>2</sub> O continuously)	IP68 to EN 60529/NEMA 6P (10 mH <sub>2</sub> O continuously)
Pressure drop	DN 15 and 25 (½" and 1"): Max. 20 mbar (0.29 psi) at 1 m/s (3 ft/s)  DN 40 ... 300 (1½" ... 12"): Max. 25 mbar (0.36 psi) at 3 m/s (10 ft/s)  DN 350 ... 1200 (14" ... 48"): Insignificant	Insignificant
Test pressure	1.5 x PN (where applicable) FM Fire Service: 2 x PN	1.5 x PN (where applicable)
Mechanical load (vibration)	18 ... 1000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36  Sensor: 3.17 g RMS Sensor with compact MAG 5000/6000 mounted transmitter: 3.17 g RMS Sensor with compact MAG 6000 I mounted transmitter: 1.14 g RMS	18 ... 1000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36  Sensor: 3.17 g RMS Sensor with compact MAG 5000/6000 mounted transmitter: 3.17 g RMS Sensor with compact MAG 6000 I mounted transmitter: 1.14 g RMS
<u>Medium conditions</u>		
Temperature of medium		
• NBR	-10 ... +70 °C (14 ... 158 °F)	-
• EPDM	-10 ... +70 °C (14 ... 158 °F)	-
• EPDM (MI-001)	0.1 ... 30 °C (32 ... 76 °F)	-
• Ebonite	-	-10 ... +70 °C (14 ... 158 °F)
EMC	2014/30/EU	2014/30/EU

#### Technical specifications (continued)

Product characteristic	MAG 5100 W (7ME6520) Mainly for the European market EPDM or NBR lining	MAG 5100 W (7ME6580) Mainly for the non-European market Ebonite lining
<b>Design</b>		
Material		
• Housing and flanges	Carbon steel ASTM A 105, with corrosion-resistant coating of category C4 or C5 according to ISO 12944-2	Carbon steel ASTM A 105, with corrosion-resistant coating of category C4 or C5 according to ISO 12944-2
• Electrode	Hastelloy C276	Hastelloy C276
• Grounding electrode	Hastelloy C276	Hastelloy C276
• Terminal box	Fibre glass reinforced polyamide	Fibre glass reinforced polyamide
<b>Certificates and approvals</b>		
Calibration		
• Default calibration	Zero-point, 2 x 25 % and 2 x 90 %	Zero-point, 2 x 25 % and 2 x 90 %
• Special calibration	5-point calibration: 20 %, 40 %, 60 %, 80 %, 100 % of factory Q <sub>max</sub> 10-point calibration: ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory Q <sub>max</sub> Matched pair calibration: default, 5-point or 10-point	5-point calibration: 20 %, 40 %, 60 %, 80 %, 100 % of factory Q <sub>max</sub> 10-point calibration: ascending and descending at 20 %, 40 %, 50 %, 80 %, 100 % of factory Q <sub>max</sub> Matched pair calibration: default, 5-point or 10-point
Custody transfer	<ul style="list-style-type: none"> <li>• MI-001 cold water (EU): DN 50 ... DN 1200 (2" ... 48")</li> <li>• Kiwa water approval (NL): DN 50 ... DN 1200 (2" ... 48")</li> <li>• Chilled water pattern approval PTB K 7.2 DN 15 ... DN 1200 (Germany)<sup>5)</sup></li> </ul>	-
Drinking water	EPDM liner: <ul style="list-style-type: none"> <li>• WRAS (WRc, BS690 cold water, GB)</li> <li>• NSF/ANSI Standard 61<sup>6)</sup> (Cold water, US)</li> <li>• ACS listed (F)</li> <li>• DVGW W270 (D)</li> <li>• Belgaqua (B)</li> <li>• AS/NZS 4020 (Australia/New Zealand)</li> </ul>	<ul style="list-style-type: none"> <li>• WRAS (WRc, BS690 cold water, GB)</li> <li>• NSF/ANSI Standard 61<sup>6)</sup> (Cold water, US)</li> </ul>
Marine <sup>7)</sup>	<ul style="list-style-type: none"> <li>• American Bureau of Shipping (ABS)</li> <li>• Bureau Veritas</li> <li>• DNV-GL</li> <li>• Lloyd's Register</li> </ul>	
Hazardous areas <sup>7)</sup>		
Standard sensor with/without MAG 5000/6000/6000 I	<ul style="list-style-type: none"> <li>• FM               <ul style="list-style-type: none"> <li>- NI Class I Div. 2 Groups A, B, C, D</li> <li>- NI Class I Zone 2 Groups IIC</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• FM               <ul style="list-style-type: none"> <li>- NI Class I Div. 2 Groups A, B, C, D</li> <li>- NI Class I Zone 2 Groups IIC</li> </ul> </li> </ul>
Pressure equipment	<ul style="list-style-type: none"> <li>• PED conforming: All EN1092-1 flanges and ANSI Class 150 (&lt; DN 300 /&lt;12") – 2014/68/EU<sup>9)</sup></li> <li>• CRN</li> </ul>	<ul style="list-style-type: none"> <li>• PED conforming: All EN1092-1 flanges (&lt; DN 600 /&lt;24") – 2014/68/EU<sup>9)</sup></li> <li>• CRN</li> </ul>
Others	<ul style="list-style-type: none"> <li>• EAC (Russia, Belarus, Kazakhstan)</li> <li>• KCC (South Korea)</li> <li>• FM Fire Service Approval acc. to class 1044<sup>8)</sup></li> <li>• VdS: Extinguishing systems DN 50 ... 300</li> <li>• MCERTS (GB environmental)</li> </ul>	<ul style="list-style-type: none"> <li>• EAC (Russia, Belarus, Kazakhstan)</li> <li>• CMC/CPA (China)</li> </ul>

<sup>1)</sup> DN 750, DN 1050 and DN 1100 (30", 42" and 44") not available with EN 1092-1 (PN 10 and PN 16) and AS4087 flanges

<sup>2)</sup> Type 01 (SORF)

<sup>3)</sup> DN ≤ 600 type 01 (SORF); DN > 600 type 11 (WNRF)

<sup>4)</sup> Compact with transmitter MAG 5000 CT/6000 CT -20 ... +50 °C (-4 ... 122 °F)

<sup>5)</sup> For verification submit Product Variation Request

<sup>6)</sup> Including Annex G

<sup>7)</sup> In remote version with sensor size DN 50 ... DN 300 (2" ... 12")

<sup>8)</sup> For sizes larger than 600 mm (24") in PN 16 PED conformity is available as a cost-added option. The basic unit will only carry the LVD (Low Voltage Directive) and EMC approval. All products sold outside of EU and EFTA are excluded from the directive, also products sold into certain market sectors are excluded. These include:

a) Meters used in networks for the supply, distribution and discharge of water.

b) Meters used in pipelines for the conveyance of any fluid from offshore to onshore.

c) Meters used in the extraction of petroleum or gas, including Christmas tree and manifold equipment.

d) Any meter mounted on a ship or mobile offshore platform. For further information on the PED standard and requirements see Pressure Equipment Directive in Appendix (chapter 10).

<sup>9)</sup> Not for sensors with 300 µm coating.

## Flow Measurement

SITRANS FM (electromagnetic)

Flow sensors

### MAG 5100 W

#### Technical specifications (continued)

##### **MAG 5100 W (7ME6520) with MAG 6000 CT (Revenue program) MI-001**


MAG 5100 W CT program is type approved according to international water meter standard OIML R 49. Since the first November 2006 the MI-001 water meter directive is in force, which means that all water meters can be sold across the EU borders if the water meters contain a MI-001 label.

The MAG 5100 W MI-001 verified and labeled products are a Class II approval according to Directive 2014/32/EU of the European Parliament and Council of 26 February, 2014 on measuring instruments, Annex III Water meters (MI-001) in the sizes from DN 50 to DN 1200 (Article No. 7ME6520).

The MID certification is obtained as a modul B + D module approval according to the above mentioned directive.


Module B: Type approval according to OIML R 49

Module D: Quality insurance approval of production

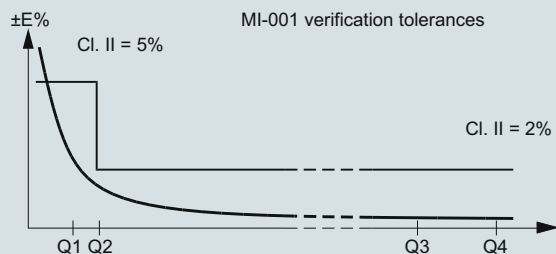

##### **MAG 5100 W (7ME6520) with MAG 5000/MAG 6000 or MAG 6000 CT for Fire Service applications**

MAG 5100 W (7ME6520) is FM Fire Service approved for automatic fire protection systems. The approval is applicable for the sizes DN 50, DN 80, DN 100, DN 150, DN 200, DN 250 and DN 300 (2", 3", 4", 6", 8", 10" and 12") with ANSI B16.5 Class 150 flanges. The FM Fire Service approved product can be ordered via the Z-options P20, P21 and P22.

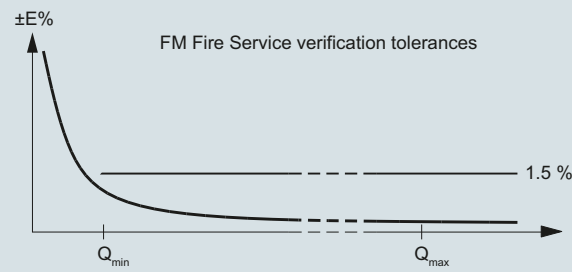

#### Technical specifications (continued)

MAG 5100 W (7ME6520) MI-001 verified and labeled products at a given Q3 and Q3/Q4 = 1.25 and Q2/Q1 = 1.6 measuring ranges see table below:

Order code: P11	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
"R" Q3/Q1	40	40	40	40	40	40	40	40	40
Q4 [m³/h]	20	31.25	50	78.75	125	200	312.5	500	787.5
<b>Q3 [m³/h]</b>	<b>16</b>	<b>25</b>	<b>40</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>
Q2 [m³/h]	0.64	1.0	1.6	2.52	4.0	6.4	10.0	16.0	25.2
Q1 [m³/h]	0.4	0.63	1.0	1.58	2.5	4.0	6.25	10.0	15.75
Order code: P12	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
"R" Q3/Q1	63	63	63	63	63	63	63	63	63
Q4 [m³/h]	20	31.25	50	78.75	125	200	312.5	500	787.5
<b>Q3 [m³/h]</b>	<b>16</b>	<b>25</b>	<b>40</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>
Q2 [m³/h]	0.41	0.63	1.02	1.6	2.5	4.1	6.3	10.2	16.0
Q1 [m³/h]	0.25	0.40	0.63	1.00	1.59	2.54	3.97	6.35	10.0
Order code: P13	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
"R" Q3/Q1	80	80	80	80	80	80	80	80	80
Q4 [m³/h]	20	31.3	50	78.75	125	200	312.5	500	787.5
<b>Q3 [m³/h]</b>	<b>16</b>	<b>25</b>	<b>40</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>
Q2 [m³/h]	0.32	0.5	0.8	1.26	2.0	3.2	5.0	8.0	12.6
Q1 [m³/h]	0.20	0.31	0.50	0.79	1.25	2.00	3.13	5.00	7.9
Order code: P16	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
"R" Q3/Q1	160	160	160	160	160	160	160	160	160
Q4 [m³/h]	50	78.5	125	200	312.5	500	787.5	1250	2000
<b>Q3 [m³/h]</b>	<b>40</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>	<b>1000</b>	<b>1600</b>
Q2 [m³/h]	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10.0	16.0
Q1 [m³/h]	0.25	0.39	0.63	1.0	1.56	2.5	3.94	6.3	10.0
Order code: P17	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
"R" Q3/Q1	200	200	200	200	200	200	200	200	200
Q4 [m³/h]	50	78.5	125	200	312.5	500	787.5	1250	2000
<b>Q3 [m³/h]</b>	<b>40</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>	<b>1000</b>	<b>1600</b>
Q2 [m³/h]	0.32	0.50	0.80	1.28	2.0	3.2	5.0	8.0	12.8
Q1 [m³/h]	0.2	0.32	0.50	0.8	1.25	2.0	3.15	5.0	8.0
Order code: P18	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
"R" Q3/Q1	250	250	250	250	250	250	250	250	250
Q4 [m³/h]	50	78.5	125	200	312.5	500	787.5	1250	2000
<b>Q3 [m³/h]</b>	<b>40</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>	<b>1000</b>	<b>1600</b>
Q2 [m³/h]	0.26	0.4	0.64	1.02	1.6	2.56	4.0	6.4	10.24
Q1 [m³/h]	0.16	0.25	0.4	0.64	1.0	1.6	2.52	4.0	6.4
Order code: P24	DN 350 (14")		DN 400 (16")		DN 450 (18")		DN 500 (20")		DN 600 (24")
"R" Q3/Q1	40		40		40		40		40
Q4 [m³/h]	1250		1250		2000		2000		3125
<b>Q3 [m³/h]</b>	<b>1000</b>		<b>1000</b>		<b>1600</b>		<b>1600</b>		<b>2500</b>
Q2 [m³/h]	40.0		40.0		64.0		64.0		100.0
Q1 [m³/h]	25.0		25.0		40.0		40.0		62.5
Order code: P25	DN 350 (14")		DN 400 (16")		DN 450 (18")		DN 500 (20")		DN 600 (24")
"R" Q3/Q1	63		63		63		63		63
Q4 [m³/h]	1250		2000		3125		3125		5000
<b>Q3 [m³/h]</b>	<b>1000</b>		<b>1600</b>		<b>2500</b>		<b>2500</b>		<b>4000</b>
Q2 [m³/h]	25.4		40.63		63.49		63.49		101.6
Q1 [m³/h]	15.9		25.4		39.7		39.7		63.49

## Flow Measurement

SITRANS FM (electromagnetic)

Flow sensors

### MAG 5100 W

#### Technical specifications (continued)

Order code: P26	DN 350 (14")	DN 400 (16")	DN 450 (18")	DN 500 (20")	DN 600 (24")
"R" Q3/Q1	80	80	80	80	80
Q4 [m <sup>3</sup> /h]	2000	3125	5000	5000	7875
<b>Q3 [m<sup>3</sup>/h]</b>	<b>1600</b>	<b>2500</b>	<b>4000</b>	<b>4000</b>	<b>6300</b>
Q2 [m <sup>3</sup> /h]	32.0	50.0	80.0	80.0	126.0
Q1 [m <sup>3</sup> /h]	20.0	31.25	50.0	50.0	78.75

Order code: P27	DN 350 (14")	DN 400 (16")	DN 450 (18")	DN 500 (20")	DN 600 (24")
"R" Q3/Q1	100	100	100	100	100
Q4 [m <sup>3</sup> /h]	3125	3125	5000	5000	7875
<b>Q3 [m<sup>3</sup>/h]</b>	<b>2500</b>	<b>2500</b>	<b>4000</b>	<b>4000</b>	<b>6300</b>
Q2 [m <sup>3</sup> /h]	40.0	2540.0	64.0	64.0	100.8
Q1 [m <sup>3</sup> /h]	25.0	25.0	40.0	40.0	63.0

Order code: P29	DN 700 (28")	DN 750 (30")	DN 800 (32")	DN 900 (36")	DN 1000 (40")	DN 1200 (48")
"R" Q3/Q1	40	40	40	40	40	40
Q4 [m <sup>3</sup> /h]	5000	5000	5000	7875	7875	7875
<b>Q3 [m<sup>3</sup>/h]</b>	<b>4000</b>	<b>4000</b>	<b>4000</b>	<b>6300</b>	<b>6300</b>	<b>6300</b>
Q2 [m <sup>3</sup> /h]	160.0	160.0	160.0	252.0	252.0	252.0
Q1 [m <sup>3</sup> /h]	100.0	100.0	100.0	157.5	157.5	157.5


  

Order code: P30	DN 700 (28")	DN 750 (30")	DN 800 (32")	DN 900 (36")	DN 1000 (40")	DN 1200 (48")
"R" Q3/Q1	63	63	63	63	63	-
Q4 [m <sup>3</sup> /h]	5000	5000	5000	7875	7875	-
<b>Q3 [m<sup>3</sup>/h]</b>	<b>4000</b>	<b>4000</b>	<b>4000</b>	<b>6300</b>	<b>6300</b>	-
Q2 [m <sup>3</sup> /h]	101.6	101.6	101.6	160.0	160.0	-
Q1 [m <sup>3</sup> /h]	63.5	63.5	63.5	100.0	100.0	-

Order code: P31	DN 700 (28")	DN 750 (30")	DN 800 (32")	DN 900 (36")	DN 1000 (40")	DN 1200 (48")
"R" Q3/Q1	80	80	80	80	80	-
Q4 [m <sup>3</sup> /h]	5000	5000	5000	7875	7875	-
<b>Q3 [m<sup>3</sup>/h]</b>	<b>4000</b>	<b>4000</b>	<b>4000</b>	<b>6300</b>	<b>6300</b>	-
Q2 [m <sup>3</sup> /h]	80.0	80.0	80.0	126.0	126.0	-
Q1 [m <sup>3</sup> /h]	50.0	50.0	50.0	78.75	78.75	-

The label is placed on the transmitter housing. An example of the product label is shown below:

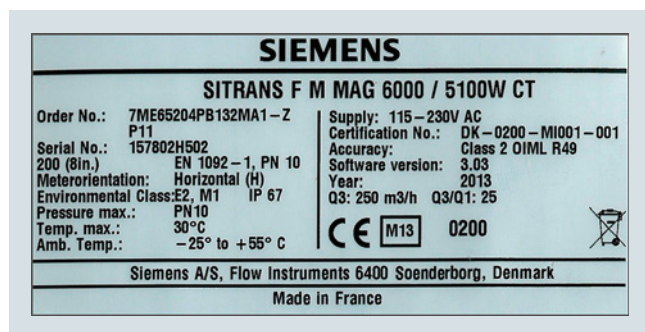

OIML R 49/MI-001 approvals valid for:

- DN 50 to 1200 mm (2" to 48")
- Horizontal and vertical installation
- Compact or remote with max. 500 m cable
- Power supply 115 to 230 V AC, 12 to 24 V AC/DC
- With or without communication module







Other restrictions may apply (see certificate)

Special OIML / MI-001 settings:

- Unit: m<sup>3</sup>
- Qmax: Q3
- Low flow cut-off: 0.1 %
- Digital output: Frequency

For other factory settings, see Operating Instructions.



Selection and ordering data	Article No.	Article No.
<b>Sensor SITRANS FM MAG 5100 W</b>  <b>7ME6520-</b> <span style="float: right;">Ord. code</span> Hastelloy electrodes, carbon steel flanges, EU water markets and low flow applications  - <b>2</b>   Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		<b>Sensor SITRANS FM MAG 5100 W</b> <b>7ME6520-</b> <span style="float: right;">Ord. code</span> Hastelloy electrodes, carbon steel flanges, EU water markets and low flow applications  - <b>2</b> 
<b>Diameter</b> DN 15 (½") <b>1 V</b> DN 25 (1") <b>2 D</b> DN 40 (1½") <b>2 R</b> DN 50 (2") <b>2 Y</b> DN 65 (2½") <b>3 F</b> DN 80 (3") <b>3 M</b> DN 100 (4") <b>3 T</b> DN 125 (5") <b>4 B</b> DN 150 (6") <b>4 H</b> DN 200 (8") <b>4 P</b> DN 250 (10") <b>4 V</b> DN 300 (12") <b>5 D</b> DN 350 (14") <b>5 K</b> DN 400 (16") <b>5 R</b> DN 450 (18") <b>5 Y</b> DN 500 (20") <b>6 F</b> DN 600 (24") <b>6 P</b> DN 700 (28") <b>6 Y</b> DN 750 (30") <b>7 D</b> DN 800 (32") <b>7 H</b> DN 900 (36") <b>7 M</b> DN 1000 (40") <b>7 R</b> (42") <b>7 U</b> (44") <b>7 V</b> DN 1200 (48") <b>8 B</b>		<b>Transmitter</b> Sensor for remote transmitter (Order transmitter separately) <b>A</b> MAG 6000 I, Aluminum, 18 ... 90 V DC, 115 ... 230 V AC <b>C</b> MAG 6000, Polyamid, 11 ... 30 V DC/11 ... 24 V AC <b>H</b> MAG 6000, Polyamid, 115 ... 230 V AC <b>J</b> MAG 5000, Polyamid, 11 ... 30 V DC/11 ... 24 V AC <b>K</b> MAG 5000, Polyamid, 115 ... 230 V AC <b>L</b> MAG 6000 CT, Polyamid, 115 ... 230 V AC <b>M</b> MAG 6000 CT, Polyamid, 11 ... 30 V DC/11 ... 24 V AC <b>R</b> <u>Transmitter including wall-mounting kit for remote design</u> MAG 5000, Polyamid, 115 ... 230 V AC, incl. special wall-mounting unit (approved marine equipment) • M20x1.5 cable glands <b>Z P O C</b> • ½" NPT cable glands <b>Z P O D</b> MAG 6000, Polyamid, 115 ... 230 V AC, incl. special wall-mounting unit (approved marine equipment) • M20x1.5 cable glands <b>Z P O G</b> • ½" NPT cable glands <b>Z P O H</b> MAG 6000 CT, Polyamid, 11 ... 30 V DC/11 ... 24 V AC, incl. wall-mounting unit • M20x1.5 cable glands <b>Z P O J</b> • ½" NPT cable glands <b>Z P O K</b> MAG 6000 CT, Polyamid, 115 ... 230 V AC, incl. wall-mounting unit • M20x1.5 cable glands <b>Z P O L</b> • ½" NPT cable glands <b>Z P O M</b>
<b>Flange norm and pressure rating</b> <u>EN 1092-1</u> PN 10 (DN 200 ... 1200/8" ... 48") <b>B</b> PN 16 (DN 50 ... 1200/2" ... 48") <b>C</b> PN 16, non PED (DN 700 ... 1200/28" ... 48") <b>D</b> PN 40 (DN 15 ... 40/½" ... 1½") <b>F</b> <u>ANSI B16.5</u> class 150 (½" ... 24") <b>J</b> <u>AWWA C-207</u> Class D (28" ... 48") <b>L</b> <u>AS 4087</u> PN 16 (DN 50 ... 1200/2" ... 48") <b>N</b> <u>JIS</u> B 2220:2004 K10 (1" ... 24") <b>R</b>		<b>Communication</b> None <b>A</b> HART <b>B</b> PROFIBUS PA Profile 3 (only MAG 6000/ MAG 6000 I) <b>F</b> PROFIBUS DP Profile 3 (only MAG 6000/ MAG 6000 I) <b>G</b> Modbus RTU/RS 485 (only MAG 6000/ MAG 6000 I) <b>E</b> FOUNDATION Fieldbus H1 (only MAG 6000/ MAG 6000 I) <b>J</b>
<b>Flange material and coating</b> Carbon steel flanges ASTM A 105, corrosion-resistant coating of category C4 <b>1</b> Carbon steel flanges ASTM A 105, 300 µm corrosion-resistant coating of category C5 <b>4</b>		<b>Cable glands/terminal box</b> Metric: Polyamide terminal box or MAG 6000 I compact <b>1</b> ½" NPT: Polyamide terminal box or MAG 6000 I compact <b>2</b>
<b>Liner material</b> EPDM <b>2</b> NBR <b>3</b>		

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 5100 W

#### Selection and ordering data

#### Order code

##### Additional information

Please add "-Z" to Article No. and specify Order code(s) and plain text.

##### Certificates

- Pressure test certificate according to EN 10204-3.1
- Material certificate according to EN 10204-3.1
- Factory certificate according to EN 10204-2.2
- Factory certificate according to EN 10204-2.1

**C01**

**C12**

**C14**

**C15**

##### Special calibration

- 5-point calibration for DN 15 ... DN 200<sup>1)</sup>
- 5-point calibration for DN 250 ... DN 600<sup>1)</sup>
- 5-point calibration for DN 700 ... DN 1200<sup>1)</sup>
- 10-point calibration for DN 15 ... DN 200<sup>2)</sup>
- 10-point calibration for DN 250 ... DN 600<sup>2)</sup>
- 10-point calibration for DN 700 ... DN 1200<sup>2)</sup>
- Default (2 x 25 % and 2 x 90 %) matched-pair calibration for DN 15 ... DN 200
- Default (2 x 25 % and 2 x 90 %) matched-pair calibration for DN 250 ... DN 600
- Default (2 x 25 % and 2 x 90 %) matched-pair calibration for DN 700 ... DN 1200
- 5-point, matched-pair calibration for DN 15 ... DN 200<sup>1)</sup>
- 5-point, matched-pair calibr. for DN 250 ... DN 600<sup>1)</sup>
- 5-point, matched-pair calibr. for DN 700 ... DN 1200<sup>1)</sup>
- 10-point, matched-pair calibration for DN 15 ... DN 200<sup>2)</sup>
- 10-point, matched-pair calibr. for DN 250 ... DN 600<sup>2)</sup>
- 10-point, matched-pair calibr. for DN 700 ... DN 1200<sup>2)</sup>
- Accredited 5-point matched-pair calibration acc. to ISO 17025 DN 15 ... DN 200
- Accredited 5-point matched-pair calibration acc. to ISO 17025 DN 250 ... DN 600
- Accredited 5-point matched-pair calibration acc. to ISO 17025 DN 600 ... DN 1200

**D01**

**D02**

**D03**

**D06**

**D07**

**D08**

**D11**

**D12**

**D13**

**D15**

**D16**

**D17**

**D18**

**D19**

**D20**

**D21**

**D22**

**D23**

##### Country of origin

- France

**F55**

##### Sensor cables

- Standard coil and electrode cable, PVC jacket
  - 5 m (16 ft)
  - 10 m (33 ft)
  - 20 m (65 ft)
  - 30 m (98 ft)
  - 40 m (131 ft)
  - 50 m (164 ft)
  - 60 m (197 ft)
  - 100 m (328 ft)
  - 150 m (492 ft)
  - 200 m (656 ft)
  - 500 m (1640 ft)
- Standard coil and special electrode cable, PVC jacket
  - 5 m (16 ft)
  - 10 m (33 ft)
  - 20 m (65 ft)
  - 30 m (98 ft)
  - 40 m (131 ft)
  - 50 m (164 ft)
  - 60 m (197 ft)
  - 100 m (328 ft)
  - 150 m (492 ft)
  - 200 m (656 ft)
  - 500 m (1640 ft)

**K01**

**K02**

**K04**

**K06**

**K07**

**K08**

**K09**

**K10**

**K11**

**K12**

**K13**

**K51**

**K52**

**K54**

**K56**

**K57**

**K58**

**K59**

**K60**

**K61**

**K62**

**K63**

##### Terminal blocks

- Factory mounted terminal blocks

**N02**

##### Additional information

Please add "-Z" to Article No. and specify Order code(s) and plain text.

##### Approval/Verification<sup>3)</sup>

- Without verification acc. to OIML R 49 (DN 50 ... DN 300)
- MI-001 Q3/Q1 = 40 (DN 50 ... DN 300)
- MI-001 Q3/Q1 = 63 (DN 50 ... DN 300)
- MI-001 Q3/Q1 = 80 (DN 50 ... DN 300)
- MI-001 Q3/Q1 = 160 (DN 50 ... DN 300)
- MI-001 Q3/Q1 = 200 (DN 50 ... DN 300)
- MI-001 Q3/Q1 = 250 (DN 50 ... DN 300)
- Without verification according to OIML R 49 (DN 350 ... DN 600)
- MI-001 Q3/Q1 = 40 (DN 350 ... DN 600)
- MI-001 Q3/Q1 = 63 (DN 350 ... DN 600)
- MI-001 Q3/Q1 = 80 (DN 350 ... DN 600)
- MI-001 Q3/Q1 = 100 (DN 350 ... DN 600)
- Without verification according to OIML R 49 (DN 700 ... DN 1200)
- MI-001 Q3/Q1 = 40 (DN 700 ... DN 1200)
- MI-001 Q3/Q1 = 63 (DN 700 ... DN 1200)
- MI-001 Q3/Q1 = 80 (DN 700 ... DN 1200)
- PTB K7.2 QP/QI=25 (DN 15 ... DN 300)
- PTB K7.2 QP/QI=50 (DN 15 ... DN 300)
- PTB K7.2 QP/QI=100 Low dynamic range (DN 15 ... DN 300)
- PTB K7.2 QP/QI=100 High dynamic range (DN 15 ... DN 300)
- PTB K7.2 QP/QI=250 (DN 50 ... DN 300)
- PTB K7.2 QP/QI=25 (DN 350 ... DN 600)
- PTB K7.2 QP/QI=50 (DN 350 ... DN 600)
- PTB K7.2 QP/QI=100 Low dynamic range (DN 350 ... DN 600)

**P10**

**P11**

**P12**

**P13**

**P16**

**P17**

**P18**

**P23**

**P24**

**P25**

**P26**

**P27**

**P28**

**P29**

**P30**

**P31**

**P41**

**P42**

**P43**

**P44**

**P45**

**P47**

**P48**

**P49**

##### Pulse output setting

Volume / Pulse

- 0.001 l/pulse
- 0.01 l/pulse
- 0.1 l/pulse
- 0.5 l/pulse
- 1 l/pulse
- 5 l/pulse
- 10 l/pulse
- 50 l/pulse
- 100 l/pulse
- 500 l/pulse
- 1 m<sup>3</sup>/pulse
- 5 m<sup>3</sup>/pulse
- 10 m<sup>3</sup>/pulse
- 50 m<sup>3</sup>/pulse
- 100 m<sup>3</sup>/pulse
- 500 m<sup>3</sup>/pulse
- 1000 m<sup>3</sup>/pulse

**L01**

**L02**

**L03**

**L04**

**L05**

**L06**

**L07**

**L08**

**L09**

**L10**

**L11**

**L12**

**L13**

**L14**

**L15**

**L16**

**L17**

Pulse width

- 2 ms
- 5 ms
- 10 ms
- 20 ms
- 50 ms
- 100 ms
- 200 ms
- 500 ms

**L61**

**L62**

**L63**

**L64**

**L65**

**L66**

**L67**

**L68**

##### FM Fire Service Approval

(with ANSI B16.5 Class 150 flanges)

- DN 50, DN 80 and DN 100 (2", 3" and 4")
- DN 150 and DN 200 (6" and 8")
- DN 250 and DN 300 (10" and 12")

**P20**

**P21**

**P22**

## Selection and ordering data

## Article No.

## Article No.

**Additional information**

Please add "-Z" to Article No. and specify Order code(s) and plain text.

**Country specific label**

FP2E label (France)	<b>H20</b>
ADDC label (Abu Dhabi)	<b>H23</b>
CRN (Canadian Registration Number)	<b>H25</b>
Tag name plate, stainless steel (specify in plain text)	<b>Y17</b>
Tag name plate, plastic (self-adhesive)	<b>Y18</b>
Customer-specific transmitter setting	<b>Y20</b>

**Factory mounted sensor cables**

- Sensor cables wired (specify Article No. for sensor cables and order cables separately or specify K-option)
- Sensor cables wired and IP68 sealing (specify Article No. for sensor cables and order cables separately or specify K-option)

**Additional calibrations**

- Customer-witnessed calibration
- Any of above calibration

- 1) 20 %, 40 %, 60 %, 80 %, 100 % of factory  $Q_{max}$
- 2) Ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory  $Q_{max}$
- 3) For more details and references of the ranges please see the tables on page 3/95.
- 4) Product Variation Request (PVR)

## Order code

<b>H20</b>
<b>H23</b>
<b>H25</b>
<b>Y17</b>
<b>Y18</b>
<b>Y20</b>
<b>Y40</b>
<b>Y41</b>

**On request<sup>4)</sup>****Sensor SITRANS FM MAG 5100 W****7ME6580-**

Hastelloy electrodes, carbon steel flanges,  
Non EU water markets

Click on the Article No. for the online  
configuration in the PIA Life Cycle Portal.

**Diameter**

DN 25 (1")	<b>2 D</b>
DN 40 (1½")	<b>2 R</b>
DN 50 (2")	<b>2 Y</b>
DN 65 (2½")	<b>3 F</b>
DN 80 (3")	<b>3 M</b>
DN 100 (4")	<b>3 T</b>
DN 125 (5")	<b>4 B</b>
DN 150 (6")	<b>4 H</b>
DN 200 (8")	<b>4 P</b>
DN 250 (10")	<b>4 V</b>
DN 300 (12")	<b>5 D</b>
DN 350 (14")	<b>5 K</b>
DN 400 (16")	<b>5 R</b>
DN 450 (18")	<b>5 Y</b>
DN 500 (20")	<b>6 F</b>
DN 600 (24")	<b>6 P</b>
DN 700 (28")	<b>6 Y</b>
DN 750 (30")	<b>7 D</b>
DN 800 (32")	<b>7 H</b>
DN 900 (36")	<b>7 M</b>
DN 1000 (40")	<b>7 R</b>
DN 1050 (42")	<b>7 U</b>
DN 1100 (44")	<b>7 V</b>
DN 1200 (48")	<b>8 B</b>
DN 1400 (54")	<b>8 F</b>
DN 1500 (60")	<b>8 K</b>
DN 1600 (66")	<b>8 P</b>
DN 1800 (72")	<b>8 T</b>
DN 2000 (78")	<b>8 Y</b>

**Sensor SITRANS FM MAG 5100 W**

Hastelloy electrodes, carbon steel flanges,  
Non EU water markets

**Flange norm and pressure rating**

<b>EN 1092-1</b>	<b>A</b>
PN 6 (DN 1400 ... 2000 (54" ... 78")) <sup>1)</sup>	<b>B</b>
PN 10 (DN 200 ... 2000 (8" ... 78")) <sup>1)</sup>	<b>C</b>
PN 16 (DN 65 ... 600 (2½" ... 24"))	<b>D</b>
PN 16, non-PED (DN 700 ... 2000 (28" ... 78"))	<b>F</b>
PN 40 (DN 25 ... 50 (1" ... 2"))	<b>J</b>

**ANSI B16.5**

Class 150 (1" ... 24")

**AWWA C-207**

Class D (28" ... 78")<sup>1)</sup>

**AS 4087**

PN 16 (DN 50 ... 1200 (2" ... 48"))

**JIS**

B 2220:2004 K10 (1" ... 24")

**Flange material and coating**

Carbon steel flanges ASTM A 105,  
corrosion-resistant coating of category C4

Carbon steel flanges ASTM A 105, 300 µm  
corrosion-resistant coating of category C5

**Liner material**

Ebonite

**Electrode material**

Hastelloy

**Transmitter**

Sensor for remote transmitter (Order transmitter separately)

MAG 6000, Polyamid, 11 ... 30 V DC/11 ... 24 V AC

MAG 6000, Polyamid, 115 ... 230 V AC

MAG 5000, Polyamid, 11 ... 30 V DC/11 ... 24 V AC

MAG 5000, Polyamid, 115 ... 230 V AC

**Communication**

No communication, add-on possible

HART

PROFIBUS PA Profile 3 (only MAG 6000)

PROFIBUS DP Profile 3 (only MAG 6000)

Modbus RTU/RS 485 (only MAG 6000)

FOUNDATION Fieldbus H1 (only MAG 6000)

**Cable glands/terminal box**

Metric: Polyamide terminal box or MAG 6000 I compact

½" NPT: Polyamide terminal box or MAG 6000 I compact

<sup>1)</sup> DN 1400 to DN 2000 (54" to 78") do not conform to PED or CRN.

**7ME6580-**

<b>A</b>	<b>1</b>	<b>2</b>
<b>B</b>	<b>4</b>	
<b>C</b>		
<b>D</b>		
<b>F</b>		
<b>J</b>		
<b>L</b>		
<b>N</b>		
<b>R</b>		
<b>1</b>		
<b>4</b>		
<b>4</b>		
<b>2</b>		
<b>A</b>		
<b>H</b>		
<b>J</b>		
<b>K</b>		
<b>L</b>		
<b>A</b>		
<b>B</b>		
<b>F</b>		
<b>G</b>		
<b>E</b>		
<b>J</b>		
<b>1</b>		
<b>2</b>		

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 5100 W

#### Selection and ordering data

#### Order code

##### Additional information

Please add "-Z" to Article No. and specify Order code(s) and plain text.

##### Certificates

Pressure test certificate according to EN 10204-3.1

**C01**

Factory certificate according to EN 10204-2.2

**C14**

Factory certificate according to EN 10204-2.1

**C15**

##### Special calibration

- 5-point calibration for DN 15 ... DN 200<sup>1)</sup> **D01**
- 5-point calibration for DN 250 ... DN 600<sup>1)</sup> **D02**
- 5-point calibration for DN 700 ... DN 1200<sup>1)</sup> **D03**
- 10-point calibration for DN 15 ... DN 200<sup>2)</sup> **D06**
- 10-point calibration for DN 250 ... DN 600<sup>2)</sup> **D07**
- 10-point calibration for DN 700 ... DN 1200<sup>2)</sup> **D08**
- Default (2 x 25 % and 2 x 90 %) match-pair calibration for DN 15 ... DN 200 **D11**
- Default (2 x 25 % and 2 x 90 %) match-pair calibration for DN 250 ... DN 600 **D12**
- Default (2 x 25 % and 2 x 90 %) match-pair calibration for DN 700 ... DN 1200 **D13**
- 5-point, matched-pair calibration for DN 15 ... DN 200<sup>1)</sup> **D15**
- 5-point, matched-pair calibration for DN 250 ... DN 600<sup>1)</sup> **D16**
- 5-point, matched-pair calibration for DN 700 ... DN 1200<sup>1)</sup> **D17**
- 10-point, matched-pair calibration for DN 15 ... DN 200<sup>2)</sup> **D18**
- 10-point, matched-pair calibration for DN 250 ... DN 600<sup>2)</sup> **D19**
- 10-point, matched-pair calibration for DN 700 ... DN 1200<sup>2)</sup> **D20**

##### Terminal blocks

- Factory mounted terminal blocks

**N02**

##### Country specific label

CRN (Canadian Registration Number)

**H25**

Tag name plate, stainless (specify in plain text)

**Y17**

Tag name plate, plastic (self-adhesive)

**Y18**

Customer-specific transmitter setting

**Y20**

##### Factory mounted sensor cables

- Sensor cables wired (specify Article No. for sensor cables and order cables separately) **Y40**
- Sensor cables wired and IP68 sealing (specify Article No. for sensor cables and order cables separately) **Y41**

<sup>1)</sup> 20 %, 40 %, 60 %, 80 %, 100 % of factory  $Q_{max}$

<sup>2)</sup> Ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory  $Q_{max}$

#### Operating instructions for SITRANS FM MAG 5100 W

##### Description

##### Article No.

- English
- German

**A5E03063678**  
**A5E03376527**

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/processinstrumentation/documentation>

#### Accessories

##### Description

##### Article No.

Potting kit for IP68/NEMA 6P sealing of sensor junction box


**FDK:085U0220**



MAG 5000/6000 transmitters and sensors are packed in separate boxes, the final assembly takes place during installation at the customer's place. MAG 6000 I transmitters and sensors are delivered compact mounted from factory. Communication module will be pre-mounted in the transmitter.

Please use online Product selector to get latest updates:

<http://www.pia-selector.automation.siemens.com>

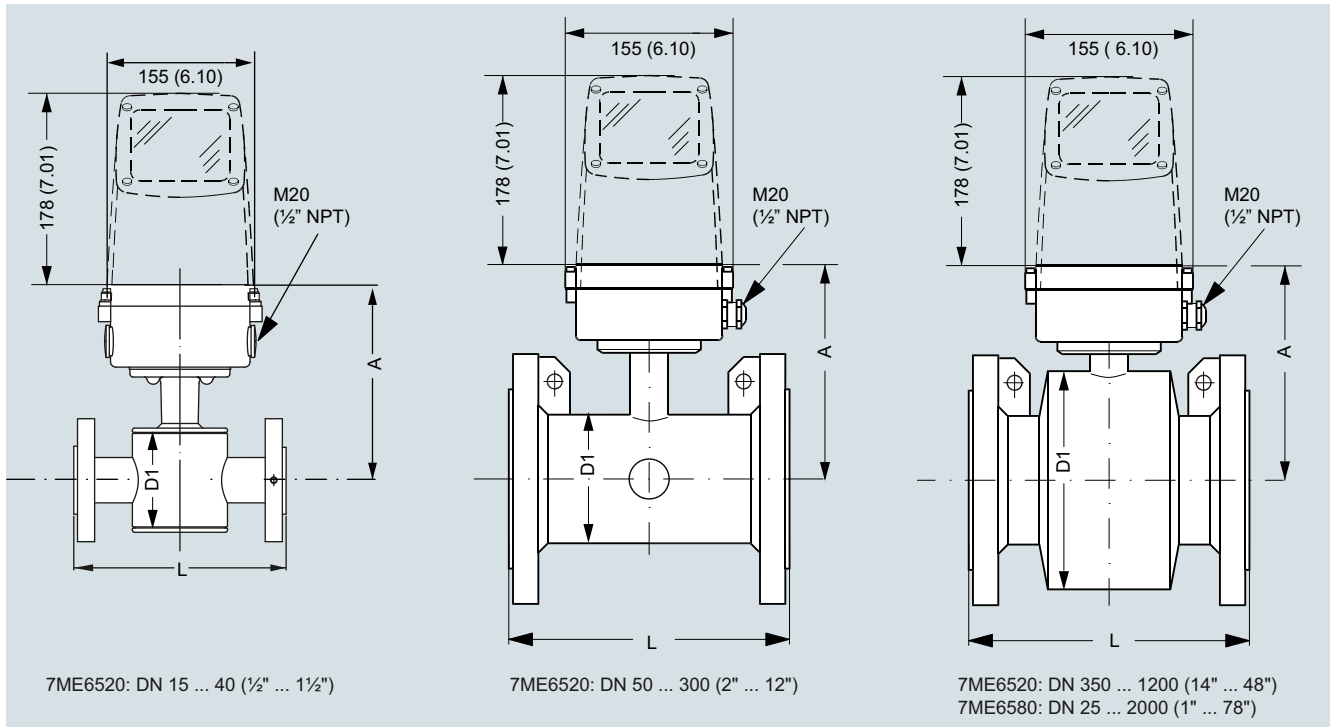**Dimensional drawings**


Nominal size		7ME6520 NBR or EPDM liner				7ME6580 Ebonite liner				L <sup>1)</sup>	
[mm]	[inch]	A [mm]	A [inch]	D1 [mm]	D1 [inch]	A [mm]	A [inch]	D1 [mm]	D1 [inch]	[mm]	[inch]
15	½	177	7.0	77	3.0	-	-	-	-	200	7.9
25	1	187	7.4	96	3.8	187	7.4	104	4.09	200	7.9
40	1½	202	8.0	127	5.0	197	7.8	124	4.88	200	7.9
50	2	188	7.4	76	3.0	205	8.1	139	5.47	200	7.9
65	2½	194	7.6	89	3.5	212	8.3	154	6.06	200	7.9
80	3	200	7.9	102	4.0	222	8.7	174	6.85	200	7.9
100	4	207	8.1	114	4.5	242	9.5	214	8.43	250	9.8
125	5	217	8.5	140	5.5	255	10.0	239	9.41	250	9.8
150	6	232	9.1	168	6.6	276	10.9	282	11.1	300	11.8
200	8	257	10.1	219	8.6	304	12.0	338	13.31	350	13.8
250	10	284	11.2	273	10.8	332	13.1	393	15.47	450	17.7
300	12	310	12.2	324	12.8	357	14.1	444	17.48	500	19.7
350	14	382	15.0	451	17.8	362	14.3	451	17.76	550	21.7
400	16	407	16.0	502	19.8	387	15.2	502	19.76	600	23.6
450	18	438	17.2	563	22.2	418	16.5	563	22.16	600	23.6
500	20	463	18.2	614	24.2	443	17.4	614	24.17	600	23.6
600	24	514	20.2	715	28.2	494	19.4	715	28.15	600	23.6
700	28	564	22.2	816	32.1	544	21.4	816	32.13	700	27.6
750	30	591	23.3	869	34.2	571	22.5	869	34.21	750	29.5
800	32	616	24.3	927	36.5	606	23.9	927	36.5	800	31.5
900	36	663	26.1	1032	40.6	653	25.7	1032	40.63	900	35.4
1000	40	714	28.1	1136	44.7	704	27.7	1136	44.72	1000	39.4
	42	714	28.1	1136	44.7	704	27.7	1136	44.72	1000	39.4
	44	765	30.1	1238	48.7	755	29.7	1238	48.74	1100	43.3
1200	48	820	32.3	1348	53.1	810	31.9	1348	53.07	1200	47.2
1400	54	-	-	-	-	925	36.4	1574	65.94	1400	55.1
1500	60	-	-	-	-	972	38.2	1672	65.83	1500	59.1
1600	66	-	-	-	-	1025	40.4	1774	75.39	1600	63.0
1800	72	-	-	-	-	1123	44.2	1974	77.72	1800	70.9
2000	78	-	-	-	-	1223	48.1	2174	85.59	2000	78.7

<sup>1)</sup> Tolerances on built-in length:

DN 15 to DN 200 (½" to 8"): +0/-3 mm (+0/-0.12"), DN 250 to DN 400 (10" to 16"): +0/-5 mm (+0/-0.20"),

DN 450 to DN 600 (18" to 24"): +5/-5 mm (+0.20/-0.20"), DN 700 to DN 2000 (28" to 78"): +10/-10 mm (+0.39/-0.39")

## Flow Measurement


SITRANS FM (electromagnetic)

Flow sensors

### MAG 5100 W

#### Dimensional drawings (continued)

##### MAG 5100 W/6000 I Compact

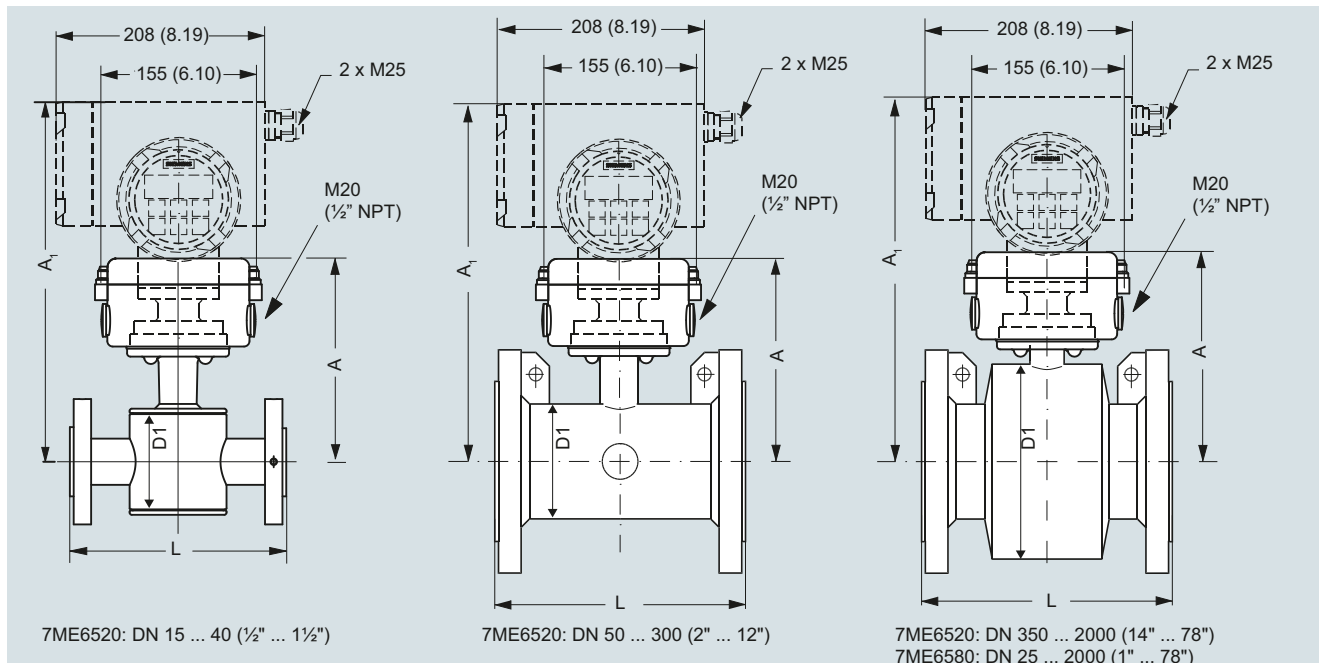

Nominal size		7ME6520 NBR or EPDM liner						7ME6580 Ebonite liner						L <sup>1)</sup>	
[mm]	[inch]	A	A1	D1				A	A1	D1					
		[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]
15	½	177	7.0	331	13.0	77	3.0	187	7.4	-	-	-	-	200	7.9
25	1	187	7.4	341	13.4	96	3.8	187	7.4	341	13.4	104	4.09	200	7.9
40	1½	202	8.0	356	14.0	127	5.0	197	7.8	351	13.8	124	4.88	200	7.9
50	2	188	7.4	342	13.5	76	3.0	205	8.1	359	14.1	139	5.47	200	7.9
65	2½	194	7.6	348	13.7	89	3.5	212	8.3	366	14.4	154	6.06	200	7.9
80	3	200	7.9	354	14.0	102	4.0	222	8.7	376	14.8	174	6.85	200	7.9
100	4	207	8.1	361	14.2	114	4.5	242	9.5	396	15.6	214	8.43	250	9.8
125	5	217	8.5	371	14.6	140	5.5	255	10.0	409	16.1	239	9.41	250	9.8
150	6	232	9.1	386	15.2	168	6.6	276	10.9	430	16.9	282	11.1	300	11.8
200	8	257	10.1	411	16.2	219	8.6	304	12.0	458	18.0	338	13.31	350	13.8
250	10	284	11.2	438	17.2	273	10.8	332	13.1	486	19.1	393	15.47	450	17.7
300	12	310	12.2	464	18.3	324	12.8	357	14.1	511	20.1	444	17.48	500	19.7
350	14	382	15.0	536	21.1	451	17.8	362	14.3	516	20.3	451	17.76	550	21.7
400	16	407	16.0	561	22.1	502	19.8	387	15.2	541	21.3	502	19.76	600	23.6
450	18	438	17.2	592	23.3	563	22.2	418	16.5	572	22.5	563	22.16	600	23.6
500	20	463	18.2	617	24.3	614	24.2	443	17.4	597	23.5	614	24.17	600	23.6
600	24	514	20.2	668	26.3	715	28.2	494	19.4	648	25.5	715	28.15	600	23.6
700	28	564	22.2	718	28.3	816	32.1	544	21.4	698	27.5	816	32.13	700	27.6
750	30	591	23.3	745	29.3	869	34.2	571	22.5	725	28.5	869	34.21	750	29.5
800	32	616	24.3	770	30.3	927	36.5	606	23.9	760	29.9	927	36.5	800	31.5
900	36	663	26.1	817	32.2	1032	40.6	653	25.7	807	31.8	1032	40.63	900	35.4
1000	40	714	28.1	868	34.2	1136	44.7	704	27.7	858	33.8	1136	44.72	1000	39.4
	42	714	28.1	868	34.2	1136	44.7	704	27.7	858	33.8	1136	44.72	1000	39.4
	44	765	30.1	919	36.2	1238	48.7	755	29.7	904	35.6	1238	48.74	1100	43.3
1200	48	820	32.3	974	38.3	1348	53.1	810	31.9	964	38.0	1348	53.07	1200	47.2
1400	54	-	-	-	-	-	-	925	36.4	1079	42.5	1574	61.97	1400	55.1
1500	60	-	-	-	-	-	-	972	38.2	1126	44.3	1672	65.83	1500	59.1
1600	66	-	-	-	-	-	-	1025	40.4	1179	46.4	1774	59.84	1600	63.0
1800	72	-	-	-	-	-	-	1123	44.2	1277	50.3	1974	77.72	1800	70.9
2000	78	-	-	-	-	-	-	1223	48.1	1377	54.2	2174	85.59	2000	78.7

<sup>1)</sup> Tolerances on built in length:

DN 15 to DN 200 (½" to 8"): +0/-3 mm (+0/-0.12"), DN 250 to DN 400 (10" to 16"): +0/-5 mm (+0/-0.20")

DN 450 to DN 600 (18" to 24"): +5/-5 mm (+0.20/-0.20"), DN 700 to DN 2000 (28" to 78"): +10/-10 mm (+0.39/-0.39")

**Dimensional drawings** (continued)

Nominal size DN		7ME6520 NBR or EPDM liner										7ME6580 Ebonite liner			
		PN 10		PN 16		PN 40		Class 150/AWWA		AS		PN 16		JIS 10K	
[mm]	[inch]	[kg]	[lbs]	[kg]	[lbs]	[kg]	[lbs]	[kg]	[lbs]	[kg]	[lbs]	[kg]	[lbs]	[kg]	[lbs]
15	½	-	-	-	-	4	9	4	9	4	9	5	11	4.18	9.22
25	1	-	-	-	-	6	12	5	11	4	9	5	11	5.68	12.52
40	1½	-	-	-	-	8	18	7	15	7	15	8	17	7.52	16.58
50	2	-	-	9	20	-	-	8	20	9	20	9	20	8.18	18.03
65	2½	-	-	10.7	24	-	-	11	24	10.7	24	11	24	9.44	20.81
80	3	-	-	11.6	26	-	-	13	28	11.6	26	12	26	10.46	23.06
100	4	-	-	15.2	33	-	-	19	41	15.2	33	16	35	13.7	30.20
125	5	-	-	20.4	45	-	-	24	52	-	-	19	42	20.22	44.58
150	6	-	-	26	57	-	-	29	64	26	57	27	60	24.1	53.13
200	8	48	106	48	106	-	-	56	124	48	106	40	88	43.42	95.72
250	10	64	141	69	152	-	-	79	174	69	152	60	132	63.64	140.30
300	12	76	167	86	189	-	-	110	243	86	189	80	176	72.62	160.01
350	14	104	229	125	274	-	-	139	307	115	254	110	242	-	-
400	16	119	263	143	314	-	-	159	351	125	277	125	275	-	-
450	18	136	299	173	381	-	-	182	400	141	311	175	385	-	-
500	20	163	359	223	491	-	-	225	495	189	418	200	440	-	-
600	24	236	519	338	744	-	-	320	704	301	664	287	633	-	-
700	28	270	595	314	692	-	-	273	602	320	704	330	728	-	-
750	30	-	-	-	-	-	-	329	725	-	-	360	794	-	-
800	32	346	763	396	873	-	-	365	804	428	944	450	992	-	-
900	36	432	951	474	1043	-	-	495	1089	619	1362	530	1168	-	-
1000	40	513	1130	600	1321	-	-	583	1282	636	1399	660	1455	-	-
	42	-	-	-	-	-	-	687	1512	-	-	-	-	-	-
	44	-	-	-	-	-	-	763	1680	-	-	1140	2513	-	-
1200	48	643	1415	885	1948	-	-	861	1896	813	1789	1180	2601	-	-
1400	54	1592	3510	-	-	-	-	-	-	-	-	1600	3528	-	-
1500	60	-	-	-	-	-	-	-	-	-	-	2460	5423	-	-
1600	66	2110	4652	-	-	-	-	-	-	-	-	2525	5566	-	-
1800	72	2560	5644	-	-	-	-	-	-	-	-	2930	6460	-	-
2000	78	3640	8025	-	-	-	-	-	-	-	-	3665	8080	-	-

With transmitter MAG 5000 and MAG 6000 compact, weight is increased by approximately 0.8 kg (1.8 lbs),  
 with MAG 6000 I, weight is increased by 5.5 kg (12.1 lb).



## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

## SITRANS FM100

### Overview



The SITRANS FM100 is an electromagnetic flow sensor in a compact design for basic applications in the process and OEM industry.

### Benefits

- Connection ½", ¾", 1", 2"
- Flow- and temperature measurement
- IO-Link communication
- Dosing function with external control output
- Colored, multi-parameter configurable TFT display, rotatable 90°
- Bidirectional measuring
- Intuitive setup menu via 4 optical touch keys
- 2 freely configurable outputs
- All-metal design: stainless steel
- Included in Quick Ship Program (delivery time see PIA LCP)

### Application

The main applications of the SITRANS FM electromagnetic flow sensors can be found in the following fields:

- OEM industry
- Process industry
- Small water cycles: e.g. cooling water, water leakage
- Dosing e.g. in chemical industry

### Design

The SITRANS FM100 is designed to measure small- and medium sized flow of conductive liquids. The small build in length of 108 mm allows to fit the device in almost any space. The robust stainless-steel housing protects the device in changing surroundings.


The measurement is displayed on the local screen as well as accessible via 2 freely configurable outputs (pulse-/frequency-/alarm- and analogue).

### Mode of operation

The flow measuring principle is based on Faraday's law of electromagnetic induction according to which the sensor converts the flow into an electrical voltage proportional to the velocity of the flow.

### Integration

#### Pressure loss

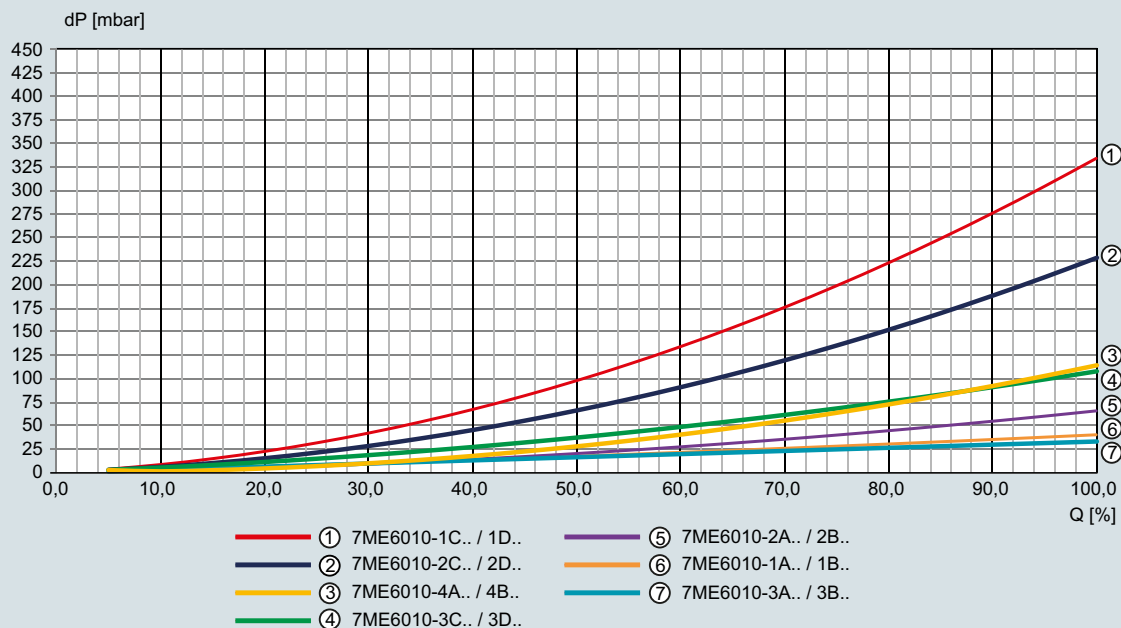



### Technical specifications

<b>Product characteristic</b>	FM100
Measuring principle	Electromagnetic induction
Media	Conductive liquid with $\geq 20 \mu\text{S/cm}$
Accuracy	$< \pm(0,8 \% \text{ of reading} + 0,5 \% \text{ of full scale})^1$
Repeatability	$\pm 0,2 \% \text{ of full scale}$
Response time flow $t_{90}$	
• Alarm/pulse/frequency output	$< 100 \text{ ms}$
• Current output	$< 1 \text{ s}$
<b>Temperature measurement</b>	
Sensor	PT1000
Accuracy	$\leq \pm 2 \text{ }^\circ\text{C}$ (flow $> 0,2 \text{ m/s}$ )
Measuring range	Temperature range of media
Response time temperature $t_{90}$ (signal output)	$< 20 \text{ s}$
<b>Process connection</b>	
Nominal size	G $\frac{1}{2}$ " ... G 2" Compatible NPT adapter available ( $\frac{1}{4}$ " ... 2")
Process connection	Threaded fitting
<b>Rated operation conditions</b>	
Mounting position	In all directions, bidirectional measuring
In-/outlet	$3 \times \text{diameter} / 2 \times \text{diameter}$
Ambient temperature	
• Standard compact sensor	$-20 \dots +70 \text{ }^\circ\text{C}$ ( $-4 \dots +158 \text{ }^\circ\text{F}$ )
• Remote version with ETFE-Cable	$-20 \dots +140 \text{ }^\circ\text{C}$ ( $-4 \dots +284 \text{ }^\circ\text{F}$ )
• Remote version with PVC-Cable	$-20 \dots +85 \text{ }^\circ\text{C}$ ( $-4 \dots +185 \text{ }^\circ\text{F}$ )
Enclosure rating	IP67
Operating pressure	Max. 16 bar
Pressure drop	See pressure loss diagram
Mechanical load	
• Shock resistance	DIN EN 60068-2-27:2010: 20 g (11 ms)
• Vibration resistance	DIN EN 60068-2-6:2008: 5 g (10 ... 2 000 Hz)
• Environmental testing	DIN EN 60068-2-30:2006: severity level b
EMC	2014/30/EU
<b>Design</b>	
Weight	See dimensional drawings
Housing material	Stainless steel 1.4404
Electrode material	Stainless steel 1.4404
Connection fitting	Stainless steel 1.4404
Insulation parts	PEEK
Seals	FKM (Option: EPDM)
Display	PMMA
	Operation via 4 optical touch sensors (operation with hand gloves)
	TFT display, $128 \times 128$ pixels, 1.4" display, orientation in $90^\circ$ steps adjustable, repetition rate adjustable 0.5 ... 10 s
Cable entries	M12x1 4-pin connection
Dimensions	See dimensional drawings

<b>Electrical data</b>	
Power supply	19 ... 30 V DC
Power consumption	Max. 200 mA
Outputs	
• Frequency	Push-Pull, freely scalable, 2kHz @ overflow $f_{\text{min}} @ \text{FS} = 50 \text{ Hz}$ $f_{\text{max}} @ \text{FS} = 1\,000 \text{ Hz}$
• Pulse	Push-Pull, freely scalable, configurable for partial and accumulated totalizer
• Alarm	NPN, PNP, Push-Pull, configurable max. 30 V DC, max. 200 mA short-circuit proof
• Current	0(4) ... 20 mA (active) or 0(2) ... 10 V DC Max. load 500 $\Omega$
Input	
• Control	Active signal $U_{\text{high}}$ max. 30 V DC $0 < \text{Low} < 10 \text{ V DC}$ $15 \text{ V DC} < \text{High} < V_{\text{s}}$
Dosing function	Dosing output OUT2: Push-Pull, High active Control input OUT1: START/STOP $0,5 \text{ s} < t_{\text{high}} < 4 \text{ s}$ RESET $t_{\text{high}} > 5 \text{ s}$
<b>Communication</b>	<b>IO-Link</b>
• Manufacturer ID	42 (decimal), 0x002A (hex)
• Manufacturer name	Siemens AG
• Version	V1.1
• Bitrate	COM3
• Minimal cycle time	1.1 ms
• SIO-Mode	Yes (OUT1 in configuration IO-Link)
• Block parameterization	Yes
• Operational readiness	10 s
• Max. cable length	20 m
1) Under reference conditions:	
- Media temperature: 15 ... 30 $^\circ\text{C}$	
- Ambient temperature: 15 ... 30 $^\circ\text{C}$	
- 1 cST	
- 500 $\mu\text{S/cm}$	
- 1 bar	

## Flow Measurement



SITRANS FM (electromagnetic)


Flow sensors

### SITRANS FM100

#### Selection and ordering data

#### Article No.

SITRANS FM100 flowmeter  7ME6010-  0

 Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Process connection, measuring range

Male thread G1/2", 0.03 ... 3 l/min	1 A
Male thread G1/2", 0.25 ... 48 gal/h	1 B
Male thread G1/2", 0.04 ... 10 l/min	1 C
Male thread G1/2", 0.011 ... 2,6 gal/min	1 D
Male thread G3/4", 0.1 ... 25 l/min	2 A
Male thread G3/4", 0.025 ... 6,6 gal/min	2 B
Male thread G3/4", 0.2 ... 50 l/min	2 C
Male thread G3/4", 0.053 ... 13 gal/min	2 D
Male thread G1", 0.2 ... 50 l/min	3 A
Male thread G1", 0.053 ... 13 gal/min	3 B
Male thread G1", 0.4 ... 100 l/min	3 C
Male thread G1", 0.1 ... 26 gal/min	3 D
Male thread G2", 1.5 ... 350 l/min	4 A
Female thread 2" NPT, 0.4 ... 92 gal/min	4 B

#### Transmitter design

Compact design without cable A

#### Gasket material


FKM/FPM 0  
EPDM 1

3

### Dimensional drawings

#### SITRANS FM100 flowmeter with compact transmitter


Process connection G1/2", G3/4" and G1"

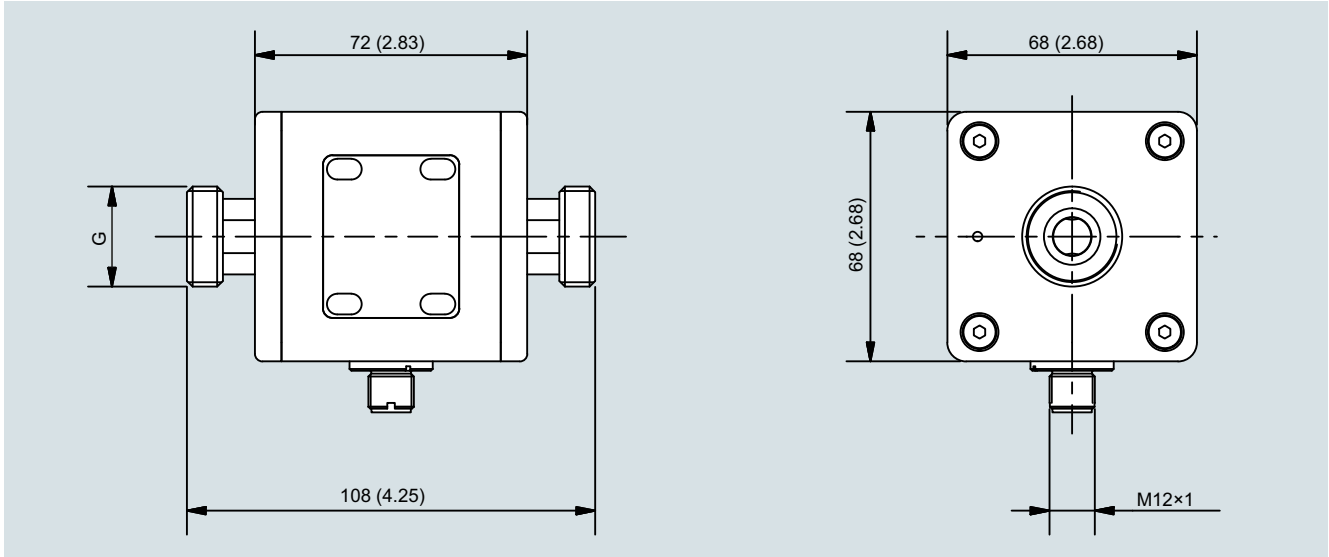

SITRANS FM100 with compact transmitter, process connection G1/2", G3/4" and G1"; dimensions in mm (inch)

Process connection	Nominal size	Weight (g)
Male thread	G1/2"	998
Male thread	G3/4"	988
Male thread	G1"	1010

Process connection G2"

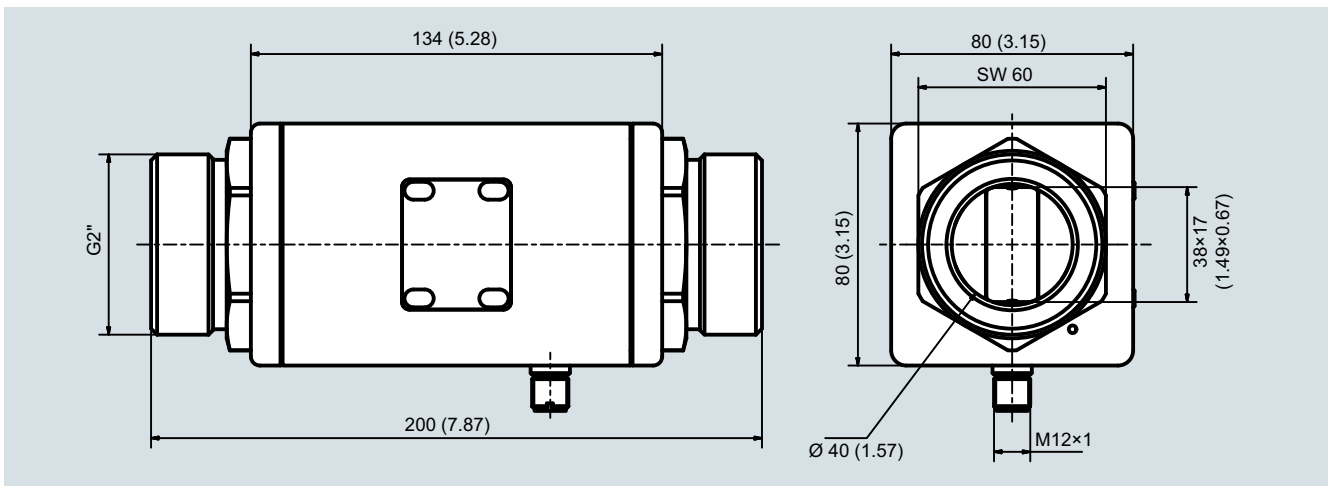

SITRANS FM100 with compact transmitter, process connection G2"; dimensions in mm (inch)

Process connection	Nominal size	Weight (g)
Male thread	G2"	2420

## Flow Measurement


SITRANS FM (electromagnetic)

Flow sensors

### SITRANS FM100

#### Dimensional drawings (continued)

Process connection 2" NPT IG

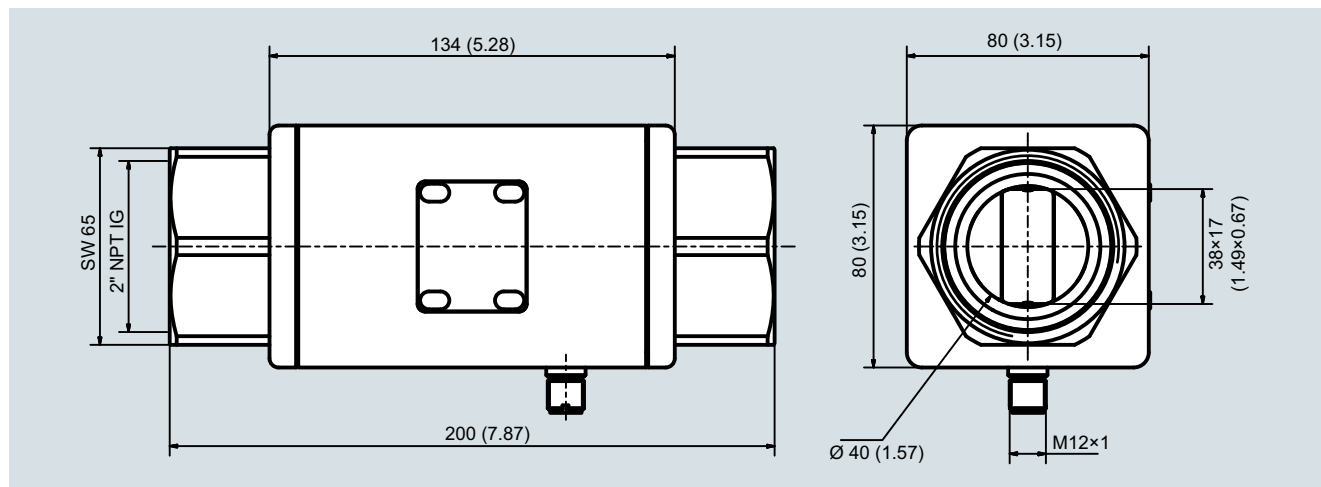

SITRANS FM100 with compact transmitter, process connection 2" NPT (female); dimensions in mm (inch)

Process connection	Nominal size	Weight (g)
Female thread	2" NPT IG	2140

#### SITRANS FM100 inner diameters

Connection, nominal size	Inside diameters (DN)	Range
G1/2"	5 mm	0.03 ... 3 l/min / 0.04 ... 10 l/min
G3/4"	10 mm	0.1 ... 25 l/min / 0.2 ... 50 l/min
G1"	15 mm	0.2 ... 50 l/min / 0.4 ... 100 l/min
2" NPT IG	see dimensional drawings	1.5 ... 350 l/min

### Overview



SITRANS FM TRANSMAG 2 with the SITRANS FM MAG 911/E sensor is a pulsed alternating field magnetic flowmeter where the magnetic field strength is much higher than conventional DC pulsed magnetic flowmeters.

### Benefits

- Wide range of sizes DN 15 to DN 1000 (½" to 40")
- Broad range of liner and electrode materials for extreme process medias
- Fully welded construction provides a ruggedness that suits the toughest applications and environments.
- Automatic reading of SmartPLUG for easy commissioning
- Simple menu operation with two-line display
- Comprehensive self-diagnostic with selfmonitoring and internal simulation

### Application

The main applications of the SITRANS FM transmitter TRANSMAG 2 can be found in the following sectors:

- Pulp and Paper industry
- Mining industry

The patented pulse alternating field technology is ideal for difficult applications like:

- High concentrated paper stock > 3 %
- Heavy mining slurries up to 70 % solid concentration
- Mining slurries with magnetic particles.
- Low conductive medias  $\geq 1 \mu\text{S}/\text{cm}$  ( $0.1 \mu\text{S}/\text{cm}$  depending on medium)

### Design

- Available for remote mounting
- PROFIBUS PA (profile 2.0) / HART communication
- Analog output and digital outputs for pulses, device status, limits, flow direction, frequency output 110

### Mode of operation

The flow measuring principle is based on Faraday's law of electromagnetic induction according to which the sensor converts the flow into an electrical voltage proportional to the velocity of the flow.

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### Transmitter TRANSMAG 2 with sensor MAG 911/E

#### Function

The TRANSMAG 2 is a microprocessor-based transmitter with a built-in alphanumeric display in several languages. The transmitters evaluate the signals from the associated electromagnetic sensors and also fulfill the task of a power supply unit which provides the magnet coils with a constant current.


The magnetic flux density in the sensor is additionally monitored by reference coils.

Further information on connection, mode of operation and installation can be found in the data sheets for the sensors.


#### Displays and keypads

Operation of the transmitter can be carried out using:

- Keypad and display unit
- HART communicator
- PC/laptop and SIMATIC PDM software via HART communication
- PC/laptop and SIMATIC PDM software using PROFIBUS PA communication

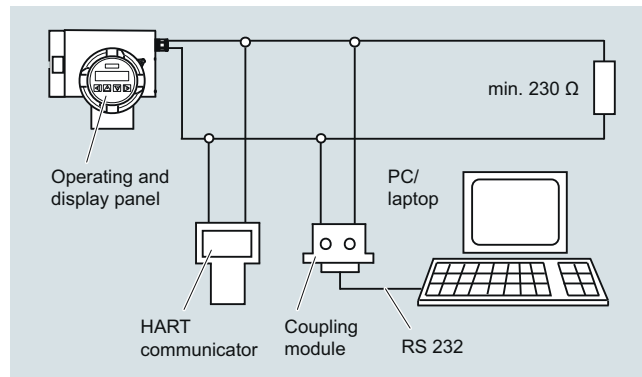

HART communication

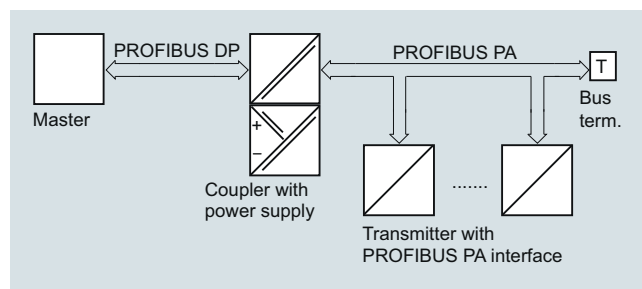

PROFIBUS PA communication

## Technical specifications

### Transmitter TRANSMAG 2

#### Mode of operation and design

Measuring principle	Electromagnetic with pulsed alternating field (PAC)
Magnetic field excitation	Automatic power supply synchronization
• 50 Hz AC power supply	Bipolar (16.7 Hz) Bipolar with prepulse (10 Hz) Unipolar (8.33 Hz)
• 60 Hz AC power supply	Bipolar (20 Hz) Bipolar with prepulse (12 Hz) Unipolar (10 Hz)

#### Accuracy under reference conditions

Measuring tolerance of pulse output	$\leq \pm 0.5\%$ of measured value $\pm 1.2$ mm/s (0.05 inch/s) $\pm 2.5$ mm/s (0.1 inch/s)
• With $v > 0.25$ m/s (0.82 ft/s)	
• With $v < 0.25$ m/s (0.82 ft/s)	$\pm 2.5$ mm/s (0.1 inch/s)
Measuring tolerance of analog output	As pulse output plus $\pm 0.1\%$ conversion error $\pm 20$ $\mu$ A
Repeatability	0.2 % of measured value
<u>Reference conditions</u>	
• Process temperature	25 °C $\pm$ 5 °C (77 °F $\pm$ 9 °F)
• Ambient temperature	25 °C $\pm$ 5 °C (77 °F $\pm$ 9 °F)
• Warm-up time	Min. 30 min
• Installation conditions	Inlet pipe section $\geq 10 \times$ DN Outlet pipe section $\geq 5 \times$ DN
• Medium	Installed centered in pipe Water without gaseous or solid components

#### Calibration

Default calibration, calibration report shipped with sensor	2 $\times$ 20 %, 2 $\times$ 50 % and 2 $\times$ 100 %
---	---

#### Outputs

Electrical isolation	Outputs electrically isolated from one another and from the power supply, max. 60 V permissible against PE/equipotential bonding
<u>Current output</u>	0/4 ... 20 mA (7ME5034-0... or 7ME5034-2...)
• Signal	
- Upper limit	0/4 ... 20 mA, selectable
- Failure	20 ... 22.5 mA, optional 3.6; 20 or 24 mA
• Load	
- Output	max. 600 $\Omega$ , max. load voltage 15 V DC
- For HART communication	$\geq 250$ $\Omega$
Communication	Via analog output with PC coupling module or HART communicator
• Protocol	HART, version 5.1
<u>Digital output</u>	
Signal	
• Output	Configurable as active or passive signals
- Active signal	24 V DC, $\leq 24$ mA, $R_i = 170$ $\Omega$
- Passive signal	Open collector, max. 30 V DC, 200 mA
Output configuration	
• Pulse	
- Pulse significance	$\leq 5000$ pulses/s
- Pulse width	$\geq 0.1$ ms
• Limit frequency	$\leq 10000$ Hz
• Limits	Limits for flow and quantity, flow direction, alarm
<u>Digital output 2 (relay)</u>	
(only 7ME5034-0...)	
Relay	NC or NO function
• Rating	Max. 5 W, max. 50 V AC/DC, max. 200 mA
• Output configuration	Limits for flow and quantity, flow direction, alarm

### Transmitter TRANSMAG 2

<u>Digital input</u> (optional to digital output 2)	Non-intrinsically-safe
(only 7ME5034-2...)	
• Input function configurable as high-active or low-active	Set measured value to zero or reset totalizer
• Signal voltage	Max. 30 V DC, $R_i = 3$ k $\Omega$ High level: +11 ... +30 V DC Low level: -30 ... +5 V DC
<b>For PROFIBUS devices</b>	
PROFIBUS PA (for PROFIBUS-devices 7ME5034-1...)	Layer 1 and 2 according to PROFIBUS PA
• Communication	Transmission according to IEC 1158-2
	Layer 7 (protocol layer) according to PROFIBUS PA and DP V1 (EN 50170)
	Device Class B, device profile 2.0
	Max. 4 simultaneous C2 connections
• Bus voltage	9 ... 32 V DC permissible
• Current consumption from bus	10 mA; limited to $\leq 15$ mA in event of fault by electrical current limitation
<b>Rated operating conditions</b>	
Ambient temperature	
• Operation	-20 ... +60 °C (-4 ... +140 °F)
• Storage	-25 ... +80 °C (-13 ... +176 °F)
Degree of protection	IP67/NEMA 4X
Electromagnetic compatibility (EMC)	
• Emitted interference	To IEC/EN 61326 for use in industrial areas
• Noise immunity	To IEC/EN 61326 for use in industrial areas
<b>Design</b>	
Weight of transmitter	4.4 kg (9.7 lb)
Remote version	Transmitter must be connected to sensor using shielded cable
Maximum cable length	100 m (328 ft)
Housing	Die-cast aluminum, painted
<b>Cables entries</b>	Remote installations
• Power supply and outputs	2 $\times$ M20 (HART)/M25 (PROFIBUS) or 2 $\times$ 1/2" NPT (HART)
• Sensor connections	2 $\times$ M16 (HART) or 2 $\times$ 1/2" NPT
<b>Displays and keypad</b>	
General display	LCD, backlid, two lines with 16 characters each
Multi-display for	Flow, totalizer, flow velocity
Keypad	4 keys for entering parameters
<b>Power supply</b>	
corresponding to rating plate	
• AC supply	100 ... 250 V AC $\pm 15\%$ , 47 ... 63 Hz
• Power consumption	Approx. 120 ... 630 VA, depending on sensor
Line fuse	100 ... 230 V AC: T1.6A
Magnet current fuse	F5A/250 V

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### Transmitter TRANSMAG 2 with sensor MAG 911/E

#### Technical specifications (continued)

##### Sensor cables between sensor and transmitter

Sufficient shielding must be provided, as well as fixed routing of the signal cables (electrode and coil cable).

Signal cables must be routed free of vibration, and protected against strong magnetic and stray fields. In case of doubt, the sensor cables must be routed in grounded steel conduit. The cable length between the sensor and transmitter must not exceed 100 m (328 ft).

#### MAG 911/E sensor

##### Process connection

###### Flanges

- EN 1092-1, raised face (EN 1092-1, DIN 2501 and BS 4504 have the same mating dimensions)
  - DN 200 ... 1000 (8" ... 40"): PN 10 (145 psi)
  - DN 65 ... 1000 (2½" ... 40"): PN 16 (232 psi)
  - DN 200 ... 1000 (8" ... 40"): PN 25 (362 psi)
  - DN 15 ... 1000 (½" ... 40"): PN 40 (580 psi)
- ANSI B16.5 (BS 1560), raised face
  - ½" ... 40": Class 150 (20 bar (290 psi))
  - ½" ... 24": Class 300 (50 bar (725 psi))
  - 28" ... 40": Class D (10 bar)
  - ½" ... 24": K10
- AWWA C-207, raised face
- JIS B 2220:2004

##### Media conductivity

Minimum conductivity  $\geq 1 \mu\text{S/cm}$

##### Rated operating conditions

###### Enclosure rating

IP67/NEMA 4X  
Optional IP68/NEMA 6


###### Temperature of medium

- Soft rubber
  - 0 ... +70 °C (32 ... 158 °F)
- Hard rubber
  - 0 ... +90 °C (32 ... 194 °F)
- PTFE
  - Option: 100°C (212°F)
  - 20 ... +150 °C (-4 ... +302 °F) at 25 bar (363 psi)
  - 20 ... +100 °C (-4 ... +212 °F) at 40 bar (580 psi)
- Linatex
  - 40 ... +70 °C (-40 ... +158 °F) (for temperatures below -20 °C (-4 °F) AISI 316L/1.4404 flanges must be used)
- Novolac
  - 130 °C (266 °F) at 40 bar (580 psi)

##### Design

Weight	See dimensional drawings
Flange and housing material	Carbon steel ASTM A 105, with corrosion resistant coating Corrosivity category C3 acc. to ISO 12944-2, or AISI 316L/1.4404 flanges and carbon steel housing ASTM A 105, with corrosion resistant coating Corrosivity category C3 according to ISO 12944-2
Measuring pipe material	Stainless steel AISI 304 or higher
Electrode material	<ul style="list-style-type: none"> <li>AISI 316/1.4571</li> <li>Hastelloy C276/2.4819</li> <li>Platinum</li> <li>Titanium</li> <li>Tantalum</li> </ul>
Grounding electrode material	Defined via the order code
Terminal box (remote version only)	<ul style="list-style-type: none"> <li>Standard: Fibre glass reinforced polyamide</li> <li>Option: Stainless steel AISI 316/1.4436</li> </ul>
Cable entries	<ul style="list-style-type: none"> <li>2 x M20 or 2 x ½" NPT</li> </ul>

#### Protection ring



Function	To protect the edges of liners from abrasion (e.g. gravel, sand etc.). Used mainly with soft rubber liners and for PTFE liners at high temperatures from 100 to 150 °C (212 to 302 °F).
Contact with medium	Yes, please always check resistance to measured medium.
Material	Stainless steel AISI 316/1.4571, optionally Hastelloy C276/2.4819
Material thickness	The overall length of the sensor is increased by 6 mm for DN 15 to DN 150 (0.24" for ½" to 6") or 10 mm for DN 200 to DN 600 (0.4" for 8" to 24")
Standard	Optional for all liners. Must be ordered separately.
Order No.	7ME5942-...

#### Grounding ring



Function	Electrical reference and grounding of the medium. Required if the pipelines are not electrically conducting or are lined (plastic pipelines, concrete pipelines etc.). All grounding rings must be connected to the grounding screw present on the sensor.
Contact with medium	Yes, please always check resistance to measured medium.
Material	Stainless steel AISI 316/1.4571 or Hastelloy C4/2.4610
Material thickness	The overall length of the sensor is increased by 2 mm (0.08") per grounding ring.
Standard	Optional for all liners. Required between the medium and sensor for equipotential bonding between non-conducting pipelines or lined pipelines.
Order No.	7ME5943-...

#### Important:

The rings must be ordered together with the sensor. Gaskets are not included. In case of replacement please include the sensor MLFB code on the order.



### Technical specifications (continued)

#### Classification according to pressure equipment directive (PED 2014/68/EU)

Nominal size		Nominal pressure		Permissible media	Category
DN	(inches)	PN	(MWP psi)		
15 ... 25	(½" ... 1")	40	580	Gases fluid group 1 and liquids fluid group 1	Article 4.3
200 ... 300	(8" ... 12")	10	(145)	Gases fluid group 1 and liquids fluid group 1	II
65 ... 250	(2½" ... 10")	16	(232)	Gases fluid group 1 and liquids fluid group 1	II
40 ... 100	(1½" ... 4")	40	(580)	Gases fluid group 1 and liquids fluid group 1	II
350 ... 1000	(14" ... 40")	10	(145)	Gases fluid group 1 and liquids fluid group 1	III
300 ... 1000	(12" ... 40")	16	(232)	Gases fluid group 1 and liquids fluid group 1	III
200 ... 600	(8" ... 24")	25	(363)	Gases fluid group 1 and liquids fluid group 1	III
125 ... 600	(5" ... 24")	40	(580)	Gases fluid group 1 and liquids fluid group 1	III

#### Notes on pressure equipment directive

The devices are designed for liquids of danger group "Gases of fluid group 1". The categories differ according to the version, and are listed in the table below.

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### Transmitter TRANSMAG 2 with sensor MAG 911/E

#### Selection and ordering data

##### Transmitter TRANSMAG 2

Remote with standard wall mounting bracket, local display, die cast aluminum

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

##### Output/communication

4 ... 20 mA with HART  
PROFIBUS PA  
4 ... 20 mA with HART and digital input

##### Cable glands

M20 x 1.5  
½" NPT

##### Additional information

Please add "-Z" to Article No. and specify Order code(s) and plain text.

Special mounting bracket for wall and pipeline installation

Transmitter setting for parameter "TAG number" (specify in plain text, max. 8 characters)

Transmitter setting for parameter "TAG descriptor" (specify in plain text, max. 16 characters)

Tag name plate, stainless steel (specify in plain text)

Special version (specify in plain text)

#### Article No.

7ME5034-

AA11-AA0

0

1

2

1

2

#### Order code

A02

Y15

Y16

Y17

Y99

##### Sensor MAG 911/E

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

##### Nominal size

DN 15 (½")  
DN 25 (1")  
DN 40 (1½")  
DN 50 (2")  
DN 65 (2½")  
DN 80 (3")  
DN 100 (4")  
DN 125 (5")  
DN 150 (6")  
DN 200 (8")  
DN 250 (10")  
DN 300 (12")  
DN 350 (14")  
DN 400 (16")  
DN 450 (18")  
DN 500 (20")  
DN 600 (24")  
DN 700 (28")  
DN 800 (32")  
DN 900 (36")  
DN 1000 (40")

##### Flange norm and pressure rating

EN 1092-1, PN 10 (DN 200 ... 1000 (8" ... 40"))  
EN 1092-1, PN 16 (DN 65 ... 1000 (2½" ... 40"))  
EN 1092-1, PN 25 (DN 200 ... 1000 (8" ... 40"))  
EN 1092-1, PN 40 (DN 15 ... 1000 (½" ... 40"))  
ANSI B16.5, Class 150 (½" ... 24")<sup>1)</sup>  
ANSI B16.5, Class 300 (½" ... 24")<sup>2)</sup>  
AWWA C-207 Class D (28" ... 40")  
JIS 10 K (½" ... 24")

7ME5610-

AA

1 V

2 D

2 R

2 Y

3 F

3 M

3 T

4 B

4 H

4 P

4 V

5 D

5 K

5 R

5 Y

6 F

6 P

6 Y

7 H

7 M

7 R

B

C

E

F

J

K

L

R

#### Article No.

7ME5610-

AA

1

3

1

3

4

5

6

1

2

3

4

5

1

2

3

4

##### Sensor MAG 911/E

##### Flange material

Mid steel flanges 1.0460/1.0570  
Stainless steel flanges, AISI 316L/1.4404

##### Liner material

Soft rubber (DN 25 to DN 1000)  
PTFE (DN 15 to DN 600)  
Hardrubber (DN 15 to DN 1000)  
Linatex (DN 25 to DN 1000)  
Novolak (sealing material FFKM) (DN 50 to DN 1000)

##### Electrode material

AISI 316Ti/1.4571  
Hastelloy C276/2.4819  
Platinum  
Titanium  
Tantalum

##### Cable glands/terminal box

Metric: Polyamide terminal box  
½" NPT: Polyamide terminal box  
Metric: Stainless steel terminal box  
½" NPT: Stainless steel terminal box

<sup>1)</sup> 20 °C (68 °F), max. 19.6 bar (285 psi) for steel flanges and max. 15.9 bar (231 psi) for stainless steel flanges

<sup>2)</sup> 20 °C (68 °F), max. 51.1 bar (741 psi) for steel flanges and max. 41.4 bar (600 psi) for stainless steel flanges

##### Additional information

Please add "-Z" to Article No. and specify Order code(s) and plain text.

Two grounding electrodes made of stainless steel  
AISI 316Ti/1.4571

Two grounding electrodes made of Hastelloy  
C276/2.4819

Two grounding electrodes made of Platinum

Two grounding electrodes made of Titanium

Two grounding electrodes made of Tantalum

Factory certificate to EN 10204-2.2

Material certificate according to EN 10204-3.1

Power supply 110 V/60 Hz

Flow range setting: Specify upper flow range value

Pulse output setting: Specify pulse value (1 pulse/unit)

Silicon-free version

Tag name plate, stainless steel (specify in plain text)

Special version (specify in plain text)

#### Order Code

A02

A04

A05

A06

A07

C14

C16

P01

Y01

Y02

Y04

Y17

Y99

Selection and ordering data	Article No.	Article No.
<b>Cable kit for sensor MAG 911/E</b>	<b>7ME5930-</b>	<b>7ME5942-</b>
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	5  A  0  0  -  0  A  A  0	<b>Protection ring (2 pcs.)</b>
<b>Cable</b>		<b>Grounding ring (1 pc.)</b>
Cable kit for sensor MAG 911/E, coil cable 3 × 1.0 mm <sup>2</sup> (3 × 0.0016 inch <sup>2</sup> ), electrode cable 7 × 0.5 mm <sup>2</sup> (7 × 0.0008 inch <sup>2</sup> ), single shielded with PVC jacket		Click on the Article No. for the online configuration in the PIA Life Cycle Portal.
<ul style="list-style-type: none"> <li>Length: 5 m (16.4 ft)</li> <li>Length: 10 m (32.8 ft)</li> <li>Length: 20 m (65.6 ft)</li> <li>Length: 30 m (98.4 ft)</li> <li>Length: 40 m (131 ft)</li> <li>Length: 50 m (164 ft)</li> <li>Length: 60 m (197 ft)</li> <li>Length: 80 m (260 ft)</li> <li>Length: 100 m (328 ft)</li> <li>Other length (specify in plain text) Please add "-Z" to Article No. and specify Order code(s) and plain text.</li> </ul>	B C D E F G H J K Z	<b>Nominal size</b> DN 15 (½") <b>1 V</b> DN 25 (1") <b>2 D</b> DN 40 (1½") <b>2 R</b> DN 50 (2") <b>2 Y</b> DN 65 (2½") <b>3 F</b> DN 80 (3") <b>3 M</b> DN 100 (4") <b>3 T</b> DN 125 (5") <b>4 B</b> DN 150 (6") <b>4 H</b> DN 200 (8") <b>4 P</b> DN 250 (10") <b>4 V</b> DN 300 (12") <b>5 D</b> DN 350 (14") <b>5 K</b> DN 400 (16") <b>5 R</b> DN 450 (18") <b>5 Y</b> DN 500 (20") <b>6 F</b> DN 600 (24") <b>6 P</b> DN 700 (28") <b>6 Y</b> DN 800 (32") <b>7 H</b> DN 900 (36") <b>7 M</b> DN 1000 (40") <b>7 R</b>
		B C E F J K L R
		<b>Flange design</b>
		EN 1092-1, PN10
		EN 1092-1, PN16
		EN 1092-1, PN25
		EN 1092-1, PN40
		AISI B16.5, class 150
		AISI B16.5, class 300
		AWWA C-207, class D
		JIS B2220, 10K
		<b>Material</b>
		Stainless steel AISI 316/1.4571 <b>1</b>
		Hastelloy C4/2.4610 <b>2</b>
		<b>Liner</b>
		Soft rubber <b>1</b>
		PTFE <b>3</b>
		Hard rubber <b>4</b>
		Linatex <b>5</b>
		Novolak <b>6</b>

## Flow Measurement

SITRANS FM (electromagnetic)

Flow sensors

### Transmitter TRANSMAG 2 with sensor MAG 911/E




#### Selection and ordering data (continued)

##### Operating instructions for SITRANS FM TRANSMAG 2









Description	Article No.
• English	A5E00102775
• German	A5E00102774

All literature is available to download for free, in a range of languages, at <http://www.siemens.com/processinstrumentation/documentation>


##### Accessories

Description	Article No.	
Standard wall-mounting bracket, stainless steel AISI 316L/1.4404	7ME5933-0AC04	
Special wall-mounting bracket, BI 2.5 DIN 59382 X6Cr17	7ME5933-0AC05	
Potting kit for IP68/ NEMA 6P sealing of sensor junction box	FDK:085U0220	


##### Spare parts

Description	Article No.	
Display unit	7ME5933-0AC00	
Display lid (Ex) in die-cast aluminum, with corrosion resistant coating (min. 60 mm)	7ME5933-0AC01	
Blind lid for sensor cables connection compartment (only remote version) in die-cast aluminum, with corrosion resistant coating (min. 60 mm) incl. O-ring seal	7ME5933-0AC02	
Blind lid (mains supply, input/outputs) in die-cast aluminum, with corrosion resistant coating (min. 60 mm)	7ME5933-0AC03	
Safety clamp for electronic cover with glass plate (7ME5933-0AC01)	7ME5933-0AC06	
M20 cable gland set for power and output connection, gray PA plastic, 2 pcs. • cables Ø 6 ... 12 mm (0.24" ... 0.47") • -40 ... +100 °C (-40 ... +212 °F)	A5E02246350	
1/2" NPT cable gland set for power and output connection, gray PA plastic, 2 pcs. • cables Ø 6 ... 12 mm (0.24" ... 0.47") • -40 ... +100 °C (-40 ... +212 °F)	A5E02246396	
M16 x 1.5 cable gland set for sensor connection, brass chrome, 2 pcs. and 2 pcs. blind • cables Ø 5 ... 9 mm (0.20" ... 0.35") • -20 ... +105 °C (-4 ... +221 °F)	A5E02246369	

**Dimensional drawings**

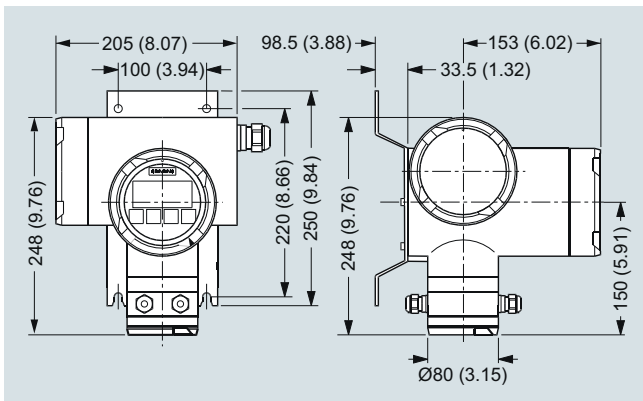

SITRANS FM transmitter TRANSMAG 2 with wall-mounting bracket, dimensions in mm (inch)

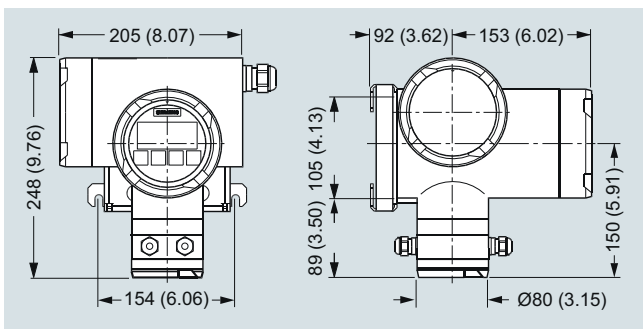

SITRANS FM transmitter TRANSMAG 2 with special wall-mounting bracket, dimensions in mm (inch)


## Flow Measurement

SITRANS FM (electromagnetic)

Flow sensors

### Transmitter TRANSMAG 2 with sensor MAG 911/E

#### Dimensional drawings (continued)

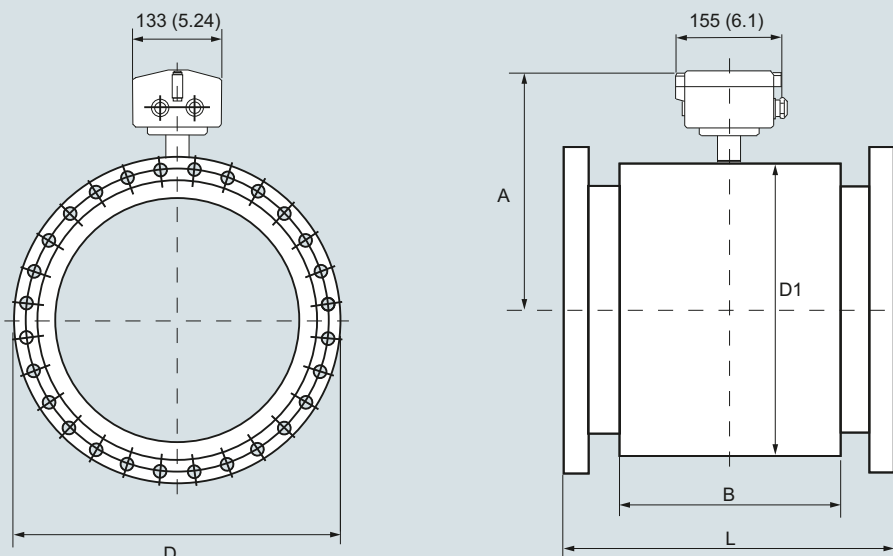

SITRANS FM flow sensor MAG 911/E, compact version, dimensions in mm (inch)

Built-in length MAG 911/E [in mm and inch]

Nominal size	DN 15	DN 25	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200	DN 250
	½"	1"	1½"	2"	2½"	3"	4"	5"	6"	8"	10"
<b>Built-in length L<sup>1)</sup></b>											
Hard rubber version	270 (10.63)	270 (10.63)	280 (11.02)	280 (11.02)	330 (12.99)	340 (13.39)	340 (13.39)	370 (14.57)	370 (14.57)	410 (16.14)	470 (18.50)
Linatex/soft rubber version											
PTFE-liner without protection rings	270 (10.63)	270 (10.63)	280 (11.02)	280 (11.02)	330 (12.99)	340 (13.39)	340 (13.39)	370 (14.57)	370 (14.57)	410 (16.14)	470 (18.50)
Novolak-version	-	-	275 (10.83)	275 (10.83)	325 (12.79)	335 (13.19)	333 (13.11)	362 (14.25)	362 (14.25)	401 (15.79)	460 (18.11)
<b>Dimensions of sensor housing</b>											
Housing width B	170 (6.69)	170 (6.69)	170 (6.69)	170 (6.69)	170 (6.69)	170 (6.69)	170 (6.69)	170 (6.69)	170 (6.69)	240 (9.45)	240 (9.45)
Height A	206 (8.11)	206 (8.11)	222 (8.74)	229 (9.02)	262 (10.32)	262 (10.32)	274 (10.79)	286 (11.26)	299 (11.78)	334 (13.15)	358 (14.10)
Housing diameter D <sub>1</sub>	135 (5.35)	135 (5.35)	167 (6.58)	182 (7.17)	247 (9.73)	247 (9.73)	272 (10.71)	296 (11.65)	322 (12.68)	392 (15.43)	440 (17.32)
Weight of PN 16 version in kg (MWP 232 psi version in lb) approx.	8.0 (17.64)	8.5 (18.74)	11.5 (25.35)	25.0 (55.12)	26 (57.32)	27 (59.53)	28 (61.73)	34 (74.95)	38 (83.78)	68 (149.9)	81 (178.6)
Nominal size	DN 300	DN 350	DN 400	DN 450	DN 500	DN 600	DN 700	DN 750	DN 800	DN 900	DN 1000
	12"	14"	16"	18"	20"	24"	28"	30"	32"	36"	40"
<b>Built-in length L<sup>1)</sup></b>											
Hard rubber version	500 (19.68)	550 (21.65)	600 (23.62)	650 (25.59)	650 (25.59)	780 (30.71)	910 (35.83)	910 (35.83)	1040 (40.95)	1170 (46.06)	1300 (51.18)
Linatex/soft rubber version											
PTFE-liner without protection rings	500 (19.68)	550 (21.65)	600 (23.62)	660 (25.98)	650 (25.59)	780 (30.71)	-	-	-	-	-
Novolak-version	489 (19.25)	538 (21.18)	592 (23.31)	638 (25.12)	638 (25.12)	772 (30.39)	903 (35.55)	903 (35.55)	1033 (40.63)	1163 (45.79)	1293 (50.91)
<b>Dimensions of sensor housing</b>											
Housing width B	240 (9.45)	225 (8.86)	250 (9.84)	270 (10.63)	300 (11.81)	360 (14.17)	420 (16.54)	420 (16.54)	500 (19.69)	560 (22.05)	620 (24.41)
Height A	383 (15.08)	375 (14.76)	400 (15.75)	433 (17.05)	453 (17.84)	505 (19.88)	558 (21.97)	590 (23.23)	608 (23.94)	658 (25.91)	713 (28.07)
Housing diameter D <sub>1</sub>	490 (19.29)	474 (18.66)	524 (20.63)	591 (23.26)	629 (24.76)	734 (28.90)	839 (33.03)	904 (35.59)	939 (36.97)	1039 (40.91)	1150 (45.28)
Weight of PN 16 version in kg (MWP 232 psi version in lb) approx.	95 (209.4)	118 (260.2)	161 (354.9)	185 (407.9)	233 (513.7)	401 (884.1)	420 (925.9)	450 (992.1)	500 (1102.3)	560 (1234.6)	620 (1366.9)

<sup>1)</sup> Tolerance for built-in length: L + 0.0 mm/-4.0 mm (-0.00/-0.157 inches).

With protection rings for > DN 25 +6.0 mm, > DN 200 +10.0 mm (> 1" +0.236 inches, > 8" +0.394 inches)

### Overview



MAG 8000 is a comprehensive meter which intelligent information and high performance measurement as well as the easy to install concept take cost of ownership and customer service to a new level for water meter.

### Benefits

#### Easy to install

- Compact or remote solution with factory mounted cable and customer setting from factory
- IP68/NEMA 6P enclosure. Sensor can be buried.
- Flexible power supply - internal or external battery pack or mains power supply with battery back-up possibilities
- Superior measurement
- Down to 0.2 % maximum uncertainty
- OIML R 49 type approval
- FM Fire Service Approval
- Bi-directional measurement

#### Long lasting performance/Low cost of Ownership

- No moving parts means less wear and tear.
- Up to 6 to 10 years maintenance-free operation in typical revenue application
- Robust construction built for the application

#### Intelligent information, easy to access

- Embedded self-testing and alarm/fault detection feature
- Internal data logger
- Advanced statistics and diagnostics
- Various Add-on communication modules

### Application

The following MAG 8000 versions are available as stand-alone water meters:


- MAG 8000 (7ME6810) for abstraction and distribution network
- MAG 8000 CT (7ME6820) for revenue and bulk metering

### Design

MAG 8000 is designed to minimize power consumption.

The product program consists of

- Basic and advanced version
- Sensor sizes from DN 25 to 1200 (1" to 48")
- Compact and remote installation in IP68/NEMA 6P enclosure and factory-mounted cable
- SIMATIC PDM and Flow Tool PC configuration softwares

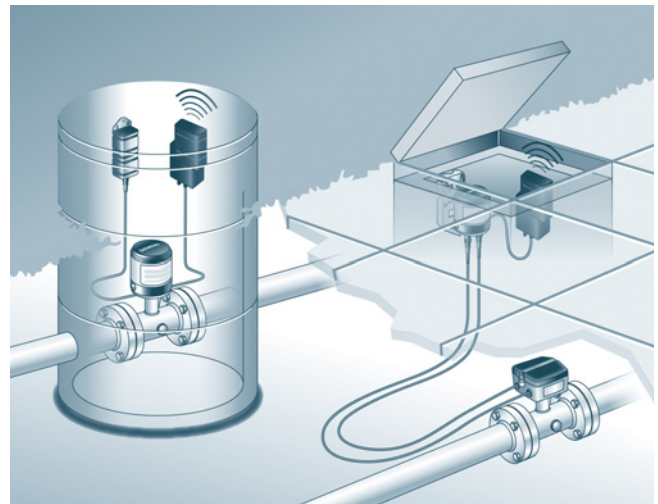

Modbus/Encoder module

## Flow Measurement

SITRANS FM (electromagnetic)

Flow sensors

### Battery-operated water meter MAG 8000

#### Function

MAG 8000 is a microprocessor-based water meter with graphical display and key for optimum customer operation and information on site. The transmitter drives the magnetic field in the sensor, evaluates the flow signal from the sensor and calculates the volume passing through. It delivers the required information via the integrated pulse output or communication interfaces as part of a system solution. Its intelligent functionality, information and diagnostic ensure optimum meter performance and information to optimize water supply and billing.



MAG 8000 can be ordered as a Basic or an Advanced version.

Features/Version	MAG 8000 Basic	MAG 8000 Advanced
Measuring frequency in battery power mode (Manually selected) <sup>1)</sup>	1/15 or 1/30 or 1/60 Hz	from 6.25 to 1/60 Hz depending of sensor size
Output MAG 8000	2 FW/RV/AI/CA	2 FW/RV/AI/CA
Communication	Add-on	Add-on
Data logger	Yes	Yes
Insulation test	Yes	Yes
Leakage detection	No	Yes
Meter utilization	No	Yes
Statistics	No	Yes
Tariff	No	Yes
Settle date (Revenue)	No	Yes

<sup>1)</sup> Excitation frequency settings with mains power supply, see technical specifications for each version:

Some information is accessible via the display whereas all information is accessible via the IrDA communication interface with the PDM software. Data and parameters are registered in a EEPROM. They can all be read, but changing the information demands a software password or a hardware key attached to the printed circuit board.

The SIMATIC PDM tool gives the possibility of testing and verifying the flowmeter on site and creating a printed "Qualification Certificate" with all specific data that define the quality status of the measurement.

The Qualification Certificate consists of two pages with information about the actual status of the sensor:

Part 1 provides general settings, sensor and battery info, totalizer values and pulse output settings.

Part 2 provides detailed information about electronic and sensor functionality and a main parameter list for evaluating the functionality of the MAG 8000 water meter.



#### SIMATIC PDM

For more details about SIMATIC PDF please go to chapter 8 "Digitalization and Communication".



#### Technical specifications

Transmitter	
<b>Installation</b>	Compact (integral) Remote with factory-mounted cable 5, 10, 20 or 30 m (16.4, 32.8, 65.6 or 98.4 ft)
<b>Enclosure</b>	Stainless steel top housing (AISI 316) and coated brass bottom. Remote wall mount bracket in stainless steel (AISI 304).
<b>Cable entries</b>	2 × M20 (one gland for one cable of size 6 ... 8 mm (0.02 ... 0.026 ft) is included in the standard delivery)
<b>Display</b>	Display with 8 digits for main information Index, menu and status symbols for dedicated information
Resolution	Totalized information can be displayed with 1, 2 or 3 decimals or automatic adjustment (default)
<b>Flow unit</b>	
Europe	Volume in m <sup>3</sup> and flow rate in m <sup>3</sup> /h
US	Volume in Gallon and flow rate in GPM
Australia	Volume in Mi and flow rate as MI/d
<b>Optional display units</b>	Volume: m <sup>3</sup> × 100, l × 100, G × 100, G × 1000, MG, CF × 100, CF × 1000, AF, Al, kl, BBL42 Flow: m <sup>3</sup> /min, m <sup>3</sup> /d, l/s, l/min, GPS, GPH, GPD, MGD, CFS, CFM, CFH, BBL42/s, BBL42/min, BBL42/h, BBL42/d
<b>Digital output</b>	2 passive outputs (MOS), individual galvanically isolated Maximum load ± 35 V DC, 50 mA short circuit protected
Output A function	Programmable as pulse volume – forward – reverse – forward/net – reverse/net
Output B function	Programmable as pulse volume (like output A), alarm
Output	Max. pulse rate of 50 Hz (pulse B) and 100 Hz (pulse A), pulse width of 5, 10, 50, 100, 500 ms

Transmitter	
<b>Communication</b>	IrDA: Standard integrated infrared communication interface with Modbus RTU protocol
Add-on modules	<ul style="list-style-type: none"> <li>RS 232 serial interface with Modbus RTU (Rx/Tx/GND), point to point with max. 15 m cable</li> <li>RS 485 serial interface with Modbus RTU (+/-/GND), multidrop with up to 32 devices with max. 1000 m cable</li> <li>Encoder interface module (for Itron 200WP) "Sensus protocol"</li> <li>3G/UMTS module with or without analog input cable</li> </ul>
<b>Power supply</b>	Auto detection of power source with display symbol for operation power
Internal battery pack	1 D-Cell 3.6 V/16.5 Ah 2 D-Cell 3.6 V/33 Ah
External battery pack	4 D-Cell 3.6 V/66 Ah
<b>Mains power supply</b>	12 ... 24 V AC/DC (10 ... 32 V) 2 VA 115 ... 230 V AC (85 ... 264 V) 2 VA Both mains power supply systems are upgradable for battery backup via internal D-Cell (3.6 V 16.5 Ah) or external battery pack.
Cable	3 m (9.8 ft) for external connection to mains supply (without cable plug)

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### Battery-operated water meter MAG 8000

#### Technical specifications (continued)

Features	
<b>Application identification</b>	Tag number up to 15 characters
<b>Time and date</b>	Device embedded Real Time Clock (Synchronization with NTP server if 3G/UMTS module connected)
<b>Totalizer</b>	
MAG 8000	Totalizer 1 and Totalizer 2: Configurable to Forward, Reverse and Bidirectional netflow  Totalizer 3: (following totalizer 1 setting) resettable via display key
<b>Measurement</b>	
Low flow cut-off	Cut-off at 15 mm/s <sup>1)</sup>
• 7ME6810	Cut-off at 15 mm/s <sup>1)</sup>
• 7ME6820	
Empty pipe detection	Symbolised in display
Data logger	Logging of 26 records: selectable as daily, weekly or monthly logging
<b>Alarm</b>	Active alarm is indicated on the display.
<b>Data protection</b>	All data stored in an EEPROM. Totalizers 1 and 2 are backed up every 10 min, statistic every hour and power consumption and temperature measurement every 4 hours.  Password protection of all parameters and hardware protection of calibration and revenue parameters.
<b>Battery power management</b>	Optimal battery information on remaining capacity.  Calculated capacity includes all consuming elements and available battery capacity is adjusted related to change in ambient temperature.  Numbers of power-ups  Date and time registered for first and last time power alarm.
<b>Diagnostic</b>	
Continuous self test including	Coil current to drive the magnetic field  Signal input circuit  Data calculation, handling and storing
Alarm statistics and logging for fault analyzing	Electrode impedance to check actual media contact  Flow simulation to check pulse and communication signal chain for correct scaling  Number of sensor measurements (excitations)  Transmitter temperature (battery capacity calculation)  Low impedance alarm for change in media  Flow alarm when defined high flow exceeds  Verification mode for fast measure performance check
<b>Insulation test</b>	Test of signal immunity against disturbance and bad installation. Test interval is selectable and measurement is interrupted during the test period of 4 min.

Features	
<b>Leakage detection</b> (only Advanced version)	Monitoring the lowest flow or volume during selected time window within 24 hours. Leakage is detected over a selectable period where monitored value exceed the possible leakage level. Min. and max. values are stored with date registration. Last store value visible on the display.
<b>Meter Utilization</b> (only Advanced version)	6 registers for monitoring total time the meter has operated in different flow intervals. Registered intervals are free selectable as % of Q <sub>n</sub> (Q3).
<b>Tariff</b> (only Advanced version)	6 tariff registers count the volume delivered within the selected tariff windows, based on time of day or flow rates or a combination.  Tariff can also be used for consumption profile where consumption is related to different time intervals or flow rates.  Tariff values visible on the display.
<b>Settling date</b> (only Advanced version)	On a predefined date the totalizer 1 index value is stored. Old values are stored to show the latest two totalized 1 index values.  Settling values visible on the display.
<b>Statistic</b> (only Advanced version)	Min. flow rate with time and date registration  Max. flow rate with time and date registration  Min. daily consumption with date registration  Max. daily consumption with date registration  Latest 7 days total and daily consumption  Actual month consumption  Latest month consumption
<b>PC Configuration Software PDM</b>	<ul style="list-style-type: none"> <li>• Meter configuration – online and offline mode</li> <li>• Own parameter settings</li> <li>• Parameter documentation</li> <li>• Print and export of data and parameters</li> </ul> PDM 9.0/9.1 Service Pack 1

<sup>1)</sup> Siemens warrants the measurement accuracy down to a flow velocity of 15 mm/s. For a flow velocity below 15 mm/s, we don't warrant the measurement accuracy.

### Technical specifications (continued)


#### MAG 8000 water meter uncertainty

To ensure continuous accurate measurement, flowmeters must be calibrated. The calibration is conducted at Siemens flow facilities with traceable instruments referring directly to the physical unit of measurement according to the International System of Units (SI).

Therefore, the calibration certificate ensures recognition of the test results worldwide, including the US (NIST traceability).


Siemens offers accredited calibrations assured to ISO 17025 in the flow range from 0.0001 m<sup>3</sup>/h to 10 000 m<sup>3</sup>/h. Siemens Flow Instruments accredited laboratories are recognized by ILAC MRA (International Laboratory Accreditation Corporation - Mutual Recognition Arrangement) ensuring international traceability and recognition of the test results worldwide.

The selected calibration determines the accuracy of the meter. A standard calibration results in max.  $\pm 0.4\%$  uncertainty and an extended calibration  $\pm 0.2\%$ . A calibration certificate follows every sensor and calibration data are stored in the meter unit.

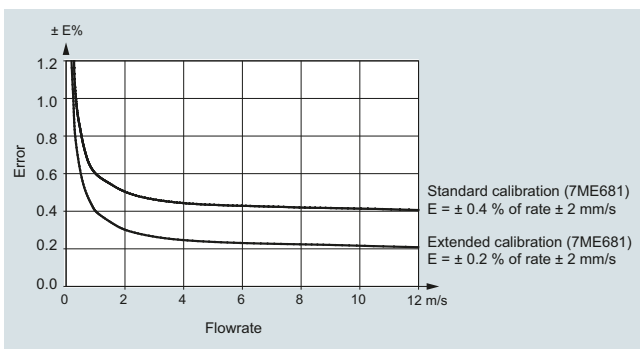


#### MAG 8000 (7ME6810) for Fire Service applications

MAG 8000 (7ME6810) is FM Fire Service approved for automatic fire protection systems according to the Fire Service Meters Standard, Class Number 1044. The approval is applicable for the sizes DN 50, DN 80, DN 100, DN 150, DN 200, DN 250, and DN 300 (2", 3", 4", 6", 8", 10", and 12") with ANSI B16.5 Class 150 flanges. The FM Fire Service approved product can be ordered via the Z-options P20, P21 and P22.

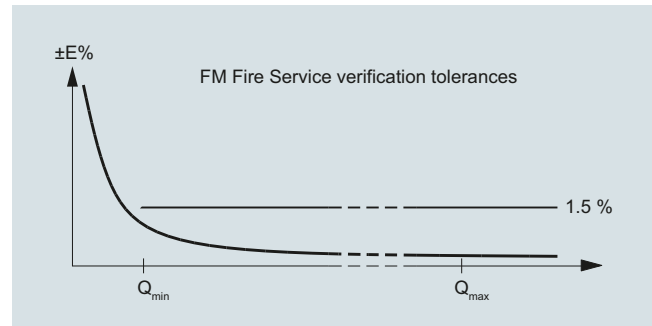


#### Grounding

The sensor body must be grounded using grounding straps and/or grounding rings to protect the flow signal against stray electrical noise. This ensures that the noise is carried through the sensor body and a noise-free measuring area within the sensor body. For MAG 8000 Irrigation grounding rings on both sides are factory-mounted.



#### Metal pipes


On metal pipes, connect the straps to both flanges.



#### Plastic pipes

On plastic pipes and lined metal pipes, optional grounding rings must be used at both ends.

Grounding rings has to be ordered separately see "grounding ring kit"



#### Combination of metal and plastic pipes

A combination of metal and plastic requires straps for metal pipe and grounding rings for plastic pipe.

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors


## Battery-operated water meter MAG 8000

### Technical specifications (continued)

#### Battery operation time and calculation

The battery operation time depends on the connected battery pack as well as the operation condition of the meter.

MAG 8000 calculates the remaining capacity every 4 hours and includes all consuming elements. Calculation compensates for temperature influence on battery capacity.

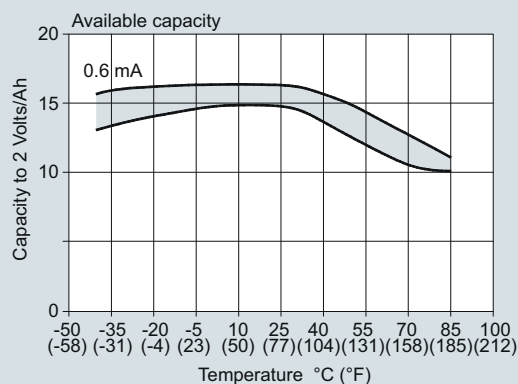

The graphic shows the effect from other temperatures. A variation in temperature from 15 °C to 55 °C (59 to 131 °F) reduces the capacity by 17 % in the table from 15 Ah to 12.5 Ah.

At typical revenue scenario of expected battery operation time can be seen in the table below.

The measurement for calculating the rest capacity of the battery life time is only completed if the system has no active fatal faults or the empty pipe is active. Maximum battery specification is 10 years operation.

#### Scenario - Revenue application

Output A	Pulse rate max. 10 Hz
Output B	Alarm or call-up
Meter dialog	1 hour per month
Add-com	None
Temperature profile	<ul style="list-style-type: none"> <li>• 5 % at 0 °C (32 °F)</li> <li>• 80 % at 15 °C (59 °F)</li> <li>• 15 % at 50 °C (122 °F)</li> </ul>

### Battery lifetime (subject to the assumptions mentioned above)

#### MAG 8000 for abstraction and distribution network applications (7ME6810) and MAG 8000 CT for revenue and bulk metering (7ME6820)

Excitation frequency (24 h operation)	1/60 Hz	1/30 Hz	1/15 Hz	1/5 Hz	1.5625 Hz	3.125 Hz	6.25 Hz
2 D-Cell battery 33 Ah Internal battery pack	DN 25 ... 150 (1" ... 6")	9 years	9 years	7 years	43 months	8 months	3 months
	DN 200 ... 600 (8" ... 24")	9 years	6 years	4 years	22 months	3 months	1 month
	DN 700 ... 1200 (28" ... 48")	7 years	4 years	2 years	12 months	1 months	N/A
4 D-Cell battery 66 Ah External battery pack	DN 25 ... 150 (1" ... 68")	15 years	15 years	14 years	86 months	16 months	7 months
	DN 200 ... 600 (8" ... 24")	15 years	13 years	8 years	44 months	7 months	3 months
	DN 700 ... 1200 (28" ... 48")	14 years	9 years	5 years	24 months	3 months	N/A

#### Typical battery lifetime scenario for MAG 8000 with 3G module

Transmission once a day and MAG 8000 factory settings


2 D-Cell battery 33 Ah Internal battery pack	3 ... 4 years
4 D-Cell battery 66 Ah External battery pack	7 ... 8 years

External battery pack can be used as battery backup for mains power supply (if two cable entries in one cable gland are needed, order cable glands with two entries, see accessories on page 3/141)

Serial RS 232/RS 485 add-on communication modules are designed for mains powered systems as the battery operation time will be reduced. At 1 hour communication per month (all meter data collected 2 times per day) and the module is connected, the operation time is reduced to:

- RS 232:
  - Switched on constantly:
    - 6.4 months for 2 D-cell internal battery pack / 12.8 months for 4 D-cell ext. battery pack
  - Switched on 2 s/day:
    - 39 months for 2 D-cell internal battery pack / 78 months for 4 D-cell ext. battery pack
- RS 485:
  - With the termination resistor on:
    - 2.3 months for 2 D-cell internal battery pack / 4.6 months for 4 D-cell ext. battery pack
  - With the termination resistor off:
    - 39 months for 2 D-cell internal battery pack / 78 months for 4 D-cell ext. battery pack, in case the entire communication time is less than 4 hours/day

### Dimensional drawings

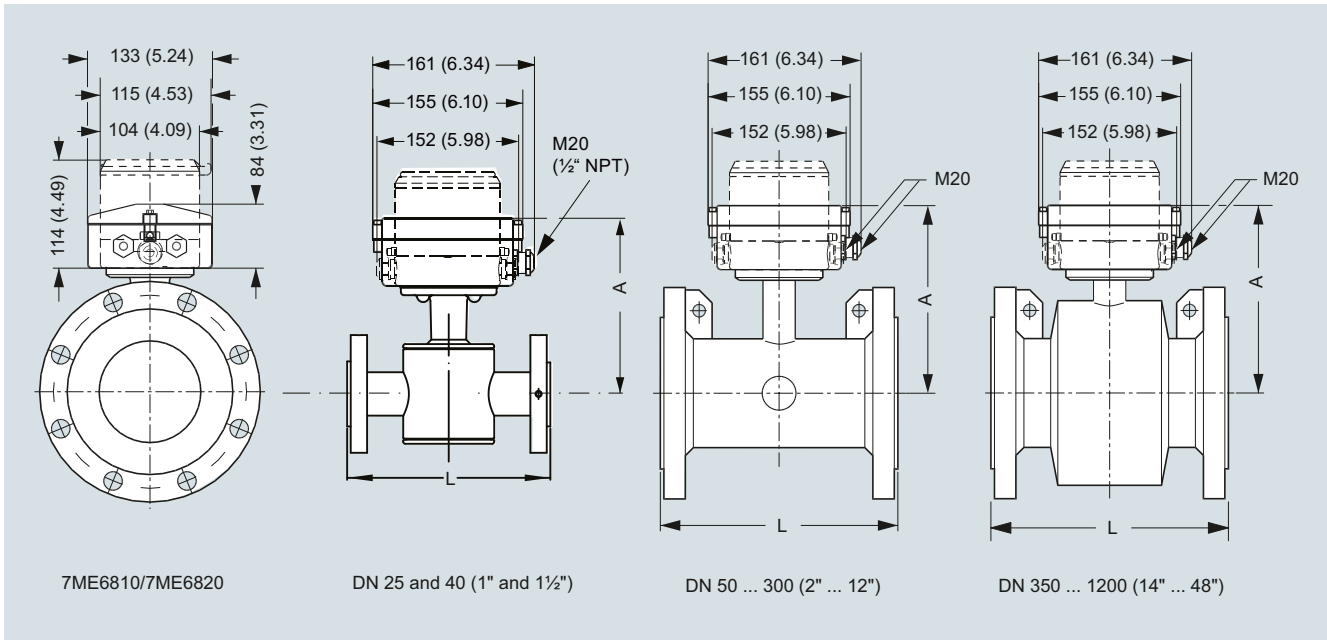

Dimensions in mm (inch)

Nominal DN size	A	L, lengths <sup>1)</sup>							Weight <sup>2)</sup>	
		EN 1092-1 PN 10	EN 1092-1 PN 16/ PN 16 non-PED	EN 1092-1 PN 40	ANSI 16.5 Class 150	AS 4087 PN 16	AWA C-207 Class D	AS 2129	kg	lb
mm (inch)	mm (inch)	mm	mm	mm	inch	mm	mm	mm		
25 (1)	188 (7.4)	-	-	200	7.9	200	-	200	6	13
40 (1½)	203 (8.0)	-	-	200	7.9	200	-	200	9	20
50 (2)	178 (7.0)	-	200	-	7.9	200	-	-	11	25
65 (2½)	181 (7.1)	-	200	-	7.9	200	-	-	13	29
80 (3)	191 (7.5)	-	200	-	7.9	200	-	-	15	34
100 (4)	197 (7.8)	-	250	-	9.8	250	-	-	17	38
125 (5)	210 (8.3)	-	250	-	9.8	250	-	250	22	50
150 (6)	224 (8.8)	-	300	-	11.8	300	-	-	28	63
200 (8)	249 (9.8)	350	350	-	13.8	350	-	-	50	113
250 (10)	276 (10.9)	450	450	-	17.7	450	-	-	71	160
300 (12)	303 (11.9)	500	500	-	19.7	500	-	-	88	198
350 (14)	365 (14.4)	550	550	-	21.7	550	-	-	127	279
400 (16)	391 (15.4)	600	600	-	23.6	600	-	-	145	318
450 (18)	421 (16.6)	600	600	-	23.6	600	-	-	175	384
500 (20)	447 (17.6)	600	600	-	23.6	600	-	-	225	494
600 (24)	497 (19.6)	600	600	-	23.6	600	-	-	340	747
700 (28)	548 (21.6)	700	875/700	-	N/A	700	700	-	316	694
750 (30)	573 (22.6)	N/A	N/A	-	N/A	N/A	750	-	N/A	N/A
800 (32)	603 (23.7)	800	1000/800	-	N/A	800	800	-	398	1045
900 (36)	656 (25.8)	900	1125/900	-	N/A	900	900	-	476	1045
1000 (40)	708 (27.9)	1000	1250/1000	-	N/A	1000	1000	-	602	1322
1050 (42)	708 (27.9)	N/A	N/A	-	N/A	N/A	1050	-	N/A	N/A
1100 (44)	759 (29.9)	N/A	N/A	-	N/A	N/A	1100	-	N/A	N/A
1200 (48)	814 (32.0)	1200	1500/1200	-	N/A	1200	1200	-	887	1996

<sup>1)</sup> Tolerances on built-in length: DN 15 to DN 200 (½" to 8"): +0/-3 mm (+0/-0.12"), DN 250 to DN 400 (10" to 16"): +0/-5 mm (+0/-0.20"), DN 450 to DN 600 (18" to 24"): +5/-5 mm (+0.20/-0.20"), DN 700 to DN 1200 (28" to 48"): +10/-10 mm (+0.39/-0.39").

<sup>2)</sup> For remote version the sensor weight is reduced with 2 kg (4.5 lbs).

## Flow Measurement


SITRANS FM (electromagnetic)

Flow sensors

### Battery-operated water meter MAG 8000


#### Dimensional drawings (continued)

Remote version

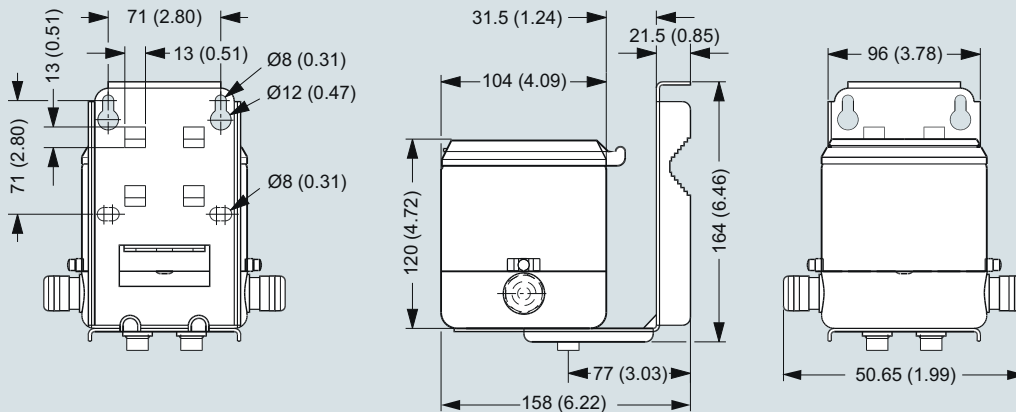

Dimensions in mm (inch), weight 3.5 kg (8 lbs)


#### External battery pack

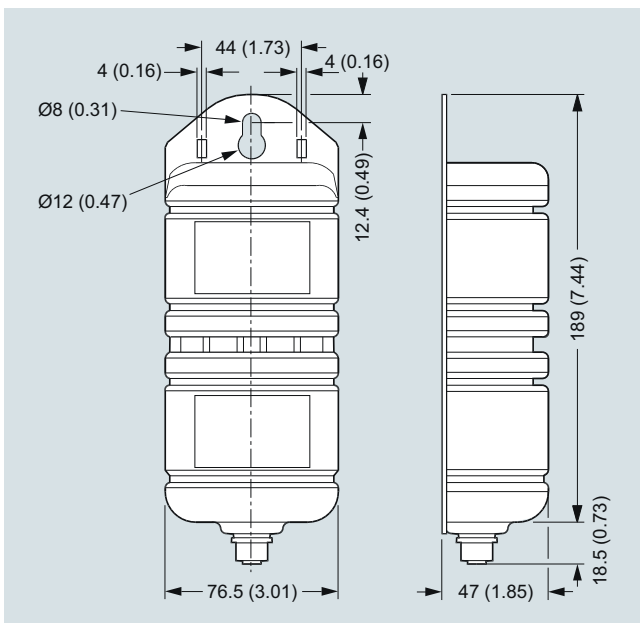

Dimensions in mm (inch), weight 2.0 kg (4.5 lbs)

Battery pack has to be mounted in upwards position to ensure maximum battery capacity.

#### Grounding rings

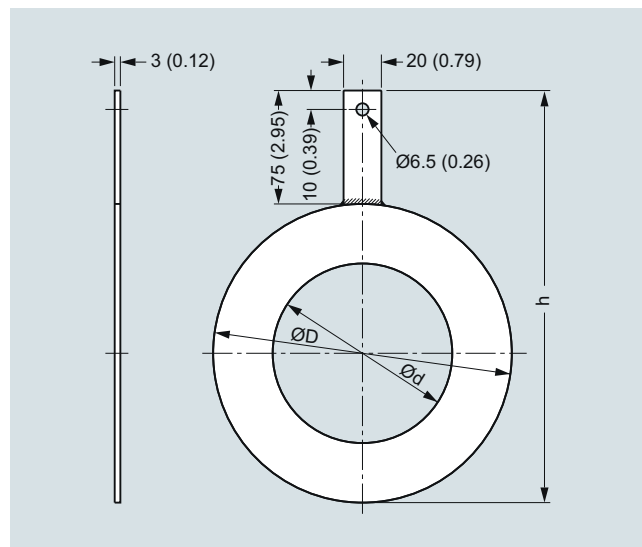


Dimensions in mm (inch) for grounding rings MAG 8000 with EPDM lining (7ME6810 and 7ME6820) DN 25 to DN 300

Dimension	Internal diameter (d)	Outside diameter (D)	h
DN 25	27	68	143
DN 40	38	88	163
DN 50	52	100	175
DN 65	64	120	195
DN 80	79	133	208
DN 100	95	158	233
DN 125	115	188	263
DN 150	145	216	291
DN 200	193	268	343
DN 250	246	324	399
DN 300	295	374	449


## Circuit diagrams

### Electrical installation and pulse output – Connection diagram

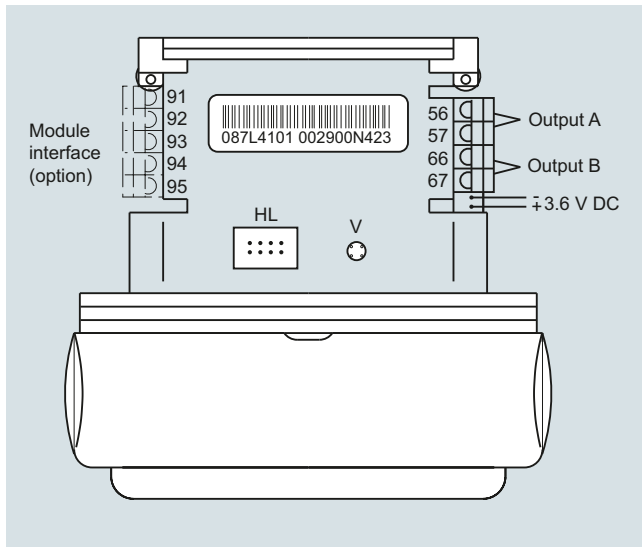

HL = Hardware lock key connection  
V = Push button for verification mode

### Pulse wire connection

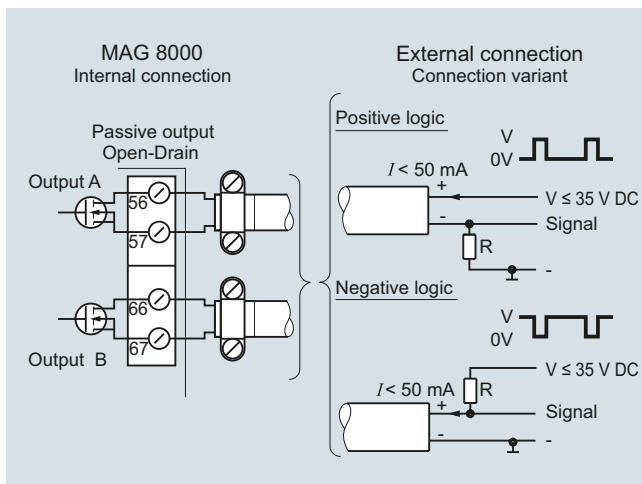

The pulse output can be configured as volume, alarm or call-up.  
The output can be connected as positive or negative logic.  
R = pull up/down is selected in relation to the  $V_x$  power supply and with a max. current  $I$  of 50 mA.

Use shielded cable to avoid EMC problems. Make sure the shield is correctly mounted under the cable clamp (no pig tail).

## Flow Measurement

SITRANS FM (electromagnetic)

Flow sensors

MAG 8000 for abstraction and distribution network application (7ME6810)

### Overview



### Benefits

#### **Easy to install**

- Compact or remote solution with factory mounted cable
- IP68/NEMA 6P enclosure. Sensor can be buried.
- Flexible power supply - internal or external battery pack or mains power supply with battery back-up possibilities

#### **Long-term stability/Low cost of ownership**

- No moving parts in a robust construction means less wear and tear
- Basic and advanced transmitter versions with different optional add-on communication modules fulfil various customer requirements for high cost efficiency
- Up to 0.2 % maximum uncertainty
- Bi-directional measurement with an outstanding low flow performance
- Up to 10 years maintenance-free operation in typical applications

#### **Intelligent information, easy to access**

- Advanced information on site
- Advanced statistics and diagnostics
- Optional high-performance 3G/UMTS module offers an efficient solution for remote measurement and monitor via wireless networks.



### Technical specifications

Meter	
<b>Accuracy</b>	Standard calibration: ± 0.4% ± 2 mm/s Extended calibration DN 50 ... DN 300 (2" ... 12"): ± 0.2 % of rate ± 2 mm/s
<b>Low flow cut-off (default)</b>	15 mm/s
<b>Media conductivity</b>	Clean water > 20 µs/cm
<b>Temperature</b>	
Ambient	-20 ... +60 °C (-4 ... +140 °F)
Media	0 ... 70 °C (32 ... 158 °F)
Storage	-40 ... +70 °C (-40 ... +158 °F)
<b>Enclosure rating</b>	
Remote sensor	IP68 to EN 60529/NEMA 6P, 10 mH <sub>2</sub> O cont.
Compact version	IP68 to EN 60529/NEMA 6P, 3 mH <sub>2</sub> O for six months
<b>Certificates and approvals</b>	
Calibration	
• Standard calibration	2 x 25 % and 2 x 90 % (default)
• Special calibration	5-point calibration: 20 %, 40 %, 60 %, 80 %, 100 % of factory Q <sub>max</sub> 10-point calibration: ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory Q <sub>max</sub> Matched-pair calibration: default, 5-point, 10-point
Material certificate EN 10204-3.1	Available when ordering together with meter <sup>1)</sup>
Drinking water approvals	<ul style="list-style-type: none"> <li>• NSF/ANSI Standard 61<sup>2)</sup> (cold water) USA</li> <li>• WRAS (BS 6920 cold water) UK</li> <li>• ACS Listed France</li> <li>• DVGW W270 Germany</li> <li>• Belgaqua (B)</li> <li>• MCERTS (GB)</li> </ul>
Fire Service Approvals	FM Fire Service Meter (Class Number 1044) <sup>3)</sup>
Conformity	<ul style="list-style-type: none"> <li>• PED: 2014/68/EU<sup>4)</sup></li> <li>• EMC: IEC/EN 61326</li> </ul>
<b>Sensor version</b>	DN 25 ... 1200 (1" ... 48")
<b>Sensor material</b>	Carbon steel ASTM A 105, with corrosion resistant coating of category C4 or C5 according to ISO 12944-2
<b>Measuring principle</b>	Electromagnetic induction
<b>Excitation frequency</b>	
Basic version	
• Battery-powered	DN 25 ... 150 (1" ... 6"): 1/15 Hz DN 200 ... 600 (8" ... 24"): 1/30 Hz DN 700 ... 1200 (28" ... 48"): 1/60 Hz
• Mains-powered	DN 25 ... 150 (1" ... 6"): 6.25 Hz DN 200 ... 600 (8" ... 24"): 3.125 Hz DN 700 ... 1200 (28" ... 48"): 1.5625 Hz

Meter	
<b>Advanced version</b>	
• Battery-powered	DN 25 ... 150 (1" ... 6"): 1/15 Hz (adjustable up to 6.25 Hz; reduced battery lifetime) DN 200 ... 600 (8" ... 24"): 1/30 Hz (adjustable up to 3.125 Hz; reduced battery lifetime) DN 700 ... 1200 (28" ... 48"): 1/60 Hz (adjustable up to 1.5625 Hz; reduced battery lifetime)
• Mains-powered	DN 25 ... 150 (1" ... 6"): 6.25 Hz DN 200 ... 600 (8" ... 24"): 3.125 Hz DN 700 ... 1200 (28" ... 48"): 1.5625 Hz
<b>Flanges</b>	
EN 1092-1 (DIN 2501)	DN 25 and DN 40 (1" and 1½"): PN 40 (580 psi) DN 50 ... 150 (2" ... 6"): PN 16 (232 psi) DN 200 ... 1200 (8" ... 48"): PN 10 or PN 16 (145 psi or 232 psi) DN 350 ... DN 600 (14" ... 24"): PN25 or PN40 (362 psi or 580 psi)
ANSI 16.5 Class 150	1" ... 24": 20 bar (290 psi)
AWWA C-207	28" ... 48": PN 10 (145 psi)
AS 4087	DN 50 ... 1200 (2" ... 48"): PN 16 (232 psi)
<b>Liner</b>	EPDM
<b>Electrode and grounding electrodes</b>	Hastelloy C276/2.4819
<b>Grounding straps</b>	Grounding straps are premounted from the factory on each side of the sensor.

- 1) Has to be ordered with the meter. It is not possible to order the certificate afterwards.
- 2) Including Annex G
- 3) Not for sensors with 300 µm coating.
- 4) For further information on PED standard and requirements see Pressure Equipment Directive in Appendix (chapter 10).

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 8000 for abstraction and distribution network application (7ME6810)

#### Selection and ordering data

#### Article No.

#### SITRANS F M MAG 8000 water meter

7ME6810-

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Diameter

DN 25 (1")

2 D

DN 40 (1½")

2 R

DN 50 (2")

2 Y

DN 65 (2½")

3 F

DN 80 (3")

3 M

DN 100 (4")

3 T

DN 125 (5")

4 B

DN 150 (6")

4 H

DN 200 (8")

4 P

DN 250 (10")

4 V

DN 300 (12")

5 D

DN 350 (14")

5 K

DN 400 (16")

5 R

DN 450 (18")

5 Y

DN 500 (20")

6 F

DN 600 (24")

6 P

DN 700 (28")<sup>1)</sup>

6 Y

DN 750 (30")<sup>1)</sup>

7 D

DN 800 (32")<sup>1)</sup>

7 H

DN 900 (36")<sup>1)</sup>

7 M

DN 1000 (40")<sup>1)</sup>

7 R

DN 1050 (42")<sup>1)</sup>

7 U

DN 1100 (44")<sup>1)</sup>

7 V

DN 1200 (48")<sup>1)</sup>

8 B

#### Flange norm and pressure rating

##### EN 1092-1

PN 10 (DN 200 ... 1200 (8" ... 48"))

B

PN 16 (DN 50 ... 1200 (2" ... 48"))

C

PN 16, non-PED (DN 700 ... 1200 (28" ... 48"))

D

PN 25 (DN 350 ... 600 (12" ... 24"))

E

PN 40 (DN 25 ... 50 (1" ... 1½"), DN 350 ... 600 (12" ... 24"))

F

##### ANSI B16.5

Class 150

J

##### AWWA C-207

Class D (28" ... 48")

L

##### AS 4087

PN 16 (DN 50 ... 1200 (2" ... 48"))

N

#### Sensor version

EPDM liner and Hastelloy electrodes, corrosion-resistant coating of category C4

3

EPDM liner and Hastelloy electrodes, 300 µm corrosion-resistant coating of category C5

4

#### Calibration

Standard ± 0.4 % of rate ± 2 mm/s

1

Extended ± 0.2 % of rate ± 2 mm/s DN 50 ... 300 (2" ... 12")

2

NMI M 10 (2.5%) without verification

3

#### Article No.

#### SITRANS F M MAG 8000 water meter

7ME6810-

#### Region version

Europe (m3, m3/h, 50 Hz)

1

USA (Gallon, GPM, 60 Hz)

2

Australia (MI, MI/d, 50 Hz)

3

#### Transmitter type and installation

Basic version integral or sensor

A

Basic version, remote cables mounted on sensor with IP68/NEMA 6P plugs:

• 5 m (16.4 ft)

B

• 10 m (32.8 ft)

C

• 20 m (65.6 ft)

D

• 30 m (98.4 ft)

E

Advanced version integral on sensor

K

Advanced version, remote cables mounted on sensor with IP68/NEMA 6P plugs:

• 5 m (16.4 ft)

L

• 10 m (32.8 ft)

M

• 20 m (65.6 ft)

N

• 30 m (98.4 ft)

P

#### Communication interface

No additional "add-on" communication module installed

A

Serial RS 485 with Modbus RTU (Terminated as end device)

B

Serial RS 232 with Modbus RTU

C

Encoder interface with Sensus protocol

D

3G/UMTS communication module with remote antenna; 5 m (16.4 ft) cable

S

3G/UMTS communication module with analog inputs and remote antenna; 5 m (16.4 ft) cable

T

#### Power supply

Internal battery (no battery included)

0

Internal battery pack installed<sup>1)</sup>

1

Power cable (1.5 m (4.9 ft)) with IP68/NEMA 6P plugs for external battery (no battery included)

2

12/24 V AC/DC power supply with battery backup and 3 m (9.8 ft) power cable for external connection (no battery included)

3

115 ... 230 V AC power supply with battery backup and 3 m (9.8 ft) power cable for external connection (no battery included)

4

<sup>1)</sup> The Diameter DN 700 (28") to DN 1200 (48") is only available as remote transmitter type installation.

<sup>2)</sup> Lithium batteries are subject to special transportation regulations according to United Nations "Regulation of Dangerous Goods, UN 3090 and UN 3091". Special transport documentation is required to observe these regulations. This may influence both transport time and costs.

### MAG 8000 for abstraction and distribution network application (7ME6810)

Selection and ordering data	Order code	Order code	
<b>Additional information</b>		<b>Additional information</b>	
Please add "-Z" to Article No. and specify Order code(s) and plain text.		Please add "-Z" to Article No. and specify Order code(s) and plain text.	
<b>Certificate</b>		<b>Volume unit</b>	
Inspection certificate 3.1 (EN 10204) - pressure test	<b>C01</b>	m <sup>3</sup>	<b>L40</b>
Material certificate according to EN 10204-3.1 <sup>1)</sup>	<b>C12</b>	MI	<b>L41</b>
<b>Special calibration</b>		G	<b>L42</b>
5-point calibration for DN 15 ... DN 200 <sup>2)</sup>	<b>D01</b>	AF	<b>L43</b>
5-point calibration for DN 250 ... DN 600 <sup>2)</sup>	<b>D02</b>	l x 100	<b>L44</b>
5-point calibration for DN 700 ... DN 1200 <sup>2)</sup>	<b>D03</b>	m <sup>3</sup> x 100	<b>L45</b>
10-point calibration for DN 15 ... DN 200 <sup>3)</sup>	<b>D06</b>	G x 100	<b>L46</b>
10-point calibration for DN 250 ... DN 600 <sup>3)</sup>	<b>D07</b>	CF x 100	<b>L47</b>
10-point calibration for DN 700 ... DN 1200 <sup>3)</sup>	<b>D08</b>	MG	<b>L48</b>
Default (2 x 25 % and 2 x 90 %) match-pair calibration for DN 15 ... DN 200	<b>D11</b>	G x 1000	<b>L49</b>
Default (2 x 25 % and 2 x 90 %) match-pair calibration for DN 250 ... DN 600	<b>D12</b>	CF x 1000	<b>L50</b>
Default (2 x 25 % and 2 x 90 %) match-pair calibration for DN 700 ... DN 1200	<b>D13</b>	AI	<b>L51</b>
5-point, matched-pair calibration for DN 15 ... DN 200 <sup>2)</sup>	<b>D15</b>	kl	<b>L52</b>
5-point, matched-pair calibration for DN 250 ... DN 600 <sup>2)</sup>	<b>D16</b>	BBL42 (US oil barrel, 1 barrel = 42 US gallons)	<b>L54</b>
5-point, matched-pair calibration for DN 700 ... DN 1200 <sup>2)</sup>	<b>D17</b>	Volume unit = AF, amount per pulse A = 1 US Gallon <sup>5)</sup>	<b>L55</b>
10-point, matched-pair calibration for DN 15 ... DN 200 <sup>3)</sup>	<b>D18</b>	Volume unit = AI, amount per pulse A = 1 US Gallon <sup>5)</sup>	<b>L56</b>
10-point, matched-pair calibration for DN 250 ... DN 600 <sup>3)</sup>	<b>D19</b>	Volume unit = CFx100, amount per pulse A = 1 US Gallon <sup>5)</sup>	<b>L57</b>
10-point, matched-pair calibration for DN 700 ... DN 1200 <sup>3)</sup>	<b>D20</b>	Volume unit = BBL42, amount per pulse A = 1 US Gallon <sup>5)</sup>	<b>L58</b>
<b>Flow unit</b>		<b>Pulse set up</b>	
l/s	<b>L00</b>	(default pulse A = forward and pulse B = Alarm, pulse width = 50 ms)	
MGD	<b>L01</b>	A function = RV, reverse flow	<b>L62</b>
CFS	<b>L02</b>	A function = FWnet, forward net flow	<b>L63</b>
l/min	<b>L03</b>	A function = RVnet, reverse net flow	<b>L64</b>
m <sup>3</sup> /min	<b>L04</b>	A function = Off	<b>L65</b>
GPM	<b>L05</b>	Volume per pulse A = x 0.0001 <sup>4)</sup>	<b>L70</b>
CFM	<b>L06</b>	Volume per pulse A = x 0.001 <sup>4)</sup>	<b>L71</b>
l/h	<b>L07</b>	Volume per pulse A = x 0.01 <sup>4)</sup>	<b>L72</b>
m <sup>3</sup> /h	<b>L08</b>	Volume per pulse A = x 0.1 <sup>4)</sup>	<b>L73</b>
GPH	<b>L09</b>	Volume per pulse A = x 1 <sup>4)</sup>	<b>L74</b>
CFH	<b>L10</b>	Pulse A pulse width 5 ms (volume per pulse x 1)	<b>L75</b>
GPS	<b>L11</b>	Pulse A pulse width 10 ms (volume per pulse x 1)	<b>L76</b>
MI/d	<b>L12</b>	Pulse A pulse width 50 ms (volume per pulse x 1)	<b>L77</b>
m <sup>3</sup> /d	<b>L13</b>	Pulse A pulse width 100 ms (volume per pulse x 1)	<b>L78</b>
GPD	<b>L14</b>	Pulse A pulse width 500 ms (volume per pulse x 1)	<b>L79</b>
BBL42/s	<b>L15</b>	B function = FW, forward flow	<b>L80</b>
BBL42/min	<b>L16</b>	B function = RV, reverse flow	<b>L81</b>
BBL42/h	<b>L17</b>	B function = FWnet, forward net flow	<b>L82</b>
BBL42/d	<b>L18</b>	B function = RVnet, reverse net flow	<b>L83</b>
<b>Totalizer</b>		B function = Alarm	<b>L84</b>
Volume calculation (default totalizer 1= forward and totalizer 2 = reverse)		B function = Call up	<b>L85</b>
Totalizer 1 = RV, reverse flow	<b>L20</b>	Volume per pulse B = x 0.0001 <sup>4)</sup>	<b>L90</b>
Totalizer 1 = NET, net flow	<b>L22</b>	Volume per pulse B = x 0.001 <sup>4)</sup>	<b>L91</b>
Totalizer 2 = FW, forward flow	<b>L30</b>	Volume per pulse B = x 0.01 <sup>4)</sup>	<b>L92</b>
Totalizer 2 = NET, net flow	<b>L31</b>	Volume per pulse B = x 0.1 <sup>4)</sup>	<b>L93</b>
		Volume per pulse B = x 1 <sup>4)</sup>	<b>L94</b>

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 8000 for abstraction and distribution network application (7ME6810)

Selection and ordering data	Order code
<b>Additional information</b>	
Please add "-Z" to Article No. and specify Order code(s) and plain text.	
<b>Device operation</b>	
Only operator menu activated	<b>M11</b>
<b>Data logger set up (default month logging)</b>	
DataloggerInterval = Daily	<b>M31</b>
DataloggerInterval = Weekly	<b>M32</b>
<b>Factory mounted cables</b>	
5 m (16.4 ft) pulse cable A+B	<b>M81</b>
5 m (16.4 ft) communication cable RS 232/RS 485 terminated as end device	<b>M82</b>
20 m (65.6 ft) pulse cable A+B	<b>M84</b>
20 m (65.6 ft) communication cable RS 232/RS 485 terminated as end device	<b>M85</b>
Cello 2 channel, input cable 3 m (9.84 ft) with Brad Harrison micro-change 3 way connector	<b>M87</b>
Cello 2 channel, input cable 5 m (16.4 ft) with MIL-C-26482 spec. connectors	<b>M89</b>
Encoder interface cable with connector for ITRON 200WP radio, length 25 ft	<b>M90</b>
Encoder interface cable with connector for ITRON 200WP radio, length 5 ft	<b>M91</b>
SOFREL cable 2 m for LS42 data logger	<b>M92</b>
Adaptors for conduit installation	<b>M94</b>
SOFREL cable 2 m for LS-Flow data logger	<b>M97</b>
<b>FM Fire Service Approval</b>	
(with ANSI B16.5 Class 150 flanges)	
DN 50, DN 80 and DN 100 (2", 3" and 4")	<b>P20</b>
DN 150 and DN 200 (6" and 8")	<b>P21</b>
DN 250 and DN 300 (10" and 12")	<b>P22</b>
<b>Region/customer specific labels</b>	
KCC label (South Korea)	<b>W28</b>
DIN 43863 label <sup>1)</sup>	<b>H21</b>
DIN 43863 label with SWM mark <sup>1)</sup>	<b>H22</b>
ADDC label	<b>H23</b>
<b>Region specific settings</b>	
Low flow cutoff = 5 mm/s	<b>M20</b>

<sup>1)</sup> Under preparation

<sup>2)</sup> 20 %, 40 %, 60 %, 80 %, 100 % of factory  $Q_{max}$

<sup>3)</sup> Ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory  $Q_{max}$

<sup>4)</sup> Pulse width = 10 ms

<sup>5)</sup> Pulse width = 5 ms

<sup>6)</sup> Siemens warrants the measurement accuracy down to a flow velocity of 15 mm/s. For a flow velocity below 15 mm/s, we don't warrant the measurement accuracy

#### Operating instructions for SITRANS F M MAG 8000

Description	Article No.
• English	<b>A5E03071515</b>
• German	<b>A5E00740986</b>

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/processinstrumentation/documentation>

#### Operating instructions for MAG 8000 3G/UMTS communication module

Description	Article No.
• English	<b>A5E03644134</b>

## Overview



## Benefits

### **Approvals**

- MI-001, OIML R 49/OIML R 49 MAA
- FM Fire Service

### **Easy to install**

- Compact or remote solution with factory mounted cable and customer setting from factory
- IP68/NEMA 6P enclosure. Sensor can be buried.
- Flexible power supply - internal or external battery pack or mains power supply with battery back-up possibilities

### **Long-term stability/Low cost of ownership**

- No moving parts in a robust construction means less wear and tear
- Basic and advanced transmitter versions with different optional add-on communication modules fulfil various customer requirements for high cost efficiency
- Bi-directional measurement with an outstanding low flow performance
- Up to 10 years maintenance-free operation in typical applications
- Insignificant pressure drop

### **Intelligent information, easy to access**

- Advanced information on site
- Advanced statistics and diagnostics
- Connectable to common AMR systems

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 8000 CT for revenue and bulk metering (7ME6820)

#### Technical specifications

Meter	
<b>Accuracy</b>	OIML R 49/OIML R 49 MAA accuracy class I for DN 50, DN 350 ... DN 600 accuracy class II for DN 50 ... DN 600  MI-001 verification for DN 50 ... DN 600 (2" ... 24"), with Q3/Q1 = 315  FM Fire Service for DN 50, DN 80, DN 100, DN 150, DN 200, DN 250, and DN 300 (2", 3", 4", 6", 8", 10", and 12") ± 1,5 % (Q <sub>min</sub> to Q <sub>max</sub> )
<b>Low flow cut-off (default)</b>	15 mm/s
<b>Media conductivity</b>	Clean water > 20 µs/cm
<b>Temperature</b>	
Ambient	-20 ... +60 °C (-4 ... +140 °F) MI-001: -25 ... +55 °C (-13 ... +131 °F)
Media	0.1 ... 50 °C (32 ... 122 °F)
Storage	-40 ... +70 °C (-22 ... +158 °F)
<b>Enclosure rating</b>	
Remote sensor	IP68 to EN 60529/NEMA 6P, 10 mH <sub>2</sub> O cont.
Compact version	IP68 to EN 60529/NEMA 6P, 3 mH <sub>2</sub> O for six months
<b>Certificates and approvals</b>	
Calibration (standard)	2 × 25 % and 2 × 90 %
Material certificate EN 10204-3.1	Available when ordering together with meter <sup>1)</sup>
Drinking water approvals	<ul style="list-style-type: none"> <li>• NSF/ANSI Standard 61<sup>2)</sup> (cold water) USA</li> <li>• WRAS (BS 6920 cold water) UK</li> <li>• ACS Listed France</li> <li>• DVGW W270 Germany</li> <li>• Belgaqua (B)</li> <li>• MCERTS (GB)</li> </ul>
Fire Service approval	FM Fire Service (1044) <sup>3)</sup>
Custody transfer approval	<ul style="list-style-type: none"> <li>• OIML R 49 and OIML R 49 MAA approval</li> <li>• MI-001 approval (DK-0200-MI001-011)</li> </ul>
Conformity	<ul style="list-style-type: none"> <li>• CEN EN 14154, ISO 4064</li> <li>• PED: 2014/68/EU<sup>4)</sup></li> </ul> For pressure/temperature curves see MAG 3100 on page 3/67 <ul style="list-style-type: none"> <li>• EMC: IEC/EN 61326</li> <li>• CRN (DN 50 ... DN 1200 (2" ... 48"))</li> </ul>

Meter	
<b>Sensor version</b>	DN 50 ... 600 (2" ... 24")
<b>Sensor material</b>	Carbon steel ASTM A 105, with corrosion resistant coating of category C4 or C5 according to ISO 12944-2
<b>Measuring principle</b>	Electromagnetic induction
<b>Excitation frequency</b>	
Basic version	
• Battery-powered	DN 50 ... 150 (2" ... 6"): 1/15 Hz DN 200 ... 600 (8" ... 24"): 1/30 Hz
• Mains-powered	DN 50 ... 150 (2" ... 6"): 6.25 Hz DN 200 ... 600 (8" ... 24"): 3.125 Hz
Advanced version	
• Battery-powered	DN 50 ... 150 (2" ... 6"): 1/15 Hz (adjustable up to 6.25 Hz; reduced battery lifetime) DN 200 ... 600 (8" ... 24"): 1/30 Hz (adjustable up to 3.125 Hz; reduced battery lifetime)
• Mains-powered	DN 50 ... 150 (2" ... 6"): 6.25 Hz DN 200 ... 600 (8" ... 24"): 3.125 Hz
<b>Flanges</b>	
EN 1092-1 (DIN 2501)	DN 50 ... 150 (2" ... 6"): PN 16 (232 psi) DN 200 ... 300 (8" ... 12"): PN 10 or PN 16 (145 psi or 232 psi) up to DN 600 (24") in preparation
ANSI 16.5 Class 150	2" ... 12": 20 bar (290 psi) up to DN 600 (24") in preparation
AWWA C-207	28" ... 48": PN 10 (145 psi)
AS 4087	DN 50 ... 300 (2" ... 12"): PN 16 (232 psi) up to DN 600 (24") in preparation
<b>Liner</b>	EPDM
<b>Electrode and grounding electrodes</b>	Hastelloy C276/2.4819
<b>Grounding straps</b>	Grounding straps are premounted from the factory on each side of the sensor.

<sup>1)</sup> Has to be ordered with the meter. It is not possible to order the certificate afterwards.

<sup>2)</sup> Including Annex G

<sup>3)</sup> Not for sensors with 300 m coating.


<sup>4)</sup> For further information on the PED standard and requirements see Pressure Equipment Directive in Appendix (chapter 10).

**Technical specifications** (continued)

**MAG 8000 CT (Revenue program) water meter type approval**

MAG 8000 CT program is type approved and verified according to international water meter standard OIML R 49.

The custody transfer program is approved as Class 1 (DN 50, DN 350 ... DN 600) and Class 2 (DN 50 ... DN 600), at different Q3 and Q3/Q1, according to OIML R 49:2013 specification.

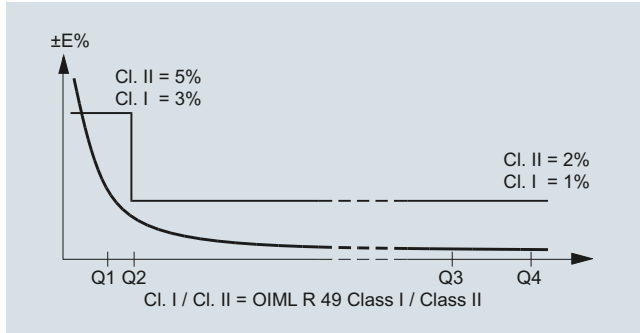

OIML R 49:2013 specification for Class 1<sup>1)</sup>

7ME6820	DN 50 (2")	DN 350 (14")	DN 400 (16")	DN 450 (18")	DN 500 (20")	DN 600 (24")
<b>R (Q3/Q1)</b>	<b>200</b>	<b>125</b>	<b>125</b>	<b>125</b>	<b>125</b>	<b>125</b>
Q4 [m <sup>3</sup> /h]	78.75	3125	5000	5000	7875	7875
<b>Q3 [m<sup>3</sup>/h]</b>	<b>63</b>	<b>2500</b>	<b>4000</b>	<b>4000</b>	<b>6300</b>	<b>6300</b>
Q2 [m <sup>3</sup> /h]	0.5	32	51.2	51.2	80.64	80.64
Q1 [m <sup>3</sup> /h]	0.32	20	32	32	50.4	50.4

OIML R 49:2013 specification for Class 2<sup>1)</sup>

7ME6820	Horizontal installation													
	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")	DN 350 (14")	DN 400 (16")	DN 450 (18")	DN 500 (20")	DN 600 (24")
<b>R (Q3/Q1)</b>	<b>315</b>	<b>315</b>	<b>315</b>	<b>315</b>	<b>315</b>	<b>315</b>	<b>315</b>	<b>315</b>	<b>315</b>	<b>200</b>	<b>200</b>	<b>200</b>	<b>200</b>	<b>200</b>
Q4 [m <sup>3</sup> /h]	78.75	125	200	312.5	500	787.5	1250	2000	2000	3125	5000	5000	7875	7875
<b>Q3 [m<sup>3</sup>/h]</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>	<b>1000</b>	<b>1600</b>	<b>1600</b>	<b>2500</b>	<b>4000</b>	<b>4000</b>	<b>6300</b>	<b>6300</b>
Q2 [m <sup>3</sup> /h]	0.32	0.51	0.81	1.27	2.03	3.2	5.08	8.13	8.13	20	32	32	50.4	50.4
Q1 [m <sup>3</sup> /h]	0.2	0.32	0.51	0.79	1.27	2	3.18	5.08	5.08	12.5	20	20	31.5	31.5

<sup>1)</sup> The product will be delivered according to requested specifications, which may deviate from the specifications of the approval frame described in tables below.

## Flow Measurement

SITRANS FM (electromagnetic)

Flow sensors

### MAG 8000 CT for revenue and bulk metering (7ME6820)

#### Technical specifications (continued)

##### MAG 8000 CT (Revenue program) MI-001


MAG 8000 CT program is type approved according to international water meter standard OIML R 49. Since the first November 2006 the MI-001 water meter directive is in force, which means that all water meters can be sold across the EU borders if the water meters contain a MI-001 label.

The MAG 8000 CT MI-001 verified and labeled products are a Class II approval according to Directive 2014/32/EU of the European Parliament and Council of 26 February, 2014 on measuring instruments, Annex III Water meters (MI-001) in the sizes from DN 50 to DN 600.

The MID certification is obtained as a B + D module approval according to the above mentioned directive.

Module B: Type approval according to OIML R 49

Module D: Quality insurance approval of production

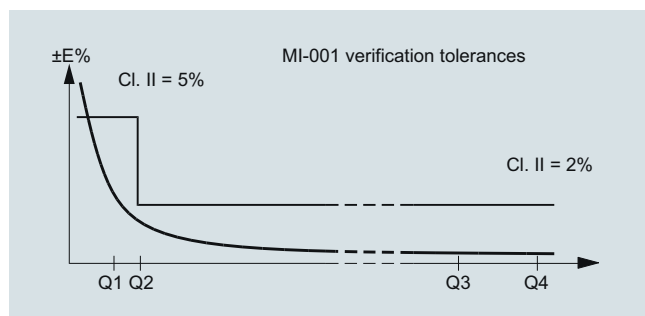

**MAG 8000 CT MI-001** verified and labeled products at a given  $Q3$  and  $Q4/Q3 = 1.25$  and  $Q2/Q1 = 1.6$  measuring ranges see below table:

Horizontal installation														
7ME6820-xxxx1	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")	DN 350 (14")	DN 400 (16")	DN 450 (18")	DN 500 (20")	DN 600 (24")
<b>R (Q3/Q1)</b>	<b>40</b>	<b>40</b>	<b>40</b>	<b>40</b>	<b>40</b>	<b>40</b>	<b>40</b>	<b>40</b>	<b>40</b>	<b>40</b>	<b>40</b>	<b>40</b>	<b>40</b>	<b>40</b>
Q4 [m³/h]	20	31.25	50	78.75	125	200	312.5	500	787.5	787.5	1250	2000	3125	5000
<b>Q3 [m³/h]</b>	<b>16</b>	<b>25</b>	<b>40</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>	<b>630</b>	<b>1000</b>	<b>1600</b>	<b>2500</b>	<b>4000</b>
Q2 [m³/h]	0.64	1	1.6	2.52	4	6.4	10	16	25.2	25.2	40	64	100	160
Q1 [m³/h]	0.4	0.63	1	1.58	2.5	4	6.25	10	15.75	15.75	25	40	62.5	100

Horizontal installation														
7ME6820-xxxx2	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")	DN 350 (14")	DN 400 (16")	DN 450 (18")	DN 500 (20")	DN 600 (24")
<b>R (Q3/Q1)</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>
Q4 [m³/h]	20	31.25	50	79	125	200	312.5	500	788	1250	2000	3125	5000	7875
<b>Q3 [m³/h]</b>	<b>16</b>	<b>25</b>	<b>40</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>	<b>1000</b>	<b>1600</b>	<b>2500</b>	<b>4000</b>	<b>6300</b>
Q2 [m³/h]	0.41	0.64	1.02	1.6	2.54	4.06	6.35	10.16	16	25.4	40.63	63.49	101.59	160
Q1 [m³/h]	0.25	0.4	0.64	1	1.59	2.54	3.97	6.35	10	15.88	25.4	39.68	63.49	100



#### MAG 8000 CT for revenue and bulk metering (7ME6820)

#### Technical specifications (continued)


Horizontal installation														
7ME6820-xxxx3	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")	DN 350 (14")	DN 400 (16")	DN 450 (18")	DN 500 (20")	DN 600 (24")
<b>R (Q3/Q1)</b>	<b>80</b>	<b>80</b>	<b>80</b>	<b>80</b>	<b>80</b>	<b>80</b>	<b>80</b>	<b>80</b>	<b>80</b>	<b>80</b>	<b>80</b>	<b>80</b>	<b>80</b>	<b>80</b>
Q4 [m³/h]	31.25	50	79	125	200	312.5	500	788	1250	2000	3125	5000	7875	8000
<b>Q3 [m³/h]</b>	<b>25</b>	<b>40</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>	<b>1000</b>	<b>1600</b>	<b>2500</b>	<b>4000</b>	<b>6300</b>	<b>10000</b>
Q2 [m³/h]	0.5	0.8	1.26	2	3.2	5	8	12.6	20	32	50	80	126	200
Q1 [m³/h]	0.31	0.5	0.79	1.25	2	3.13	5	7.88	12.5	20	31.25	50	78.75	126

Horizontal installation														
7ME6820-xxxx4	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")	DN 350 (14")	DN 400 (16")	DN 450 (18")	DN 500 (20")	DN 600 (24")
<b>R (Q3/Q1)</b>	<b>160</b>	<b>160</b>	<b>160</b>	<b>160</b>	<b>160</b>	<b>160</b>	<b>160</b>	<b>160</b>	<b>160</b>	<b>160</b>	<b>160</b>	<b>160</b>	<b>160</b>	<b>160</b>
Q4 [m³/h]	50	79	125	200	312.5	500	788	1250	2000	3125	5000	7875	10000	12600
<b>Q3 [m³/h]</b>	<b>40</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>	<b>1000</b>	<b>1600</b>	<b>2500</b>	<b>4000</b>	<b>6300</b>	<b>10000</b>	<b>12600</b>
Q2 [m³/h]	0.4	0.63	1	1.6	2.5	4	6.3	10	16	25	40	63	100	126
Q1 [m³/h]	0.25	0.39	0.63	1	1.56	2.5	3.94	6.25	10	15.63	25	39.38	63	78.75

Horizontal installation									
7ME6820-xxxx5	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
<b>R (Q3/Q1)</b>	<b>200</b>	<b>200</b>	<b>200</b>	<b>200</b>	<b>200</b>	<b>200</b>	<b>200</b>	<b>200</b>	<b>200</b>
Q4 [m³/h]	78.75	125	200	312.5	500	787.5	1250	2000	3125
<b>Q3 [m³/h]</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>	<b>1000</b>	<b>1600</b>	<b>2500</b>
Q2 [m³/h]	0.5	0.8	1.28	2	3.2	5.04	8	12.8	20
Q1 [m³/h]	0.32	0.5	0.8	1.25	2	3.15	5	8	12.5

Horizontal installation									
7ME6820-xxxx6	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
<b>R (Q3/Q1)</b>	<b>250</b>	<b>250</b>	<b>250</b>	<b>250</b>	<b>250</b>	<b>250</b>	<b>250</b>	<b>250</b>	<b>250</b>
Q4 [m³/h]	78.75	125	200	312.5	500	787.5	1250	2000	3125
<b>Q3 [m³/h]</b>	<b>63</b>	<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>	<b>1000</b>	<b>1600</b>	<b>2500</b>
Q2 [m³/h]	0.4	0.64	1.02	1.6	2.56	4.03	6.4	10.24	16
Q1 [m³/h]	0.25	0.40	0.64	1	1.6	2.52	4	6.4	10

The Label is placed on the side of the encapsulation. An example of the product label is shown below:

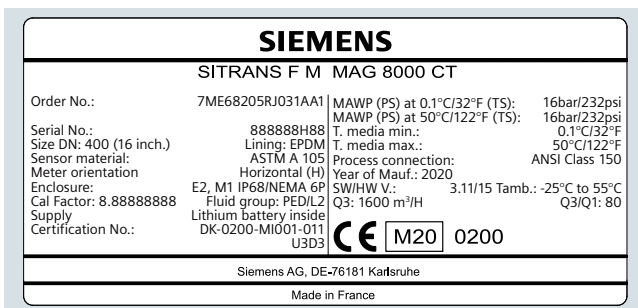

#### Installation conditions

Please refer to "System information SITRANS FM electromagnetic flowmeters".


#### Battery operation time and calculation

The battery operation time depends on the connected battery pack as well as the operation condition of the meter.

MAG 8000 calculates the remaining capacity every 4 hours and includes all consuming elements. Calculation compensates for temperature influence on battery capacity (drawing).

#### MAG 8000 CT (7ME6820) for Fire Service applications

MAG 8000 CT (7ME6820) is FM Fire Service approved for automatic fire protection systems according to the Fire Service Meters Standard, Class Number 1044. The approval is applicable for the sizes 50, DN 80, DN 100, DN 150, DN 200, DN 250, and DN 300 (2", 3", 4", 6", 8", 10", and 12") with ANSI B16.5 Class 150 flanges. The FM Fire Service approved product can be ordered via the Z-options P20, P21 and P22.

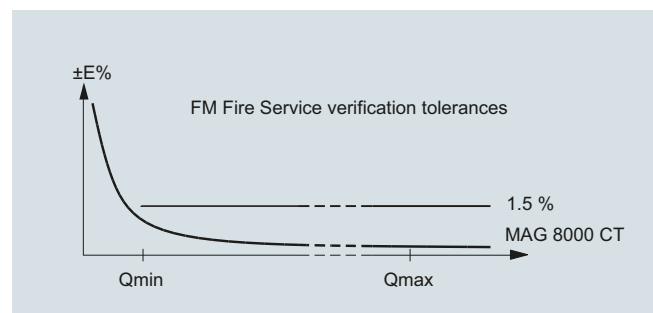

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### MAG 8000 CT for revenue and bulk metering (7ME6820)

#### Selection and ordering data

#### Article No.

#### Article No.

#### SITRANS FM

7ME6820-

#### MAG 8000 CT water meter with EPDM liner and Hastelloy electrodes

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Diameter

DN 50 (2")

2 Y

DN 65 (2½")

3 F

DN 80 (3")

3 M

DN 100 (4")

3 T

DN 125 (5")

4 B

DN 150 (6")

4 H

DN 200 (8")

4 P

DN 250 (10")

4 V

DN 300 (12")

5 D

DN 350 (14")

5 K

DN 400 (16")

5 R

DN 450 (18")

5 Y

DN 500 (20")

6 F

DN 600 (24")

6 P

#### Flange norm and pressure rating

EN 1092-1

PN 10

B

PN 16

C

ANSI B16.5

Class 150

J

AS4087

PN 16

N

#### Sensor version

EPDM liner and Hastelloy electrodes, corrosion-resistant coating of category C4

0

EPDM liner and Hastelloy electrodes, 300 µm corrosion-resistant coating of category C5

4

#### Approval/Verification<sup>2)</sup>

Without verification according to OIML R 49<sup>3)</sup>

0

MI-001 Q3/Q1 = 40

1

MI-001 Q3/Q1 = 63

2

MI-001 Q3/Q1 = 80

3

MI-001 Q3/Q1 = 160

4

MI-001 Q3/Q1 = 200

5

MI-001 Q3/Q1 = 250

6

Without verification calibrated to OIML R 49-Class II (Q3/Q1 = 100)

7

Without verification calibrated to OIML R 49-Class II (Q3/Q1 = 250)

8

#### Region version

Europe (m<sup>3</sup>, m<sup>3</sup>/h, 50 Hz)

1

USA (m<sup>3</sup>, m<sup>3</sup>/h, 60 Hz)

2

#### SITRANS FM

7ME6820-

#### MAG 8000 CT water meter with EPDM liner and Hastelloy electrodes

#### Transmitter type and installation

Basic version integral on sensor

A

Basic version, remote cables mounted on sensor with IP68/NEMA 6P plugs

B

5 m (16.4 ft)

C

10 m (32.8 ft)

D

20 m (65.6 ft)

E

30 m (98.4 ft)

K

Advanced version integral on sensor

Advanced version, remote cables mounted on sensor with IP68/NEMA 6P plugs

L

5 m (16.4 ft)

M

10 m (32.8 ft)

N

20 m (65.6 ft)

P

30 m (98.4 ft)

#### Communication interface

No additional "add-on" communication module installed

A

Serial RS 485 with Modbus RTU (Terminated as end device)

B

Serial RS 232 with Modbus RTU

C

Encoder interface for ITRON 200WP radio with "Sensus" protocol"

D

3G/UMTS communication module with remote antenna; 5 m (16.4 ft) cable

S

3G/UMTS communication module with analog inputs and remote antenna; 5 m (16.4 ft) cable

T

#### Power supply

Internal battery (no battery included)

0

Internal battery pack installed<sup>1)</sup>

1

Power cable (1.5 m (4.9 ft)) with IP68/NEMA 6P plugs for external battery (no battery included)

2

12/24 V AC/DC power supply with battery backup and 3 m (9.8 ft) power cable for external connection (no battery included)

3

115 ... 230 V AC power supply with battery backup and 3 m (9.8 ft) power cable for external connection (no battery included)

4

- <sup>1)</sup> Lithium batteries are subject to special transportation regulations according to United Nations "Regulation of Dangerous Goods, UN 3090 and UN 3091". Special transport documentation is required to observe these regulations. This may influence both transport time and costs.
- <sup>2)</sup> For more details and references of the ranges please see the tables on the previous pages.
- <sup>3)</sup> Standard calibration or according to FM Fire Service requirements if P20, P21 or P22 is selected as Z option.

Selection and ordering data	Order code	Order code
<b>Additional information</b>		<b>Additional information</b>
Please add "-Z" to Article No. and specify Order code(s) and plain text.		Please add "-Z" to Article No. and specify Order code(s) and plain text.
Inspection certificate 3.1 (EN 10204) - pressure test	<b>C01</b>	<b>FM Fire Service Approval</b>
Material certificate according to EN 10204-3.1 <sup>1)</sup>	<b>C12</b>	(with ANSI B16.5 Class 150 flanges)
<b>Totalizer</b>		DN 50, DN 80 and DN 100 (2", 3" and 4")
Volume calculation (default totalizer 1= forward and totalizer 2 = reverse)		<b>P20</b>
Totalizer 1 = RV, reverse flow	<b>L20</b>	DN 150 and DN 200 (6" and 8")
Totalizer 1 = NET, net flow	<b>L22</b>	<b>P21</b>
Totalizer 2 = FW, forward flow	<b>L30</b>	DN 250 and DN 300 (10" and 12")
Totalizer 2 = NET, net flow	<b>L31</b>	<b>P22</b>
<b>Pulse set up</b>		<b>Region/customer specific label</b>
(default pulse A = forward and pulse B = Alarm, pulse width = 50 ms)		KCC label (South Korea)
A function = RV, reverse flow	<b>L62</b>	FP2E label (France)
A function = FWnet, forward net flow	<b>L63</b>	DIN 43863 label <sup>1)</sup>
A function = RVnet, reverse net flow	<b>L64</b>	DIN 43863 label with SWM mark <sup>1)</sup>
A function = Off	<b>L65</b>	ADDC label
Volume per pulse A = x 0.001 <sup>2)</sup>	<b>L71</b>	<sup>1)</sup> Under preparation
Volume per pulse A = x 0.01 <sup>2)</sup>	<b>L72</b>	<sup>2)</sup> Pulse width = 10 ms
Volume per pulse A = x 0.1 <sup>2)</sup>	<b>L73</b>	
Volume per pulse A = x 1 <sup>2)</sup>	<b>L74</b>	
B function = FW, forward flow	<b>L80</b>	
B function = RV, reverse flow	<b>L81</b>	
B function = FWnet, forward net flow	<b>L82</b>	
B function = RVnet, reverse net flow	<b>L83</b>	
B function = Alarm	<b>L84</b>	
B function = Call up	<b>L85</b>	
Volume per pulse B = x 0.001 <sup>2)</sup>	<b>L91</b>	
Volume per pulse B = x 0.01 <sup>2)</sup>	<b>L92</b>	
Volume per pulse B = x 0.1 <sup>2)</sup>	<b>L93</b>	
Volume per pulse B = x 1 <sup>2)</sup>	<b>L94</b>	
<b>Data logger set up (default month logging)</b>		
DataloggerInterval = Daily	<b>M31</b>	
DataloggerInterval = Weekly	<b>M32</b>	
<b>Factory mounted cables</b>		
5 m (16.4 ft) pulse cable A+B	<b>M81</b>	
5 m (16.4 ft) communication cable RS 232/RS 485 terminated as end device	<b>M82</b>	
20 m (65.6 ft) pulse cable A+B	<b>M84</b>	
20 m (65.6 ft) communication cable RS 232/RS 485 terminated as end device	<b>M85</b>	
Cello 2 channel, input cable 3 m (9.84 ft) with Brad Harrison micro-change 3 way connector	<b>M87</b>	
Cello 2 channel, input cable 5 m (16.4 ft) with MIL-C-26482 spec. connectors	<b>M89</b>	
5 ft. Encoder interface cable with connector for ITRON 200WP radio	<b>M91</b>	
25 ft. Encoder interface cable with connector for ITRON 200WP radio	<b>M90</b>	
SOFREL cable 2 m for LS42 data logger	<b>M92</b>	
SOFREL cable 2 m for LS-Flow data logger	<b>M97</b>	

<b>Operating instructions for SITRANS F M MAG 8000</b>	
Description	Article No.
• English	<b>A5E03071515</b>
• German	<b>A5E00740986</b>

All literature is available to download for free, in a range of languages, at <http://www.siemens.com/processinstrumentation/documentation>

<b>Operating instructions for MAG 8000 3G/UMTS communication module</b>	
Description	Article No.
• English	<b>A5E03644134</b>

## Flow Measurement

SITRANS FM (electromagnetic)

Flow sensors

### MAG 8000 3G/UMTS Wireless Communication Module

#### Overview



3G/UMTS communication module



PC-IrDA connection

#### **MAG 8000 3G/UMTS Wireless Communication Module**

The 3G/UMTS wireless communication module is a compact built-in solution which can be installed in the existing MAG 8000 with SW version 3.02 and higher, supporting HSDPA cat. 8/HSUPA Cat.6 at 5 UMTS bands, with the ability to fall back to GSM/GPRS network in case there is no 3G signal.

The 3G/UMTS module collects comprehensive measurement data from MAG 8000 at an interval down to 1 minute, allows for data transmission via numerous protocols including SMS, email via SMTP, email via SMTPS (TLS/SSL-based encryption), FTP, and FTPS (TLS/SSL-based encryption, implicit), with a customer configurable transmission interval (down to 1 hour). This provides customers with the flexibility to receive data via email, FTP or text message for the monitoring and control systems anywhere in the world.

TLS/SSL based data encryption provides a high level information security to protect customers data privacy.

The 3G/UMTS module offers

- Remote Qualification Certificate feature to enable the offsite diagnostic and audit on devices installed anywhere in the world
- 2-channel analog input measurement for external ratiometric pressure transmitter, transmission together with flow measurement (2-in-1 solution)
- 4-20 mA alarm signal detection and realtime SMS alarm for tamper protection and flooding situations
- Real-time clock synchronization with internet NTP server, ensuring that all measurement data is accurately time-stamped
- Data transmission at customer-specified points in time, allowing for synchronization of information from multiple MAG 8000 devices


The OPC server specifically designed for the MAG 8000 3G/UMTS module is offered free of charge. With this value-added package, the opportunity for measurement data collection and further processing/analyzing for system integration and automation is offered.

The package of information retrieved via the csv file includes:

- Time stamp
- Flow rate
- Tot 1
- Tot 2
- Tot 3
- Analog 1 (mA)
- Analog 2 (V)
- Battery lifetime
- Alarm list (as decimal format)

#### Circuit diagrams

##### Electrical installation of 3G/UMTS module

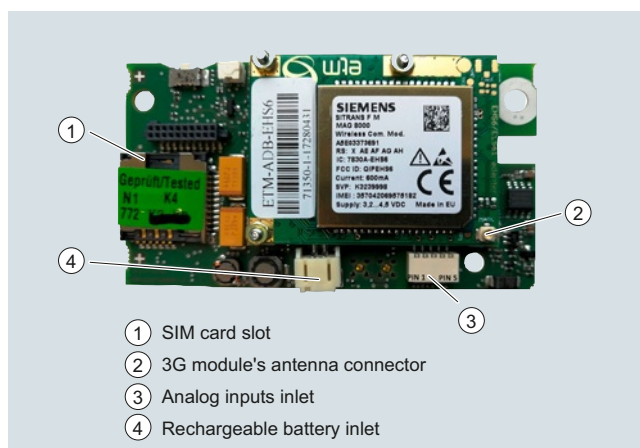

### Selection and ordering data

#### Accessories

Description	Article No.		Description	Article No.	
PC Flow Tool on CD (Download for free from <a href="http://www.siemens.com/flow">http://www.siemens.com/flow</a> )	<b>FDK:087L6001</b>		One cable entry 2 ... 5 mm (0.08 ... 0.20 ") M12 brass glands with M20 reduction <sup>2)</sup> . Package of 10 pcs, for 3G/UMTS module antenna cable, power cable of external battery pack, encoder card cable.	<b>FDK:087L4154</b>	
IrDA infrared interface adapter with USB for data acquisition with 1.2 m (3.9 ft) cable	<b>FDK:087L4163</b>		One cable entry 6 ... 8 mm (0.24 ... 0.31 ") M20 brass glands pack- age <sup>2)</sup> (10 pcs), for pulse output cable or MODBUS cable, Cello cable or mains power supply	<b>FDK:087L4155</b>	
Battery backup for mains power supply, 1 pc. D-cell (3.6 V, 16.5 Ah) <sup>1)</sup>	<b>A5E03354392</b>		One cable entry 8 ... 11 mm (0.31 ... 0.43 ") M20 brass glands package <sup>2)</sup> (10 pcs), for SOFREL cable	<b>FDK:087L4156</b>	
Rechargeable Lithium battery for MAG 8000 3G/UMTS communi- cation module <sup>1)</sup>	<b>A5E03436686</b>		One cable entry 11 ... 15 mm (0.43 ... 0.59 ") M20 brass glands package <sup>2)</sup> (10 pcs)	<b>FDK:087L4157</b>	
Internal battery pack, one set of 2 D-cell (3.6 V, 33 Ah) and access- ories for replacement <sup>1)</sup> incl. NBR O-ring	<b>FDK:087L4150</b>		Two cable entries 3.5 ... 5 mm (0.14 ... 0.20 ") M20 brass glands package <sup>2)</sup> (10 pcs)	<b>FDK:087L4158</b>	
External battery pack IP68/ NEMA 6P with connector, 4 D-cell (3.6 V, 66 Ah) <sup>1)</sup> . Order cable FDK:087L4152 separately.	<b>FDK:087L4151</b>		Two cable entries 5.5 ... 7.5 mm (0.22 ... 0.30 "), M20 brass glands package <sup>2)</sup> (10 pcs)	<b>FDK:087L4159</b>	
Mains power supply 12 ... 24 V AC/DC (average power consumption during line ≤ 0.1 VA) with battery backup and 3 m (9.8 ft) power cable for exter- nal connection (backup battery not included) Temperature range: Fixed laying: -40 ... +90 °C (-40 ... +194 °F) Flexible application: -30 ... +80 °C (-22 ... +176 °F)	<b>FDK:087L4210</b>		High gain antenna for MAG 8000 3G/UMTS (PVC, IP68, cable length 5 m (16.4 ft), with SMA male connector (type RG 58) and internal antenna adaptor cable, and single entry cable gland)	<b>A5E40957990</b>	
Mains power supply 115 ... 230 V AC, 50/60 Hz, with battery backup up and 3 m (9.8 ft) power cable for external connection (backup battery not included)	<b>FDK:087L4211</b>		Analog input cable for MAG 8000 3G/UMTS (2.5 m (8.2 ft) cable with M12 connector (IP67) A-Coding female 5 pins, and two-entry cable gland)	<b>A5E03436698</b>	
RS 232 add-on module, point to point communication interface with Modbus RTU protocol	<b>FDK:087L4212</b>		Potting kit for terminal box of flow sensors for IP68/NEMA 6P	<b>FDK:085U0220</b>	
RS 485 add-on module, multidrop communication interface with Modbus RTU protocol	<b>FDK:087L4213</b>		MAG 8000 Hardware key to access protected parameters	<b>FDK:087L4165</b>	
Encoder interface module, with "Sensus" protocol for ITRON 200WP and 100W radio	<b>A5E02475650</b>		MAG 8000 demo - training unit pack operating on Alkaline batter- ies. Transmitter with Flow tool CD, IrDA interface adapter and hard- ware key (No dangerous goods limitations)	<b>FDK:087L4080</b>	
MAG 8000 3G/UMTS module. Rechargeable battery, antenna and analog cable input must be ordered separately	<b>A5E41011589</b>		Antenna adaptor cable for 3G/UMTS module (2 pieces)	<b>A5E41896494</b>	



## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow sensors

#### Accessories and spare parts for MAG 8000

#### Selection and ordering data (continued)


Description	Article No.	
Service adaptor for 3G/UMTS module	<b>A5E03436699</b>	
Alkaline battery for MAG 8000 demo transmitter (3 V 13 Ah) (No dangerous goods limitations)	<b>FDK:087L4142</b>	

<sup>1)</sup> Lithium batteries are subject to special transportation regulations according to United Nations "Regulation of Dangerous Goods, UN 3090 and UN 3091". Special transport documentation is required to observe these regulations. This may influence both transport time and costs.









<sup>2)</sup> For cable connection through MAG 8000 transmitter bottom part.

When MAG 8000 (7ME6810 and 7ME6820) is installed in PVC or coated pipelines, grounding rings must be installed additionally.

Grounding rings, type C must be used for the 7ME6810 and 7ME6820 routes (sizes > DN 300). Please see grounding rings in the section MAG 3100 Grounding rings and be aware that the mentioned MLFB codes include only 1 grounding ring. Grounding rings DN 25 to DN 300 in stainless steel are packed in pairs and sold as a "grounding ring kit".




Dimension	Article No.	
DN 25	<b>A5E01002946</b>	
DN 40	<b>A5E01002947</b>	
DN 50	<b>A5E01002948</b>	
DN 65	<b>A5E01002950</b>	
DN 80	<b>A5E01002952</b>	
DN 100	<b>A5E01002953</b>	
DN 125	<b>A5E01002954</b>	
DN 150	<b>A5E01002955</b>	
DN 200	<b>A5E01002957</b>	
DN 250	<b>A5E01002958</b>	
DN 300	<b>A5E01002962</b>	

#### Spare parts

Description	Article No.	
MAG 8000 transmitter compact replacement kit <sup>1)</sup> . No battery included. With original product label. System number specified by ordering	<b>FDK:087L4166</b>	
MAG 8000 transmitter remote replacement kit <sup>1)</sup> No battery included. With original product label. System number specified by ordering	<b>FDK:087L4202</b>	
MAG 8000 (Advanced version) transmitter compact replacement kit <sup>1)</sup> No battery included. With blank product label. No system number required	<b>FDK:087L4203</b>	
MAG 8000 (Advanced version) transmitter remote replacement kit <sup>1)</sup> No battery included No system number required	<b>FDK:087L4204</b>	
MAG 8000 (Basic version) transmitter PCB replacement kit <sup>1)</sup> No system number required	<b>A5E01171569</b>	
MAG 8000 (advanced version) transmitter PCB replacement kit <sup>1)</sup> No system number required	<b>FDK:087L4168</b>	
Enclosure top including plastic lid, screws, O-ring and blank product label	<b>FDK:087L4167</b>	
Power cable 1.5 m (4.9 ft) with IP68/NEMA 6P plugs for external battery (no battery included); PE jacket, ambient temperature: -20 °C ... +60 °C (-4 °F ... 140 °F)	<b>FDK:087L4152</b>	




## Selection and ordering data (continued)

Description	Article No.	
Encoder interface cable with IP68/NEMA 6P plugs included, for ITRON 200WP and 100W radio; 22 AWG stranded TC conductors, polypropylene insulation, twisted pair, overall Beldfoil shield, 22 AWG stranded TC drain wire, PVC jacket Length: 152.4 cm (5 ft)	<b>A5E02551263</b>	
Encoder interface cable with IP68/NEMA 6P plugs included, for ITRON 200WPradio; 22 AWG stranded TC conductors, polypropylene insulation, twisted pair, overall Beldfoil shield, 22 AWG stranded TC drain wire, PVC jacket Length: 762 cm (25 ft)	<b>A5E02551182</b>	
Service tool kit package with various component for service and replacement. Content: 10 × plastic top lids 20 × screws 10 × wire holders 10 × battery cups 10 × greased O-rings 20 × clamp kits 10 × IrDA adaptor holding rings	<b>FDK:087L4162</b>	
Remote cable set with IP68/NEMA 6P plugs: • 5 m (16.4 ft) – PG 13.5 <sup>2)</sup> • 5 m (16.4 ft) – M20 • 10 m (32.8 ft) – PG 13.5 <sup>2)</sup> • 10 m (32.8 ft) – M20 • 20 m (65.6 ft) – PG 13.5 <sup>2)</sup> • 20 m (65.6 ft) – M20 • 30 m (98.4 ft) – PG 13.5 <sup>2)</sup> • 30 m (98.4 ft) – M20	<b>FDK:087L4108</b> <b>A5E00862482</b> <b>FDK:087L4109</b> <b>A5E00862487</b> <b>FDK:087L4110</b> <b>A5E00862492</b> <b>FDK:087L4111</b> <b>A5E00862497</b>	
Cable set with pre-mounted conduit adaptor • 10 m • 20 m	<b>A5E33400834</b> <b>A5E33400836</b>	

<sup>1)</sup> Not applicable to custody transfer (CT) verified systems without re-verification

<sup>2)</sup> For sensors produced before October 2007

MAG 8000 (7ME6880) grounding ring service kit, consisting of 2 pcs. grounding rings (AISI 304/1.4301), screws and gaskets.

Dimension		Article No.	
<b>Drilled pattern flanges (7 bar)</b>			
DN 50	2"	<b>A5E03082907</b>	
DN 65	2½"	<b>A5E03082908</b>	
DN 80	3"	<b>A5E03082909</b>	
DN 100	4"	<b>A5E03082910</b>	
DN 125	5"	<b>A5E03082911</b>	
DN 150	6"	<b>A5E32877967</b>	
DN 200	8"	<b>A5E03082913</b>	
DN 250	10"	<b>A5E03082914</b>	
DN 300	12"	<b>A5E03082915</b>	
DN 350	14"	<b>A5E03082916</b>	
DN 400	16"	<b>A5E03082917</b>	
DN 450	18"	<b>A5E03082918</b>	
DN 500	20"	<b>A5E03082919</b>	
DN 600	24"	<b>A5E03082920</b>	
<b>AS 2191 table E flanges</b>			
DN 25	1"	<b>A5E33474999</b>	
DN 40	1½"	<b>A5E33475000</b>	
DN 125	5"	<b>A5E33475006</b>	
<b>AS 4087 PN 16 flanges</b>			
DN 50	2"	<b>A5E33475001</b>	
DN 65	2½"	<b>A5E33475002</b>	
DN 80	3"	<b>A5E33475003</b>	
DN 100	4"	<b>A5E33475004</b>	
DN 150	6"	<b>A5E33475007</b>	
DN 200	8"	<b>A5E33475008</b>	
DN 250	10"	<b>A5E33475009</b>	
DN 300	12"	<b>A5E33475010</b>	
DN 350	14"	<b>A5E33475011</b>	
DN 400	16"	<b>A5E33475012</b>	
DN 450	18"	<b>A5E34240921</b>	
DN 500	20"	<b>A5E33475013</b>	
DN 600	24"	<b>A5E33475014</b>	
DN 700	28"	<b>A5E33414889</b>	
DN 800	32"	<b>A5E33414890</b>	
DN 900	36"	<b>A5E33414891</b>	
DN 1000	40"	<b>A5E33414892</b>	
DN 1200	48"	<b>A5E33414893</b>	

### Operating instructions for SITRANS FM MAG 8000

Description	Article No.
• English	<b>A5E03071515</b>
• German	<b>A5E00740986</b>

All literature is available to download for free, in a range of languages, at <http://www.siemens.com/processinstrumentation/documentation>

### Operating instructions for MAG 8000 3G/UMTS communication module

Description	Article No.
• English	<b>A5E03644134</b>

## Flow Measurement

### SITRANS FC (Coriolis)

#### System information

#### Overview



SITRANS FC Coriolis mass flowmeters are designed for measurement of a variety of liquids and gases. The meter offers accurate measurement of mass flow, volume flow, density, temperature and fraction.

#### Compatibility between transmitters and sensors

Transmitter	Page	Compact	Remote	Ex-Approval	Sensor	Page
FCT030	3/155	Yes	Yes	Yes	FCS300, DN 15 ... DN 150	3/167
		Yes	Yes	Yes	FCS400, DN 15 ... DN 50	3/187
		No	Yes	Yes	MASS 2100, DI 1.5	3/203; 3/218
		Yes	Yes	Yes	MASS 2100, DI 3 ... DI 15	3/203; 3/218
		No	Yes	Yes	FC300, DN 4	3/203; 3/218
FCT010	3/161	Yes	No	Yes	FCS300, DN 15 ... DN 150	3/167
		Yes	No	Yes	FCS400, DN 15 ... DN 50	3/187
		No	Yes	Yes	MASS 2100, DI 1.5	3/203; 3/223
		Yes	Yes	Yes	MASS 2100, DI 3 ... DI 15	3/203; 3/223
		No	Yes	Yes	FC300, DN 4	3/203; 3/223
FCT070	3/164	No	Yes	Yes	FCS300, DN 15 ... DN 150	3/167
		No	Yes	Yes	FCS400, DN 15 ... DN 50	3/187
		No	Yes	Yes	MASS 2100, DI 1.5	3/203; 3/227
		No	Yes	Yes	MASS 2100, DI 3 ... DI 15	3/203; 3/227
		No	Yes	Yes	FC300, DN 4	3/203; 3/227
SIFLOW FC070	3/240	No	Yes	Yes	FC300, DN 4	3/203
		No	Yes	Yes	MASS 2100, DI 1.5	3/203
		No	Yes	Yes	MASS 2100, DI 3 ... DI 15	3/203



### Benefits

#### Greater flexibility

- Wide product program
- High performance and top-end flowmeters
- Compact or remote installation using the same transmitters and sensors within their flowmeter series
- Full integration in SIMATIC solutions

#### Easier commissioning

All SITRANS FC Coriolis flowmeters feature a sensor related memory unit SensorFlash which stores calibration data and transmitter settings for the lifetime of the product as well as all product documentation and certificates.

At commissioning the flowmeter commences measurement without any initial programming.

#### Easier service

- Comprehensive self-diagnosis and service menu enhances troubleshooting and meter verification.
- Transmitter replacement requires no programming. SensorFlash data updates all settings after initialization.

#### Room for growth

- FC330/FC310: Digital platform allows for any sensor in the range DN 15 to DN 150 to be matched in compact or remote installation.
- FC430/FC410: Robust and compact sensor dedicated for OEM and skid manufacturer in sizes DN 15 to DN 50. Also available in a true sanitary version.
- MASS 2100/FC300 DN 4 sensors with FCT digital platform transmitters allows all sensors from DI 1.5 to DI 15 to be matched with the FCT010, FCT030 and FCT070 transmitters.
- FCT070 transmitter solution as a fully integrated technology module in SIMATIC ET 200SP. Seamless communicating with all SIMATIC solutions by very fast PROFINET communication. Advanced batch function blocks are available.

### Application

Coriolis flowmeters are generally suitable for measuring liquids and gases. The flow measurement is to a large extent independent of changes in process conditions/parameters such as temperature, density, pressure, viscosity, conductivity and flow profile.

Due to this versatility the meter is easy to install and use. The Coriolis flowmeter is recognized for its high accuracy over a wide turn-down ratio and its ability to be a true multi parameter device.

#### The main applications of the Coriolis flowmeter can be found in all industries, such as:

<b>Chemical</b>	Detergents, bulk chemicals, pharmaceuticals, acids, alkalis, filling and dosing
<b>Food and beverage</b>	Dairy products, beer, wine, softdrinks, °Plato/°Brix, fruit juices and pulps, bottling, CO2 dosing, CIP liquids
<b>Automotive</b>	Fuel injection nozzle and pump testing, filling of AC units, engine consumption measurement, paint robots
<b>Oil and gas</b>	Filling of gas bottles, furnace control, test separators, LPG, well-head water-cut monitoring. All hydrocarbon fluids in refineries
<b>Marine</b>	Fuel consumption management, boiler control, bunkering management
<b>Water &amp; waste water</b>	Dosing of chemicals for water treatment

# Flow Measurement

## SITRANS FC (Coriolis)

### System information

#### Application (continued)

Please see **Product selector**

[www.pia-selector.automation.siemens.com](http://www.pia-selector.automation.siemens.com)

on the Internet, since some constraints might be related to some of the features



FC310	FC330	FCS300 with FCT070	FC410	FC430	FCS400 with FCT070	MASS 2100 DI 1.5 FC300 DN 4 with FCT010	MASS 2100 DI 1.5 FC300 DN 4 with FCT030	MASS 2100 DI 1.5 with FCT010	MASS 2100 with FCT030	MASS 2100 with FCT070	
7ME4631	7ME4633	7ME4637	7ME4611	7ME4613	7ME4617	7ME4811	7ME4813	7ME4817	7ME4811	7ME4813	7ME4817

Design	7ME4631	7ME4633	7ME4637	7ME4611	7ME4613	7ME4617	7ME4811	7ME4813	7ME4817	7ME4811	7ME4813	7ME4817
Compact	•	•		•	•					•	•	
Remote		•	•		•	•	•	•	•	•	•	•
<b>Transmitter enclosure</b>												
Aluminium IP67 Field mounting enclosure	•	•		•	•		•	•		•	•	
Aluminum IP67 Wall mounting enclosure		•			•			•			•	
Noryl (FCT070), IP20/NEMA 2			•			•			•			•
<b>Communication</b>												
HART		•			•			•			•	
PROFIBUS PA		•			•			•			•	
PROFIBUS DP		•			•			•			•	
MODBUS RTU/RS 485	•	•		•	•		•	•		•	•	
SIMATIC integration ET200SP ST & HF (Profinet)			•			•			•			•
<b>Supply voltage</b>												
24 V DC	•	•	•	•	•	•	•	•	•	•	•	•
115/230 V AC		•			•			•			•	
<b>Pipe size</b>												
DI 1,5 (1/16")							•	•	•			
DI 3 (1/8")										•	•	•
DN 4 (1/6")							•	•	•			
DI 6 (1/4")										•	•	•
DI 15 (1/2")										•	•	•
DN 15 (1/2")	•	•	•	•	•	•						
DN 25 (1")	•	•	•	•	•	•						
DN 50 (2")	•	•	•	•	•	•						
DN 80 (3")	•	•	•									
DN 100 (4")	•	•	•									
DN 150 (6")	•	•	•									

**Application** (continued)

Please see **Product selector**

[www.pia-selector.automation.siemens.com](http://www.pia-selector.automation.siemens.com)

on the Internet, since some constraints might be related to some of the features



FC310	FC330	FCS300 with FCT070	FC410	FC430	FCS400 with FCT070	MASS 2100 DI 1.5 FC300 DN 4 with FCT010	MASS 2100 DI 1.5 FC300 DN 4 with FCT030	MASS 2100 DI 1.5 FC300 DN 4 with FCT070	MASS 2100 with FCT010	MASS 2100 with FCT030	MASS 2100 with FCT070
7ME4631	7ME4633	7ME4637	7ME4611	7ME4613	7ME4617	7ME4811	7ME4813	7ME4817	7ME4811	7ME4813	7ME4817

*Process connection norms and pressure*

Pipe thread	FC310	FC330	FCS300	FC410	FC430	FCS400	MASS 2100 DI 1.5 FC300 DN 4 with FCT010	MASS 2100 DI 1.5 FC300 DN 4 with FCT030	MASS 2100 DI 1.5 FC300 DN 4 with FCT070	MASS 2100 with FCT010	MASS 2100 with FCT030	MASS 2100 with FCT070
NPT ANSI/ASME B.20.1; PN 100	●	●	●	●	●	●	●	●	●	●	●	●
ISO 228/1; PN 100	●	●	●	●	●	●	●	●	●	●	●	●
<b>Flange</b>												
EN 1092-1 PN 16	●	●	●	●	●	●						
EN 1092-1 PN 40	●	●	●	●	●	●			●	●		●
EN 1092-1 PN 63	●	●	●	●	●	●						
EN 1092-1 PN 100	●	●	●	●	●	●			●	●		●
ANSI B 16.5 Class 150	●	●	●	●	●	●			●	●		●
ANSI B 16.5 Class 300	●	●	●	●	●	●						
ANSI B 16.5 Class 600	●	●	●	●	●	●			●	●		●
ANSI B 16.5 Class 900 <sup>1)</sup>	●	●	●	●	●	●						
ANSI B 16.5 Class 1500 <sup>1)</sup>	●	●	●	●	●	●						
JIS B2220 10K	●	●	●	●	●	●						
JIS B2220 20K	●	●	●	●	●	●						
JIS B2220 40K	●	●	●	●	●	●						
JIS B2220 63K	●	●	●	●	●	●						
<b>Hygienic</b>												
DIN 11851	●	●	●	●	●	●			●	●		●
DIN32676 Clamp Form C Triclampe				●	●	●						
DIN 32676 Clamp (ISO) Row A	●	●	●									
DIN11864-1 GS Form A Row A				●	●	●						
DIN11864-2 BF Form A Row A				●	●	●						
DIN11864-3 BKS Form A Row A				●	●	●						
ISO 2852 Clamp				●	●	●			●	●		●
ISO 2853 Throat				●	●	●			●	●		●
SMS 1145	●	●	●	●	●	●						
Others on request	●	●	●	●	●	●			●	●		●

# Flow Measurement

## SITRANS FC (Coriolis)

### System information

#### Application (continued)

Please see **Product selector**

[www.pia-selector.automation.siemens.com](http://www.pia-selector.automation.siemens.com)

on the Internet, since some constraints might be related to some of the features



FC310	FC330	FC3300 with FCT070	FC410	FC430	FCS400 with FCT070	MASS 2100 DI 1.5 FC300 DN 4 with FCT010	MASS 2100 DI 1.5 FC300 DN 4 with FCT030	MASS 2100 DI 1.5 with FCT010	MASS 2100 with FCT030	MASS 2100 with FCT070	
7ME4631	7ME4633	7ME4637	7ME4611	7ME4613	7ME4617	7ME4811	7ME4813	7ME4817	7ME4811	7ME4813	7ME4817

Pipe material	7ME4631	7ME4633	7ME4637	7ME4611	7ME4613	7ME4617	7ME4811	7ME4813	7ME4817	7ME4811	7ME4813	7ME4817
Stainless steel AISI 316L/1.4435/1.4404	●	●	●	●	●	●	●	●	●	●	●	●
Nickel-Alloy C4	●	●	●									
Hastelloy C22/2.4602							●	●	●	●	●	●
<b>With heating jacket</b>												
Internal U-Tube										●	●	●
Heating jacket electrical (optional)				●	●	●						
<b>Pressure rating</b>												
PN 16	●	●										
PN 40	●	●		●						●	●	●
PN 63	●	●		●								
PN 100	●	●	●	●	●	●	●	●	●	●	●	●
PN 130							●	●	●	●	●	●
PN 160					● <sup>5)</sup>	● <sup>5)</sup>	● <sup>5)</sup>					
PN 230							●	●	●	●	●	●
PN 265										●	●	●
PN 350					●					●	●	●
PN 365							●	●	●	●	●	●
PN 410										●	●	●
High-pressure version <sup>2)</sup>							●	●	●	●	●	●
<b>Accuracy (liquids)</b>												
Flow error ≤ 0.1 % of rate <sup>3)</sup>	●	●	●	●	●	●	●	●	●	●	●	●
Flow error ≤ 0.2 % of rate <sup>3)</sup>	●	●	●									
Density error ≤ 0.0005 g/cm <sup>3</sup>				●	●	●				●	●	●
Density error ≤ 0.005 g/cm <sup>3</sup>				●	●	●				●	●	●
Density error ≤ 0.001 g/cm <sup>3</sup>							●	●	●			
Density error ≤ 0.002 g/cm <sup>3</sup>	●	●	●									
Density error ≤ 0.010 g/cm <sup>3</sup>	●	●	●									
<b>Cable glands</b>												
½" NPT	●	●	●	●	●	●	●	●	●	●	●	●
M20	●	●	●	●	●	●	●	●	●	●	●	●

**Application** (continued)

Please see **Product selector**

[www.pia-selector.automation.siemens.com](http://www.pia-selector.automation.siemens.com)

on the Internet, since some constraints might be related to some of the features



FC310	FC330	FCS300 with FCT070	FC410	FC430	FCS400 with FCT070	MASS 2100 DI 1.5 FC300 DN 4 with FCT010	MASS 2100 DI 1.5 FC300 DN 4 with FCT030	MASS 2100 DI 1.5 with FCT010	MASS 2100 with FCT030	MASS 2100 with FCT070	
7ME4631	7ME4633	7ME4637	7ME4611	7ME4613	7ME4617	7ME4811	7ME4813	7ME4817	7ME4811	7ME4813	7ME4817

**Approvals**

<b>Hazardous locations</b>											
ATEX zone 1	●	●	●	● <sup>6)</sup>	● <sup>6)</sup>	● <sup>6)</sup>	●	●	●	●	●
IECEx zone 1	●	●	●	● <sup>6)</sup>	● <sup>6)</sup>	● <sup>6)</sup>	●	●	●	●	●
EAC Ex zone 1	●	●	●	●	●	●	●	●	●	●	●
US /CSA) Div 1	●	●	●	●	●	●	●	●	●	●	●
Canada (CSA) zone 1	●	●	●	●	●	●	●	●	●	●	●
NEPSI	●	●	●	●	●	●					
INMETRO	●	●	●	●	●	●					
<b>PED</b>											
Fluid group 1 Category III, gas	●	●	●	●	●	●	●	●	●	●	●
PED Directive 2014/68/EU											
<b>CRN</b>											
Category F, OF10769.5C CRN	●	●	●	●	●	●	●	●	● <sup>4)</sup>	● <sup>4)</sup>	● <sup>4)</sup>
<b>F&amp;B/Pharma</b>											
EHEDG (in preparation)				●	●	●					
3A (in preparation)				●	●	●					
<b>Marine</b>											
Germanischer Lloyd/det Norske Veritas, Bureau Veritas, Lloyds of London, American Bureau of Shipping, Rina, CCS	●	●		●	●						

● = Available

- 1) Sensor pressure and temperature limited to ANSI class 600 rating.
- 2) See technical specifications.
- 3) Increased error for gas mass flow measurement.
- 4) Only DI 6 is CRN.
- 5) Max. 100 bar.
- 6) Also for dust zone 21.

## Flow Measurement

### SITRANS FC (Coriolis)

#### System information

#### Function

The SITRANS FC flow measuring principle is based on the Coriolis effect. The flowmeter consists of a sensor and a transmitter. The sensor can be digital with an integrated frontend DSL or for low flow sensors also analogue sensors directly connected to the transmitter.

There are following sensors available:

- SITRANS FC MASS 2100 DI 1.5 to DI 15 mm in a single loop design
- SITRANS FC300 DN 4 in a single loop design
- SITRANS FCS300 DN 15 to DN 150 mm in bended dual tube design
- SITRANS FCS400 DN 15 to DN 50 mm in a compact bended dual tube design for OEM and other specific applications.

All sensors can be freely combined with three different transmitters in various configurations and protection style.

- SITRANS FCT010 transmitter: single channel Modbus
- SITRANS FCT030 transmitter: multi channel transmitter with full graphical display and full feature loaded.
- FCT070 transmitter: for full integration in the Siemens SIMATIC TIA and PCS7 world by the ET 200SP ST & HF. Full functionality including advanced functions blocks for easy integration. Functions block in TIA and APL library.

The SITRANS FC sensors are energized by an electro-mechanical driver circuit which oscillates the pipe at its resonant frequency.

Two pick-ups, 1 and 2 are placed symmetrically on both sides of the driver. When liquid or gas flows through the sensor, Coriolis force will act on the measuring pipe and cause a pipe deflection which can be measured as a phase shift on pick-up 1 and 2. The phase shift is proportional to the mass flow rate.

The amplitude of the driver is automatically regulated to ensure a stable output from the 2 pick-ups. The temperature of the tubes is measured by a Pt1000. The flow-proportional signal from the 2 pick-ups, the temperature measurement and the driver frequency are fed into the SITRANS FC transmitter for calculations of mass, volume, fraction, temperature and density. The signal transfer function is based on a DFT technology (Discrete Fourier Transformation).

The transmitter has built-in noise filters, which can be used to improve the meter's performance if the installation and application conditions are not ideal. Typically influence from process noise such as pump pulsations, mechanical vibrations, oscillating valves and aerated flow conditions can be reduced considerably.



SensorFlash flow memory units

FCT010 flow transmitters communicate via Modbus RTU and FCT030 via HART/Modbus/PROFIBUS DP / PROFIBUS PA beside up to 4 individual I/O free programmable as analogue, frequency, pulse or relay outputs. As well as static inputs can be set up.

The FCT070 transmitter is a technology module for the SIMATIC ET 200SP ST & HF system with directly connection from the digital sensor. Full transmitter functionality available to be set up directly in the SIMATIC system. The ET 200SP is very often connected to other SIMATIC systems like PCS7; S7 1200 and S7 1500 via the direct connection by PROFINET. Fast and simple signal transfer and controlling.

## Integration

### General installation requirements / System design information

The SITRANS FC mass flowmeter is suitable for in- and outdoor installations. The standard instrument meets the requirements of Protection Class IP67/NEMA 4x or IP65. The flowmeter is bidirectional and can be installed in almost any orientation, however, the sensor is not self-emptying in all positions.

It is important to ensure that the meter tubes are always completely filled with homogeneous fluid. Otherwise measuring errors may occur. Suitable fluids are clean liquids, pastes, light slurries or gases. Condensing vapors, aerated liquids or slush are not recommended.

The corrosion and erosion resistance of the fluid-wetted materials must be evaluated to secure long lifetime of the sensor. The pressure drop through the sensor is a function of the properties of the fluid and the flow rate. The Sizing Program (download from <https://www.siemens.com>) can be used to calculate the pressure drop and the accuracy over the full flowrange in use for the application.

#### Sizing

**Liquids:** The correct sensor size is determined by the allowable pressure drop at the maximum flowrate the meter is used with. After selecting the sensor size the accuracy throughout the flowrate range for the application can be checked by using the Sizing Program.

**Gases:** The correct size is very often determined by the calculation of the Mach number at maximum flowrate for the application. After that the accuracy throughout the flowrange should be checked.

The preferred flow direction is indicated by the arrow on the flowmeter. Flow in this direction will be indicated as positive.

**Note:** For some sensor types, specific installation requirement has been taken into account. Please also see under the specific sensor type chapter.

#### General installation orientation

- FCS300 and FCS400 – sensors.  
The optimal installation orientation is vertical with flow upwards (liquids). This ensures that suspended solids or bubbles are completely pushed through the sensor. A drain valve below the sensor will allow the pipe and sensor to drain. To secure selfdraining a up to 10° off vertical installation could be required.
- MASS 2100/FC300 DN4 – sensors.  
The optimal installation orientation is horizontal.

#### Supports

- In order to support the weight of the flowmeter and to ensure reliable measurements when external effects exist (e.g. vibrations), the sensor should be installed in well-supported pipelines. Supports or hangers should be installed symmetrically and stress-free in close proximity to the process connections.

#### Shut-off devices

- To conduct a system zero adjustment, shut-off devices are ideally required in the pipeline before and after the sensor:
- A bypass valve is recommended where regular zero adjustment is planned to avoid disruption of the flowing system.

#### Installation: straight run requirements

- The mass flowmeter does not require any flow condition or straight inlet sections. Care should be exercised to ensure that any valves, gates, sight glasses etc. do not cavitate and are not set into vibration by the flowmeter.

#### System design information

- The presence of gas bubbles in the fluid may result in erroneous measurements, particularly in the density measurement. Therefore, the flowmeter should not be installed at the highest point in the system where bubbles are possibly largest.
- Long drop lines downstream from the flowmeter should be avoided to prevent the meter tube from draining during operation.
- The flowmeter should not come into contact with any other objects. Avoid attachments to the housing.
- When the cross-section of the connecting pipeline is larger than the sensor size, suitable standard reducers may be installed.
- If strong vibrations exist in the pipeline, they should be damped using elastic pipeline elements. The damping devices must be installed outside the supported flowmeter section and outside the section between the shut-off devices.
- Make sure that any dissolved gases, which are present in many liquids, do not outgas. The back pressure at the outlet should be at least 0.2 bar (3 psi).
- Assure that operation below the vapor pressure cannot occur when a vacuum exists in the meter tube or for fluids which boil readily.
- The sensor should not be installed in the vicinity of strong electromagnetic fields, e.g. near motors, pumps, transformers etc.
- When operating more than one meter in one or multiple interconnected pipelines, the sensors should be spaced distant from each other or the pipelines should be decoupled to prevent cross talk.

#### Zero adjustment

- In order to adjust the zero under operating conditions it must be possible to reduce the flow rate to „ZERO“ while the meter tube is completely filled. It is important for accurate measurements that during the zero adjustment there are no gas bubbles in the flowmeter. It is also important that the pressure and temperature in the meter tube be the same as that which exists during operation.

## Flow Measurement

### SITRANS FC (Coriolis)

#### System information

#### Technical specifications

##### Flowmeter uncertainty/specifications

To ensure continuous accurate measurement, flowmeters must be calibrated.

The Siemens flowmeter calibration process is ISO 9001-certified, ensuring the entire calibration procedure is controlled to the highest quality standards. All primary measuring instrumentation used by the Flow Laboratory during the performance of its calibrations, has been calibrated with international standards traceability referring directly to the physical unit of measurement according to the International System of Units (SI). Therefore the calibration certificate ensures recognition of the test results worldwide, including the US (NIST traceability).

A calibration certificate is shipped with every sensor and calibration data are stored in the SD Memory card. The sensors has the calibration data written to the frontend section DSL.

A backup of all calibrations and PDF copies of all certificates are stored in the SensorFlash.

##### Sensor flow capacity

FCS300 sensors for liquids:

	$Q_{\min}$ at 1 % accuracy water		$Q_{\text{nom}}$ <sup>1)</sup>		100 % ( $Q_{\text{max}}$ ) <sup>2)</sup>	
	kg/h	(lb/min)	kg/h	(lb/min)	kg/h	(lb/min)
DN 15 (½")	70	(2.57)	4 500	(165)	8 000	(294)
DN 25 (1")	240	(8.92)	20 500	(753)	35 000	(1 286)
DN 50 (2")	800	(29.4)	49 000	(1 800)	90 000	(3 307)
DN 80 (3")	2 000	(73.5)	122 000	(4 483)	250 000	(9 186)
DN 100 (4")	4 000	(147)	273 000	(10 031)	520 000	(19 108)
DN 150 (6")	6 900	(253)	459 200	(16 873)	860 000	(31 600)

FCS400 sensors for liquids:

	$Q_{\min}$ at 1 % accuracy water <sup>3)</sup>		$Q_{\text{nom}}$ <sup>1)</sup>		100 % ( $Q_{\text{max}}$ ) <sup>2)</sup>	
	kg/h	(lb/min)	kg/h	(lb/min)	kg/h	(lb/min)
DN 15 (½")	20	(0.73)	3 700	(135)	6 400	(234)
DN 25 (1")	200	(7.32)	11 500	(421)	17 700	(648)
DN 50 (2")	750	(27.4)	50 000	(1 831)	70 700	(2 590)

MASS 2100 and FC300 sensors for liquids:

	$Q_{\min}$ at 1 % accuracy water		$Q_{\text{nom}}$ <sup>1)</sup>		100 % ( $Q_{\text{max}}$ ) <sup>2)</sup>	
	kg/h	(lb/h)	kg/h	(lb/h)	kg/h	(lb/h)
DI 1.5 (1/16")	0.1	(0.22)	19	(42)	30	(66)
DI 3 (1/8")	1.0	(2.2)	90	(198)	250	(550)
DN 4 (1/6")	1	(2.2)	140	(308)	350	(770)
DI 6 (¼")	5	(11)	500	(1 102)	1 000	(2 200)
DI 15 (½")	20	(44)	3 800	(8 370)	5 600	(12 345)

<sup>1)</sup>  $Q_{\text{nom}} = \Delta$  1 barg @ water 20 °C.

<sup>2)</sup>  $Q_{\text{max}} = 10$  m/sec @ water 20 °C at inlet (up to 25 m/s in the flowtubes).

<sup>3)</sup> For 0.1% sensor.

For gas applications the massflow rate is depending on the gas type. The max. flowrate is calculated with the Mach-Number to be  $Ma = 0.3$ .

- For flow > 5% of the sensors max. flow rate, the error can be read directly from the curve below.
- For flow < 5% of the sensors max. flow rate, use the formula to calculate the error.

The error curve is plotted from the formula:

$$E = \pm \sqrt{(\text{Cal.})^2 + \left(\frac{z \times 100}{q_m}\right)^2}$$


E Error

Z Zero point error [kg/h]<sup>1)</sup>

qm Mass flow [kg/h]

Cal. Calibrated flow accuracy: 0.10, 0.15 or 0.20

<sup>1)</sup> Zero point error for each sensor is shown in the tables below.

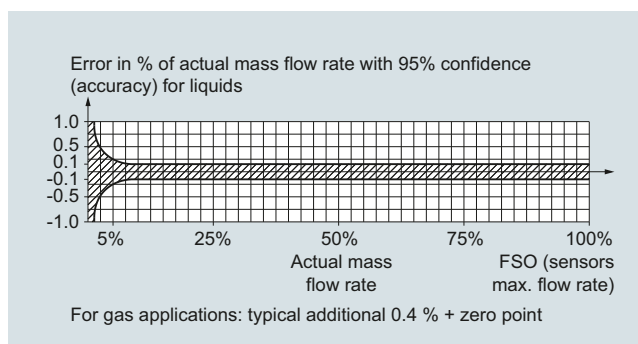

##### Reference conditions for flow calibration

Flow conditions	Fully developed flow profile
Temperature, medium	25 °C (77 °F) ± 5 K
Temperature, ambient	25 °C (77 °F) +10/-5 K
Liquid pressure	2 ± 1 bar
Density	0.997 g/cm <sup>3</sup>
Brix	40 °Brix
Supply voltage	$U_n \pm 1\%$
Warming-up time	30 min.
Cable length	5 m between transmitter and sensor

##### Additions in the event of deviations from reference conditions

Current output	As pulse output ± (0.1 % of actual flow +0.05 % FSO)
Effect of ambient temperature	<ul style="list-style-type: none"> <li>• Display/frequency/pulse output: &lt; ± 0.003 % / K act.</li> <li>• Current output: &lt; ± 0.005 % / K act.</li> </ul>
Effect of supply voltage	< 0.005 % of measuring value on 1 % alteration



## Technical specifications (continued)

Sensor type	FC300	MASS 2100			
Sensor size	DN 4 (1/6")	DI 1.5 (1/16")	DI 3 (1/8")	DI 6 (1/4")	DI 15 (1/2")
<b>Number of measuring pipes</b>	1	1	1	1	1
<b>Mass flow (liquids)</b>					
Linearity error <sup>1)</sup> % of rate	0.10	0.10	0.10	0.10	0.10
Repeatability of flow-rate at rates > 5 % of Q <sub>max</sub> % of rate	0.05	0.05	0.05	0.05	0.05
Max. zero point error [kg/h]	0.010	0.001	0.010	0.050	0.200
<b>Density (liquids)</b>					
Density error standard [g/cm <sup>3</sup> ]	n.a.	0.008	0.008	0.008	0.008
Density error extended [g/cm <sup>3</sup> ]	0.007 <sup>2)</sup>	0.001	0.0015	0.0015	0.0005
Repeatability error [g/cm <sup>3</sup> ]	0.0002	0.0002	0.0002	0.0002	0.0001
Range [g/cm <sup>3</sup> ]	0.3 ... 2.9	0.3 ... 2.9	0.3 ... 2.9	0.3 ... 2.9	0.3 ... 2.9
<b>Temperature</b>					
Error [°K]	0.5	0.5	0.5	0.5	0.5

<sup>1)</sup> Increased error can be expected for gas mass flow measurement (for gas measurement typically additional +0.40 % error).

<sup>2)</sup> For Hastelloy tubes: 0.0025 g/cm<sup>3</sup>.

Sensor type	FCS300					
Sensor size	DN 15 (1/2")	DN 25 (1")	DN 50 (2")	DN 80 (3")	DN 100 (4")	DN 150 (6")
<b>Number of measuring pipes</b>	2	2	2	2	2	2
<b>Mass flow (liquids)</b>						
Linearity error <sup>1)</sup> 0.1% sensor % of rate	0.1	0.1	0.1	0.1	0.1	0.1
0.2% sensor % of rate	0.2	0.2	0.2	0.2	0.2	0.2
Repeatability of flow-rate at rates > 5 % of Q <sub>max</sub> % of rate	0.05	0.05	0.05	0.05	0.1	0.1
Max. zero point error [kg/h]	0.6	2.16	7.2	20.0	41.6	68.8
<b>Density (liquids)</b>						
Density error 0.1% massflow sensor [g/cm <sup>3</sup> ]	0.002	0.002	0.002	0.002	0.002	0.002
0.2% massflow sensor [g/cm <sup>3</sup> ]	0.010	0.010	0.010	0.010	0.010	0.010
Range [kg/dm <sup>3</sup> ]	0.001 ... 5.0	0.001 ... 5.0	0.001 ... 5.0	0.001 ... 5.0	0.001 ... 5.0	0.001 ... 5.0
Repeatability error [kg/m <sup>3</sup> ]	± 0.25	± 0.25	± 0.25	± 0.25	± 0.25	± 0.25
<b>Temperature</b>						
Error [°K]	0.5	0.5	0.5	0.5	0.5	0.5

<sup>1)</sup> Increased error can be expected for gas mass flow measurement (for gas measurement typically additional +0.4 % error).

Sensor type	FCS400		
Sensor size	DN 15 (1/2")	DN 25 (1")	DN 50 (2")
<b>Number of measuring pipes</b>	2	2	2
<b>Mass flow (liquids)</b>			
Linearity error <sup>1)</sup> % of rate	0.1	0.1	0.1
Repeatability of flow-rate at rates > 5 % of Q <sub>max</sub> % of rate	0.05	0.05	0.05
Max. zero point error [kg/h]	0.2	2.0	7.5
<b>Density (liquids)</b>			
Density error (Standard) [g/cm <sup>3</sup> ]	0.005	0.005	0.005
(Extended) [g/cm <sup>3</sup> ]	0.0005	0.0005	0.0005
Range [kg/dm <sup>3</sup> ]	0.001 ... 5.0	0.001 ... 5.0	0.001 ... 5.0
Repeatability error [kg/m <sup>3</sup> ]	± 0.25	± 0.25	± 0.25
<b>Temperature</b>			
Error [°K]	0.5	0.5	0.5

<sup>1)</sup> Increased error can be expected for gas mass flow measurement (for gas measurement typically additional up to +0.4 % error).

## Flow Measurement

### SITRANS FC (Coriolis)

#### System information

#### Technical specifications (continued)

##### PROFIBUS PA/DP for FCT030

###### General specifications

PROFIBUS device profile Profile V 4.0 and compatible to V 3.x

###### Electrical specification DP

###### Physical layer specifications

Applicable standard IEC 61158/EN 50170  
 Physical Layer (transmission technology) RS 485  
 Transmission speed  $\leq 12$  Mbits/s  
 Number of stations Up to 32 per line segment (maximum total of 126)

###### Cable specification (Type A)

Cable design Two wire twisted pair  
 Shielding CU shielding braid or shielding braid and shielding foil  
 Impedance 35 up to 165  $\Omega$  at frequencies from 3 ... 20 MHz  
 Cable capacity < 30 pF per meter  
 Core diameter > 0.34 mm<sup>2</sup>, corresponds to AWG 22  
 Resistance < 110  $\Omega$  per km  
 Signal attenuation Max. 9 dB over total length of line section  
 Max. bus length 100 m at 12 Mbit/s, up to 1.2 km at 93.75 kbit/s. Extendable by repeaters

###### Electrical specification PA

###### Physical layer specifications

Applicable standard IEC 61158/EN 50170  
 Physical Layer (transmission technology) IEC 61158-2  
 Transmission speed 31.25 Kbits/s  
 Number of stations Up to 32 per line segment (maximum total of 126)  
 Max. basic current [ $I_B$ ] 14 mA  
 Fault current [ $I_{FDE}$ ] 0 mA  
 Bus voltage 9 ... 32 V (non Ex)

###### Preferred cable specification (Type A)

Cable design Two wire twisted pair  
 Conductor area (nominal) 0.8 mm<sup>2</sup> (AWG 18)  
 Loop resistance 44  $\Omega$ /km  
 Impedance 100  $\Omega \pm 20$  %  
 Wave attenuation at 39 kHz 3 dB/km  
 Capacitive asymmetry 2 nF/km  
 Bus termination Passive line terminated on both ends  
 Max. bus length Up to 1.9 km. Extendable by repeaters

###### IS (Intrinsic Safety) data

Required sensor electronics Compact mounted SITRANS FCT030  
 FISCO Yes  
 Max.  $U_I$  17.5 V  
 Max.  $I_I$  380 mA  
 Max.  $P_I$  5.32 W  
 Max.  $L_I$  10  $\mu$ H  
 Max.  $C_I$  5 nF  
 Max.  $U_O$  1.3 V  
 Max.  $I_O$  50  $\mu$ A

###### FISCO cable requirements

Loop resistance  $R_C$  15 ... 150  $\Omega$ /km  
 Loop inductance  $L_C$  0.4 ... 1 mH/km  
 Capacitance  $C_C$  80 ... 200 nF/km  
 Max. Spur length in IIC and IIB 30 m  
 Max. Trunk length in IIC 1 km  
 Max. Trunk length in IIB 5 km

###### PROFIBUS parameter support

The following parameters are accessible using a Class 1 Master.

###### Cyclic services

Input (Master view)	Parameter	FCT030
	Mass flow	✓
	Volume flow	✓
	Media temperature	✓
	Frame temperature	✓
	Standard volume flow	✓
	Density	✓
	Fraction A <sup>1)</sup>	✓
	Fraction B <sup>1)</sup>	✓
	Pct Fraction A <sup>1)</sup>	✓
	Pct Fraction B <sup>1)</sup>	✓
	Totalizer 1	✓
	Totalizer 2	✓
	Totalizer 3	✓
	Digital dosing control	✓
	Analog dosing control	✓
	Dosing status	✓
<b>Output (Master view)</b>	Control totalizer 1+2+3	✓
	Control commands as zero point adjustment	✓

<sup>1)</sup> Requires a flowmeter ordered with fraction option.

### Overview



FCT030 is based on the latest developments within digital signal processing technology – engineered for high measuring performance, fast response to step changes in flow, fast dosing applications, high immunity against process noise, easy to install commission and maintain.

The FCT030 transmitter delivers true multi-parameter measurements i.e. massflow, volumeflow, standard volumeflow, density, temperature and fraction.

The FCT030 IP67 transmitter can be remote connected or compact mounted with all sensors of type FCS300 sizes DN 15 to DN 150, FCS400 sizes DN 15 to DN 50, MASS 2100 DI 1.5, DI 3, DI 6, DI 15 and FC300 DN 4.

### Fraction

The transmitter FCT030 can be set up at works to measure and report various fraction concentrations of two-part mixtures or solutions. Where a discrete relationship exists between concentration and density at particular temperatures a calculation is performed and the percentage concentration by volume or mass of Part A or Part B (100 % minus Part A) is measured. For solutions and some mixtures the total mass, or dry weight, is also available.

In some industries, a selection of standard density scales has been adopted to represent the density or relative density of the process fluid.

If "Standard fractions" option is chosen at ordering, the following fraction or standard density scales can be selected in the setup menu:

- |                    |   |
|--------------------|---|
| • API number       | • Twaddell  |
| • Balling          | • %HFCS42   |
| • °Baumé light     | • %HFCS55   |
| • °Baumé heavy     | • %HFCS90   |
| • °Brix            | • Ethanol-Water (ABM) <sup>1)</sup> 0 % to 20 %   |
| • °Oeschlé         | • Ethanol-Water (ABM) <sup>1)</sup> 15 % to 35 %  |
| • Plato            | • Ethanol-Water (ABM) <sup>1)</sup> 30 % to 55 %  |
| • Specific Gravity | • Ethanol-Water (ABM) <sup>1)</sup> 50 % to 100 % |

<sup>1)</sup> ABM: Alcohol by Mass  
ABV: Alcohol by volume on request

### Benefits

#### Flow calculation and measurement

- Dedicated mass flow calculation with DSP technology
- Fast dosing and flow step response with maximum 10 ms response time
- 100 Hz update rate to all outputs
- Maximum data age from pickup to output is 20 ms (two update cycles)
- Independent low flow cut-off settings for mass and volume flowrates
- Automatic zero-point adjustment on command from discrete input or host system
- Empty pipe monitoring

#### Operation and display

- User-configurable operation display
  - Full graphical display 240 × 160 pixels with up to 6 programmable views
  - Self-explaining alarm handling/log in clear text
  - Help text for all parameters appears automatically in the configuration menu
  - Keypad can be used for controlling dosing as start/stop/hold/reset
- SensorFlash technology stores production specific system documentation and provides removable memory of all flowmeter setups and functions
  - Calibration certificates
  - Pressure and material test certificates (as ordered)
  - Non-volatile memory backup of operational data
  - Transfer of user configuration to other flowmeters
  - Alarm history log
  - Parameter change log
  - Logging of min and max process values
  - Data logging of process values and parameter (including diagnostic parameters)

#### Alarms and safety

- Advanced diagnosis and service menu enhances troubleshooting and meter validation
- Configurable upper and lower alarm and warning limits for all process values
- Alarm handling can be selected between Siemens and NAMUR standard configurations

#### Outputs and control

- Built-in dosing controller with compensation and monitoring comprising 3 built-in totalizers
- Multi-parameter outputs, individually configurable for mass-flow, volumeflow, standard volumeflow, density, temperature or fraction flow such as °Brix or °Plato

Up to four I/O channels are configured as follows:

#### Channel 1

Channel 1 is 4 to 20 mA analog output with HART 7.5, PROFIBUS PA, PROFIBUS DP or Modbus RS 485 RTU. The current signal can be configured for massflow, volumeflow or density, standard volume flow, medium temperature, Fraction A and B and Fraction A% and B%.

#### Channel 2

Channel 2 is a signal output which can be freely configured for any process variable.

## Flow Measurement

### SITRANS FC (Coriolis) Transmitters

#### SITRANS FCT030

##### Benefits (continued)

- Analog current (0/4 to 20 mA)
- 3 stage analog valve dosing control
- Frequency or pulse
- Digital one or two-valve dosing control in combination with channel 3 or 4
- Operational and alarm status

##### Channels 3 and 4

Channels 3 and 4 can be ordered with signal (freely configured for any process variable) or relay outputs, or signal input.

##### Signal

Signal output can be user configured to:

- Analog current (0/4 to 20 mA)
- 3 stage analog valve dosing control
- Frequency or pulse
- Redundant frequency or pulse (linked to Channel 2)
- Digital one or two-valve dosing control
- Operational and alarm status

##### Relay

Relay output(s) can be user configured to:

- Digital one or two-valve dosing control
- Operation status including flow direction
- Alarm status

##### Signal input

Signal input can be user configured for

- Dosing control
- Totalizer reset functions
- Force or freeze output(s)
- Initiate automatic zero point adjustment

Signal outputs and inputs for non hazardous areas can be changed for active or passive operations by dip switch.

For hazardous areas Signal outputs and inputs can't be changed by dip switch, and has to be selected individually by ordering.

During service and maintenance all outputs can be forced to a preset value for simulation, verification or calibration purposes.

##### Approvals and certificates

The FCT030 coriolis flowmeter program was designed from the ground up to comply with or exceed the requirements of international standards and regulations.

##### Application

SITRANS FCT030 transmitters are suitable for applications within the entire process industry where there is a demand for accurate flow measurement. The meter is capable of measuring both liquid and gas flow.

Coriolis flowmeters can be applied in all industries, such as:

- Chemical & Pharma: detergents, bulk chemicals, acids, alkalis, paint mixing systems, solvents and resins, pharmaceuticals, blood products, vaccines, insulin production
- Food & Beverage: dairy products, beer, wine, soft drinks, °Brix/°Plato, fruit juices and pulps, bottling, CO<sub>2</sub> dosing, CIP/SIP-liquids, mixture recipe control

- Automotive: fuel injection nozzle & pump testing, filling of AC units, engine consumption
- Oil & Gas: filling of gas bottles, furnace control, test separators
- Hydrocarbon processing: oil refining, derivatives manufacturing, polymerisation
- Water & Waste Water: dosing of chemicals for water treatment

The multiple outputs and bus communication mean that all of the process information can be read either instantaneously (10 ms update) or periodically as plant operation requires.

##### Design

The transmitter SITRANS FCT030 is designed in an IP67/NEMA 4X aluminum enclosure with corrosion resistant coating. It can be remote connected or compact mounted with the following sensors:

- FCS300 DN 15, DN 25, DN 50, DN 80, DN 100, DN 150
- FCS400 DN 15, DN 25 and DN 50
- MASS 2100 DI 1.5, DI 3, DI 6, DI 15
- FC300 DN 4

FCT030 is available with current output HART 7.5, Modbus RS 485 RTU, PROFIBUS DP or PROFIBUS PA as standard on Channel 1.

The transmitter has a modular design with discrete, replaceable electronic modules and connection boards to maintain separation between functions and facilitate field service. All modules are fully traceable and their provenance is included in the transmitter setup.

##### SensorFlash

SensorFlash is a standard, 4 GByte micro SD card with the ability to be updated by PC. It is supplied with each sensor with the complete set of certification documents including calibration report. Material, pressure test, factory conformance certificates are optional at ordering.

The Siemens SensorFlash memory unit offers the following features and benefits:

- Automatically program any similar transmitter in seconds to the operation standard
- Transmitter replacement in less than 5 minutes
- True "plug & play" provided by integrated cross-checking data consistency and HW/SW version verification
- Permanent memory of operational and functional information from the moment that the flowmeter is switched on
- New firmware updates can be downloaded from the Siemens internet portal for Product Support and placed onto SensorFlash (unmounted from the transmitter and inserted into a PC's SD card slot). The firmware is then inserted into the existing flowmeter and the complete system upgraded.
- Storing of alarm history log
- Storing of parameter change log
- Storing of process peak values log

##### Datalogging on SensorFlash

The following functions are available:

- Logging of process values and diagnostic values simultaneous
- Logging of parameter settings
- Selectable logging interval

### Function

The following functions are available:

- Mass flowrate, volume flowrate, density, process temperature, frame temperature, fraction flow
- Up to four output/input channels selected at ordering
- Outputs can be individually configured with mass, volume, density etc.
- Three built-in totalizers which can count forward, backward or forward and backward
- Low flow cut-off, adjustable
- Density cut-off or empty pipe cut-off, adjustable
- Flow direction adjustable
- Alarm system consisting of alarm-log, alarm pending menu
- Internal data logger is updated each 10 minutes with operational data such as system health, totalizer values, all configurations and data needed for custody transfer requirements to OIML R 117 and NTEP
- Display of operating time with real-time clock. Daylight saving time is not implemented
- Uni/bidirectional flow measurement
- Flowrate outputs are freely configurable between maximum negative and maximum positive flows according to the sensor capacity
- Limit switches programmable for flow, density, temperature or fraction process values. Limit points can be graded as warning and alarm for values both above and below nominal process conditions
- Process noise filter for optimization of measurement performance under non-ideal application conditions. 5-stage pumping filter compensates for flow fluctuations caused by e.g. single acting piston pumps
- Full dosing controller with 5 user-configurable recipes
- Automatic zero adjustment menu, with zero point evaluation display
- Full service menu for effective and straight forward application and meter troubleshooting
- Precise temperature measurement ensures optimum accuracy on massflow, density and fraction flow.
- Fraction flow computation is based on a 5th-order algorithm matching known applications.
- Audit trail information, stores parameters changes with time stamp information
- Simulation of process values, status information and alarms
- Aerated flow filtering system, for advanced filtering of fluids with gas or air bubbles
- Datalogging of process values and parameter changes on SensorFlash

### Technical specifications

<b>Number of process variables</b>	7
<b>Measurement of</b>	<ul style="list-style-type: none"> <li>• Mass flow</li> <li>• Volume flow</li> <li>• Density</li> <li>• Process media temperature</li> <li>• Standard volume flow</li> <li>• Reference density</li> <li>• Fraction A flow</li> <li>• Fraction B flow</li> <li>• Fraction A %</li> <li>• Fraction B %</li> </ul>
<b>Current output</b>	
Current	0 ... 20 mA or 4 ... 20 mA (Channel 1 only 4 ... 20 mA)
Load	Ex i: < 470 Ω (HART ≥ 230 Ω) Non-Ex: < 770 Ω (HART ≥ 230 Ω)
Time constant	0 ... 100 s adjustable
<b>Digital output<sup>1)</sup></b>	
Pulse	41.6 μs ... 5 s pulse duration
Frequency	0 ... 12.5 kHz, 50 % duty cycle, 120 % overscale provision
Time constant	0 ... 100 s adjustable
Active	0 ... 24 V DC, 87 mA, short-circuit-protected
Passive	3 ... 30 V DC, max. 110 mA
<b>Relay</b>	Only for channel 3 and 4
Type	Change-over voltage-free relay contact
Load	30 V AC/100 mA
Functions	Alarm level, alarm number, limit, flow direction
<b>Digital input<sup>1)</sup></b>	Only for channel 3 and 4
Voltage	15 ... 30 V DC (2 ... 15 mA)
Functionality	Start/stop/hold/continue dosing, reset totalizer 1 and 2, force output, freeze output
<b>Galvanic isolation</b>	All inputs and outputs are galvanically isolated, isolation voltage 500 V
<b>Cut-off</b>	
Low-flow	0 ... 9.9 % of maximum flow
<b>Limit function</b>	Mass flow, volume flow, fraction, density, sensor temperature
<b>Totalizer</b>	Three eight-digit counters for forward, net or reverse flow
<b>Display</b>	<ul style="list-style-type: none"> <li>• Background illumination with alphanumeric text, 3 × 20 characters to indicate flow rate, totalized values, settings and faults.</li> <li>• Time constant as current output 1</li> <li>• Reverse flow indicated by negative sign</li> </ul>
<b>Zero point adjustment</b>	Via keypad or remote via digital input

# Flow Measurement

## SITRANS FC (Coriolis)

### Transmitters

#### SITRANS FCT030

#### Technical specifications (continued)

<b>Ambient temperature</b>	
Operation	
• Transmitter	-40 ... +60 °C (-40 ... +140 °F) (humidity max. 95 %)
• Display	-20 ... +60 °C (-4 ... +140 °F)
Storage	
• Transmitter	-40 ... +70 °C (-40 ... +158 °F) (humidity max. 95 %)
• Display	-20 ... +70 °C (-4 ... +158 °F)
<b>Communication Ch1</b>	
	HART 7.5 PROFIBUS PA PROFIBUS DP Modbus RS 485 RTU
<b>Enclosure</b>	
Material	Aluminum, corrosion Class C4
Rating	IP67/NEMA 4X to EN/IEC 60529 (1 mH <sub>2</sub> O for 30 min.)
Mechanical load	18 ... 1000 Hz random, 3.17 g RMS, in all directions, to IEC 68-02-36
<b>Supply voltage</b>	
Supply	20 ... 90 V DC ± 10 % 100 ... 240 V AC ± 10 % 47 ... 63 Hz
Fluctuation	No limit
Power consumption	11 W/30 VA
<b>EMC performance</b>	
Emission	EN 55011/CISPR-11 (Class A)
Immunity	EN/IEC 61236-1 (Industry)
<b>NAMUR</b>	
	Within the value limits according to "General requirements" with error criteria A in accordance with NE 21
<b>Environment</b>	
Environmental conditions acc. to IEC/EN/UL 61010-1	<ul style="list-style-type: none"> <li>• Altitude up to 2000 m</li> <li>• Pollution degree 2</li> </ul>
<b>Maintenance</b>	
	The flowmeter has a built-in error log/pending menu which should be inspected on a regular basis
<b>Cable glands</b>	
	Cable glands are available in nylon, nickel plated brass or stainless steel (316L/W1.4404) in the following dimensions: <ul style="list-style-type: none"> <li>• 1 × M25, 2 × M20</li> <li>• 3 × ½" NPT</li> </ul>
<b>Digital cable connection (remote version)</b>	
	Standard industrial signal cable up to 75 m long with 2 × screened pairs or 4-wire overall screen can be laid between the sensor and transmitter. Siemens offers cables in a selection of pre-cut lengths and prepared for either gland or plug connection.
<b>Analog cable connection (MASS 2100/FC300)</b>	
	Standard industrial cable up to 15 m distance between sensor and trans- mitter. PVC insulated 5 × 2 × Ø 0.34 mm, twisted and screened in pairs, temperature range - 20 ... +105 °C  Siemens offers cables in a selection of pre-cut lengths.

#### Approvals FCT030

Hazardous area (fieldmount housing  
only)<sup>2)</sup>

- ATEX zone 1, IECEx zone 1, cCSAus (Class 1 Div 1), EAC Ex zone 1, cCSAus Zone 1, NEPSI, INMETRO (depending on version and configuration)
  - ATEX/IECEx Zone 1:
    - Ex db eb ia [ia Ga] IIC T6 Gb
  - ATEX/IECEx Zone 21 (depending on sensor type):
    - Ex tb [ia Da] IIIC T85°C Db
  - Canada:
    - Ex db eb ia [ia Ga] IIC T6 Gb
    - Ex tb [ia Da] IIIC T85°C (depending on sensor type)
  - USA:
    - Class I, II, III, Division 1, Groups A, B, C, D, E, F, Class I Zone 1: AEx db eb ia [ia Ga] IIC T6 Gb
    - Zone 21: AEx tb [ia Da] IIIC T85°C

#### Certificates

CE mark

- Pressure equipment
- Low voltage directive
- WEEE
- RoHS


Regional certifications

- C-TICK (Australia and New Zealand EMC)
- EAC (Belarus, Armenia, Kazakhstan, Russia)
- KCC (South Korea) (in preparation)


<sup>1)</sup> With 300 Ω internal impedance. For coil switching use the passive output option.

<sup>2)</sup> Dust certification depending on sensor type.


**Dimensional drawings**

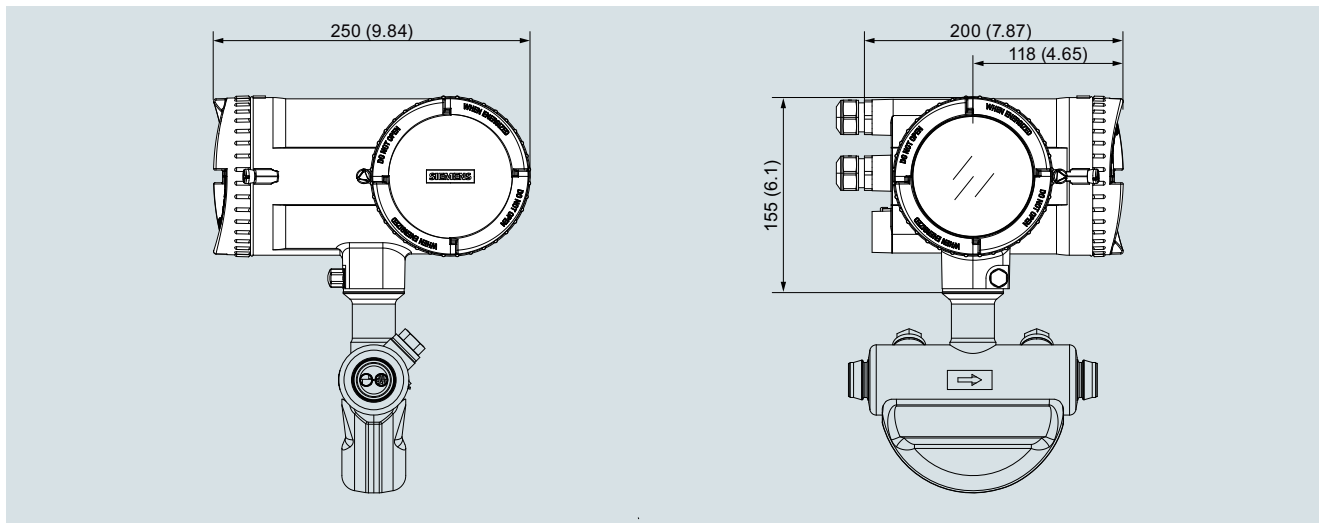

SITRANS FCT030, compact version, dimensions in mm (inch)

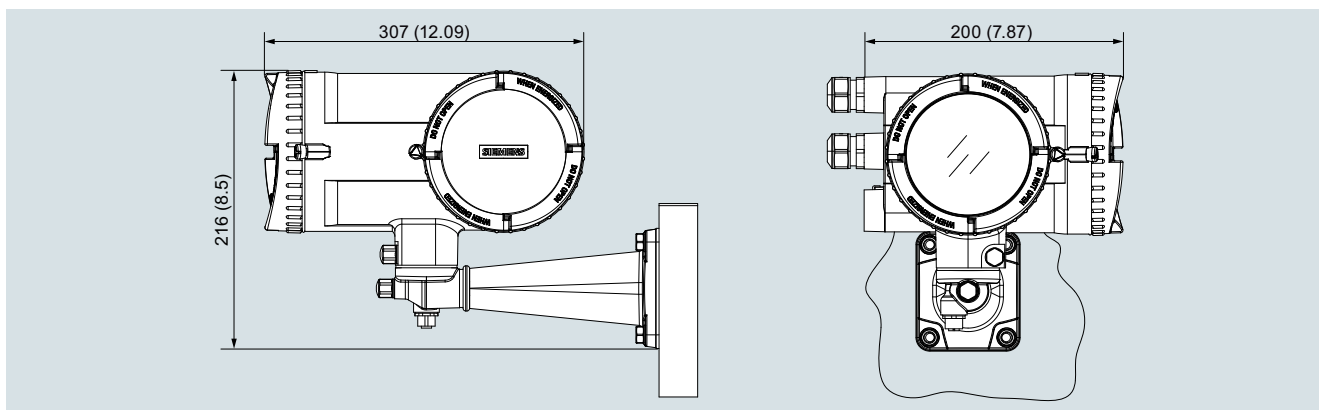

SITRANS FCT030, field mount version for sensors with digital cable and M12 plug connection, dimensions in mm (inch)

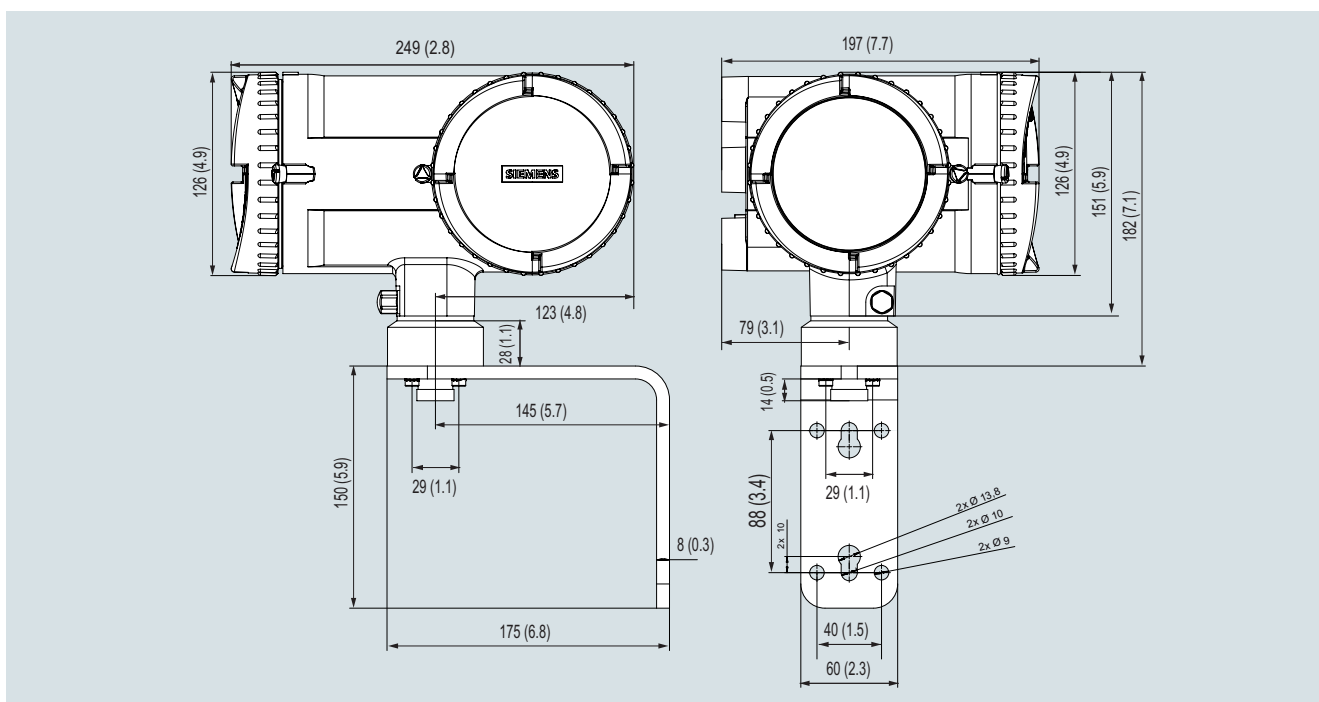


SITRANS FCT030, field mount version for low flow MASS 2100 / FC300 sensors with analog cable dimensions in mm (inch)

## Flow Measurement

### SITRANS FC (Coriolis) Transmitters

#### SITRANS FCT030

#### Dimensional drawings (continued)

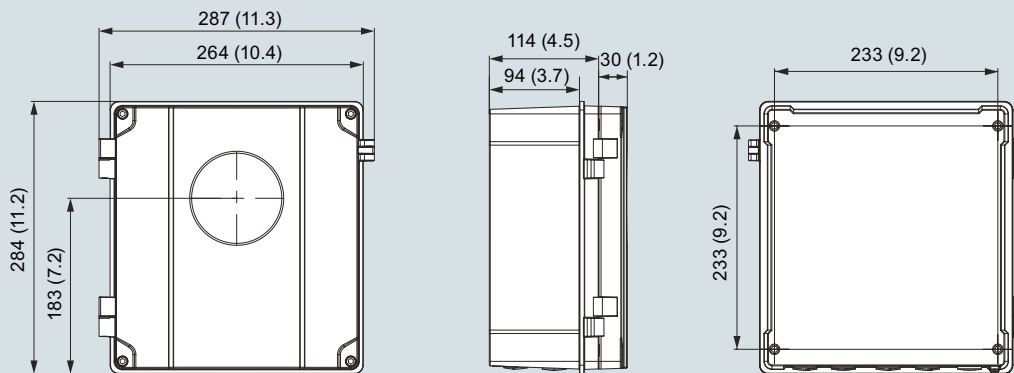

SITRANS FCT030, wall mount version, dimensions in mm (inch)



### Overview



FCT010 is based on the latest developments within digital signal processing technology – engineered for high measuring performance, fast response to step changes in flow, fast dosing applications, high immunity against process noise, easy to install commission and maintain.

The FCT010 transmitter delivers true multi-parameter measurements i.e. massflow, volumeflow, standard volumeflow, density, temperature . All with a single Modbus connection.

The FCT010 IP67 transmitter is compact mounted with all sensors of type FCS300, FCS400 , MASS 2100 DI 3, DI 6, DI 15.

For MASS 2100 DI 1.5 to DI 15 and FC300 DN 4 an analogue connection is available for a remote FCT010 solution.

### Benefits

#### **Flow calculation and measurement**

Dedicated mass flow calculation with DSP technology

- Fast dosing and flow step response with maximum 10 ms response time
- 100 Hz update rate to all outputs
- Independent low flow cut-off settings for mass and volume flowrates
- Automatic zero-point adjustment on command from discrete input or host system

#### **Operation**

- User-configurable settings over SIMATIC PDM

#### **Alarms and safety**

- Advanced diagnosis and service menu enhances troubleshooting and meter validation
- Configurable upper and lower alarm and warning limits for all process values
- Alarm handling can be selected between Siemens and NAMUR standard configurations

#### **Outputs and control**

- Single channel Modbus RTU output
- Individually configurable for massflow, volumeflow, standard volumeflow, density, temperature
- One Totalizer (data not secured by power failure )

#### **Approvals and certificates**

The FCT010 coriolis flowmeter program was designed from the ground up to comply with or exceed the requirements of international standards and regulations.

### Application

SITRANS FCT010 transmitters are suitable for applications within the entire process industry where there is a demand for accurate flow measurement. The meter is capable of measuring both liquid and gas flow.

Coriolis flowmeters can be applied in all industries, such as:

- Chemical & Pharma: detergents, bulk chemicals, acids, alkalis, paint mixing systems, solvents and resins, pharmaceuticals, blood products, vaccines, insulin production
- Food & Beverage: dairy products, beer, wine, soft drinks, CO2 dosing, CIP/SIP-liquids, mixture recipe control
- Automotive: fuel injection nozzle & pump testing, filling of AC units, engine consumption
- Oil & Gas applications e.g. test separators
- Hydrocarbon processing: oil refining, derivatives manufacturing, polymerisation
- Water & Waste Water: dosing of chemicals for water treatment

The Modbus communication mean that all of the process information can be read either instantaneously (10 ms update) or periodically as plant operation requires.

### Design

The transmitter SITRANS FCT010 is designed in an IP67/NEMA 4X aluminum enclosure with corrosion resistant coating.

It is compact mounted with the following sensors:

- FCS300 DN 15, DN 25, DN 50, DN 80, DN 100, DN 150
- FCS400 DN 15, DN 25 and DN 50
- MASS 2100 DI 3, DI 6, DI 15

It can be remote mounted with the following sensors:

- MASS 2100 DI 1.5, DI 3, DI 6, DI 15
- FC300 DN 4

FCT010 is available with Modbus RS 485 RTU as standard.

#### SensorFlash

SensorFlash is a standard, 4 GByte micro SD card with the ability to be updated by PC. It is supplied with each sensor with the complete set of certification documents including calibration report. Material, pressure test, factory conformance certificates are optional at ordering.

The Siemens SensorFlash memory unit for the FCT010 only has the function of documentation including a parameter backup and a FW bundle. The Sensor Flash is not mounted into the FCT010 and will not have the extra features as the FCT030 transmitter has.

- Storing of alarm history log
- Storing of parameter change log

# Flow Measurement

## SITRANS FC (Coriolis)

### Transmitters

#### SITRANS FCT010

#### Function

The following functions are available:

- Mass flowrate, volume flowrate, density, process temperature
- Single Modbus RTU I/O
- Low flow cut-off, adjustable
- Density cut-off or empty pipe cut-off, adjustable
- Flow direction adjustable
- Alarm system consisting of alarm-log, alarm pending menu
- Uni/bidirectional flow measurement
- Flowrate outputs are freely configurable between maximum negative and maximum positive flows according to the sensor capacity
- Process noise filter for optimization of measurement performance under non-ideal application conditions. 5-stage pumping filter compensates for flow fluctuations caused by e.g. single acting piston pumps
- Full service menu for effective and straight forward application and meter troubleshooting
- Aerated flow filtering system, for advanced filtering of fluids with gas or air bubbles


#### Technical specifications

<b>Number of process variables</b>	5
<b>Measurement of</b>	<ul style="list-style-type: none"> <li>• Mass flow</li> <li>• Volume flow</li> <li>• Density</li> <li>• Process media temperature</li> <li>• Standard volume flow</li> </ul>
<b>I/O</b>	Modbus RTU
Galvanic isolation	All inputs and outputs are galvanically isolated, isolation voltage 500 V
<b>Cut-off</b>	
Low-flow	0 ... 9.9 % of maximum flow
<b>Limit function</b>	Mass flow, volume flow, density, sensor temperature
<b>Totalizer</b>	One eight-digit counters for forward, or reverse flow - data recovery not protected at power loss.
<b>Zero point adjustment</b>	Via Simatic PDM
<b>Ambient temperature</b>	
Operation	
• Transmitter	-40 ... +60 °C (-40 ... +140 °F) (humidity max. 95 %)
Storage	
• Transmitter	-40 ... +70 °C (-40 ... +158 °F) (humidity max. 95 %)
<b>Communication Ch1</b>	Modbus RS 485 RTU
<b>Enclosure</b>	
Material	Aluminum corrosion Class C4
Rating	IP67/NEMA 4X to EN/IEC 60529 (1 mH <sub>2</sub> O for 30 min.)
Mechanical load	18 ... 1000 Hz random, 3.17 g RMS, in all directions, to IEC 68-02-36

<b>Supply voltage</b>	
Supply	12 ... 27 V DC Ex d: 12-24 V DC Intrinsic safe: Ui: 20 V, Ii: 484 mA, Pi: 2.3 W, Li: 0.6 uH, Ci: 1.9 nF
Fluctuation	No limit
Power consumption	1.1 W
<b>EMC performance</b>	
Emission	EN 55011/CISPR-11 (Class A)
Immunity	EN/IEC 61236-1 (Industry)
<b>NAMUR</b>	Within the value limits according to "General requirements" with error criteria A in accordance with NE 21
<b>Environment</b>	
Environmental conditions acc. to IEC/EN/UL 61010-1	<ul style="list-style-type: none"> <li>• Altitude up to 2000 m</li> <li>• Pollution degree 2</li> </ul>
<b>Maintenance</b>	The flowmeter has a built-in error log/pending menu which should be inspected on a regular basis.
<b>Cable glands</b>	M12 connector Cable glands are available in nylon, nickel plated brass or stainless steel (316L/W1.4404) in the following dimensions: <ul style="list-style-type: none"> <li>• 1 × M20</li> <li>• 1 × ½" NPT</li> </ul>
<b>Digital cable connection</b>	Standard industrial signal cable up to 75 m long with 2 × screened pairs or 4-wire overall screen can be laid between the sensor and transmitter. Siemens offers cables in a selection of pre-cut lengths and prepared for either gland or plug connection.
<b>Analog cable connection (MASS 2100/FC300)</b>	Standard industrial cable up to 15 m distance between sensor and transmitter. PVC insulated 5 × 2 × Ø 0.34 mm, twisted and screened in pairs, temperature range -20 ... +105 °C
<b>Approvals</b>	
Hazardous area	FCT010 can be installed in zone 1 for gas and zone 21 for dust (dust: depending on sensor type ) and Class 1 Div 1/ Zone 1 <ul style="list-style-type: none"> <li>• ATEX, IECEx, cCSAus (Class 1 Div 1), EAC Ex, cCSAus Zone 1, NEPSI Zone 1</li> </ul>
<b>Certificates</b>	
CE mark	<ul style="list-style-type: none"> <li>• Pressure equipment</li> <li>• Low voltage directive</li> <li>• WEEE</li> <li>• RoHS</li> </ul>
Regional certifications	<ul style="list-style-type: none"> <li>• C-TICK (Australia and New Zealand EMC)</li> <li>• EAC (Belarus, Armenia, Kazakhstan, Russia)</li> <li>• KCC (South Korea) (in preparation)</li> </ul>

### Dimensional drawings

Dimension for the FCT010 remote mounted (for analogue cable connections for MASS 2100 / FC300 DN4)

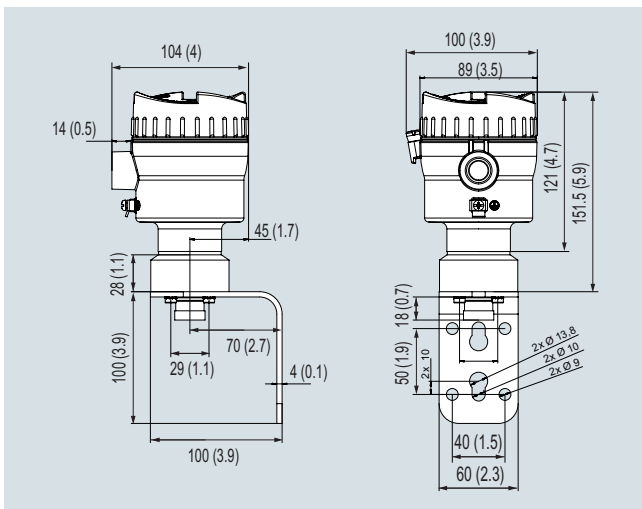

SITRANS FCT010, dimensions in mm (inch)

## Flow Measurement


### SITRANS FC (Coriolis) Transmitters

#### SITRANS FCT070

##### Overview



SITRANS FCT070 transmitter

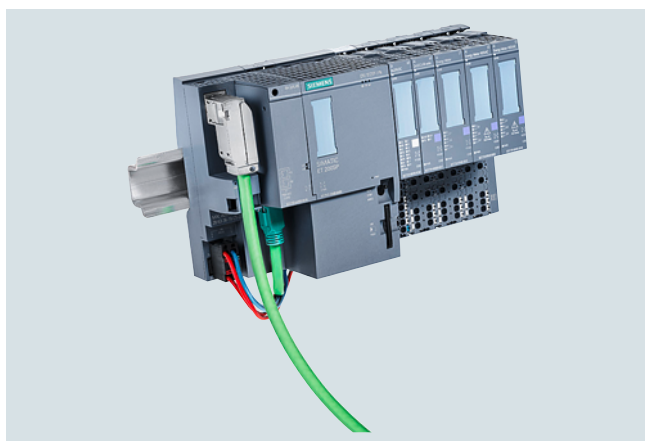

Mounting on the SIMATIC ET 200SP ST & HF

The technology module SITRANS FCT070 is a Coriolis flow meter transmitter for the SIMATIC ET 200SP ST & HF.

The TM SITRANS FCT070 flow transmitter can be operated directly in the SIMATIC PCS7 or in TIA Portal with the FCT070 Faceplates.

TM FCT070 offers real-time data processing and the display of all measuring and status data of the Coriolis flowmeter.

The TM FCT070 can work with all Siemens Coriolis flow meters. It can be directly connected to the SITRANS FCS300, SITRANS FCS400 and SITRANS FC MASS 2100 FC300 DN 4.

##### Benefits

- Easy integration into automation process control as TIA portal and PCS7
- Easy selection and integration of flow meters via TIA-Selector
- No transmitter between automation and flow meter required
- Cost effective integration of Coriolis flow meters for PLC controlled machines

- SITRANS FCT070 is a ET 200SP technology module and can be combined with all other SIMATIC ET 200S SP ST & HF modules
- Fast and trouble-free communication between the flow meter and the PLC through digital data communication with up to 10 ms update rate
- SITRANS FCT070 and ET 200SP have the ATEX Zone 2 Class 1 Div 2 approvals. With the barrier SITRANS I300 the flowmeters sensor can be used in Ex Zone 1 & Class 1 Div 1 approval.
- Included advanced batch functionality without additional modules. I/Os are onboard
- Included the 17 standard fraction tables.

##### Application

SITRANS FCT070 can be used for machine builders and in the process industry plants. The meters are suitable for measuring on liquid and gas. With ET 200SP ST & HF the SITRANS FCT070 can be installed decentralized in small stations, with fast communication to the control room.

The faceplates for TIA-Portal and PCS 7 offer the direct full remote access to the flow meter.

The main industries for the SITRANS FCT070 transmitter:

- Chemical
- Food and beverage
- Pharmaceutical
- Automotive
- Oil and gas
- Power generation and utility
- Water and waste water

##### Design

The SITRANS FCT070 is designed as ET 200SP ST & HF module and can directly installed with other ET 200SP modules.

The sensor DSL cable is directly mounted to the ET 200SP ST & HF base unit is providing the supply voltage and the data communication. The SITRANS FC sensors with DSL can be connected directly to the SITRANS FCT070.

For sensors in ATEX Zone 1, the SITRANS I300 barrier must be installed between FCT070 and the FC DSL.

##### Function

The following key functionalities are available:

- Mass flow rate, volume flow rate, density, temperature and fraction flow
- Three built-in totalizers which can freely be set for counting mass flow, volume flow, standard volume flow and fraction
- Two-stage batch controller
- Two digital inputs
- Two digital outputs
- Low flow cut-off
- Zero point adjustment
- Configurable upper and lower alarm and warning limits for all process values
- Comprehensive status and error reporting

### Technical specifications

<b>Measurement of</b>	Mass flow, volume flow, density, temperature, fraction A flow, fraction A %, fraction B flow, fraction B %	<b>Decentralized operation</b>	<ul style="list-style-type: none"> <li>• to SIMATIC S7-300</li> <li>• to SIMATIC S7-400</li> <li>• to SIMATIC S7-1200</li> <li>• to SIMATIC S7-1500</li> <li>• to standard PROFINET controller</li> </ul>	<ul style="list-style-type: none"> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> </ul>
<b>Measurement functions</b>		<b>Usable with the following flowmeters</b>	<ul style="list-style-type: none"> <li>• SITRANS FCS400</li> <li>• SITRANS FCS300</li> <li>• SITRANS FC MASS2100</li> <li>• SITRANS FC300</li> </ul>	<p>For hazardous area application the SITRANS I300 can be used as barrier/power supply between sensor and FCT070</p>
<ul style="list-style-type: none"> <li>• Totalizer 1</li> <li>• Totalizer 2</li> <li>• Totalizer 3</li> <li>• Single and 2-stage batch function</li> </ul>	<p><b>Mass flow</b>, volume flow, standard volume flow, fraction A, fraction B  <b>Mass flow</b>, <b>volume flow</b>, standard volume flow, fraction A, fraction B  <b>Mass flow</b>, volume flow, <b>standard volume flow</b>, fraction A, fraction B  Batching function with the use of one or two outputs for dosing at high and low speed</p>	<b>Digital inputs 1 and 2</b>	Free useable inputs 1 and 2	<ul style="list-style-type: none"> <li>• Start dosing</li> <li>• Stop dosing</li> <li>• Pause/resume dosing</li> <li>• Start/stop totalizer 1, 2 or 3</li> <li>• Reset totalizer 1, 2 or 3</li> <li>• Zero adjust</li> <li>• Force outputs</li> <li>• Freeze process values</li> </ul>
<b>General information</b>		High signal	Low signal	<ul style="list-style-type: none"> <li>• Nominal voltage: 24 V DC</li> <li>• Upper limit: +30 V DC</li> <li>• Lower limit: +11 V DC</li> <li>• Current: max 35 mA</li> </ul>
Product type designation	Technology module TM FCT070	Potential separation	Isolation test	707 V DC
FW update possible	Yes	Isolation test	Cable length	<ul style="list-style-type: none"> <li>• Max. 50 m shielded</li> <li>• Max. 25 m unshielded</li> </ul>
Usable BaseUnits	BU 20 type B1	<b>Digital outputs 1 and 2</b>	Free useable outputs 1 and 2	<ul style="list-style-type: none"> <li>• Alarm acknowledgment</li> <li>• Out of specification</li> <li>• Failure sensor measuring</li> <li>• Function check</li> <li>• Status force value</li> <li>• Flow direction</li> </ul>
ET 200SP	Yes; from FW V4.2 or higher.	Low signal	High signal	<ul style="list-style-type: none"> <li>• Max. 1 V</li> <li>• Min 23.2 V</li> </ul>
ET 200SP ST & HF	Compatible and tested ST: Standard HF: High Feature	Switching capacity	On lamp load	300 mA signal high 8 W
<b>Engineering with</b>	<ul style="list-style-type: none"> <li>• STEP 7 TIA Portal configurable/integrated as of version V16 or higher</li> <li>• STEP 7 configurable/integrated as of version V5.5 SP4 and higher</li> <li>• PCS 7 V9.0 or higher</li> <li>• PROFINET as of GSD version/GSD revision GSDML V2.34</li> </ul>	Load resistance	Between diffrenet circuits	80 ... 10 kΩ Electronic/thermal
<b>Cable</b>		Potential separation	Isolation test	707 V DC
Maximum cable length to FC DSL	75 m (150 m)	Isolation test	Cable length	<ul style="list-style-type: none"> <li>• Max. 50 m shielded</li> <li>• Max. 25 m unshielded</li> </ul>
<b>Supply voltage</b>		Low signal	High signal	Max. 1 V Min 23.2 V
Load voltage L+	24 V DC	Switching capacity	On lamp load	300 mA signal high 8 W
Rated value (DC)	24 V NEC-Class II	Load resistance	Between diffrenet circuits	80 ... 10 kΩ Electronic/thermal
Permissible range, lower limit (DC)	19.2 V	Potential separation	Isolation test	707 V DC
Permissible range, upper limit (DC)	28.8 V	Isolation test	Cable length	<ul style="list-style-type: none"> <li>• Max. 50 m shielded</li> <li>• Max. 25 m unshielded</li> </ul>
Short-circuit protection	Yes			
Reverse polarity protection	Yes; against destruction			
<b>Input current</b>				
Current consumption, max.	500 mA			
<b>Power loss</b>				
Typical power loss, max.	1.7 W			
<b>Protection class</b>				
IP protection	IP20			
<b>EMV</b>	<ul style="list-style-type: none"> <li>• Electrostatic discharge according to IEC 61000-4-2: 2008</li> <li>• Field-related interference according to IEC 61000-4-3: 2006</li> <li>• Bursted interference due to Burst according to IEC 61000-4-4: 2012</li> <li>• Conducted interference by surge according to IEC 61000-4-5: 2014</li> <li>• Conducted interference by high-frequency radiation according to IEC 61000-4-6: 2013</li> </ul>			

# Flow Measurement

## SITRANS FC (Coriolis)




### Transmitters

#### SITRANS FCT070

#### Technical specifications (continued)

Environment	
<b>Ambient temperature during operation</b>	
Minimum installation	-25 °C
horizontal installation, max.	60 °C; observe derating
vertical installation, max.	50 °C; observe derating
<b>Ambient temperature during storage/transport</b>	
Storage, min.	-40 °C
Storage, max.	70 °C
Transport, min.	-40 °C
Transport, max.	70 °C
<b>Relative humidity</b>	
Operation, min.	5 %
Operation, max.	95 %; no condensation
<b>Height in operation</b>	
Ambient air pressure altitude (relative to sea level)	$T_{min} \dots T_{max}$ at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)
<b>EMC performance</b>	
Emission	• EN 61000-6-4
Electromagnetic compatibility	• IEC 61000-6-2:2016 • IEC 61000-6-4:2018
Emission of radio interference	Class A industrial environment: • IEC 61000-6-4: 2018 • IEC/CISPR 16-2-3: 2008 • EN 55016-2-3: 2006
Emission on power supply cables	Class A Industrial environment: • IEC 61000-6-4: 2018 • IEC/CISPR 16-2-1: 2010 • EN 55016-2-1: 2009
<b>Certification</b>	
CE mark	Low voltage directive RoHS
UL	ANSI / ISA 12.12.01
CAN/CSA	CSA C22.2 No. 213-M1987 Class I, Div. 2 Group A.B.C.D T4
ATEX	II 3 G Ex ec IIC T4 Gc
IECEX	Ex ec IIC T4 Gc
EAC	Yes
Tick	Yes
KCC	Yes
RoHS	Yes
FM	Class I, Div. 2, Group A.B.C.D T4
<b>Communication</b>	
Digital Sensor Link	460.8 kBits/s
Cable length FCT070 to FC DSL-Sensor	75 m (150 m)
Power supply FCS sensor	The operating voltage of the sensors is supplied via the sensor cable directly from the FCT070

#### Selection and ordering data

Description	Article No.	
<b>SITRANS FCT070</b> Transmitter for ET 200SP	<b>7ME4138-6AA00-0BB1</b>	
<b>BU20-P12+A0+4B, PU1</b> BaseUnit plate for ET 200SP	<b>6ES7193-6BP20-0BB0</b> <b>6ES7193-6BP20-0BB1</b>	
<b>SITRANS I300 – Isolating power supply – Ex barrier</b>	<b>A5E39832532</b>	

#### Compatible Coriolis sensors

<b>SITRANS FCS300</b>	<b>7ME4637-...</b>
<b>SITRANS FCS400</b>	<b>7ME4617-...</b>
<b>SITRANS MASS 2100</b>	<b>7ME4817-...</b>
<b>SITRANS FC300 DN4</b>	<b>7ME4817-...</b>

#### Operating instructions for SITRANS FCT070


Description	Article No.
<b>SITRANS FCT070 system manual</b> • English • German	<b>A5E47701533-AA</b>

#### Circuit diagrams

Naming	Con.	PIN	BU20 type B1	PIN	Con.	Naming
Digital input	DIO	1	①	②	2	DQ0
Digital input	DI1	3			4	DQ1
+24 V DC supply voltage for digital inputs	DI_L+	5	③	④	6	nc
Ground for digital outputs	M	7	⑤	⑥	8	M
RS 485 data line A for SEN communication	SEN_A	9	⑦	⑧	10	SEN_L+
RS 485 data line B for SEN communication	SEN_B	11	⑨	⑩	12	SEN_M
+24 V DC supply voltage	L+	13	⑪	⑫	14	M
	L+	15	⑬	⑭	16	M
			⑮	⑯		

Pin assignment of the BaseUnit BU20-P12+A0+4B

#### Overview

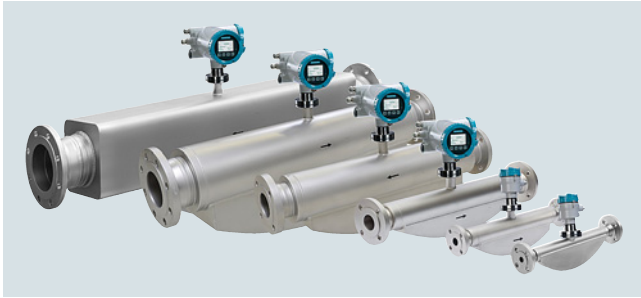

The SITRANS FCS300 sensor is available in DN 15 to DN 150 mm sizes in stainless steel AISI 316 L or nickel alloy wetted material. The sensor design consists of process connections, inlet and outlet manifolds mounted in a stiff frame and two parallel tubes equally sharing the process medium flow.

The sensing tubes are curved in the CompactCurve shape which gives high sensitivity and low pressure loss. The CompactCurve shape was selected to ensure that the smallest flows are measured with optimal signal to noise ratio.

The compact sensor design with a split flow dual tube design with high driver frequency is suitable for high end applications in all industry segments e.g. Chemical, Oil & Gas, Refineries, F&B and Power.

A variety of process connections available to cover all common process connections and pressure ratings.

The sensor has a solid stainless steel fully welded enclosure to protect the measuring tubes from any harsh environments. For hazardous area applications the FCS300 comes in a number of common hazardous area approved like ATEX, IECEx, cCSAus, EAC, and NEPSI.

#### Integration

The SITRANS FCS300 sensor is suitable for both indoor and outdoor installation and meets the requirements of Protection Class IP67/NEMA 4X. Optionally the sensor can be ordered with hazardous certification to Zone 1 and Div 1 (ATEX, IECEx, cCSAus, EAC Ex, NEPSI).

The flowmeter is bidirectional and can be installed in any orientation. The sensor is self-draining in many positions, with vertical mounting preferred.

It is important to ensure that the sensor tubes are always completely filled with homogeneous fluid; otherwise measuring errors may occur. Suitable fluids are clean liquids, pastes, light slurries or gases. Condensing vapours, aerated liquids or slush are not recommended.

The materials in contact with the process medium must be evaluated for corrosion and erosion resistances for long sensor life.

The pressure drop through the sensor is a function of the properties of the fluid and the flow rate. A pressure loss and accuracy calculator can be found on the Siemens internet site <https://www.siemens.com>.

The preferred flow direction is indicated by an arrow on the sensor. Flow in the direction of the arrow will be measured as positive. The flow direction can be adjusted at the transmitter to compensate for reverse installation.

#### Installation orientation

The optimal installation orientation is vertical with the flow upwards. This ensures that suspended solids or bubbles are completely pushed through the sensor. A drain valve below the sensor will allow the pipe and sensor to drain completely.

#### Supports

In order to support the weight of the flowmeter and to ensure reliable measurements when external effects exist (e.g. plant vibrations), the sensor should be installed in rigidly supported pipelines.

Supports or hangers should be installed symmetrically and stress-free in close proximity to both of the process connections.

#### Shut-off devices

To conduct a system zero adjustment, secure shut-off devices are required in the pipeline.

Where possible, shut-off devices should be installed both upstream and downstream of the flowmeter.



## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### SITRANS FCS300 flow sensor

### Configuration

#### Installation guidelines

- The mass flowmeter does not require any flow conditioning or straight inlet pipe sections. Care should be exercised however to ensure that any upstream valves, gates, sight glasses etc. do not cavitate and are not set into vibration by the flow.
- It is always preferred to place the flowmeter upstream of any control valve or other pipeline component which may cause flashing, cavitation or vibrations.
- The presence of gas bubbles in the fluid may result in erroneous measurements, particularly in the density measurement. Therefore the flowmeter should not be installed at the lowest pressure point in the liquid piping system or where vapour can collect. Install the meter in pipeline sections with high pressure to maintain system pressure and compress any bubbles.
- Drop lines downstream from the flow sensor should be avoided to prevent the meter tube from draining during flowing conditions. A back-pressure device or orifice is recommended to ensure that flow does not separate within the flow sensor but the metering section remains at positive pressure at all times while there is flow.
- The flowmeter should not come into contact with any other objects. Avoid making attachments to the housing except for the pressure guard components (if required).
- When the connecting pipeline is larger than the sensor size, suitable standard reducers may be installed. A selection of oversize and undersize connections can be ordered - refer to the sizes tables below.
- The flow sensor may be supported at the junction between process connection and the manifold, but should not be used to support adjacent piping. Ensure that the piping is also supported on both sides so that connection stresses are neutral.
- If strong vibrations exist in the pipeline, they should be damped using elastic pipeline elements. The damping devices must be installed outside the supported flowmeter section. Direct connection of flexible elements to the sensor should be avoided.
- Make sure that any dissolved gases, which are present in many liquids, do not outgas. The back pressure at the outlet should be at least 0.2 bar (3 psi) above the vapour pressure of the process fluid.
- Assure that operation below the vapour pressure cannot occur particularly for fluids with low latent heat of vaporisation.
- The sensor should not be installed in the vicinity of strong electromagnetic fields, e.g. near motors, pumps, variable frequency drives, transformers etc.
- When operating meters on a common mounting base the sensors should be mounted and spaced separate from each other to avoid cross-talk and other vibration interferences.
- When operating meters in interconnected pipelines the pipes should be decoupled to prevent cross talk.

#### Remote system cabling

The system is designed so that standard instrumentation cable with four cores and overall screen or two screened pairs can be used, or cable sets can be ordered with the flowmeter. The cable can be ordered in various set lengths and terminated in the field.

Be aware of maximum sensor length cable depending on product selection, currently 75 m. Data transmission speed and process variable update rates may be affected by the cable characteristics. For best results, choose a cable with the following electrical characteristics:

Property	Unit	Value
Resistance	[ $\Omega$ /km]	59
Characteristic impedance	[ $\Omega$ ]	100 @ 1 MHz
Insulation resistance	[M $\Omega$ /km]	200
Maximum voltage	[V]	300

The flowmeter system applies maximum 15 V DC in operation and is certified intrinsically safe. The complete system is insulation tested to 1 500 V in production.

Cabling solutions which can be ordered with the flowmeter are as follows:

1. High performance plugged cable using M12 connectors into prepared sockets
2. Cable glands for either metric or NPT threaded terminal housings
3. Plain cable in set lengths to be passed through flexible and rigid conduit (not supplied) for metric or NPT threaded terminal housings

Cable for items 1, 2 and 3 are available either gray for standard applications or light blue for Ex applications to identify the circuit as intrinsically safe.

#### Insulation and heating

For applications where pipeline insulation is required for personnel protection or process temperature maintenance, the SITRANS FCS300 flow sensor may also be insulated. The form and material of insulation is not prescribed and entirely depends on the practices at the application location or plant.

Insulation must not be crowded around the sensor pedestal but shaped at a 45° cone to allow the pedestal to radiate excess heat and maintain a suitable working temperature within the front-end transmitter housing.



### Technical specifications

Flow sensor FCS300		
Parameter	Unit	Value
Process media		<ul style="list-style-type: none"> <li>Fluid Group 1 (suitable for dangerous fluids)</li> <li>Aggregate state: Paste/light slurry, liquid and gas</li> </ul>
Process pressure range	[barg (psi)]	The maximum permissible operating pressure is determined by the respective process connection and the temperature of the medium 316L: 0 ... 100 (0 ... 1 450) Nickel-alloy C4 (2.4610) <sup>3)</sup> : 0 ... 100 (0 ... 1 450)
Process temperature range	[°C (°F)]	The maximum permissible process temperature is determined by the respective process connection -50 ... +205 (-58 ... +400)
Ambient temperature range	[°C (°F)]	-40 ... +70 (-40 ... +158)
Transport temperature range	[°C (°F)]	-40 ... +70 (-40 ... +158)
Density range	[kg/m <sup>3</sup> (lb/ft <sup>3</sup> )]	1 ... 5 000 (0.062 ... 312.2)
No. of process values		
• Primary process values		<ul style="list-style-type: none"> <li>Mass flow</li> <li>Density</li> <li>Process medium temperature</li> </ul>
• Derived process values		<ul style="list-style-type: none"> <li>Volume flow</li> <li>Standard volume flow (with reference density)</li> <li>Fraction A:B</li> <li>Fraction % A:B</li> </ul>

Performance specifications		Sensor					
Parameter	Unit	DN 15	DN 25	DN 50	DN 80	DN 100	DN 150
Max. zero point error		0.6 (0.0235)	2.16 (0.0792)	7.2 (0.264)	20 (0.735)	41.6 (1.628)	68.8 (2.528)
Q <sub>min</sub> (1 % error) <sup>4)</sup>	[kg/h (lb/min)]	70 (2.57)	240 (8.92)	800 (29.4)	2 000 (73.5)	4 000 (146.9)	6 900 (253.5)
Q <sub>nom</sub> (1 bar pressure)	[kg/h (lb/min)]	4 500 (163.3)	20 500 (753.2)	49 000 (1 800)	122 000 (4 483)	273 000 (10 031)	459 200 (16 873)
Q <sub>max</sub> <sup>2)</sup>	[kg/h (lb/min)]	8 000 (293.9)	35 000 (1 286)	90 000 (3 307)	250 000 (9 186)	520 000 (19 107)	860 000 (31 600)
Linearity error mass flow							
• for liquids <sup>1)</sup>	0.1% massflow sensor [%]	± 0.1	± 0.1	± 0.1	± 0.1	± 0.1	± 0.1
	0.2% massflow sensor [%]	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2
• for gases (additional)	[%]	± 0.40	± 0.40	± 0.40	± 0.40	± 0.40	± 0.40
Repeatability mass flow	[%]	± 0.05	± 0.05	± 0.05	± 0.05	± 0.05	± 0.05
Density accuracy with 0.1%	[kg/m <sup>3</sup> (lb/ft <sup>3</sup> )]	± 2 (± 0.124)	± 2 (± 0.124)	± 2 (± 0.124)	± 2 (± 0.124)	± 2 (± 0.124)	± 2 (± 0.124)
Density accuracy with 0.2 %	[kg/m <sup>3</sup> (lb/ft <sup>3</sup> )]	± 10 (± 0.62)	± 10 (± 0.62)	± 10 (± 0.62)	± 10 (± 0.62)	± 10 (± 0.62)	± 10 (± 0.62)
Temperature error	[°K]	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5

<sup>1)</sup> Increased error can be expected for gas mass flow measurement (for gas measurement typically + 0.40 % error).

<sup>2)</sup> For gas applications the max. flowrate is calculated at Mach-Number = 0.3.

<sup>3)</sup> Hastelloy C is a registered trademark of Haynes International. C4 nickel alloys are equivalent to Hastelloy C4.

<sup>4)</sup> Valid for the 0.1% sensor.

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems


#### SITRANS FCS300 flow sensor

#### Technical specifications (continued)


##### Pressure/temperature curves

With two major exceptions, the pressure rating of the flow sensors is independent of the process medium temperature. Design rules for flange connections in both the EN 1092-1 and ASME B16.5 standards dictate pressure derating with increasing temperature. The charts below show the effect of process medium temperature on the pressure ratings for the flanges within the FCS300 product program.


3

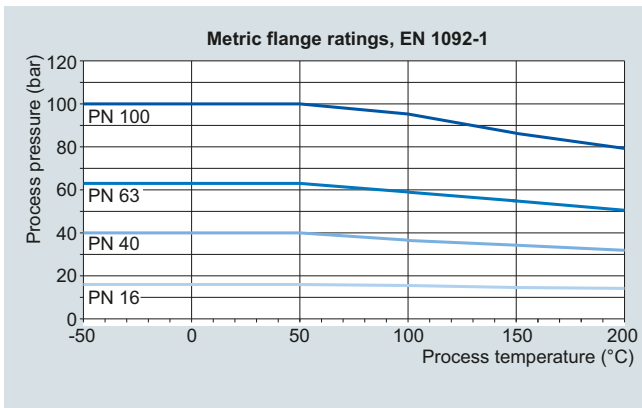


EN1092-1 flanged sensors in AISI 316L

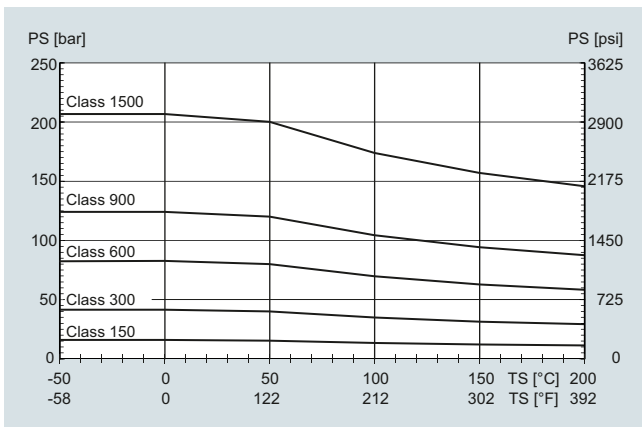

Stainless steel ASME flange 1.4571/1.4404 (AISI 316Ti/316L) up to DN200 (8")

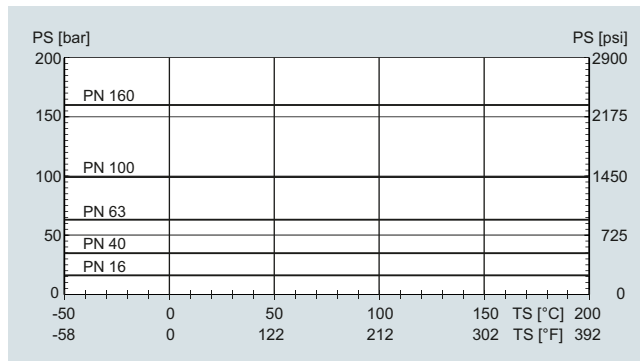

Nickel alloy DIN flange C4 (2.4610) or nickel alloy C22 (2.4602) up to DN200 (8")

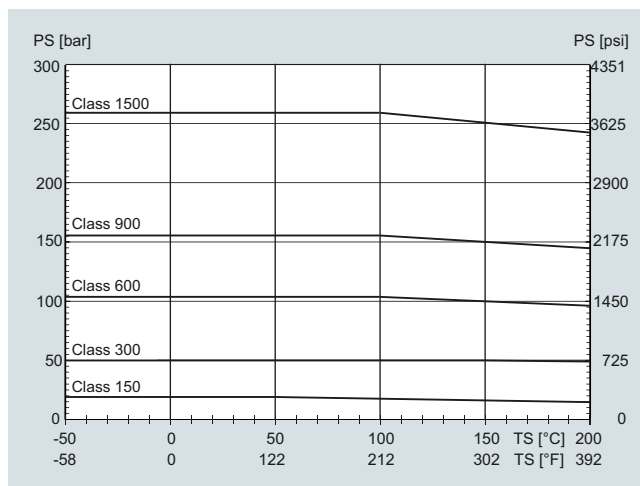

Nickel alloy ASME flange C4 (2.4610) or nickel alloy C22 (2.4602) up to DN200 (8")

##### Sanitary connections

Design	Nominal size	PS <sub>max</sub>		TS <sub>max</sub>		TS <sub>min</sub>	
		[bar]	[psi]	[°C]	[°F]	[°C]	[°F]
Pipe fitting DIN 11851	DN 15 ... 40 (½ ... 1½")	40	580	140	284	-40	-40
	DN 50 ... 100 (2 ... 4")	25	363	140	284	-40	-40
Pipe fitting SMS 1145	DN 25 ... 80 (1 ... 3")	6	87	140	284	-40	-40
Clamp DIN 32676	DN 15 ... 50 (½ ... 2")	16	232	120	248	-40	-40
	DN 65 ... 100 (2½ ... 4")	10	145	120	248	-40	-40

#### Technical specifications (continued)

##### Sensor variants

SITRANS FCS300 sensors are available in a wide range of process connections. The available combinations of type, sensor size and connection size are shown in the tables below.

##### Standard variants

Sensor	Connection	EN 1092-1 B1, PN 16	EN 1092-1 B1, PN 40	EN 1092-1 B2, PN 63	EN 1092-1 B2, PN 100	EN 1092-1 D, PN 40	ANSI B16.5-2009, class 150	ANSI B16.5-2009, class 300	ANSI B16.5-2009, class 600	ANSI B16.5-2009, class 900	ANSI B16.5-2009, class 1500	ISO 228-1 G female pipe thread	ASME B1.20.1 NPT female pipe thread	DIN 11851 hygienic screwed	DIN 32676 clamp (ISO) Row A	SMS 1145 hygienic screwed	JIS B2220:2004/10K	JIS B2220:2004/20K	EN 1092-1 PN 16, NAMUR length	EN 1092-1 PN 40, NAMUR length
<b>Standard: 7ME463-...</b>																				
DN 15 (½")	DN 10 (3/8")	•										•		•	•		•	•		
	DN 15 (½")	•	•	•	•	•	•	•	•	• <sup>1)</sup>	• <sup>1)</sup>	•	•	•	•	•	•	•		•
	DN 20 (¾")	•					•							•	•		•	•		
DN 25 (1")	DN 20 (¾")	•					•							•	•		•	•		
	DN 25 (1")	•	•	•	•	•	•	•	•	• <sup>1)</sup>	• <sup>1)</sup>			•	•	•	•	•		•
	DN 40 (1½")	•	•	•	•		•	•	•					•	•	•	•	•		
DN 50 (2")	DN 40 (1½")	•	•	•	•		•	•	•	•	•			•	•	•	•	•		
	DN 50 (2")	•	•	•	•	•	•	•	•	• <sup>1)</sup>	• <sup>1)</sup>			•	•	•	•	•		•
	DN 65 (2½")	•	•				•	•	•	• <sup>1)</sup>	• <sup>1)</sup>			•	•	•	•	•		
DN 80 (3")	DN 65 (2½")	•	•	•	•		•	•	•	• <sup>1)</sup>	• <sup>1)</sup>			•	•	•	•	•		
	DN 80 (3")	•	•	•	•	•	•	•	•	• <sup>1)</sup>	• <sup>1)</sup>			•	•	•	•	•		•
	DN 100 (4")	•	•	•	•		•	•	•	• <sup>1)</sup>	• <sup>1)</sup>			•	•	•	•	•		
DN 100 (4")	DN 80 (3")	•	•	•	•		•	•	•	• <sup>1)</sup>	• <sup>1)</sup>						•	•		
	DN 100 (4")	•	•	•	•		•	•	•	• <sup>1)</sup>	• <sup>1)</sup>						•	•	•	
	DN 150 (6")	•	•	•	•		•	•	•	• <sup>1)</sup>	• <sup>1)</sup>						•	•	•	
DN 150 (6")	DN 100 (4")	•	•	•	•		•	•	•	• <sup>1)</sup>	• <sup>1)</sup>						•	•		
	DN 150 (6")	•	•	•	•		•	•	•	• <sup>1)</sup>	• <sup>1)</sup>						•	•	•	
	DN 200 (8")	•	•	•	•		•	•	•	• <sup>1)</sup>	• <sup>1)</sup>						•	•	•	

<sup>1)</sup> Apply class 600 p and t ratings for class 900 and class 1500 flanges.

##### Hygienic sensor variants

The hygienic sensors will have to be ordered with stainless steel tubes 316L/1.4435/1.4404 (polished). Hygienic sensors are offered with process connection conforming to various international quick-connect clamps or threaded connectors. Pressure ratings are according to the relevant standard and the sensor size.


##### NAMUR sensor variants

The NAMUR variants have built-in lengths according to NAMUR recommendation NE 132. The recommendations of NE 132 are stated for sensors with flanges the same size as the sensor nominal size, and for flanges to EN 1092-1 PN 40 with B1 flange facing. For DN 100 and DN 150 flanges to PN 16.


**Flow Measurement**

SITRANS FC (Coriolis)

Sensors and Flowmeter systems

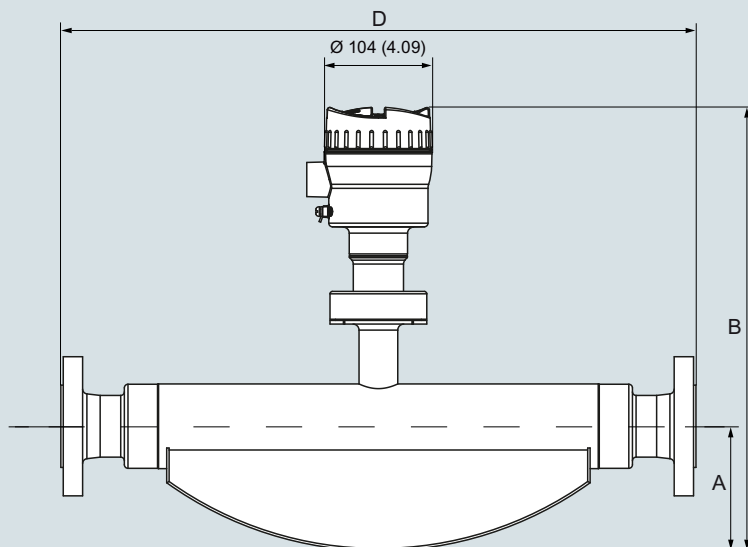**SITRANS FCS300 flow sensor****Dimensional drawings****Sensor dimensions**

SITRANS FCS300 remote sensor

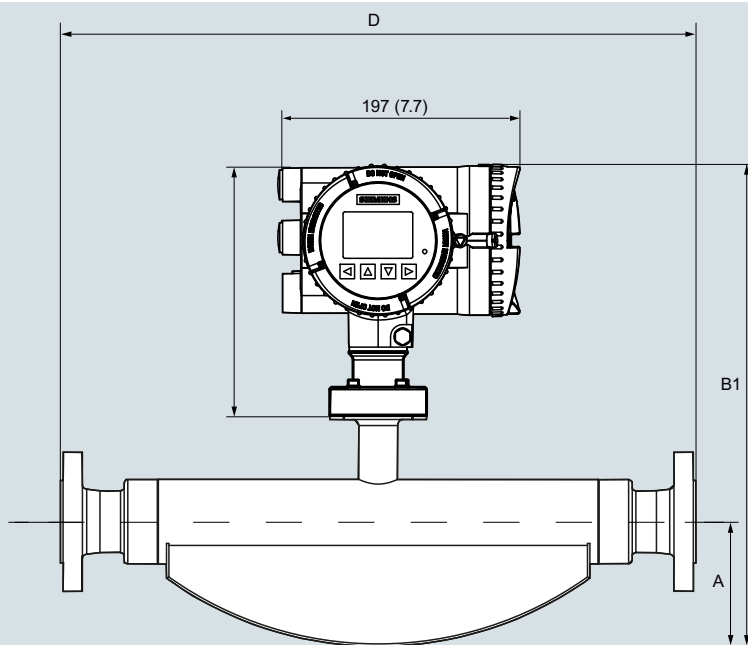

SITRANS FCS300 compact

Sensor [DN]	[inch]	A		B		B1		Weight <sup>1)</sup>	
		[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[kg]	[lb]
15	½	80	3.15	358	14.09	387	15.19	4.6	10.1
25	1	103	4.06	398	15.67	427	16.77	7.9	17.4
50	2	126	4.96	435	17.13	464	18.23	25.7	56.7
80	3	181	7.13	525	20.67	554	21.77	66.5	147
100	4	262	10.31	622	24.49	651	25.59	128	282
150	6	317	12.48	714	28.11	743	29.21	207	456

<sup>1)</sup> For FCT030 compact add 4 kg (8.8 lb)

SITRANS FCS300, dimensions in mm (inch), weights in kg (lb), for a EN 1092 PN 40 flanged version.

The built-in length D depends on the flange.

#### Dimensional drawings (continued)

##### Overall length

The overall length (built-in length (D)) of each sensor depends on the connection standard and the pressure rating. The tables below summarize the dimensions available at the time of publishing. Please contact Siemens for further information about our desired process connection specification.

Sensor in AISI 316L: 7ME463-...

Sensor AISI 316L Connection	DN 15 (½")			DN 25 (1")			DN 50 (2")		
	DN 10 (¾")	DN 15 (½")	DN 20 (¾")	DN 20 (¾")	DN 25 (1")	DN 40 (1½")	DN 40 (1½")	DN 50 (2")	DN 65 (2½")
EN 1092-1 B1, PN 16									
EN 1092-1 B1, PN 40	385	385	421	576	525	576	763	715	763
EN 1092-1 B2, PN 63		403			564	572	745	745	
EN 1092-1 B2, PN 100		403			564	576	745	745	
EN 1092-1 D, PN 40		385			525		715		
ASME B16.5, class 150		435	421	575	575	576	763	715	756
ASME B16.5, class 300		421			576	576	756	763	
ASME B16.5, class 600		421			576		756	773	
ASME B16.5, class 900		421			576		780	790	800
ASME B16.5, class 1500		421					780	790	800
ISO 228-1 G female pipe thread		450							
ASME B1.20.1 NPT female pipe thread		450							
DIN 11851 hygienic screwed	413	413	413	590	590	590	763	740	740
DIN 32676 Row A hygienic clamp	413	413	413	590	590	590	763	740	740
SMS 1145 hygienic screwed				590	590		763	740	740
JIS B2220/10K	385	385	421	576	525	576	763	715	763
JIS B2220/20K	385	385	421	576	525	576	763	715	763
EN 1092-1 PN 16, NAMUR length									
EN 1092-1 PN 40, NAMUR length		510			600		715		

Sensor Connection	DN 80 (3")			DN 100 (4")			DN 150 (6")		
	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 80 (3")	DN 100 (4")	DN 150 (6")	DN 100 (4")	DN 150 (6")	DN 200 (8")
EN 1092-1 B1, PN 16			875	1222	1122	1260	1569	1421	1587
EN 1092-1 B1, PN 40	910	870	875	1222	1144	1260	1599	1461	1650
EN 1092-1 B2, PN 63	910	910	1060	1234	1304				
EN 1092-1 B2, PN 100	910	910	1080	1234	1334				
EN 1092-1 D, PN 40		870							
ASME B16.5, class 150		880	880	1244	1144	1330	1630	1485	1650
ASME B16.5, class 300	920	895	1075	1244	1324	1350		1505	1670
ASME B16.5, class 600	920	920	1100	1244	1354	1400	1675	1555	
ASME B16.5, class 900	965	1100	1130	1470	1380	1450	1705	1605	
ASME B16.5, class 1500	965	1300	1150	1500	1400	1510	1725	1665	
ISO 228-1 G female pipe thread									
ASME B1.20.1 NPT female pipe thread									
DIN 11851 hygienic screwed	990	940	940						
DIN 32676 (ISO) Row A hygienic clamp	950	910	910						
SMS 1145 hygienic screwed	990	940							
JIS B2220/10K	910	870		1275	1150	1300			
JIS B2220/20K	910	870		1275	1150	1308			
EN 1092-1 PN 16, NAMUR length					1400			1700	
EN 1092-1 PN 40, NAMUR length		915							

SITRANS FCS300, overall length (D), dimensions in mm

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### SITRANS FCS300 flow sensor

#### Dimensional drawings (continued)

Sensor	DN 15 (½")			DN 25 (1")			DN 50 (2")		
	DN 10 (¾")	DN 15 (½")	DN 20 (¾")	DN 20 (¾")	DN 25 (1")	DN 40 (1½")	DN 40 (1½")	DN 50 (2")	DN 65 (2½")
EN 1092-1 B1, PN 16									
EN 1092-1 B1, PN 40	15.16	15.16	16.57	22.68	20.67	22.68	30.04	28.15	30.04
EN 1092-1 B2, PN 63		15.87			22.20	22.52	29.33	29.33	
EN 1092-1 B2, PN 100		15.87			22.20	22.68	29.33	29.33	
EN 1092-1 D, PN 40		15.16			20.67			28.15	
ASME B16.5, class 150		17.13	16.57	22.64	22.64	22.68	30.04	28.15	29.76
ASME B16.5, class 300		16.57			22.68	22.68	29.76	30.04	
ASME B16.5, class 600		16.57			22.68	22.68	29.76	30.43	
ASME B16.5, class 900		16.57			22.68		30.71	31.10	31.50
ASME B16.5, class 1500		16.57			22.68		30.71	31.10	31.50
ISO 228-1 G female pipe thread		17.72							
ASME B1.20.1 NPT female pipe thread		17.72							
DIN 11851 hygienic screwed	16.26	16.26	16.26	23.23	23.23	23.23	30.04	29.13	29.13
DIN 32676 (ISO) Row A hygienic clamp	16.26	16.26	16.26	23.23	23.23	23.23	30.04	29.13	29.13
SMS 1145 hygienic screwed					23.23	23.23	30.04	29.13	29.13
JIS B2220/10K	15.16	15.16	16.57	22.68	20.67	22.68	30.04	28.15	30.04
JIS B2220/20K	15.16	15.16	16.57	22.68	20.67	22.68	30.04	28.15	30.04
EN 1092-1 PN 16, NAMUR length									
EN 1092-1 PN 40, NAMUR length		20.08			23.62			28.15	

Sensor	DN 80 (3")			DN 100 (4")			DN 150 (6")		
	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 80 (3")	DN 100 (4")	DN 150 (6")	DN 100 (4")	DN 150 (6")	DN 200 (8")
EN 1092-1 B1, PN 16			34.45	48.11	44.17	49.61	61.77	55.94	62.48
EN 1092-1 B1, PN 40	35.83	34.25	34.45	48.11	45.04	49.61	62.95	57.52	64.96
EN 1092-1 B2, PN 63	35.83	35.83	41.73	48.58	51.34				
EN 1092-1 B2, PN 100	35.83	35.83	42.52	48.58	52.52				
EN1092-1 D, PN 40		34.25							
ASME B16.5, class 150		34.65	34.65	48.98	45.04	52.36	64.17	58.46	64.96
ASME B16.5, class 300	36.22	35.24	42.32	48.98	52.13	55.12		59.25	65.75
ASME B16.5, class 600	36.22	36.22	43.31	48.98	53.31	57.14	65.94	61.22	
ASME B16.5, class 900	37.99	43.31	44.49	57.87	54.33	57.09	67.13	63.19	
ASME B16.5, class 1500	37.99	51.18	45.28	59.06	55.12	59.45	67.91	65.55	
ISO 228-1 G female pipe thread									
ASME B1.20.1 NPT female pipe thread									
DIN 11851 hygienic screwed	38.98	37.01	37.01						
DIN 32676 (ISO) Row A hygienic clamp	37.40	35.83	35.83						
SMS 1145 hygienic screwed	38.98	37.01							
JIS B2220/10K	35.83	34.25		50.20	45.28	50.20			
JIS B2220/20K	35.83	34.25		50.20	45.28	51.50			
EN 1092-1 PN 16, NAMUR length					55.12			66.93	
EN 1092-1 PN 40, NAMUR length		36.02							

SITRANS FCS300, overall length (D), dimensions in inch

#### Dimensional drawings (continued)

Sensor in nickel-alloy C4: 7ME463.-...

Sensor nickel-alloy C4	DN 15 (½")			DN 25 (1")			DN 50 (2")		
	DN 10 (¾")	DN 15 (½")	DN 20 (¾")	DN 20 (¾")	DN 25 (1")	DN 40 (1½")	DN 40 (1½")	DN 50 (2")	DN 65 (2½")
EN 1092-1 B1, PN 40	449	442	428	646	614	576	814	764	819
EN 1092-1 B2, PN 63	449	442	428	646	614	576	814	764	819
EN 1092-1 B2, PN 100	449	442	428	646	614	576	814	764	819
ANSI B16.5, class 150		442	428	646	614	576	814	764	819
ANSI B16.5, class 300		442	428	646	614	576	814	764	819
ANSI B16.5, class 600		442	428	646	614	576	814	764	819
JIS B2220/10K		442	428	646	614	576	814	764	819

Sensor	DN 80 (3")			DN 100 (4")			DN 150 (6")		
	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 80 (3")	DN 100 (4")	DN 150 (6")	DN 100 (4")	DN 150 (6")	DN 200 (8")
EN 1092-1 B1, PN 16			971	1357	1280	1261	1592	1502	
EN 1092-1 B1, PN 40	1021	971	971	1357	1280	1261	1592	1502	
EN 1092-1 B2, PN 63	1021		971	1357	1280	1261	1632	1542	
EN 1092-1 B2, PN 100	1021	971	971	1357	1280	1261	1632	1542	
ANSI B16.5, class 150	1021	971	971	1357	1280	1261	1592	1502	
ANSI B16.5, class 300	1021	971	971	1357	1280	1261	1632	1542	
ANSI B16.5, class 600	1021	971	971	1357	1280	1261	1632	1542	
JIS B2220/10K	1021	971	971	1357	1280	1261	1592	1502	

SITRANS FCS300, overall length (D), dimensions in mm

Sensor	DN 15 (½")			DN 25 (1")			DN 50 (2")		
	DN 10 (¾")	DN 15 (½")	DN 20 (¾")	DN 20 (¾")	DN 25 (1")	DN 40 (1½")	DN 40 (1½")	DN 50 (2")	DN 65 (2½")
EN 1092-1 B1, PN 40	17.7	17.4	16.9	25.4	24.2	22.7	32.0	30.1	32.2
EN 1092-1 B2, PN 63	17.7	17.4	16.9	25.4	24.2	22.7	32.0	30.1	32.2
EN 1092-1 B2, PN 100	17.7	17.4	16.9	25.4	24.2	22.7	32.0	30.1	32.2
ANSI B16.5, class 150		17.4	16.9	25.4	24.2	22.7	32.0	30.1	31.2
ANSI B16.5, class 300		17.4	16.9	25.4	24.2	22.7	32.0	30.1	31.2
ANSI B16.5, class 600		17.4	16.9	25.4	24.2	22.7	32.0	30.1	31.2
JIS B2220/10K		17.4	16.9	25.4	24.2	22.7	32.0	30.1	32.2

Sensor	DN 80 (3")			DN 100 (4")			DN 150 (6")		
	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 80 (3")	DN 100 (4")	DN 150 (6")	DN 100 (4")	DN 150 (6")	DN 200 (8")
EN 1092-1 B1, PN 16			38.2	53.4	50.4	49.6	62.7	59.1	
EN 1092-1 B1, PN 40	40.2	38.2	38.2	53.4	50.4	49.6	62.7	59.1	
EN 1092-1 B2, PN 63	40.2		38.2	53.4	50.4	49.6	64.3	60.7	
EN 1092-1 B2, PN 100	40.2	38.2	38.2	53.4	50.4	49.6	64.3	60.7	
ANSI B16.5, class 150	40.2	38.2	38.2	53.4	50.4	49.6	62.7	59.1	
ANSI B16.5, class 300	40.2	38.2	38.2	53.4	50.4	49.6	64.3	60.7	
ANSI B16.5, class 600	40.2	38.2	38.2	53.4	50.4	49.6	64.3	60.7	
JIS B2220/10K	35.83	34.25	41.73	53.4	50.4	49.6	62.7	59.1	

SITRANS FCS300, overall length (D), dimensions in inch

## Flow Measurement

SITRANS FC (Coriolis)

Sensors and Flowmeter systems

### SITRANS FC330 flowmeter system

#### Overview



The complete flowmeter system SITRANS FC330 can be ordered for standard, hygienic or NAMUR service. The flowmeter is based on the latest developments within digital signal processing technology – engineered for high measuring performance:

- Fast response to rapid changes in flow
- Fast dosing applications
- High immunity against process noise
- High turndown ratio of flowrates
- Suitable for liquid and gas service
- Easy to install, commission and maintain

With all global marine approvals the FC330 is ideal for integration in ship fuel efficiency and environmental measurement systems as well as bunkering solutions.

FC330 is available with current output HART 7.5, Modbus RS 485 RTU, PROFIBUS DP or PROFIBUS PA as standard on Channel 1. Additional functions can be freely configured for analog, pulse, frequency, relay or status output or binary input.

The transmitter comes with a user-configurable graphical display and SensorFlash, a micro SD card for configuration backup, firmware update and data storage.

The SITRANS FC330 flowmeter system consists of a SITRANS FCS300 sensor and a SITRANS FCT030 transmitter.

#### Benefits

- It is compact and light, fitting neatly into dense piping arrangements
- Easy maintenance because modules can be exchanged rapidly
- Effective separation of measurement from plant vibration
- Highly secure operation in safety critical applications
- Non-volatile memory of all setup and operation data
- Reliable measurements due to high signal to noise ratio
- Secure, digital transfer of measurement data from the sensor
- Short overall length; easy drop-in replacement into most existing installations



#### Technical specifications

<b>Sizes</b>	DN 15 (½") DN 25 (1") DN 50 (2") DN 80 (3") DN 100 (4") DN 150 (6")
<b>Accuracy</b>	± 0.10 % or 0.20 % for liquids additional ±0.40 for gases
<b>Repeatability</b>	± 0.05 %
<b>Flow range (liquids)</b> (water @ 1 bar pressure loss) (Q <sub>nom</sub> )	<ul style="list-style-type: none"> <li>• DN 15 4 500 kg/h (163.3 lb/min)</li> <li>• DN 25 20 500 kg/h (753.2 lb/min)</li> <li>• DN 50 49 000 kg/h (1 800 lb/min)</li> <li>• DN 80 122 000 kg/h (4 483 lb/min)</li> <li>• DN 100 273 000 kg (10 031 lb/min)</li> <li>• DN 150 459 200 kg/h (16 873 lb/min)</li> </ul>
<b>Architecture</b>	Compact or remote configuration
<b>Display</b>	Full graphical display, 240 x 160 pixels with selection of 6 languages
<b>Power supply</b>	20 ... 90 V DC ± 10 %; 100 ... 240 V AC ± 10 %, 47 ... 63 Hz ± 10 %
<b>Material</b>	
• Sensor	
- Wetted parts	316L stainless steel or nickel alloy C4
- Enclosure	304 stainless steel
• Transmitter	Aluminum with corrosion-resistant coating class C4
<b>Enclosure rating</b>	IP67 <sup>1)</sup>
<b>Pressure ratings</b>	
• Measuring tubes	
- 316L	100 bar (1 450 psi)
- Nickel alloy C4	100 bar (1 450 psi)
• Sensor enclosure	No pressure containment
<b>Temperature ratings</b>	
• Process medium	-50 ... +205 °C (-58 ... +400 °F)
• Ambient	-40 ... +60 °C (-40 ... +140 °F) <sup>1)</sup>
• Display	-20 ... +60 °C (-4 ... +140 °F)

<b>Process connections</b>	
• Flanges	EN 1092-1 B1, EN 1092-1 B2, EN 1092-1 D, ANSI/ASME B16.5, JIS B 2220
• Pipe threads	ASME B1.20 (NPT) female pipe thread, ISO 228-1 G female pipe thread (BSPP)
• Hygienic threads	DIN 11851, SMS 1145
• Hygienic clamps	DIN 32676 (ISO) Row A
<b>Approvals</b>	
• Hazardous area (zone 1)	ATEX, IECEx, EAC Ex, CSA, cCSAus, NEPSI, EAC No dust approval PED, CRN
• Pressure equipment	EHEDG (DN 25 ... DN 80) (in preparation)
• Hygienic	Germanischer Lloyd/det Norske Veritas, Bureau Veritas, Lloyds of London, American Bureau of Shipping, RINA (Italy)
• Marine (in preparation for FC330 compact)	
<b>NAMUR</b>	NAMUR-compliant (e.g. NE 21, NE 41, NE 107 and NE 132)
<b>I/O</b>	Up to 4 channels combining analog, relay or digital outputs and binary input
<b>Communication</b>	HART PROFIBUS PA PROFIBUS DP Modbus RTU (RS 485)
<b>EMC performance</b>	
Emission	EN 55011/CISPR-11 (Class A)
Immunity	EN/IEC 61326-1 (Industry)
<b>Mechanical load</b>	18 ... 400 Hz random  The flow meter will mechanically tolerate 3.17 g RMS in all directions. Flow accuracy cannot be guaranteed under all conditions.

<sup>1)</sup> If operating outdoors, avoid direct sunlight, particularly in warm climatic regions.

## Flow Measurement

SITRANS FC (Coriolis)

Sensors and Flowmeter systems

### SITRANS FC330 flowmeter system

#### Selection and ordering data

#### Article No.

SITRANS FC330 digital coriolis flowmeter with SITRANS FCS300 standard flow sensor compact or remote mounting with FCT030 transmitter

7ME4633-

Ord.  
code

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Sensor size, connector size

DN 15, DN 10 (½", 3/8")

3 F

DN 15, DN 15 (½", ½")

3 G

DN 15, DN 20 (½", ¾")

3 H

DN 25, DN 20 (1", ¾")

3 K

DN 25, DN 25 (1", 1")

3 L

DN 25, DN 40 (1", 1½")

3 N

DN 50, DN 40 (2", 1½")

4 B

DN 50, DN 50 (2", 2")

4 C

DN 50, DN 65 (2", 2½")

4 D

DN 80, DN 65 (3", 2½")

4 J

DN 80, DN 80 (3", 3")

4 K

DN 80, DN 100 (3", 4")

4 L

DN 100, DN 80 (4", 3")

5 M

DN 100, DN 100 (4", 4")

5 N

DN 100, DN 150 (4", 6")

5 Q

DN 150, DN 100 (6", 4")

6 D

DN 150, DN 150 (6", 6")

6 F

DN 150, DN 200 (6", 8")

6 H

#### Process connection

EN 1092-1 B1, PN 16

A 0

EN 1092-1 B1, PN 40

A 1

EN 1092-1 B2, PN 63

A 2

EN 1092-1 B2, PN 100

A 3

EN 1092-1 D, PN 40

A 5

ASME B16.5 RF, lass 150

D 1

ASME B16.5 RF, Class 300

D 2

ASME B16.5 RF, Class 600

D 3

ASME B16.5 RF, Class 900  
(p- and t-rating as Class 600)

D 4

ASME B16.5 RF, Class 1500  
(p- and t-rating as Class 600)

D 5

ISO 228-1G female pipe thread

E 1

ASME B1.20.1 NPT female pipe thread

E 3

DIN 11851 hygienic screwed

F 1

DIN 32676 hygienic clamp (ISO) Row A

G 2

SMS 1145 hygienic screwed

K 1

JIS B2220/10K

L 2

JIS B2220/20K

L 4

EN 1092-1, PN 16, NAMUR length

N 1

EN 1092-1, PN 40, NAMUR length

N 2

#### Wetted parts material

AISI 316L/1.4435/1.4404

1

AISI 316L/1.4435/1.4404 (polished)

2

Nickel alloy C4

3

#### Article No.

SITRANS FC330 digital coriolis flowmeter with SITRANS FCS300 standard flow sensor compact or remote mounting with FCT030 transmitter

7ME4633-

Ord.  
code

#### Calibration/Accuracy class

0.2 % flow, 10 kg/m<sup>3</sup> density

0

0.1 % flow, 2 kg/m<sup>3</sup> density

1

0.1 % Standard fraction (with density 2 kg/m<sup>3</sup>)

8

0.1 % Customer selected fraction

9

N O Y

#### Mounting style, transmitter housing and material

None (replacement sensor)

A

Compact, IP67 fieldmount, aluminum

D

Remote, IP67 fieldmount, aluminum, M12

G

Remote, IP67 fieldmount, aluminum, T/Box

K

Remote, IP67, wall mount, aluminium (in preparation)

U

#### Ex approval (depending on variant)

Non-Ex

A

ATEX (zone 1)

C

IECEx (zone 1)

F

US (cCSAus), Div 1

L

Canada (cCSAus), zone 1

M

NEPSI

N

INMETRO (in preparation)

P

KCC (in preparation)

Q

EAC

U

#### Local User Interface

None (replacement sensor, DSL only)

0

Blind

1

Graphical, 240 × 160 pxl

3

#### Selection and ordering data

#### Order code

#### Further designs

Please add "-Z" to Article No. and specify Order code(s).

#### Cable glands

None (replacement sensor)

A00

Metric, no glands

A01

Metric, nylon, limited to -20 °C/-4 °F

A02

Metric, brass/Ni plated

A05

Metric, stainless steel

A06

NPT, no glands

A11

NPT, nylon, limited to -20 °C/-4 °F

A12

NPT, brass/Ni plated

A15

NPT, stainless steel

A16

Metric thread with M12 socket fitted

A20

#### Software functions and CT approvals

None (replacement sensor)

B10

Standard

B11

Selection and ordering data	Order code	Order code	
<b>Further designs</b>		<b>Add-on options and accessories</b>	
Please add <b>"-Z"</b> to Article No. and specify Order code(s).		Please add <b>"-Z"</b> to Article No. and specify Order code(s).	
<b>I/O configuration Ch1</b>		<b>Customer selected calibration</b>	
No output channel	<b>E00</b>	DN 15 ... 50: Multi-point (5 flows × 1 pass) Flow 10 ... 100 % of $Q_{norm}$	<b>D60</b>
4 ... 20 mA HART Active/Passive (non-Ex)	<b>E02</b>	DN 15 ... 50: Multi-point (10 flows × 1 pass) Flow 10 ... 100 % of $Q_{norm}$	<b>D61</b>
Ca 4 ... 20 mA HART active (Ex)	<b>E06</b>	DN 80: Multi-point (5 flows × 1 pass) Flow 10 ... 100 % of $Q_{norm}$	<b>D62</b>
Ca 4 ... 20 mA HART passive (Ex)	<b>E07</b>	DN 80: Multi-point (10 flows × 1 pass) Flow 10 ... 100 % of $Q_{norm}$	<b>D63</b>
PROFIBUS PA	<b>E10</b>	DN 100: Multi-point (5 flows × 1 pass) Flow 10 ... 100 % of $Q_{norm}$	<b>D64</b>
PROFIBUS DP (non-Ex)	<b>E11</b>	DN 100: Multi-point (10 flows × 1 pass) Flow 10 ... 100 % of $Q_{norm}$	<b>D65</b>
Modbus RTU RS 485	<b>E14</b>	DN 150: Multi-point (5 flows × 1 pass) Flow 10 ... 100 % of $Q_{norm}$	<b>D66</b>
<b>I/O configuration Ch2, Ch3 and Ch4</b>		DN 150: Multi-point (8 flows × 1 pass) Flow 10 ... 100 % of $Q_{norm}$	<b>D67</b>
None	<b>F00</b>	<b>Cable</b>	
• Non Ex: Sig O, None, None	<b>F01</b>	None	<b>L50</b>
• Non Ex: Sig O, Sig I/O, None	<b>F02</b>	5 m (16.4 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L51</b>
• Non Ex: Sig O, Sig I/O, Sig I/O	<b>F03</b>	5 m (16.4 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L52</b>
• Non Ex: Sig O, Sig I/O, R	<b>F04</b>	10 m (32.8 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L55</b>
• Non Ex: Sig O, R, R	<b>F05</b>	10 m (32.8 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L56</b>
• Non Ex: Sig O, R, None	<b>F06</b>	25 m (82 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L59</b>
• Ex: pSig O, None, None	<b>F11</b>	25 m (82 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L60</b>
• Ex: pSig O, pSig I/O, None	<b>F12</b>	50 m (164 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L63</b>
• Ex: pSig O, pSig I/O, pSig I/O	<b>F13</b>	50 m (164 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L64</b>
• Ex: pSig O, pSig I/O, R	<b>F14</b>	75 m (246 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L67</b>
• Ex: pSig O, R, R	<b>F15</b>	75 m (246 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L68</b>
• Ex: pSig O, R, None	<b>F16</b>	<b>Sensor options</b>	
• Ex: aSig O, None, None	<b>F21</b>	FCS300 marine approval (in preparation)	<b>S22</b>
• Ex: aSig O, aSig I/O, None	<b>F22</b>	<b>SD-Card accessibility via USB</b>	
• Ex: aSig O, aSig I/O, aSig I/O	<b>F23</b>	(not allowed in USA by Patent)	
• Ex: aSig O, aSig I/O, R	<b>F24</b>	Mass storage enabled	<b>S30</b>
• Ex: aSig O, R, R	<b>F25</b>	<b>Additional data</b>	
• Ex: aSig O, R, None	<b>F26</b>	Please add <b>"-Z"</b> to Article No. and specify Order code(s) and plain text.	
<b>Notes on I/O configurations:</b>		<b>Tag name</b>	
<b>a or p suffix:</b> The I/O module is selected at ordering with either active or passive function.		Tag name plate, stainless steel	<b>Y17</b>
<b>Signal:</b> The output can be selected for Current (0 or 4 to 20 mA), frequency or pulse function in the menu.		<b>Operating instructions for SITRANS FC330</b>	
<b>I:</b> Discrete status input to the flowmeter. Functions are selected in the menu including 'Freeze output', 'Reset totalizer' (only CH3&4).		<b>Description</b>	<b>Article No.</b>
<b>R:</b> Relay output for discrete status reporting. Function is selected in the menu, including 'Error', 'High flow warning'.		English	
The MLFB structure for FC330 systems must be filled to <b>this level</b> , including <b>"-Z"</b> options A..., B..., E... and F.		• for firmware V 4.0 and onwards	<b>A5E44030648</b>
		German	<b>TBD</b>
		• for firmware V 4.0 and onwards	
		All literature is available to download for free, in a range of languages, at	
		<a href="http://www.siemens.com/processinstrumentation/documentation">www.siemens.com/processinstrumentation/documentation</a>	
<b>Add-on options and accessories</b>			
Please add <b>"-Z"</b> to Article No. and specify Order code(s).			
<b>Certificates</b>			
Certificate EN 10204-2.2 confirmation of pressure containing material	<b>C01</b>		
Certificate EN 10204-3.1 material (wetted parts)	<b>C02</b>		
Material certificate EN 10204-3.2 with inspection	<b>C03</b>		
Certificate NACE MR0175-2009 + MR0103-2012	<b>C04</b>		
Certificate EN 10204-2.1 Declaration of compliance with the order	<b>C05</b>		
Insp. Certificate EN 10204-3.1 for visual, dimensional and functional test	<b>C06</b>		
Certificate EN 10204-3.1 PMI Positive material ident. of pressure-cont./wetted parts (confirmation only)	<b>C07</b>		
Certificate EN 10204-3.1 P-test Pressure-test acc. AD2000	<b>C08</b>		
Test pack (pressure test, non-destructive welding test, welder & welding procedure certificate)	<b>C09</b>		
Certificate EN10204-3.1welding X-ray / Dye-penetration test of weldings (pressure cont.)	<b>C10</b>		
Certificate EN10204-2.1 Declaration of accuracy	<b>C11</b>		
Certificate EN10204-3.1 PMI Positive material ident. of pressure-cont./wetted parts (including heat analysis)	<b>C12</b>		

## Flow Measurement

SITRANS FC (Coriolis)

Sensors and Flowmeter systems

### SITRANS FC310 flowmeter system

#### Overview



The compact flowmeter SITRANS FC310 can be ordered for industrial, hygienic or NAMUR service.

Intended for integration into OEM skids, machines or pre-assembled plant systems, the flowmeter is based on the latest developments within digital signal processing technology - engineered for high measuring performance:

- Fast response to rapid changes in flow
- Fast dosing applications with control in host system
- High immunity against process noise
- High turndown ratio of flowrates
- Suitable for liquid and gas service
- Easy to install, commission and maintain

With all global marine approvals the FC310 is ideal for integration in ship fuel efficiency and environmental measurement systems as well as bunkering solutions.

The FCT010 transmitter delivers true multi-parameter measurements i.e. massflow, density, temperature.

FC310 is available with Modbus RTU (RS 485) multi-drop serial communication.

The flowmeter is supplied with SensorFlash, a micro SD card containing all relevant certificates. The SITRANS FC310 flowmeter system consists of a SITRANS FCS300 sensor and a SITRANS FCT010 transmitter always compact mounted.

#### Benefits

- It is compact and light, fitting neatly into dense piping arrangements
- Effective separation of measurement from plant vibration
- Reliable measurements due to high signal to noise ratio
- Short overall length; easy drop-in replacement into most existing installations
- Direct connection to host with high-speed Modbus simplifies machine or skid construction and set-up
- Modbus RS 485 RTU allows simple and easy integration with all Modbus masters with fast update rate of process values.

#### Technical specifications

<b>Sizes</b>	DN 15 (½") DN 25 (1") DN 50 (2") DN 80 (3") DN 100 (4") DN 150 (6")
<b>Accuracy</b>	± 0.10 % or ± 0.20 % Additional ± 0.40 % for gases
<b>Repeatability</b>	± 0.05 %
<b>Flow range</b> (water @ 1 bar pressure loss)	<ul style="list-style-type: none"> <li>• DN 15 4 500 kg/h (163.3 lb/min)</li> <li>• DN 25 20 500 kg/h (753.2 lb/min)</li> <li>• DN 50 49 000 kg/h (1 800 lb/min)</li> <li>• DN 80 122 000 kg/h (4 483 lb/min)</li> <li>• DN 100 273 000 kg/h (10 031 lb/min)</li> <li>• DN 150 459 200 kg/h (16 873 lb/min)</li> </ul>
<b>Power supply</b>	12-27 V DC; 1.1 W
<b>Weight</b>	4.6 ... 207 kg
<b>Material</b>	<ul style="list-style-type: none"> <li>• Sensor <ul style="list-style-type: none"> <li>- Measuring tubes 316L stainless steel or nickel alloy C4</li> <li>- Enclosure 304 stainless steel</li> </ul> </li> <li>• Transmitter Aluminum with corrosion-resistant coating class C4</li> </ul>
<b>Enclosure rating</b>	IP67
<b>Pressure ratings</b>	<ul style="list-style-type: none"> <li>• Measuring tubes <ul style="list-style-type: none"> <li>- 316L 100 bar (1 450 psi)</li> <li>- Nickel alloy C4 100 bar (1 450 psi)</li> </ul> </li> <li>• Sensor enclosure No pressure containment</li> </ul>
<b>Temperature ratings</b>	<ul style="list-style-type: none"> <li>• Process medium -50 ... +205 °C (-58 ... +400 °F)</li> <li>• Ambient -40 ... +60 °C (-40 ... +140 °F)</li> </ul>
<b>Process connections</b>	<ul style="list-style-type: none"> <li>• Flanges EN 1092-1 B1, EN 1092-1 B2, EN 1092-1 D, ANSI/ASME B16.5, JIS B 2220</li> <li>• Pipe threads ASME B1.20 (NPT) female pipe thread, ISO 228-1 G female pipe thread (BSPP)</li> <li>• Hygienic threads DIN 11851, SMS 1145</li> <li>• Hygienic clamps DIN 32676 Hygienic Clamp Row A</li> </ul>
<b>Approvals</b>	<ul style="list-style-type: none"> <li>• Hazardous area (zone 1) ATEX, IECEx, EAC Ex, cCSAus, NEPSI, EAC No dust approval</li> <li>• Pressure equipment PED, CRN (in preparation)</li> <li>• Hygienic EHEDG (DN 25 ... 80) (in preparation)</li> <li>• Marine Germanischer Lloyd/det Norske Veritas, Bureau Veritas, Lloyds of London, American Bureau of Shipping, RINA (Italy)</li> </ul>
<b>NAMUR</b>	NAMUR-compliant (e.g. NE 21, NE 41 and NE 132)
<b>Communication</b>	Modbus RS 485 RTU
<b>EMC performance</b>	<ul style="list-style-type: none"> <li>Emission EN 55011/CISPR-11 (Class B)</li> <li>Immunity EN/IEC 61326-1 (Industry)</li> </ul>
<b>Mechanical load</b>	18 ... 400 Hz random The flow meter will mechanically tolerate 3.17 g RMS in all directions. Flow accuracy cannot be guaranteed under all conditions.

## Selection and ordering data

## Article No.

## Article No.

**SITRANS FC310 digital coriolis flowmeter with SITRANS FCS300 standard flow sensor with hygienic and flange/pipe thread connections and compact mounting with FCT010 transmitter**

7ME4631-

Ord.  
code

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

## Sensor size, connector size

DN 15, DN 10 (½", 3/8")

3 F

DN 15, DN 15 (½", ½")

3 G

DN 15, DN 20 (½", ¾")

3 H

DN 25, DN 20 (1", ¾")

3 K

DN 25, DN 25 (1", 1")

3 L

DN 25, DN 40 (1", 1½")

3 N

DN 50, DN 40 (2", 1½")

4 B

DN 50, DN 50 (2", 2")

4 C

DN 50, DN 65 (2", 2½")

4 D

DN 80, DN 65 (3", 2½")

4 J

DN 80, DN 80 (3", 3")

4 K

DN 80, DN 100 (3", 4")

4 L

DN 100, DN 80 (4", 3")

5 M

DN 100, DN 100 (4", 4")

5 N

DN 100, DN 150 (4", 6")

5 Q

DN 150, DN 100 (6", 4")

6 D

DN 150, DN 150 (6", 6")

6 F

DN 150, DN 200 (6", 8")

6 H

## Process connection

EN 1092-1 B1, PN 16

A 0

EN 1092-1 B1, PN 40

A 1

EN 1092-1 B2, PN 63

A 2

EN 1092-1 B2, PN 100

A 3

EN 1092-1 D, PN 40

A 5

ASME B16.5 RF, class 150

D 1

ASME B16.5 RF, class 300

D 2

ASME B16.5 RF, class 600

D 3

ASME B16.5 RF, class 900 (p- and t-rating as class 600)

D 4

ANSI B16.5-2009, class 1500 (p- and t-rating as class 600)

D 5

ISO 228-1G female pipe thread

E 1

ASME B1.20.1 NPT female pipe thread

E 3

DIN 11851 hygienic screwed

F 1

DIN 32676 hygienic clamp Row A

G 1

SMS 1145 hygienic screwed

K 1

JIS B2220/10K

L 2

JIS B2220/20K

L 4

EN 1092-1, PN 16, NAMUR length

N 1

EN 1092-1, PN 40, NAMUR length

N 2

## Wetted parts material

AISI 316L/1.4435/1.4404

1

AISI 316L/1.4435/1.4404 (polished)

2

Nickel alloy C4

3

**SITRANS FC310 digital coriolis flowmeter with SITRANS FCS300 standard flow sensor with hygienic and flange/pipe thread connections and compact mounting with FCT010 transmitter**

7ME4631-

Ord.  
code

## Calibration/Accuracy class

0.2 % flow, 10 kg/m<sup>3</sup> density

0

0.1 % flow, 2 kg/m<sup>3</sup> density

1

## Mounting style, transmitter housing and material

Compact, IP67, aluminum

D

## Ex approval

Non-Ex

ATEX II 2G zone 1

IECEx Gb (zone 1)

US (cCSAus), Div 1

Canada (cCSAus), class I, zone 1

NEPSI

INMETRO (in preparation)

KCC (in preparation)

EAC

A

C

F

L

M

N

P

Q

U

## Local User Interface

Blind

1

## Selection and ordering data

## Order code

## Further designs

Please add "-Z" to Article No. and specify Order code(s).

## Cable glands

None (replacement sensor)

A00

Metric, no glands

A01

Metric, plastic

A02

Metric, brass/Ni plated

A05

Metric, stainless steel

A06

NPT, no glands

A11

NPT, plastic

A12

NPT, brass/Ni plated

A15

NPT, stainless steel

A16

Metric thread with M12 socket fitted

A20

## Software functions and CT approvals

Standard

B11

## I/O configuration Ch1

Modbus RTU RS 485

E14

## I/O configuration Ch2, Ch3 and Ch4

None

F00

## Add-on options and accessories

Please add "-Z" to Article No. and specify Order code(s).

## Certificates

Certificate EN 10204-2.2 confirmation of pressure containing material

C01

Certificate EN 10204-3.1 material (wetted parts)

C02

Material certificate EN 10204-3.2 with inspection

C03

Certificate NACE MR0175-2009 + MR0103-2012

C04

Certificate EN 10204-2.1 Declaration of compliance with the order

C05

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### SITRANS FC310 flowmeter system

#### Selection and ordering data

#### Order code

#### Order code

##### Add-on options and accessories

Please add **"-Z"** to Article No. and specify Order code(s).

Insp. Certificate EN 10204-3.1 for visual, dimensional and functional test

**C06**

Certificate EN 10204-3.1 PMI Positive material ident. of pressure-cont./wetted parts (confirmation only)

**C07**

Certificate EN 10204-3.1 P-test Pressure-test acc. AD2000

**C08**

Test pack (pressure test, non-destructive welding test, welder & welding procedure certificate)

**C09**

Certificate EN 10204-3.1 welding X-ray / Dye-penetration test of weldings (pressure cont.)

**C10**

Certificate EN 10204-2.1 Declaration of accuracy

**C11**

Certificate EN 10204-3.1 PMI Positive material ident. of pressure-cont./wetted parts (including heat analysis)

**C12**

##### Customer selected calibration

DN 15 ... 50, multi-point, 5 flows × 1 pass Flow 10 ... 100 % of  $Q_{norm}$

**D60**

DN 15 ... 50, multi-point, 10 flows × 1 pass Flow 10 ... 100 % of  $Q_{norm}$

**D61**

DN 80, multi-point, 5 flows × 1 pass Flow 10 ... 100 % of  $Q_{norm}$

**D62**

DN 80, multi-point, 10 flows × 1 pass Flow 10 ... 100 % of  $Q_{norm}$

**D63**

DN 100, multi-point, 5 flows × 1 pass Flow 10 ... 100 % of  $Q_{norm}$

**D64**

DN 100, multi-point, 10 flows × 1 pass Flow 10 ... 100 % of  $Q_{norm}$

**D65**

DN 150, multi-point, 5 flows × 1 pass Flow 10 ... 100 % of  $Q_{norm}$

**D66**

DN 150, multi-point, 8 flows × 1 pass Flow 10 ... 100 % of  $Q_{norm}$

**D67**

##### Cable

None

**L50**

5 m (16.4 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted

**L51**

5 m (16.4 ft), sensor cable, 4 wire, without plugs for terminal connection

**L52**

5 m (16.4 ft), sensor cable, 4 wire, with 1 pc M12 plug mounted

**L53**

10 m (32.8 ft) sensor cable, 4 wire, with 2 pcs M12 plugs mounted

**L55**

10 m (32.8 ft), sensor cable, 4 wire, without plugs for terminal connection

**L56**

10 m (32.8 ft), sensor cable, 4 wire, with 1 pc M12 plug mounted

**L57**

25 m (82 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted

**L59**

25 m (82 ft), sensor cable, 4 wire, without plugs for terminal connection

**L60**

##### Add-on options and accessories

Please add **"-Z"** to Article No. and specify Order code(s).

25 m (82 ft), sensor cable, 4 wire, with 1 pc M12 plug mounted

**L61**

50 m (164 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted

**L63**

50 m (164 ft), sensor cable, 4 wire, without plugs for terminal connection

**L64**

50 m (164 ft), sensor cable, 4 wire, with 1 pc M12 plug mounted

**L65**

75 m (246 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted

**L67**

75 m (246 ft), sensor cable, 4 wire, without plugs for terminal connection

**L68**

75 m (246 ft), sensor cable, 4 wire, with 1 pc M12 plug mounted

**L69**

##### Sensor options

FCS300 marine approval

**S22**

##### Additional data

Please add **"-Z"** to Article No. and specify Order code(s) and plain text.

##### Tag name

Tag name plate, stainless steel

**Y17**

#### Operating instructions for SITRANS FC310

##### Description

##### Article No.

English

• for firmware V 4.0 and onwards

**A5E44036384**

German

• for firmware V 4.0 and onwards

**TBD**

All literature is available to download for free, in a range of languages, at

[www.siemens.com/processinstrumentation/documentation](http://www.siemens.com/processinstrumentation/documentation)

#### Accessories

##### Description

##### Article No.

**SITRANS I300  
Isolating power supply – Ex barrier**

**A5E39832532**



#### Overview



Full integration in the Siemens SIMATIC systems PCS7 or in TIA portal with FCT070 faceplates with the ET 200SP ST & HF powerful IO system for compact control cabinets. The complete flowmeter system consists of a SITRANS FCS300 sensor and a SIMATIC ET 200SP Coriolis module FCT070 transmitter.

The transmitter FCT070 offers real-time data processing and the display of all measuring and status data of the Coriolis flowmeter.

For hazardous area the FCS300 sensor can be placed in Ex Zone 1 or Class 1 Div 1 locations. Together with the SITRANS I300 power/barrier module the FCT070 transmitter can be placed in Zone 2 or Div 2 areas.

#### Benefits

- FCS300 sensor in sizes from DN 15 to 150 mm in a large variety of process connections and wetted materials
- Short overall length; easy drop-in replacement into most existing installations
- Full hazardous area solutions
- Easy integration into automation process control as TIA portal and PCS7
- Easy selection and integration of flowmeters via TIA selector
- Cost effective integration of Coriolis flowmeters for PLC controlled machines
- SITRANS FCT070 ET 200SP technology module and can combined with all other SIMATIC ET200 ST & HF modules
- The FCT070 has all high-end transmitter functionality integrated including the advanced fraction tables on board
- Fast and trouble-free communication between the flow meter and the PLC through digital data communication with up to 10 ms update rate
- Integrated advanced two-stage batch controller functionality without additional modules. I/Os are onboard



## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### SITRANS FCS300 with FCT070 transmitter

#### Technical specifications

<b>Sizes</b>	DN 15 (½") DN 25 (1") DN 50 (2") DN 80 (3") DN 100 (4") DN 150 (6")
<b>Accuracy</b>	± 0.10 % or 0.20 % for liquids additional ± 0.40 for gases
<b>Repeatability</b>	± 0.05 %
<b>Flow range (liquids)</b> (water @ 1 bar pressure loss) (Q <sub>nom</sub> )	<ul style="list-style-type: none"> <li>• DN 15 4 500 kg/h (163.3 lb/min)</li> <li>• DN 25 20 500 kg/h (753.2 lb/min)</li> <li>• DN 50 49 000 kg/h (1 800 lb/min)</li> <li>• DN 80 122 000 kg/h (4 483 lb/min)</li> <li>• DN 100 273 000 kg/h (10 031 lb/min)</li> <li>• DN 150 459 200 kg/h (16 873 lb/min)</li> </ul>
<b>Measurement of</b>	Mass flow, volume flow, density, temperature, fraction A flow, fraction A %, fraction B flow, fraction B %
<b>Architecture</b>	Remote configuration
<b>System integration</b>	PCS7 and TIA portal with faceplates
<b>Power supply</b>	24 V DC, 19.2 ... 28.8 V
<b>Material</b>	
<ul style="list-style-type: none"> <li>• Sensor</li> <li>• Wetted parts</li> <li>• Enclosure</li> <li>• Transmitter</li> </ul>	316L stainless steel or nickel alloy C4 304 stainless steel Aluminum with corrosion-resistant coating class C4
<b>Enclosure rating</b>	Sensor: IP67 FCT070 Transmitter: IP20
<b>Pressure ratings</b>	
<ul style="list-style-type: none"> <li>• Measuring tubes</li> <li>• 316L</li> <li>• Nickel alloy C4</li> <li>• Sensor enclosure</li> </ul>	100 bar (1 450 psi) 100 bar (1 450 psi) No pressure containment
<b>Temperature ratings</b>	
<ul style="list-style-type: none"> <li>• Process medium</li> <li>• Ambient</li> <li>• Display</li> </ul>	-50 ... +205 °C (-58 ... +400 °F) -40 ... +60 °C (-40 ... +140 °F) <sup>1)</sup> -20 ... +60 °C (-4 ... +140 °F)
<b>Process connections</b>	
<ul style="list-style-type: none"> <li>• Flanges</li> <li>• Pipe threads</li> <li>• Hygienic threads</li> <li>• Hygienic clamps</li> </ul>	EN 1092-1 B1, EN 1092-1 B2, EN 1092-1 D, ANSI/ASME B16.5, JIS B 2220  ASME B1.20 (NPT) female pipe thread, ISO 228-1 G female pipe thread (BSPF)  DIN 11851, SMS 1145 DIN 32676 hygienic clamp Row A

<b>Approvals</b>	
<ul style="list-style-type: none"> <li>• Hazardous area</li> <li>• Pressure equipment</li> <li>• Hygienic</li> </ul>	Sensor FCS300: Zone 1 & Class 1 Div 1 ATEX, IECEx, EAC Ex, CSA, cCSAus, NEPSI, EAC No dust approval FCT070 transmitter: Zone 2 & Class 1 Div 2 ATEX, IECEx, EAC Ex, CSA, cCSAus, FM, NEPSI, EAC PED, CRN EHEDG (DN 25 ... DN 80) (in preparation)
<b>NAMUR</b>	NAMUR-compliant (e.g. NE 21, NE 41, NE 107 and NE 132)
<b>I/O</b>	2 digital input and 2 digital output Single and 2 stage batch function
<b>Totalizer</b>	3 totalizer
<b>Communication</b>	Integrated PROFINET for SIMATIC integration and other PROFINET Controllers
<b>EMC performance</b>	
Emission	EN 55011/CISPR-11 (Class A)
Immunity	EN/IEC 61326-1 (Industry)
<b>Mechanical load</b>	18 ... 1000 Hz random The flow meter will mechanically tolerate 3.17 g RMS in all directions. Flow accuracy cannot be guaranteed under all conditions.



## SITRANS FCS300 with FCT070 transmitter

Selection and ordering data	Article No.	Article No.
<b>Coriolis sensor SITRANS FCS300 with DSL ready for FCT070 transmitter</b>	7ME4637-	7ME4637-
Ord. code		Ord. code
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
<b>Sensor size, connector size</b>		
DN 15, DN 10 (½", 3/8")	3 F	
DN 15, DN 15 (½", ½")	3 G	
DN 15, DN 20 (½", ¾")	3 H	
DN 25, DN 20 (1", ¾")	3 K	
DN 25, DN 25 (1", 1")	3 L	
DN 25, DN 40 (1", 1½")	3 N	
DN 50, DN 40 (2", 1½")	4 B	
DN 50, DN 50 (2", 2")	4 C	
DN 50, DN 65 (2", 2½")	4 D	
DN 80, DN 65 (3", 2½")	4 J	
DN 80, DN 80 (3", 3")	4 K	
DN 80, DN 100 (3", 4")	4 L	
DN 100, DN 80 (4", 3")	5 M	
DN 100, DN 100 (4", 4")	5 N	
DN 100, DN 150 (4", 6")	5 Q	
DN 150, DN 100 (6", 4")	6 D	
DN 150, DN 150 (6", 6")	6 F	
DN 150, DN 200 (6", 8")	6 H	
<b>Process connection</b>		
EN 1092-1 B1, PN 16	A 0	
EN 1092-1 B1, PN 40	A 1	
EN 1092-1 B2, PN 63	A 2	
EN 1092-1 B2, PN 100	A 3	
EN 1092-1 D, PN 40	A 5	
ASME B16.5 RF, Class 150	D 1	
ASME B16.5 RF, Class 300	D 2	
ASME B16.5 RF, Class 600	D 3	
ASME B16.5 RF, Class 900 (p- and t-rating as Class 600)	D 4	
ANSI B16.5-2009, Class 1500 (p- and t-rating as Class 600)	D 5	
ISO 228-1G female pipe thread	E 1	
ASME B1.20.1 NPT female pipe thread	E 3	
DIN 11851 hygienic screwed	F 1	
DIN 32676 hygienic clamp Row A	G 1	
SMS 1145 hygienic screwed	K 1	
JIS B2220/10K	L 2	
JIS B2220/20K	L 4	
EN 1092-1, PN 16, NAMUR length	N 1	
EN 1092-1, PN 40, NAMUR length	N 2	
<b>Wetted parts material</b>		
AISI 316L/1.4435/1.4404	1	
AISI 316L/1.4435/1.4404 (polished)	2	
Nickel alloy C4	3	
<b>Coriolis sensor SITRANS FCS300 with DSL ready for FCT070 transmitter</b>		
<b>Calibration/Accuracy class</b>		
0.2 % flow, 10 kg/m <sup>3</sup> density		0
0.1 % flow, 2 kg/m <sup>3</sup> density		1
<b>Mounting style, transmitter housing and material</b>		
Compac, IP67, aluminum		D
<b>Ex approval (sensor)</b>		
Non-Ex		A
ATEX II 2G zone 1		C
IECEx Gb (zone 1)		F
US (cCSAus), Div 1		L
Canada (cCSAus), class I, zone 1		M
NEPSI		N
INMETRO		P
KCC (in preparation)		Q
EAC		U
<b>Local User Interface</b>		
Blind		1
<b>Selection and ordering data</b>		Order code
<b>Further designs</b>		
Please add "-Z" to Article No. and specify Order code(s).		
<b>Cable glands</b>		
Metric, no glands		A01
Metric, plastic		A02
Metric, brass/Ni plated		A05
Metric, stainless steel		A06
NPT, no glands		A11
NPT, plastic		A12
NPT, brass/Ni plated		A15
NPT, stainless steel		A16
Metric thread with M12 socket fitted		A20
<b>Software functions and CT approvals</b>		
Standard software DSL		B10
<b>I/O configuration Ch1</b>		
No output channel ( integration of FCT070)		E00
<b>I/O configuration Ch2, Ch3 and Ch4</b>		
None		F00

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### SITRANS FCS300 with FCT070 transmitter

#### Selection and ordering data

#### Order code

#### Order code

##### Add-on options and accessories

Please add **"-Z"** to Article No. and specify Order code(s).

##### Certificates

Certificate EN 10204-2.2 confirmation of pressure containing material	<b>C01</b>
Certificate EN 10204-3.1 material (wetted parts)	<b>C02</b>
Material certificate EN 10204-3.2 with inspection	<b>C03</b>
Certificate NACE MR0175-2009 + MR0103-2012	<b>C04</b>
Certificate EN 10204-2.1 Declaration of compliance with the order	<b>C05</b>
Insp. Certificate EN 10204-3.1 for visual, dimensional and functional test	<b>C06</b>
Certificate EN 10204-3.1 PMI Positive material ident. of pressure-cont./wetted parts (confirmation only)	<b>C07</b>
Certificate EN 10204-3.1 P-test Pressure-test acc. AD2000	<b>C08</b>
Test pack (pressure test, non-destructive welding test, welder & welding procedure certificate)	<b>C09</b>
Certificate EN 10204-3.1 welding X-ray / Dye-penetration test of weldings (pressure cont.)	<b>C10</b>
Certificate EN 10204-2.1 Declaration of accuracy	<b>C11</b>
Certificate EN 10204-3.1 PMI Positive material ident. of pressure-cont./wetted parts (including heat analysis)	<b>C12</b>

##### Customer selected calibration

DN 15 ... 50, multi-point, 5 flows × 1 pass Flow 10 ... 100% of $Q_{norm}$	<b>D60</b>
DN 15 ... 50, multi-point, 10 flows × 1 pass Flow 10 ... 100% of $Q_{norm}$	<b>D61</b>
DN 80, multi-point, 5 flows × 1 pass Flow 10 ... 100% of $Q_{norm}$	<b>D62</b>
DN 80, multi-point, 10 flows × 1 pass Flow 10 ... 100% of $Q_{norm}$	<b>D63</b>
DN 100, multi-point, 5 flows × 1 pass Flow 10 ... 100% of $Q_{norm}$	<b>D64</b>
DN 100, multi-point, 10 flows × 1 pass Flow 10 ... 100% of $Q_{norm}$	<b>D65</b>
DN 150, multi-point, 5 flows × 1 pass Flow 10 ... 100% of $Q_{norm}$	<b>D66</b>
DN 150, multi-point, 8 flows × 1 pass Flow 10 ... 100% of $Q_{norm}$	<b>D67</b>

##### Add-on options and accessories

Please add **"-Z"** to Article No. and specify Order code(s).

##### Cable

No sensor cable	<b>L50</b>
5 m (16.4 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L52</b>
5 m (16.4 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted	<b>L53</b>
10 m (32.8 ft), standard, without plugs	<b>L56</b>
10 m (32.8 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted	<b>L57</b>
25 m (82 ft), standard, without plugs	<b>L60</b>
25 m (82 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted	<b>L61</b>
50 m (164 ft), standard, without plugs	<b>L64</b>
50 m (164 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted	<b>L65</b>
75 m (246 ft), standard, without plugs	<b>L68</b>
75 m (246 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted	<b>L69</b>

##### Additional data

Please add **"-Z"** to Article No. and specify Order code(s) and plain text.

##### Tag name

Tag name plate, stainless steel	<b>Y17</b>
---------------------------------	------------

##### Description

##### Article No.

**SITRANS FCT070**  
Transmitter for ET 200SP

**7ME4138-6AA00-0BB1**



**BU20-P12+A0+4B, PU1**  
Baseunit plate for ET 200SP

**6ES7193-6BP20-0BB0**  
**6ES7193-6BP20-0BB1**



**SITRANS I300**  
Isolating power supply – Ex barrier

**A5E39832532**



#### Overview



The SITRANS FCS400 sensor is available in DN 15; DN 25 and DN 50 mm sizes in stainless steel AISI 316 L. The sensor design consists of process connections, inlet and outlet manifolds mounted in a stiff frame and two parallel tubes equally sharing the process medium flow.

The sensing tubes are curved in the CompactCurve shape which gives high sensitivity and low pressure loss. The CompactCurve shape was selected to ensure that the smallest flows are measured with optimal signal to noise ratio.

The super compact sensor design with a split flow dual tube design with very high driver frequency is suitable for high end applications in all industry segments e.g. Chemical, F&B, O&G and Power.

A variety of process connections available to cover all common process connections and pressure ratings.

The sensor has a solid stainless steel fully welded enclosure to protect the measuring tubes from any harsh environments. For hazardous area applications the FCS400 comes in a number of common hazardous area approved like ATEX, IECEx, cCSAus, EAC, and NEPSI.

For sanitary applications the sensor is available with polished inside wetted parts and carry the EHEDG and 3A sanitary certifications (in preparation).

For the chemical industry the FCS400 sensors are available with standardized NAMUR inbuilding length (in preparation).

#### Integration

The SITRANS FCS400 Massflow sensor is suitable for both indoor and outdoor installation and meets the requirements of Protection Class IP67/NEMA 4X. Optionally the sensor can be ordered with hazardous certification to Zone 1 + 21 (ATEX, IECEx, cCSAus, EAC Ex, NEPSI) or Class I + II + III Div. 1 (cCSAus).

The flowmeter is bidirectional and can be installed in any orientation. The sensor is self-draining in many positions, with vertical mounting preferred.

It is important to ensure that the sensor tubes are always completely filled with homogeneous fluid; otherwise measuring errors may occur. Suitable fluids are clean liquids, pastes, light slurries or gases. Condensing vapours, aerated liquids or slush are not recommended.

The materials in contact with the process medium must be evaluated for corrosion and erosion resistances for long sensor life.

The pressure drop through the sensor is a function of the properties of the fluid and the flow rate. A pressure loss and accuracy calculator can be found on the Siemens Internet site <https://www.siemens.com/fc430/sizer>

The preferred flow direction is indicated by an arrow on the sensor. Flow in the direction of the arrow will be measured as positive. The flow direction can be adjusted at the transmitter to compensate for reverse installation.

#### Installation orientation

The optimal installation orientation is vertical with the flow upwards. This ensures that suspended solids or bubbles are completely pushed through the sensor. A drain valve below the sensor will allow the pipe and sensor to drain completely.

#### Supports

In order to support the weight of the flowmeter and to ensure reliable measurements when external effects exist (e.g. plant vibrations), the sensor should be installed in rigidly supported pipelines.

Supports or hangers should be installed symmetrically and stress-free in close proximity to both of the process connections.

#### Shut-off devices

To conduct a system zero adjustment, secure shut-off devices are required in the pipeline.

Where possible, shut-off devices should be installed both upstream and downstream of the flowmeter.

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### SITRANS FCS400 flow sensor

### Configuration

#### Installation guidelines

- The mass flowmeter does not require any flow conditioning or straight inlet pipe sections. Care should be exercised however to ensure that any upstream valves, gates, sight glasses etc. do not cavitate and are not set into vibration by the flow.
- It is always preferred to place the flowmeter upstream of any control valve or other pipeline component which may cause flashing, cavitation or vibrations.
- The presence of gas bubbles in the fluid may result in erroneous measurements, particularly in the density measurement. Therefore the flowmeter should not be installed at the lowest pressure point in the liquid piping system or where vapour can collect. Install the meter in pipeline sections with high pressure to maintain system pressure and compress any bubbles.
- Drop lines downstream from the flow sensor should be avoided to prevent the meter tube from draining during flowing conditions. A back-pressure device or orifice is recommended to ensure that flow does not separate within the flow sensor but the metering section remains at positive pressure at all times while there is flow.
- The flowmeter should not come into contact with any other objects. Avoid making attachments to the housing except for the pressure guard components (if required).
- When the connecting pipeline is larger than the sensor size, suitable standard reducers may be installed. A selection of oversize and undersize connections can be ordered - refer to the sizes tables below.
- The flow sensor may be supported at the junction between process connection and the manifold, but should not be used to support adjacent piping. Ensure that the piping is also supported on both sides so that connection stresses are neutral.
- If strong vibrations exist in the pipeline, they should be damped using elastic pipeline elements. The damping devices must be installed outside the supported flowmeter section. Direct connection of flexible elements to the sensor should be avoided.
- Make sure that any dissolved gases, which are present in many liquids, do not outgas. The back pressure at the outlet should be at least 0.2 bar (3 psi) above the vapour pressure of the process fluid.
- Assure that operation below the vapour pressure cannot occur particularly for fluids with low latent heat of vaporisation.
- The sensor should not be installed in the vicinity of strong electromagnetic fields, e.g. near motors, pumps, variable frequency drives, transformers etc.
- When operating meters on a common mounting base the sensors should be mounted and spaced separate from each other to avoid cross-talk and other vibration interferences.
- When operating meters in interconnected pipelines the pipes should be decoupled to prevent cross talk.

#### Remote system cabling

The system is designed so that standard instrumentation cable with four cores and overall screen or two screened pairs can be used, or cable sets can be ordered with the flowmeter. The cable can be ordered in various set lengths and terminated in the field.

Be aware of maximum sensor length cable depending on product selection, currently 75 m. Data transmission speed and process variable update rates may be affected by the cable characteristics. For best results, choose a cable with the following electrical characteristics:

Property	Unit	Value
Resistance	[ $\Omega$ /km]	59
Characteristic impedance	[ $\Omega$ ]	100 @ 1 MHz
Insulation resistance	[M $\Omega$ /km]	200
Maximum voltage	[V]	300

The flowmeter system applies maximum 15 V DC in operation and is certified intrinsically safe. The complete system is insulation tested to 1 500 V in production.

Cabling solutions which can be ordered with the flowmeter are as follows:

1. High performance plugged cable using M12 connectors into prepared sockets
2. Cable glands for either metric or NPT threaded terminal housings.
3. Plain cable in set lengths to be passed through flexible and rigid conduit (not supplied) for metric or NPT threaded terminal housings

Cable for items 1, 2 and 3 are available either gray for standard applications or light blue for Ex applications to identify the circuit as intrinsically safe.

#### Insulation and heating

For applications where pipeline insulation is required for personnel protection or process temperature maintenance, the SITRANS FCS400 flow sensor may also be insulated. The form and material of insulation is not prescribed and entirely depends on the practices at the application location or plant.

Insulation must not be crowded around the sensor pedestal but shaped at a 45° cone to allow the pedestal to radiate excess heat and maintain a suitable working temperature within the front-end housing.

Where trace heating is employed, an electric heating jacket can be ordered as an accessory. It is shaped to the sensor body and controlled from a weatherproof setpoint device.

The jacket can heat the sensor enclosure up to 200 °C (392 °F). However the maximum temperature increase is limited to 70 °C. Further insulation is also recommended for personnel protection or low loss temperature maintenance.

### Technical specifications

Flow sensor FCS400		
Parameter	Unit	Value
Process media		<ul style="list-style-type: none"> <li>Fluid Group 1 (suitable for dangerous fluids)</li> <li>Aggregate state: Paste/light slurry, liquid and gas</li> </ul>
Process pressure range	[barg (psi)]	316L: 0 ... 100 (0 ... 1 450)
Process temperature range		
• DN 15 ... DN 50	[°C (°F)]	-50 ... +200 (-58 ... +392)
Ambient temperature range	[°C (°F)]	-40 ... +60 (-40 ... +140)
Transport temperature range	[°C (°F)]	-40 ... +70 (-40 ... +158)
Density range	[kg/m <sup>3</sup> (lb/ft <sup>3</sup> )]	1 ... 5 000 (0.062 ... 312.2)
No. of process values		
• Primary process values		<ul style="list-style-type: none"> <li>Mass flow</li> <li>Density</li> <li>Process medium temperature</li> </ul>
• Derived process values		<ul style="list-style-type: none"> <li>Volume flow</li> <li>Standard volume flow (with reference density)</li> <li>Fraction A:B</li> <li>Fraction % A:B</li> </ul>

Performance specifications		Sensor		
Parameter	Unit	DN 15	DN 25	DN 50
Max. zero point error	[kg/h (lb/min)]	0.2 (0.007)	2 (0.8)	7.5 (0.27)
Q <sub>min</sub> (1 % error) <sup>1)</sup>	[kg/h (lb/min)]	20 (0.735)	240 (8.92)	800 (29.4)
Q <sub>nom</sub> (1 bar pressure) <sup>1)</sup>	[kg/h (lb/min)]	3 700 (136)	20 500 (753.2)	49 000 (1 800)
Q <sub>max</sub> <sup>1)</sup>	[kg/h (lb/min)]	6 400 (235.2)	35 000 (1 286)	90 000 (3 307)
Linearity error mass flow				
• for liquids <sup>2)</sup>	[%]	± 0.1	± 0.1	± 0.1
• for gases	[%]	± 0.35	± 0.35	± 0.35
Repeatability mass flow	[%]	± 0.05	± 0.05	± 0.05
Density accuracy standard calibration <sup>3)</sup>	[kg/m <sup>3</sup> (lb/ft <sup>3</sup> )]	± 5 (± 0.31)	± 5 (± 0.31)	± 5 (± 0.31)
Density accuracy extended calibration <sup>3)</sup>	[kg/m <sup>3</sup> (lb/ft <sup>3</sup> )]	± 0.5 (± 0.031)	± 0.5 (± 0.031)	± 0.5 (± 0.031)
Temperature error	[°C (°F)]	± 0.5 (± 0.9)	± 0.5 (± 0.9)	± 0.5 (± 0.9)


<sup>1)</sup> For gas applications the max. flowrate is calculated at Mach-Number = 0.3.

<sup>2)</sup> Increased error can be expected for gas mass flow measurement.


<sup>3)</sup> Liquid only.

### Pressure/temperature curves

With two major exceptions, the pressure rating of the flow sensors is independent of the process medium temperature. Design rules for flange connections in both the EN 1092-1 and ASME B16.5 standards dictate pressure derating with increasing temperature. The charts below show the effect of process medium temperature on the pressure ratings for the flanges within the FCS400.

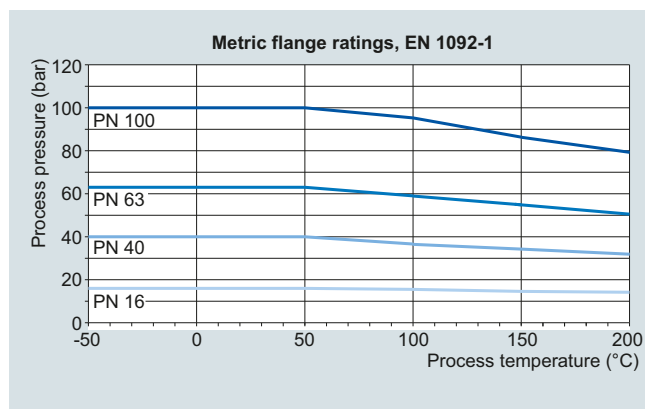

EN 1092-1 flanged sensors

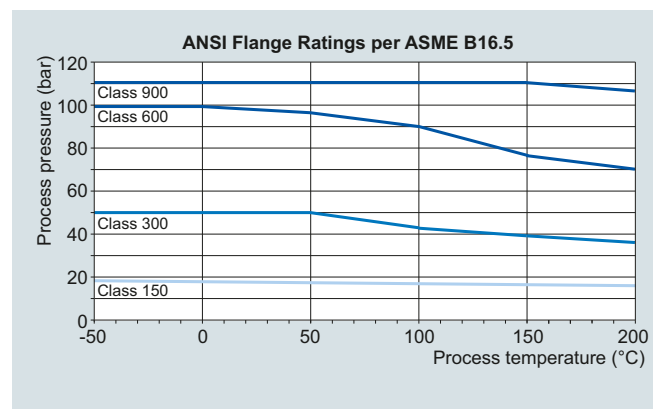

ASME B16.5 flanged sensors

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### SITRANS FCS400 flow sensor

#### Technical specifications (continued)

##### Sensor variants

SITRANS FCS400 sensors are available in a wide range of process connections. The available combinations of type, sensor size and connection size are shown in the tables below.

##### Standard sensors

Sensor	Connection	EN 1092-1 B1, PN 16	EN 1092-1 B1, PN 40	EN 1092-1 B1, PN 63	EN 1092-1 B1, PN 100	EN 1092-1 B1, PN 160 <sup>2)</sup>	EN 1092-1 D Nut, PN 40	EN 1092-1 D Nut, PN 63	EN 1092-1 D Nut, PN 100	EN 1092-1 D Nut, PN 160 <sup>2)</sup>	ANSI B16.5-2009, class 150	ANSI B16.5-2009, class 300	ANSI B16.5-2009, class 600	ANSI B16.5-2009, class 900 <sup>1)</sup>	ISO 228-1 G pipe thread	ASME B1.20.1 NPT pipe thread	DIN 11851 hygienic screwed	DIN 32676 hygienic tri-clamp	DIN 11864-1A aseptic screwed	DIN 11864-2A aseptic flanged	DIN 11864-3A aseptic clamp	ISO 2852 hygienic clamped	ISO 2853 hygienic screwed	SMS 1145 hygienic screwed	12-VCO-4 quick connect	JIS B2220:2004/10K	JIS B2220:2004/20K	JIS B2220:2004/40K	JIS B2220:2004/63K			
<b>Standard: 7ME461-...</b>																																
DN 15 (½")	DN 6 (¼")														•	•																
	DN 10 (3/8")																	•														
	DN 15 (½")	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	DN 20 (¾")		•									•	•	•					•													
	DN 25 (1")	•	•		•													•						•	•	•						
DN 25 (1")	DN 15 (½")																															
	DN 25 (1")	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	DN 32 (1¼")		•															•														
DN 50 (2")	DN 40 (1½")	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	DN 50 (2")	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

<sup>1)</sup> Apply class 600 p and t ratings for class 900 and class 1500 flanges.

<sup>2)</sup> P and T rating as PN 100.

##### Hygienic sensor variants (in preparation)

The hygienic sensors all have polished internal wetted material and a maximum internal surface roughness Ra < 0.8 µm and are EHEDG and 3A approved.

##### Aseptic flanged process connections

The aseptic flanges offered for FCS400 conform with the standard DIN 11864-2A BF-A. The flange fitted to the sensor is therefore the back flange and the seal is an O-ring.


The flange dimensions in the FCS400 program are as follows:

Size DN	Pipe	Bore d <sub>1</sub>	Ring OD d <sub>11</sub>	Bolt circle d <sub>5</sub>	Bolt holes	Flange diameter d <sub>10</sub>
10	13 × 1.5	10	22.4	37	4 × Ø9	54
15	19 × 1.5	16	28.4	42	4 × Ø9	59
20	23 × 1.5	20	32.4	47	4 × Ø9	64
25	29 × 1.5	26	38.4	53	4 × Ø9	70
32	35 × 1.5	32	47.7	59	4 × Ø9	76
40	41 × 1.5	38	53.7	65	4 × Ø9	82
50	53 × 1.5	50	65.7	77	4 × Ø9	94
65	70 × 2.0	66	81.7	95	8 × Ø9	107
80	85 × 2.0	81	97.7	112	8 × Ø11	113

DIN 11864-2A BF-A flange dimensions

## Dimensional drawings

### Sensor dimensions

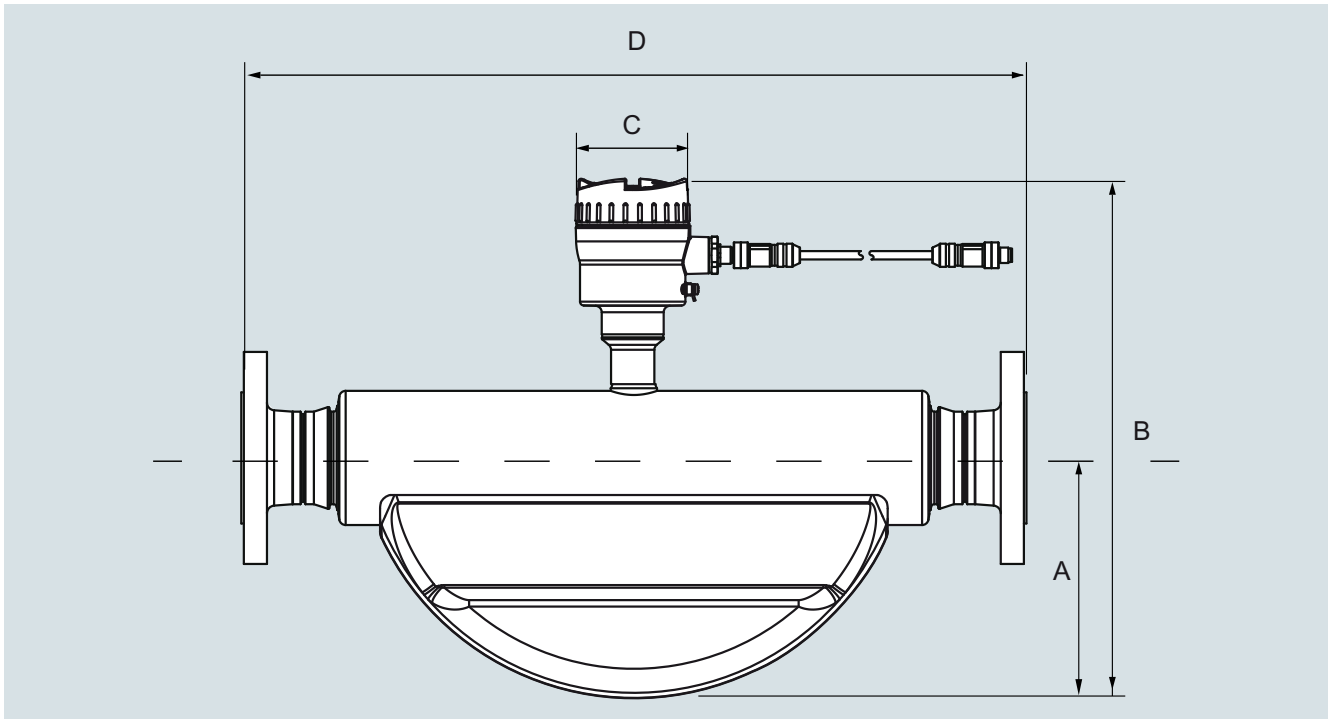

Sensor		A		B		B1		Weight <sup>1)</sup>	
[DN]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[kg]	[lb]
15	½	90	3.54	280	11.0	314	12.4	4.6	10.1
25	1	123	4.84	315	12.4	349	13.8	7.9	17.4
50	2	187	7.36	390	15.4	424	16.8	25.7	56.7

SITRANS FCS400, dimensions in mm (inch), weights in kg (lb), for a EN 1092 PN 40 flanged version.

The built-in length D depends on the flange.

<sup>1)</sup> For FCT030 compact add 4 kg (8.8 lb)

### Overall length

The overall length (built-in length (D)) of each sensor depends on the connection standard and the pressure rating. The tables below summarize the dimensions available at the time of publishing. Please contact Siemens for further information about our desired process connection specification.



## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### SITRANS FCS400 flow sensor

#### Dimensional drawings (continued)

Standard: 7ME461-...

Sensor	DN 15 (½")					DN 25 (1")			DN 50 (2")	
	DN 6 (¼")	DN 10 (3/8")	DN 15 (½")	DN 20 (¾")	DN 25 (1")	DN 25 (1")	DN 32 (1¼")	DN 40 (1½")	DN 40 (1½")	DN 50 (2")
EN 1092-1 B1, PN 16			265		265	360			610	610
EN 1092-1 B1, PN 40			265		265	360		365	610	610
EN 1092-1 B1, PN 63			265			360			610	610
EN 1092-1 B1, PN 100			270		275	360			610	610
EN 1092-1 B1, PN 160			270			360				620
ANSI B16.5, class 150			270	270		360		365		620
ANSI B16.5, class 300			270	270		360		380		620
ANSI B16.5, class 600			270	285		360		380		620
ANSI B16.5, class 900			290			385				620
ISO 228-1 GH pipe thread	265		265			365				620
ANSI B1.20.1 NPT pipe thread	265		270			365				620
DIN 11851 hygienic screwed <sup>1)</sup>		265	265		193	360	360		610	610
DIN 32676-C hygienic tri-clamp			265	265		360		360		610
DIN 11864-1 aseptic screwed <sup>1)</sup>			265			360			610	610
DIN 11864-2 aseptic flange <sup>1)</sup>			265			360			620	610
DIN 11864-3 aseptic clamp <sup>1)</sup>			265			360			610	610
ISO 2852 hygienic clamp <sup>1)</sup>					265	360			610	610
ISO 2853 hygienic screwed <sup>1)</sup>			265			360		274		610
SMS 1145 hygienic screwed			285			360			610	610
12-VCO-4 quick connect			285							
JIS B2220/10K			265			360			620	610
JIS B2220/20K			265			360			620	610
JIS B2220/40K			270			360			620	610
JIS B2220/63K			275			370				620

<sup>1)</sup> Available with 3A and EHEDG certification.

Sensor	DN 15 (½")					DN 25 (1")			DN 50 (2")	
	DN 6 (¼")	DN 10 (3/8")	DN 15 (½")	DN 20 (¾")	DN 25 (1")	DN 25 (1")	DN 32 (1¼")	DN 40 (1½")	DN 40 (1½")	DN 50 (2")
EN 1092-1 B1, PN 16			10.43		10.43	14.17			24.02	24.02
EN 1092-1 B1, PN 40			10.43		10.43	14.17		14.37	24.02	24.02
EN 1092-1 B1, PN 63			10.43			14.17			24.02	24.02
EN 1092-1 B1, PN 100			10.63		10.83	14.17			24.02	24.02
EN 1092-1 B1, PN 160			10.63			14.17				24.41
ANSI B16.5, class 150			10.63	10.63		14.17		14.37		24.41
ANSI B16.5, class 300			10.63	10.63		14.17		14.96		24.41
ANSI B16.5, class 600			10.63	11.22		14.17		14.96		24.41
ANSI B16.5, class 900			11.4			15.2				24.41
ISO 228-1 GH pipe thread	10.43		10.43			14.37				24.41
ANSI B1.20.1 NPT pipe thread	10.43		10.63			14.37				24.41
DIN 11851 hygienic screwed <sup>1)</sup>		10.43	10.43		7.60	14.17	14.17		24.02	24.02
DIN 32676-C hygienic tri-clamp			10.43	10.43		14.17		14.17		24.02
DIN 11864-1 aseptic screwed <sup>1)</sup>			10.43	10.43		14.17				24.02
DIN 11864-2 aseptic flange <sup>1)</sup>			10.43	10.43		14.17		10.78	24.41	24.02
DIN 11864-3 aseptic clamp <sup>1)</sup>			10.43			14.17			24.02	24.02
ISO 2852 hygienic clamp <sup>1)</sup>					10.43	14.17			24.02	24.02
ISO 2853 hygienic screwed <sup>1)</sup>			10.43			14.17		10.78		24.02
SMS 1145 hygienic screwed			10.43			14.17			24.02	24.02
12-VCO-4 quick connect			11.2							
JIS B2220/10K			10.4			14.2			24.4	24.0
JIS B2220/20K			10.4			14.2			24.4	24.0
JIS B2220/40K			10.6			14.2			24.4	24.0
JIS B2220/63K			10.8			14.6				24.4

<sup>1)</sup> Available with 3A and EHEDG certification.

SITRANS FCS400, overall length (D), dimensions in mm.



## Overview



The complete flowmeter system SITRANS FC consist of a new FCS400 sensor in sizes DN 15 to DN 50 mm and a FCT030 multichannel/multifunctional in compact or remote versions. The flowmeter is based on the latest developments within digital signal processing technology – engineered for high measuring performance:

- Fast response to rapid changes in flow
- Fast dosing applications
- High immunity against process noise
- High turndown ratio of flowrates
- Suitable for liquid and gas service
- Easy to install, commission and maintain
- Aerated flow filtering system, for advanced filtering of fluids with gas or air bubbles
- Build in Data logger for all process variables and status messages (FCT030)
- Build in Batch functionality (FCT030)

The SITRANS FC430 is available with current output HART 7.5, Modbus RS 485 RTU, PROFIBUS DP or PROFIBUS PA as standard on Channel 1. Additional I/O functions can be freely configured for analog, pulse, frequency, relay or status output, or binary input.

The transmitter comes with a user configurable graphical display and SensorFlash, a micro SD card for configuration backup, firmware update and data storage.

## Benefits

- It is truly compact and light, fitting neatly into dense piping arrangements
- Easy maintenance because modules can be exchanged rapidly
- Effective separation of measurement from plant vibration
- Highly secure operation in safety critical applications
- Non-volatile memory of all setup and operation data
- Reliable measurements due to high signal to noise ratio
- Secure, digital transfer of measurement data from the sensor
- Shortest overall length; easy drop-in replacement into most existing installations
- Marine Application: fuel management & consumption; bunkering solutions; boiler control

## Technical specifications

SITRANS FC430	
<b>Sizes</b>	DN 15 (½") DN 25 (1") DN 50 (2")
<b>Accuracy</b>	± 0.10 %
<b>Repeatability</b>	± 0.05 %
<b>Flow range (liquids)</b>	
Q <sub>nom</sub> (water @ 1 bar pressure loss)	
• DN 15 (½")	3 700 kg/h (8 157 lb/h)
• DN 25 (1")	11 500 kg/h (25 353 lb/h)
• DN 50 (2")	52 000 kg/h (114 640 lb/h)
<b>Architecture</b>	Compact or remote configuration
<b>Display</b>	Full graphical display, 240 × 160 pixels with selection of 6 languages
<b>Power supply</b>	20 ... 90 V DC ± 10 %; 100 ... 240 V AC ± 10 %, 47 ... 63 Hz ± 10 %
<b>Materials</b>	
• Sensor	
- Wetted parts	316L stainless steel
- Enclosure	304 stainless steel
• Transmitter	Aluminum with corrosion-resistant coating class C4
<b>Enclosure rating</b>	IP67 <sup>1)</sup>
<b>Pressure ratings</b>	
• Measuring tubes	
- 316L	100 bar (1 450 psi)
- Sensore enclosure	20 bar (DN 15, DN 25) 17 bar (DN 50) >160 bar (depending on size)
• Sensor enclosure burst pressure	
<b>Temperature ratings</b>	
• Process medium	
- DN 15 ... DN 50	-50 ... +200 °C (-58 ... +392 °F)
• Ambient	-40 ... +60 °C (-40 ... +140 °F) <sup>1)</sup>
• Display	-20 ... +60 °C (-4 ... +140 °F)
<b>Process connections</b>	
• Flanges	EN 1092-1 B1, EN 1092-1 D, ANSI/ASME B16.5, JIS B 2220, DIN 11864-2
• Pipe threads	ASME B1.20 (NPT), ISO 228-1 G (BSPP), VCO Quick-connect
• Hygienic threads	DIN 11851, DIN 11864-1A, ISO 2853, SMS 1145
• Hygienic clamps	DIN 11864-3A, DIN 32676-C Tri-clamp, ISO 2852
<b>Approvals</b>	
• Hazardous area	ATEX, IECEx, EAC Ex, NEPSI, CSA, cCSA us
• Pressure equipment	PED, CRN
• Hygienic (in preparation)	3A, EHEDG
<b>NAMUR</b>	NAMUR-compliant (e.g. NE 21, NE 41, NE 107 and NE 132)
<b>I/O</b>	Up to 4 channels combining analog, relay or digital outputs and binary input
<b>Communication</b>	HART PROFIBUS PA PROFIBUS DP Modbus RTU (RS 485)
<b>EMC performance</b>	
• Emission	EN 55011/CISPR-11 (Class A)
• Immunity	EN/IEC 61326-1 (Industry)
<b>Mechanical load</b>	18 ... 400 Hz random  The flow meter will mechanically tolerate 3.17 g RMS in all directions. Flow accuracy cannot be guaranteed under all conditions.

<sup>1)</sup> If operating outdoors, avoid direct sunlight, particularly in warm climatic regions.

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### SITRANS FC430 flowmeter for OEM customers

#### Selection and ordering data

#### Article No.

#### Article No.

**SITRANS FC430 digital coriolis flowmeter with SITRANS FCS400 standard flow sensor compact or remote mounting with FCT030 transmitter**

7ME4613-  
-  
Ord. code

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Sensor size, connector size

DN 15, DN 6 (½", ¼") **3 E**  
 DN 15, DN 10 (½", 3/8") **3 F**  
 DN 15, DN 15 (½", ½") **3 G**  
 DN 15, DN 20 (½", ¾") **3 H**  
 DN 15, DN 25 (½", 1") **3 J**  
 DN 25, DN 25 (1", 1") **3 L**  
 DN 25, DN 32 (1", 1¼") **3 M**  
 DN 25, DN 40 (1", 1½") **3 N**  
 DN 50, DN 40 (2", 1½") **4 B**  
 DN 50, DN 50 (2", 2") **4 C**  
 DN 50, DN 65 (2", 2½") **4 D**

#### Process connection

EN 1092-1 B1, PN 16 **A 0**  
 EN 1092-1 B1, PN 40 **A 1**  
 EN 1092-1 B1, PN 63 **A 2**  
 EN 1092-1 B1, PN 100 **A 3**  
 EN 1092-1 D, PN 40 **A 5**  
 EN 1092-1 D, PN 63 **A 6**  
 EN 1092-1 D, PN 100 **A 7**  
 EN 1092-1 D, PN 160 (max operation pressure 100 bar) **A 8**  
 ASME B16.5 RF, Class 150 **D 1**  
 ASME B16.5 RF, lass 300 **D 2**  
 ASME B16.5 RF, lass 600 **D 3**  
 ASME B16.5 RF, Class 900 (p- and t-rating as Class 600) **D 4**  
 ISO 228-1G female pipe thread **E 1**  
 ASME B1.20.1 NPT female pipe thread **E 3**  
 DIN 11851 hygienic screwed **F 1**  
 DIN 32676, ASME, Form C (inch) (tri-clamp) **G 1**  
 DIN 11864-1 GS Form A Row A, Form A = O-ring type hygienic, aseptic thread connector, hygienic class H3 **H 1**  
 DIN 11864-2 BF Form A Row A, Form A = O-ring type hygienic, aseptic flange connector, hygienic class H3 **H 2**  
 DIN 11864-3 BKS Form A Row A, Form A = O-ring type hygienic, aseptic clamp connector, hygienic class H3 **H 3**  
 ISO 2852 hygienic clamp **J 1**  
 ISO 2853 hygienic thread **J 2**  
 SMS 1145 hygienic screwed **K 1**  
 Quick connect **K 5**  
 JIS B2220/10K **L 2**  
 JIS B2220/20K **L 4**  
 JIS B2220/40K **L 6**  
 JIS B2220/63K **L 7**

**SITRANS FC430 digital coriolis flowmeter with SITRANS FCS400 standard flow sensor compact or remote mounting with FCT030 transmitter**

7ME4613-  
-  
Ord. code

#### Wetted parts material

AISI 316L/1.4435/1.4404 **1**  
 AISI 316L/1.4435/1.4404 (polished; EHEDG; 3A) (in preparation) **2**

#### Calibration/Accuracy class

0.1 % flow, 5 kg/m<sup>3</sup> density **1**  
 0.1 % flow, 0.5 kg/m<sup>3</sup> density **4**  
 Standard fraction (with density 0.5 kg/m<sup>3</sup>) **8**

#### Mounting style, transmitter housing and material

None (replacement sensor) **A**  
 Compact, IP67 fieldmount, aluminum **D**  
 Remote, IP67 fieldmount, aluminum, M12 **G**  
 Remote, IP67 fieldmount, aluminum, T/Box **K**  
 Remote, IP67, wall mount, aluminium **U**

#### Ex approval (depending on variant)

Non-Ex **A**  
 ATEX (zone 1 / zone 21) **C**  
 IECEx (zone 1 / zone 21) **F**  
 US (cCSAus), Div 1 **L**  
 Canada (cCSAus), zone 1 **M**  
 NEPSI **N**  
 INMETRO (in preparation) **P**  
 KCC (in preparation) **Q**  
 EAC **U**

#### Local User Interface

None (replacement sensor, DSL only) **0**  
 Blind **1**  
 Graphical, 240 × 160 pxl **3**

Selection and ordering data	Order code	Order code	
<b>Further designs</b>		<b>Add-on options and accessories</b>	
Please add <b>"-Z"</b> to Article No. and specify Order code(s).		Please add <b>"-Z"</b> to Article No. and specify Order code(s).	
<b>Cable glands</b>		<b>Certificates</b>	
None (replacement sensor)	<b>A00</b>	Pressure testing certificate CRN	<b>C01</b>
Metric, no glands	<b>A01</b>	Pressure testing certificate PED	<b>C02</b>
Metric, nylon, limited to -20 °C/-4 °F	<b>A02</b>	Material certificate EN 10204-3.1 (wetted parts)	<b>C05</b>
Metric, brass/Ni plated	<b>A05</b>	Welding inspection certificate	<b>C07</b>
Metric, stainless steel	<b>A06</b>	Factory certificate EN 10204 2.1	<b>C10</b>
NPT, no glands	<b>A11</b>	Factory certificate EN 10204 2.2	<b>C11</b>
NPT, nylon, limited to -20 °C/-4 °F	<b>A12</b>	Cleaned for oil and grease	<b>C50</b>
NPT, brass/Ni plated	<b>A15</b>		
NPT, stainless steel	<b>A16</b>	<b>Customer selected calibration</b>	
Metric thread with M12 socket fitted	<b>A20</b>	Multi-point (5 flows × 2 pass) Flow 10 ... 100 % of $Q_{norm}$	<b>Y60</b>
		Multi-point (10 flows × 1 pass) Flow 10 ... 100 % of $Q_{norm}$	<b>Y61</b>
<b>Software functions and CT approvals</b>		Multi-point calibration (5 flows × 2 pass) Flow 2 ... 20 % of $Q_{norm}$	<b>Y69</b>
None (replacement sensor)	<b>B10</b>	Multi-point calibration (5 flows × 2 pass) Flow 5 ... 50 % of $Q_{norm}$	<b>Y71</b>
Standard	<b>B11</b>	Multi-point calibration (10 flows × 1 pass) Flow 2 ... 20 % of $Q_{norm}$	<b>Y72</b>
		Multi-point calibration (10 flows × 1 pass) Flow 5 ... 50 % of $Q_{norm}$	<b>Y73</b>
<b>I/O configuration Ch1</b>		<b>Cable</b>	
No output channel	<b>E00</b>	None	<b>L50</b>
4 ... 20 mA HART Active/Passive (non-Ex)	<b>E02</b>	5 m (16.4 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L51</b>
Ca 4 ... 20 mA HART active (Ex)	<b>E06</b>	5 m (16.4 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L52</b>
Ca 4 ... 20 mA HART passive (Ex)	<b>E07</b>	10 m (32.8 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L55</b>
PROFIBUS PA	<b>E10</b>	10 m (32.8 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L56</b>
PROFIBUS DP (non-Ex)	<b>E11</b>	25 m (82 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L59</b>
Modbus RTU RS 485	<b>E14</b>	25 m (82 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L60</b>
		50 m (164 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L63</b>
<b>I/O configuration Ch2, Ch3 and Ch4</b>		50 m (164 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L64</b>
None	<b>F00</b>	75 m (246 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L67</b>
• Non Ex: Sig O, None, None	<b>F01</b>	75 m (246 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L68</b>
• Non Ex: Sig O, Sig I/O, None	<b>F02</b>		
• Non Ex: Sig O, Sig I/O, Sig I/O	<b>F03</b>	<b>Sensor options</b>	
• Non Ex: Sig O, Sig I/O, R	<b>F04</b>	FCS400 marine approval	<b>S22</b>
• Non Ex: Sig O, R, R	<b>F05</b>	<b>SD-Card accessibility via USB</b>	
• Non Ex: Sig O, R, None	<b>F06</b>	(not allowed in USA by Patent)	
• Ex: pSig O, None, None	<b>F11</b>	Mass storage enabled	<b>S30</b>
• Ex: pSig O, pSig I/O, None	<b>F12</b>	<b>Region-specific approvals and certificates</b>	
• Ex: pSig O, pSig I/O, pSig I/O	<b>F13</b>	South Korea (KCC)	<b>W28</b>
• Ex: pSig O, pSig I/O, R	<b>F14</b>	<b>Additional data</b>	
• Ex: pSig O, R, R	<b>F15</b>	Please add <b>"-Z"</b> to Article No. and specify Order code(s) and plain text.	
• Ex: pSig O, R, None	<b>F16</b>	<b>Tag name</b>	
• Ex: aSig O, None, None	<b>F21</b>	Tag name plate, stainless steel	<b>Y17</b>
• Ex: aSig O, aSig I/O, None	<b>F22</b>		
• Ex: aSig O, aSig I/O, aSig I/O	<b>F23</b>		
• Ex: aSig O, aSig I/O, R	<b>F24</b>		
• Ex: aSig O, R, R	<b>F25</b>		
• Ex: aSig O, R, None	<b>F26</b>		
<b>Notes on I/O configurations:</b>			
<b>a or p suffix:</b> The I/O module is selected at ordering with either active or passive function.			
<b>Signal:</b> The output can be selected for Current (0 or 4 to 20 mA), frequency or pulse function in the menu.			
<b>I:</b> Discrete status input to the flowmeter. Functions are selected in the menu including 'Freeze output', 'Reset totalizer' (only CH3&4).			
<b>R:</b> Relay output for discrete status reporting. Function is selected in the menu, including 'Error', 'High flow warning'.			
The MLFB structure for FC330 systems must be filled to <b>this level</b> , including <b>"-Z"</b> options A..., B..., E... and F.			

## Flow Measurement

SITRANS FC (Coriolis)

Sensors and Flowmeter systems

### SITRANS FC430 flowmeter for OEM customers

#### Selection and ordering data (continued)



##### Operating instructions for SITRANS FC430

Description	Article No.
English • for firmware V 4.0 and onwards	<b>A5E39789392</b>
German • for firmware V 4.0 and onwards	<b>TBD</b>

All literature is available to download for free, in a range of languages, at

[www.siemens.com/processinstrumentation/documentation](http://www.siemens.com/processinstrumentation/documentation)

##### Heating jacket for FCS400

Description	Article No.	
Heating jacket, indoor use, 0 ... 200 °C (32 ...392 °F) max. temperature. Complete with 5 m (16.4 ft) high temperature cable fitted. Dedicated plug connection to included controller • 230 V AC - DN 15 electric - DN 25 electric - DN 50 electric	<b>A5E33035287</b> <b>A5E33035324</b> <b>A5E33035325</b>	
• 115 V AC - DN 15 electric - DN 25 electric - DN 50 electric	<b>A5E32877520</b> <b>A5E32877556</b> <b>A5E32877557</b>	
Heating jacket controller, IP65. Digital display for 0 ... 200 °C (32 ...392 °F) control setpoint • 230 V AC • 115 V AC	<b>A5E03839193</b> <b>A5E03839194</b>	

## Overview



The compact flowmeter SITRANS FC410 is available in sizes DN 15, DN 25 and DN 50 for standard and hygienic applications.

Intended for integration into OEM skids, machines or pre-assembled plant systems. The sensor design is the marked leader in compact design which makes it easy to integrate in the compact skids. The flowmeter is based on the latest developments within digital signal processing technology - engineered for high measuring performance:

- Fast response to rapid changes in flow
- Markeds most compact sensor design
- Sensor with sanitary EHEDG and 3 A certification (in preparation)
- Fast dosing applications with control in host system
- High immunity against process noise
- High turndown ratio of flowrates
- Suitable for liquid and gas service
- Easy to install, commission and maintain

With all global marine approvals the FC410 is ideal for integration in ship fuel efficiency and environmental measurement systems. The FCT010 transmitter delivers true multi-parameter measurements i.e. massflow, density, temperature.

FC410 is available with Modbus RTU (RS 485) multi-drop serial communication. The flowmeter is supplied with SensorFlash, a micro SD card containing all relevant certificates. The SITRANS FC410 flowmeter system consists of a SITRANS FCS400 sensor and a SITRANS FCT010 transmitter always compact mounted.

## Benefits

- It is truly compact and light, fitting neatly into dense piping arrangements
- Easy maintenance because modules can be exchanged rapidly
- Effective separation of measurement from plant vibration
- Reliable measurements due to high signal to noise ratio
- Shortest overall length; easy drop-in replacement into most existing installations
- Direct connection to host with high-speed Modbus simplifies machine or skid construction and set-up
- Modbus RS 485 RTU allows simple and easy integration with all Modbus masters with fast update rate of process values

## Technical specifications

SITRANS FC410	
<b>Sizes</b>	DN 15 (½") DN 25 (1") DN 50 (2")
<b>Accuracy</b>	± 0.10 %
<b>Repeatability</b>	± 0.05 %
<b>Flow range (liquids)</b>	Q <sub>nom</sub> (water @ 1 bar pressure loss)
• DN 15 (½")	3 700 kg/h (8 157 lb/h)
• DN 25 (1")	11 500 kg/h (25 353 lb/h)
• DN 50 (2")	52 000 kg/h (114 640 lb/h)
<b>Architecture</b>	Compact configuration
<b>Display</b>	Full graphical display, 240 × 160 pixels with selection of 6 languages
<b>Power supply</b>	12 ... 27 V DC; 1.1 W
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Sensor <ul style="list-style-type: none"> <li>- Wetted parts 316L stainless steel</li> <li>- Enclosure 304 stainless steel</li> </ul> </li> <li>• Transmitter Aluminum with corrosion-resistant coating class C4</li> </ul>
<b>Enclosure rating</b>	IP67
<b>Pressure ratings</b>	<ul style="list-style-type: none"> <li>• Measuring tubes <ul style="list-style-type: none"> <li>- 316L 100 bar (1 450 psi)</li> <li>- Sensore enclosure 20 bar (DN 15, DN 25) 17 bar (DN 50)</li> </ul> </li> <li>• Sensor enclosure burst pressure &gt; 160 bar (depending on size)</li> </ul>
<b>Temperature ratings</b>	<ul style="list-style-type: none"> <li>• Process medium <ul style="list-style-type: none"> <li>- DN 15 ... DN 50 -50 ... +200 °C (-58 ... +392 °F)</li> </ul> </li> <li>• Ambient -40 ... +60 °C (-40 ... +140 °F)<sup>1)</sup></li> </ul>
<b>Process connections</b>	<ul style="list-style-type: none"> <li>• Flanges EN 1092-1 B1, EN 1092-1 D, ANSI/ASME B16.5, JIS B 2220, DIN 11864-2</li> <li>• Pipe threads ASME B1.20 (NPT), ISO 228-1 G (BSPP), VCO Quick-connect</li> <li>• Hygienic threads DIN 11851, DIN 11864-1A, ISO 2853, SMS 1145</li> <li>• Hygienic clamps DIN 11864-3A, DIN 32676-C Tri-clamp, ISO 2852</li> </ul>
<b>Approvals</b>	<ul style="list-style-type: none"> <li>• Hazardous area ATEX, IECEx, EAC Ex, NEPSI, CSA, cCSA us</li> <li>• Pressure equipment PED, CRN</li> <li>• Hygienic 3A, EHEDG (in preparation)</li> </ul>
<b>NAMUR</b>	NAMUR-compliant (e.g. NE 21, NE 41, NE 107 and NE 132)
<b>I/O</b>	Up to 4 channels combining ana-log, relay or digital outputs and binary input
<b>Communication</b>	Modbus RTU (RS 485)
<b>EMC performance</b>	<ul style="list-style-type: none"> <li>• Emission EN 55011/CISPR-11 (Class A)</li> <li>• Immunity EN/IEC 61326-1 (Industry)</li> </ul>
<b>Mechanical load</b>	18 ... 400 Hz random  The flow meter will mechanically tolerate 3.17 g RMS in all directions. Flow accuracy cannot be guaranteed under all conditions.

<sup>1)</sup> If operating outdoors, avoid direct sunlight, particularly in warm climatic regions.

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### SITRANS FC410 flowmeter for OEM customers

#### Selection and ordering data

#### Article No.

#### Article No.

**SITRANS FC410 digital coriolis flowmeter with SITRANS FCS400 standard flow sensor compact or remote mounting with FCT010 transmitter**

7ME4611-

Ord.  
code

**SITRANS FC410 digital coriolis flowmeter with SITRANS FCS400 standard flow sensor compact or remote mounting with FCT010 transmitter**

7ME4611-

Ord.  
code

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Sensor size, connector size

DN 15, DN 6 (½", ¼")  
DN 15, DN 10 (½", 3/8")  
DN 15, DN 15 (½", ½")  
DN 15, DN 20 (½", ¾")  
DN 15, DN 25 (½", 1")  
DN 25, DN 25 (1", 1")  
DN 25, DN 32 (1", 1¼")  
DN 25, DN 40 (1", 1½")  
DN 50, DN 40 (2", 1½")  
DN 50, DN 50 (2", 2")  
DN 50, DN 65 (2", 2½")

3 E  
3 F  
3 G  
3 H  
3 J  
3 L  
3 M  
3 N  
4 B  
4 C  
4 D

#### Process connection

EN 1092-1 B1, PN 16  
EN 1092-1 B1, PN 40  
EN 1092-1 B1, PN 63  
EN 1092-1 B1, PN 100  
EN 1092-1 D, PN 40  
EN 1092-1 D, PN 63  
EN 1092-1 D, PN 100  
EN 1092-1 D, PN 160  
(max operation pressure 100 bar)  
ASME B16.5 RF, Class 150  
ASME B16.5 RF, Class 300  
ASME B16.5 RF, Class 600  
ASME B16.5 RF, Class 900  
(p- and t-rating as Class 600)  
ISO 228-1G female pipe thread  
ASME B1.20.1 NPT female pipe thread  
DIN 11851 hygienic screwed  
DIN 32676, ASME, Form C (inch)  
(tri-clamp)  
DIN 11864-1 GS Form A Row A,  
Form A = O-ring type hygienic, aseptic  
thread connector, hygienic class H3  
DIN 11864-2 BF Form A Row A, Form A =  
O-ring type hygienic, aseptic flange con-  
nector, hygienic class H3  
DIN 11864-3 BKS Form A Row A, Form A =  
O-ring type hygienic, aseptic clamp con-  
nector, hygienic class H3  
ISO 2852 hygienic clamp  
ISO 2853 hygienic thread  
SMS 1145 hygienic screwed  
Quick connect  
JIS B2220/10K  
JIS B2220/20K  
JIS B2220/40K  
JIS B2220/63K

A 0  
A 1  
A 2  
A 3  
A 5  
A 6  
A 7  
A 8  
D 1  
D 2  
D 3  
D 4  
E 1  
E 3  
F 1  
G 1  
H 1  
H 2  
H 3  
J 1  
J 2  
K 1  
K 5  
L 2  
L 4  
L 6  
L 7

#### Wetted parts material

AISI 316L/1.4435/1.4404  
AISI 316L/1.4435/1.4404 (polished;  
EHEDG; 3A) (in preparation)

#### Calibration/Accuracy class

0.1 % flow, 5 kg/m³ density  
0.1 % flow, 0.5 kg/m³ density

#### Mounting style, transmitter housing and material

None (replacement sensor)  
Compact, IP67 fieldmount, aluminum

#### Ex approval (depending on variant)

Non-Ex  
ATEX (zone 1 / zone 21)  
IECEX (zone 1 / zone 21)  
US (cCSAus), Div 1  
Canada (cCSAus), zone 1  
NEPSI  
INMETRO (in preparation)  
KCC (in preparation)  
EAC

#### Local User Interface

Blind

1  
2

1  
4

A  
D

A  
C  
F  
L  
M  
N  
P  
Q  
U

1

Selection and ordering data	Order code	Order code
<b>Further designs</b> Please add <b>"-Z"</b> to Article No. and specify Order code(s).		<b>Further designs</b> Please add <b>"-Z"</b> to Article No. and specify Order code(s).
<b>Cable glands</b>		
None (replacement sensor)	A00	25 m (82 ft), sensor cable, 4 wire, without plugs for terminal connection
Metric, no glands	A01	25 m (82 ft), sensor cable, 4 wire, with 1 pc M12 plugs mounted
Metric, plastic	A02	50 m (164 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted
Metric, brass/Ni plated	A05	50 m (164 ft), sensor cable, 4 wire, without plugs for terminal connection
Metric, stainless steel	A06	50 m (164 ft), sensor cable, 4 wire, with 1 pc M12 plugs mounted
NPT, no glands	A11	75 m (246 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted
NPT, plastic	A12	75 m (246 ft), sensor cable, 4 wire, without plugs for terminal connection
NPT, brass/Ni plated	A15	75 m (246 ft), sensor cable, 4 wire, with 1 pc M12 plugs mounted
NPT, stainless steel	A16	
Metric thread with M12 socket fitted	A20	
<b>Software functions and CT approvals</b>		<b>Sensor options</b>
Standard	B11	FCS400 marine approval
<b>I/O configuration Ch1</b>		<b>Region-specific approvals and certificates</b>
Modbus RTU RS 485	E14	South Korea (KCC)
<b>I/O configuration Ch2, Ch3 and Ch4</b>		
None	F00	
<b>Add-on options and accessories</b> Please add <b>"-Z"</b> to Article No. and specify Order code(s).		<b>Additional data</b> Please add <b>"-Z"</b> to Article No. and specify Order code(s) and plain text.
<b>Certificates</b>		<b>Tag name</b>
Pressure testing certificate CRN	C01	Tag name plate, stainless steel
Pressure testing certificate PED	C02	
Material certificate EN 10204-3.1 (wetted parts)	C05	
Welding inspection certificate	C07	
Factory certificate EN 10204 2.1	C10	
Factory certificate EN 10204 2.2	C11	
Cleaned for oil and grease	C50	
<b>Customer selected calibration</b>		<b>Operating instructions for SITRANS FC410</b>
Multi-point (5 flows × 2 pass) Flow 10 ... 100 % of $Q_{norm}$	Y60	
Multi-point (10 flows × 1 pass) Flow 10 ... 100 % of $Q_{norm}$	Y61	
Multi-point calibration (5 flows × 2 pass) Flow 2 ... 20 % of $Q_{norm}$	Y69	
Multi-point calibration (5 flows × 2 pass) Flow 5 ... 50 % of $Q_{norm}$	Y71	
Multi-point calibration (10 flows × 1 pass) Flow 2 ... 20 % of $Q_{norm}$	Y72	
Multi-point calibration (10 flows × 1 pass) Flow 5 ... 50 % of $Q_{norm}$	Y73	
<b>Cable</b>		
None	L50	
5 m (16.4 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	L51	
5 m (16.4 ft), sensor cable, 4 wire, without plugs for terminal connection	L52	
5 m (16.4 ft), sensor cable, 4 wire, with 1 pc M12 plugs mounted	L53	
10 m (32.8 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	L55	
10 m (32.8 ft), sensor cable, 4 wire, without plugs for terminal connection	L56	
10 m (32.8 ft), sensor cable, 4 wire, with 1 pc M12 plugs mounted	L57	
25 m (82 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	L59	
		<b>Description</b>
		<b>Article No.</b>
		English
		• for firmware V 4.0 and onwards
		A5E39789214
		German
		• for firmware V 4.0 and onwards
		TBD
		All literature is available to download for free, in a range of languages, at
		<a href="http://www.siemens.com/processinstrumentation/documentation">www.siemens.com/processinstrumentation/documentation</a>



## Flow Measurement

SITRANS FC (Coriolis)

Sensors and Flowmeter systems

### SITRANS FCS400 with FCT070 transmitter

#### Overview



Full integration in the Siemens SIMATIC systems PCS7 or in TIA portal with FCT070 Faceplates with the ET 200SP ST & HF powerful IO system for compact control cabinets. The complete flowmeter system consists of a SITRANS FCS400 sensor and a SIMATIC ET200 SP Coriolis module FCT070 transmitter.

TM FCT070 offers real-time data processing and the display of all measuring and status data of the Coriolis flowmeter.

For hazardous area the FCS400 sensor can be placed in Ex Zone 1/21 or Class1 Div 1 locations. Together with the Sitrans I300 power/barrier module the FCT070 transmitter can be placed in Zone 2 or Div 2 areas.

#### Benefits

- FCS400 sensor in sizes from DN 15 to DN 50 mm in a large variety of process connections and wetted materials
- Marked most compact sensor design
- Sensor with sanitary EHEDG and 3A certification
- Full hazardous area solutions
- Easy integration into automation process control as TIA portal and PCS7
- Easy selection and integration of flow meters via TIA-Selector
- Cost effective integration of Coriolis flow meters for PLC controlled machines
- SITRANS FCT070 ET 200SP technology module and can be combined with all other SIMATIC ET200 ST & HF modules.
- The FCT070 has all high-end transmitter functionality integrated including the advanced fraction tables on board
- Fast and trouble-free communication between the flow meter and the PLC through digital data communication with up to 10 ms update rate
- Integrated advanced Two-stage batch controller functionality without additional modules. I/Os are onboard.

#### Technical specifications

SITRANS FCS400 with FCT070 transmitter	
<b>Sizes</b>	DN 15 (½") DN 25 (1") DN 50 (2")
<b>Accuracy</b>	± 0.10 %
<b>Repeatability</b>	± 0.05 %
<b>Flow range (liquids)</b>	
Q <sub>nom</sub> (water @ 1 bar pressure loss)	
• DN 15 (½")	3 700 kg/h (8 157 lb/h)
• DN 25 (1")	11 500 kg/h (25 353 lb/h)
• DN 50 (2")	52 000 kg/h (114 640 lb/h)
<b>Measurement of</b>	Mass flow, volume flow, density, temperature Fraction A flow, fraction A % Fraction B flow, fraction B %
<b>Architecture</b>	Remote configuration
<b>System integration</b>	ET200 SP; PCS7 and TIA portal with faceplates ET 200SP ST & HF
<b>Power supply</b>	24 V DC, 19.2 ... 28.8 V
<b>Materials</b>	
• Sensor	
- Wetted parts	316L stainless steel
- Enclosure	304 stainless steel
• Transmitter	Aluminum with corrosion-resistant coating class C4
<b>Enclosure rating</b>	IP67
<b>Pressure ratings</b>	
• Measuring tubes	
- 316L	100 bar (1 450 psi)
- Sensore enclosure	20 bar (DN 15, DN 25) 17 bar (DN 50)
• Sensor enclosure burst pressure	> 160 bar (depending on size)
<b>Temperature ratings</b>	
• Process medium	
- DN 15 ... DN 50	-50 ... +200 °C (-58 ... +392 °F)
• Ambient	-40 ... +60 °C (-40 ... +140 °F) <sup>1)</sup>
<b>Process connections</b>	
• Flanges	EN 1092-1 B1, EN 1092-1 D, ANSI/ASME B16.5, JIS B 2220, DIN 11864-2
• Pipe threads	ASME B1.20 (NPT), ISO 228-1 G (BSP), VCO Quick-connect
• Hygienic threads	DIN 11851, DIN 11864-1A, ISO 2853, SMS 1145
• Hygienic clamps	DIN 11864-3A, DIN 32676-C Tri-clamp, ISO 2852
<b>Approvals</b>	
• Hazardous area	FCS400 sensor: ATEX, IECEx, EAC Ex, NEPSI, CSA, cCSA us FCT070: Zone 2 & Class1 Div 2
• Pressure equipment (in preparation)	PED, CRN
• Hygienic	3A, EHEDG
<b>NAMUR</b>	NAMUR-compliant (e.g. NE 21, NE 41, NE 107 and NE 132)
<b>I/O (FCT070)</b>	2 digital Input and 2 digital output
<b>Totalizer (FCT070)</b>	3 totalizer
<b>Communication (FCT070)</b>	Integrated PROFINET for SIMATIC integration and other PROFINET Controllers
<b>EMC performance</b>	
• Emission	EN 55011/CISPR-11 (Class A)
• Immunity	EN/IEC 61326-1 (Industry)
<b>Mechanical load</b>	18 ... 400 Hz random The flow meter will mechanically tolerate 3.17 g RMS in all directions. Flow accuracy cannot be guaranteed under all conditions.

<sup>1)</sup> operating outdoors, avoid direct sunlight, particularly in warm climatic regions.



## Selection and ordering data

Article No.

Article No.

SITRANS FC430 digital coriolis flowmeter with SITRANS FCS400 standard flow sensor for integration with FCT070 transmitter

7ME4617-

Ord.  
code

SITRANS FC430 digital coriolis flowmeter with SITRANS FCS400 standard flow sensor for integration with FCT070 transmitter

7ME4617-

Ord.  
code

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

## Sensor size, connector size

DN 15, DN 6 (½", ¼")	3 E
DN 15, DN 10 (½", 3/8")	3 F
DN 15, DN 15 (½", ½")	3 G
DN 15, DN 20 (½", ¾")	3 H
DN 15, DN 25 (½", 1")	3 J
DN 25, DN 25 (1", 1")	3 L
DN 25, DN 32 (1", 1¼")	3 M
DN 25, DN 40 (1", 1½")	3 N
DN 50, DN 40 (2", 1½")	4 B
DN 50, DN 50 (2", 2")	4 C
DN 50, DN 65 (2", 2½")	4 D

## Process connection

EN 1092-1 B1, PN 16	A 0
EN 1092-1 B1, PN 40	A 1
EN 1092-1 B1, PN 63	A 2
EN 1092-1 B1, PN 100	A 3
EN 1092-1 D, PN 40	A 5
EN 1092-1 D, PN 63	A 6
EN 1092-1 D, PN 100	A 7
EN 1092-1 D, PN 160 (max operation pressure 100 bar)	A 8
ASME B16.5 RF, class 150	D 1
ASME B16.5 RF, class 300	D 2
ASME B16.5 RF, class 600	D 3
ASME B16.5 RF, class 900 (p- and t-rating as class 600)	D 4
ISO 228-1G female pipe thread	E 1
ASME B1.20.1 NPT female pipe thread	E 3
DIN 11851 hygienic screwed	F 1
DIN 32676, ASME, Form C (inch) (tri-clamp)	G 1
DIN 11864-1 GS Form A Row A, Form A = O-ring type hygienic, aseptic thread connector, hygienic class H3	H 1
DIN 11864-2 BF Form A Row A, Form A = O-ring type hygienic, aseptic flange connector, hygienic class H3	H 2
DIN 11864-3 BKS Form A Row A, Form A = O-ring type hygienic, aseptic clamp connector, hygienic class H3	H 3
ISO 2852 hygienic clamp	J 1
ISO 2853 hygienic thread	J 2
SMS 1145 hygienic screwed	K 1
Quick connect	K 5
JIS B2220/10K	L 2
JIS B2220/20K	L 4
JIS B2220/40K	L 6
JIS B2220/63K	L 7

## Wetted parts material

AISI 316L/1.4435/1.4404

1

AISI 316L/1.4435/1.4404 (polished; EHEDG; 3A) (in preparation)

2

## Calibration/Accuracy class

0.1 % flow, 5 kg/m<sup>3</sup> density

1

0.1 % flow, 0.5 kg/m<sup>3</sup> density

4

## Mounting style, transmitter housing and material

Compact, IP67 fieldmount, aluminum

D

## Ex approval (depending on variant)

Non-Ex

ATEX (zone 1 / zone 21)

A

IECEX (zone 1 / zone 21)

C

US (cCSAus), Div 1

F

Canada (cCSAus), zone 1

L

NEPSI

M

INMETRO (in preparation)

N

KCC (in preparation)

P

EAC

Q

## Local User Interface

Blind

U

1

## Selection and ordering data

Order code

## Further designs

Please add "-Z" to Article No. and specify Order code(s).

## Cable glands

Metric, no glands

A01

Metric, plastic

A02

Metric, brass/Ni plated

A05

Metric, stainless steel

A06

NPT, no glands

A11

NPT, plastic

A12

NPT, brass/Ni plated

A15

NPT, stainless steel

A16

Metric thread with M12 socket fitted

A20

## Software functions and CT approvals

Standard software DSL

B10

## I/O configuration Ch1

No output channel (integration of FCT070)

E00

## I/O configuration Ch2, Ch3 and Ch4

None

F00

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### SITRANS FCS400 with FCT070 transmitter

#### Selection and ordering data

#### Order code

##### Add-on options and accessories

Please add **"-Z"** to Article No. and specify Order code(s).

##### Certificates

Pressure testing certificate CRN	<b>C01</b>
Pressure testing certificate PED	<b>C02</b>
Material certificate EN 10204-3.1 (wetted parts)	<b>C05</b>
Welding inspection certificate	<b>C07</b>
Factory certificate EN 10204 2.1	<b>C10</b>
Factory certificate EN 10204 2.2	<b>C11</b>
Cleaned for oil and grease	<b>C50</b>

##### Customer selected calibration

Multi-point (5 flows × 2 pass) Flow 10 ... 100 % of $Q_{norm}$	<b>Y60</b>
Multi-point (10 flows × 1 pass) Flow 10 ... 100 % of $Q_{norm}$	<b>Y61</b>
Multi-point calibration (5 flows × 2 pass) Flow 2 ... 20 % of $Q_{norm}$	<b>Y69</b>
Multi-point calibration (5 flows × 2 pass) Flow 5 ... 50 % of $Q_{norm}$	<b>Y71</b>
Multi-point calibration (10 flows × 1 pass) Flow 2 ... 20 % of $Q_{norm}$	<b>Y72</b>
Multi-point calibration (10 flows × 1 pass) Flow 5 – 50 % of $Q_{norm}$	<b>Y73</b>

##### Cable

None	<b>L50</b>
5 m (16.4 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L52</b>
5 m (16.4 ft), sensor cable, 4 wire, with 1 pc M12 plugs mounted	<b>L53</b>
10 m (32.8 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L56</b>
10 m (32.8 ft), sensor cable, 4 wire, with 1 pc M12 plugs mounted	<b>L57</b>
25 m (82 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L60</b>
25 m (82 ft), sensor cable, 4 wire, with 1 pc M12 plugs mounted	<b>L61</b>
50 m (164 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L64</b>
50 m (164 ft), sensor cable, 4 wire, with 1 pc M12 plugs mounted	<b>L65</b>
75 m (246 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L68</b>
75 m (246 ft), sensor cable, 4 wire, with 1 pc M12 plugs mounted	<b>L69</b>

##### Region-specific approvals and certificates

South Korea (KCC)	<b>W28</b>
-------------------	------------

##### Additional data

Please add **"-Z"** to Article No. and specify Order code(s) and plain text.

##### Tag name

Tag name plate, stainless steel	<b>Y17</b>
---------------------------------	------------

##### Description

**SITRANS FCT070**  
Transmitter for ET 200SP

##### Article No.

**7ME4138-6AA00-0BB1**



**BU20-P12+A0+4B, PU1**  
BaseUnit plate for ET 200SP

**6ES7193-6BP20-0BB0**  
**6ES7193-6BP20-0BB1**



**SITRANS I300**  
Isolating power supply – Ex barrier

**A5E39832532**



All literature is available to download for free, in a range of languages, at

[www.siemens.com/processinstrumentation/documentation](http://www.siemens.com/processinstrumentation/documentation)

#### Overview

MASS 2100 DI 1.5 to DI 15 and the FC300 DN4 is suitable for low flow measurement applications of a variety of liquids and gases.

The sensor is designed with a single bended tube in corrosion resistant stainless steel AISI316L or Hastelloy C22 and a solid stainless steel fully welded enclosure to protect the measuring tubes from any harsh environments. For hazardous area applications the MASS 2100 / FC300 DN4 sensor comes in a number of common hazardous area approved variants like ATEX, IECEx, cCSAus, EAC, and NEPSI.

The sensor offers superior performance in terms of flow accuracy, turn-down ratio and density accuracy and delivers true multi-parameter measurements i.e.: mass flow, volume flow, density, temperature and fraction.

With the large variety of process connections and the ability for high pressure solutions up to 1 000 bar, the compact single tube design is especially suitable for high end applications in all industry segments e.g. Automotive, Painting, Chemical, Oil & Gas and F&B. Accurate dosing and mixing down to drops are widely used applications.

#### The main applications for the MASS 2100 / FC300 DN 4 sensor can be found in:

Chemical industry	Liquid and gas measurement within Miniplant and R&D, dosing of additives and catalysts
Cosmetic industry	Dosing of essence and fragrances
Pharmaceutical industry	High-speed dosing and coating of pills, filling of ampuls/injectors
Food and beverage industry	Dosing of flavourings, colours and additives, density measurement, inline Measurement of liquid or gaseous CO <sub>2</sub>
Automotive industry	Fuel injection nozzle and pump testing, filling of AC units, engine consumption, paint robots, ABS test-beds

#### Integration

The SITRANS MASS 2100/FC300 DN4 sensor are suitable for both indoor and outdoor installation and meets the requirements of Protection Class IP67/NEMA 4X. Optionally the sensor can be ordered with hazardous certification to Zone 1 (ATEX, IECEx, cCSAus, EAC Ex, NEPSI).

It is important to ensure that the sensor tubes are always completely filled with homogeneous fluid; otherwise measuring errors may occur. Suitable fluids are clean liquids, pastes, light slurries or gases. Condensing vapours, aerated liquids or slush are not recommended.

The materials in contact with the process medium must be evaluated for corrosion and erosion resistances for long sensor life.

The pressure drop through the sensor is a function of the properties of the fluid and the flow rate. A pressure loss and accuracy calculator can be found on the Siemens Internet site <https://www.siemens.com>

The preferred flow direction is indicated by an arrow on the sensor. Flow in the direction of the arrow will be measured as positive. The flow direction can be adjusted at the transmitter to compensate for reverse installation.

#### Shut-off devices

To conduct a system zero adjustment, secure shut-off devices are required in the pipeline.

Where possible, shut-off devices should be installed both upstream and downstream of the flowmeter.

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems


#### SITRANS FC MASS 2100 and FC300 DN 4 sensors

#### Integration (continued)

#### Installation guidelines MASS 2100 DI 3 ... DI 15 (1/8" ... 1/2")


In order to perform according to given specifications for flow and density accuracy, the sensor must be installed using rigid mounting brackets as shown in the installation examples.

If the liquid is volatile or contains solid particles, vertical mounting is not recommended.

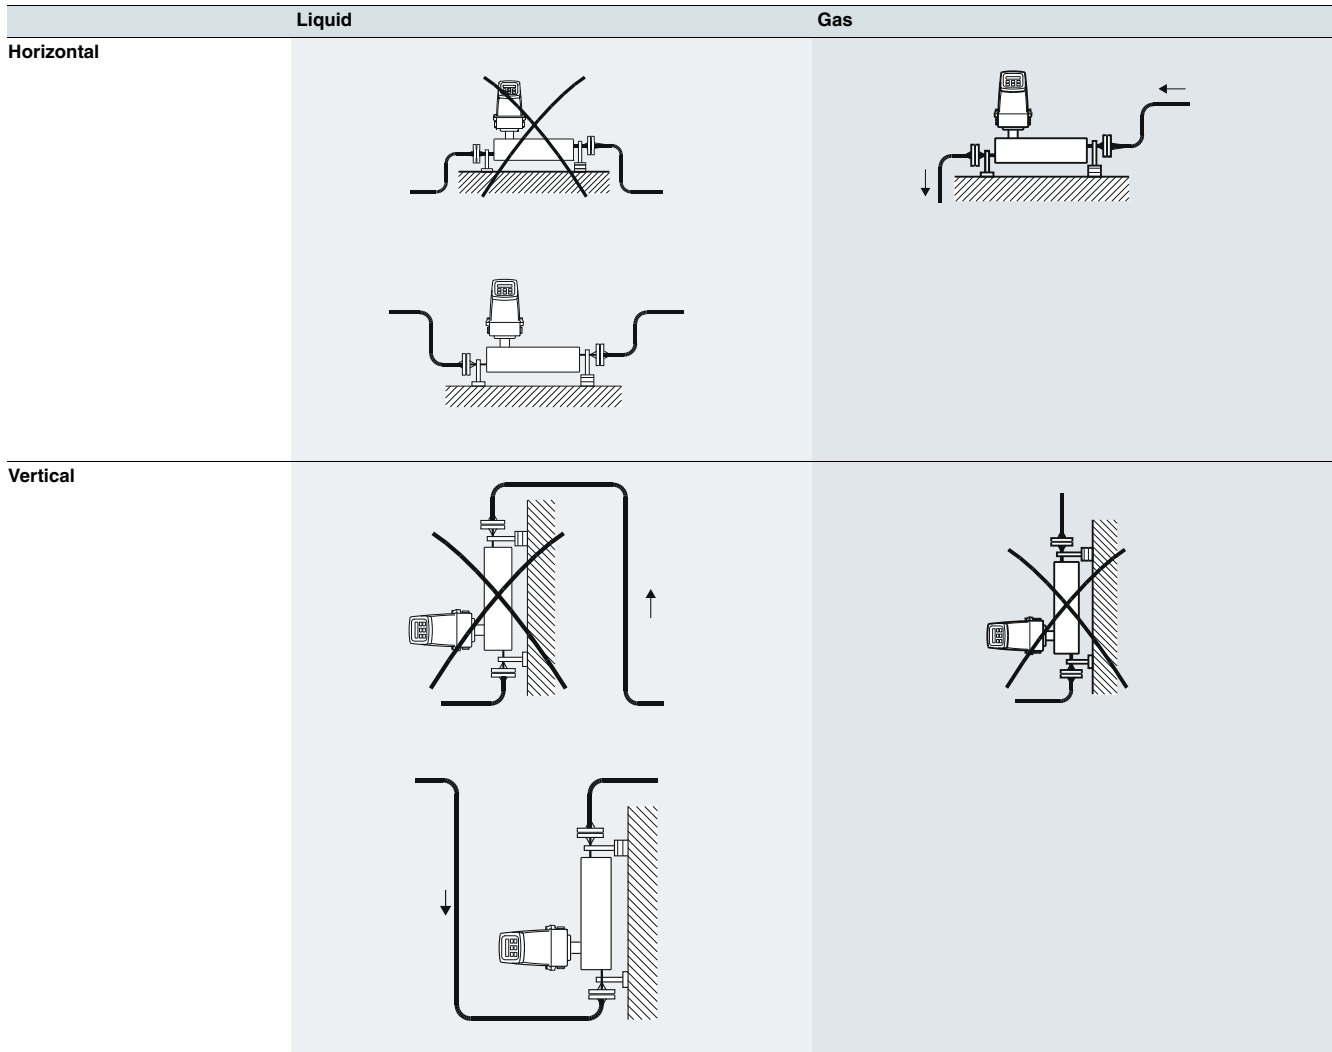


#### Vibration

Always locate the flowmeter as far away as possible from components that generate mechanical vibration in the piping. Avoid vibration. If necessary use flexible pipes.

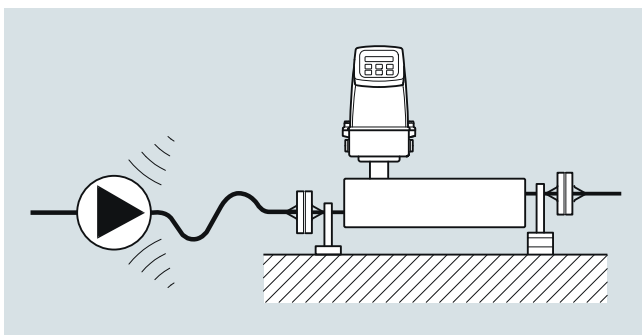

#### Cross talk


Cross talk between sensors mounted close to each other may disturb the measurement. To avoid cross talk never mount more than one meter on each frame and mount flexible hose connections between the sensors as shown.

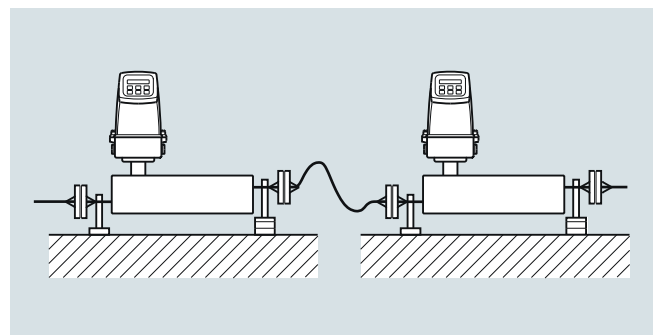

#### Integration (continued)

##### Zero point adjustment


To facilitate zero point adjustment a shut-off valve should always be mounted in connection with the sensor as a proper zero point setting is essential for a good accuracy.

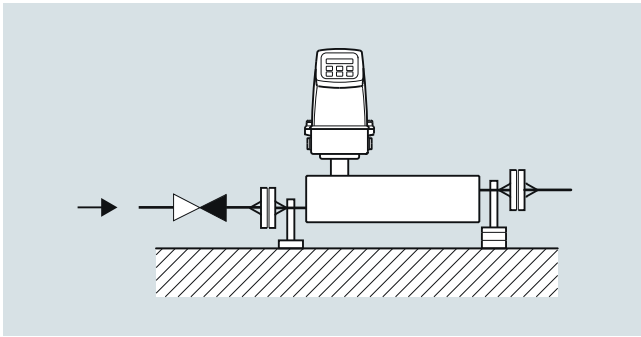

##### Installation guidelines MASS 2100 DI 1.5 (1/16")


- The optimal installation is horizontal. If vertical mounting is necessary, upward flow is recommended to facilitate the removal of air bubbles. To remove the air from the sensor the flow speed in the sensor must be at least 1 m/s. If there are solid particles in the liquid, especially in connection with low flow, it is recommended that the sensor be mounted horizontally with inlet flange uppermost so that particles are more easily flushed out. To ensure that the sensor does not become partially empty, there must be sufficient counter-pressure on the unit min. 0.2 bar (2.9 psi).
- Mount the sensor on a vibration-free wall or steel frame.
- Locate the sensor low in the system in order to avoid an under-pressure in the sensor separating air/gas in the liquid.
- Ensure that the sensor is not emptied of liquid (during normal operation) otherwise incorrect measurement will occur.

##### Horizontal

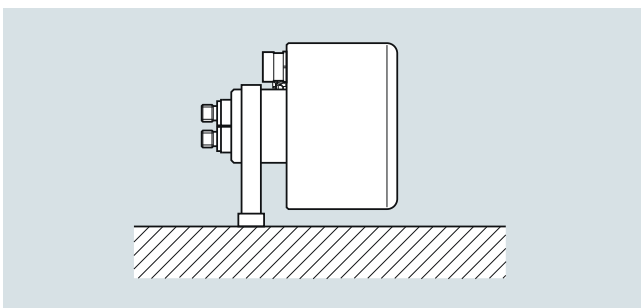

Liquid and gas application

##### Vertical

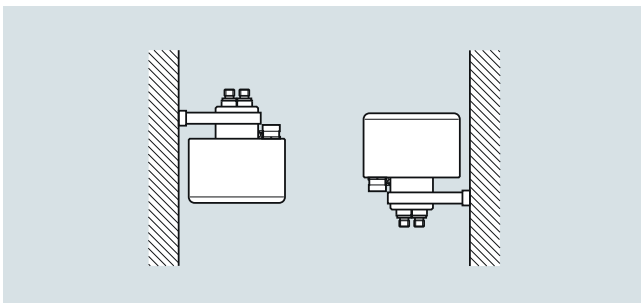

Liquid application (left), gas application (right)

##### Installation guidelines for SITRANS FC300 sensor

Horizontal installation as shown in figure A is recommended with gas or liquid applications.

This installation is also recommended when the flow velocity is low ( $< 1$  m/s) or the liquid contains solid particles or air bubbles.


Vertical installation as shown in figure B can be used for liquid or gas applications.

For liquid applications upwards flow is recommended to facilitate the removal of air bubbles and to avoid partly emptying of the sensor.

For gas applications we recommend to place the flow inlet on the sensor high and the outlet low to remove impurities and oil films.


- To ensure that the sensor does not become partly empty, there must be a sufficient counter-pressure on the unit min. 0.2 bar (2.9 psi)
- Mount the sensor on a vibration-free and plane wall or steel frame
- Locate the sensor low in the system in order to avoid under-pressure in the sensor separating air/gas in the liquid
- Ensure that the sensor is not emptied of liquid (during normal operation) otherwise incorrect measurement will occur

##### Horizontal mounting (recommended)

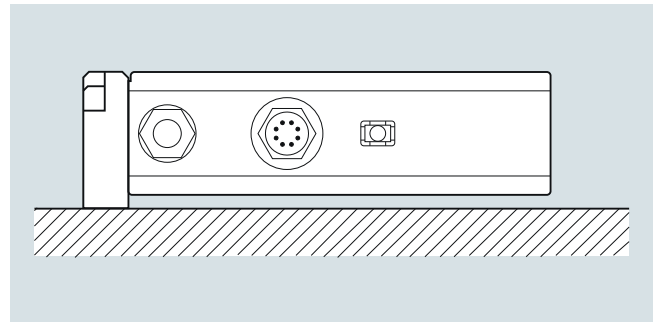

Liquid or gas (low to high flow)

##### Vertical mounting

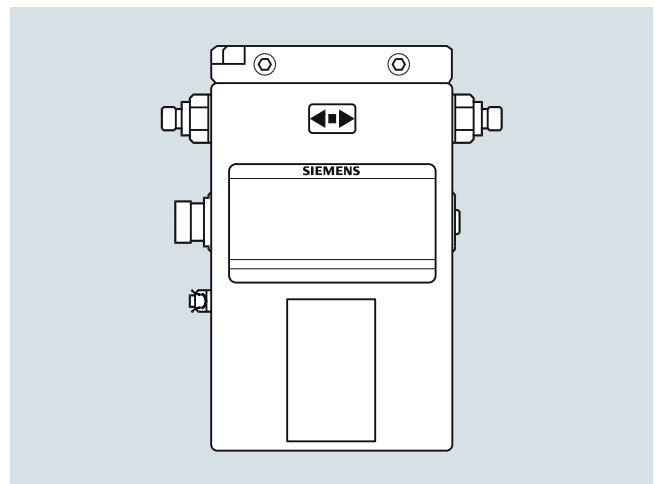

Liquid or gas (medium to high flow)

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### SITRANS FC MASS 2100 and FC300 DN 4 sensors

#### Technical specifications

Versions dimensions		DI 1.5 (1/16)	DI 3 (1/8)	DI 6 (¼)	DI 15 (5/8)	FC300 DN 4
<b>Inside pipe diameter</b> (sensor consists of one continuous pipe)	mm (inch)	1.5 (0.06)	3.0 (0.12)	6.0 (0.24)	14.0 (0.55)	SS: 3.5 (0.14) Hast. 3.0 (0.12)
<b>Pipe wall thickness</b>	mm (inch)	0.25 (0.01)	0.5 (0.02)	1.0 (0.04)	1.0 (0.04)	SS: 0.25 (0.0098) Hast. 0.5 (0.0196)
<b>Mass flow measuring range (liquids)</b>	kg/h (lb/h)	0 ... 30 (0 ... 66)	0 ... 250 (0 ... 550)	0 ... 1 000 (0 ... 2 200)	0 ... 5 600 (0 ... 12 345)	0 ... 350 (0 ... 772)
<b>Density (for liquids)</b>	g/cm <sup>3</sup> (lb/inch <sup>3</sup> )	0 ... 2.9 (0 ... 0.10)	0 ... 2.9 (0 ... 0.10)	0 ... 2.9 (0 ... 0.10)	0 ... 2.9 (0 ... 0.10)	0 ... 2.9 (0 ... 0.10)
<b>Fraction e.g.</b>	°Brix	0 ... 100	0 ... 70 (applicable temperature range: 10 ... 99 °C (50 ... 210.2 °F))	0 ... 70 (applicable temperature range: 10 ... 99 °C (50 ... 210.2 °F))	0 ... 70 (applicable temperature range: 10 ... 99 °C (50 ... 210.2 °F))	0 ... 100

#### Temperature

Media temperature	°C (°F)	-50 ... +180 °C (-58 ... +356 °F)	-50 ... +180 °C (-58 ... +356 °F)	-50 ... +180 °C (-58 ... +356 °F)	-50 ... +180 °C (-58 ... +356 °F)	-40 ... 115 (40 ... 239) -40 ... 180 (40 ... 356)
Ambient temperature	°C (°F)	-20 ... +50 °C (-4 ... +122 °F)	-20 ... +50 °C (-4 ... +122 °F)	-20 ... +50 °C (-4 ... +122 °F)	-20 ... +50 °C (-4 ... +122 °F)	-20 ... +50 °C (-4 ... +122 °F)

#### Liquid pressure measuring pipe<sup>1)</sup>

Stainless steel	bar (psi)	230 (3 336)	230 (3 336)	265 (3 844)	130 (1 885)	130 (1 885)
Hastelloy C22/2.4602	bar (psi)	365 (5 294)	350 (5 076)	410 (5 946)	200 (2 900)	410 (5 945)

#### Materials

Measuring pipe, flange and thread connection		Stainless steel AISI 316L/1.4435 Hastelloy C22/2.4602				
--	--	--	--	--	--	--

#### Enclosure and enclosure material

IP67 (NEMA 4) and stainless steel AISI 326L/1.4404  
**The housing is not rated for pressure containment**

#### Process connections<sup>2)</sup>

Flange				DN 10	DN 15	
• DIN 1092-1, PN 40				½"	½"	
• ANSI B16.5, Class 150				½"	½"	
• ANSI B16.5, Class 600 (Class 300)						
Dairy (screwed connection, PN 16/25/40) <sup>3)</sup>				DN 10	DN 15	
• DIN 11851				25 mm	25 mm	
• ISO 2853/BS 4825 part 4 (SS3351)						
Dairy clamp connection (PN 16) <sup>3)</sup>				25 mm	25 mm	
• ISO 2853/BS 4825 part 3 (SS3016)						
Thread						
• ISO 228/1, PN 100		G¼" male	G¼" female	G¼" male	G½" male	G¼" male
• ANSI/ASME B1.20.1, PN 100		¼" NPT male	¼" NPT female	¼" NPT male	½" NPT male	¼" NPT male

#### Ex-version (sensor)

• ATEX, IECEx, EAC Ex		Zone 0: Ex ia IIC T3...T6 Ga
• UL (c-UL-us)		Class I, Div. 1: Grp. A, B, C, D
• cCSAus		Class 1 Div 1 or Class 1 Zone1

<sup>1)</sup> Max. at 20 °C (68 °F), DIN 2413, DIN 17457


<sup>2)</sup> Other connections to order, see "Selection and Ordering data"

<sup>3)</sup> Material, AISI 316/1.4401 or corresponding


For accuracy specification see "System information SITRANS FC".

**Technical specifications** (continued)


Pressure drop MASS 2100

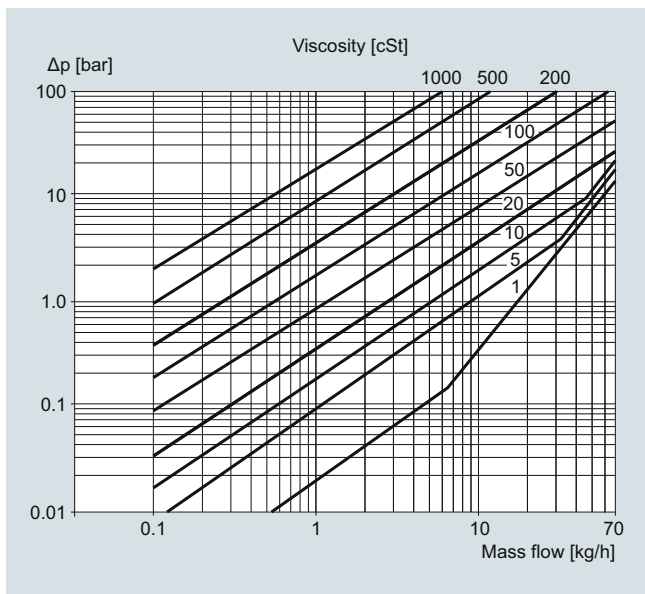


MASS 2100 DI 1.5 (1/16"), pressure drop for density = 1 000 kg/m<sup>3</sup>

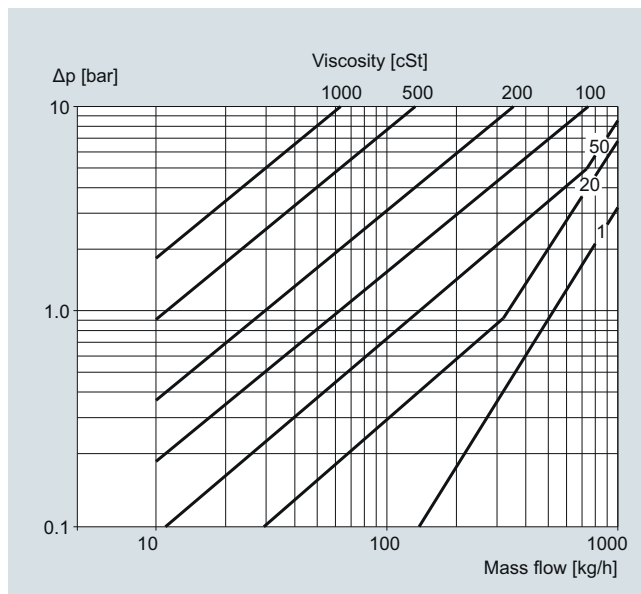

MASS 2100 DI 6 (1/4"), pressure drop for density = 1 000 kg/m<sup>3</sup>

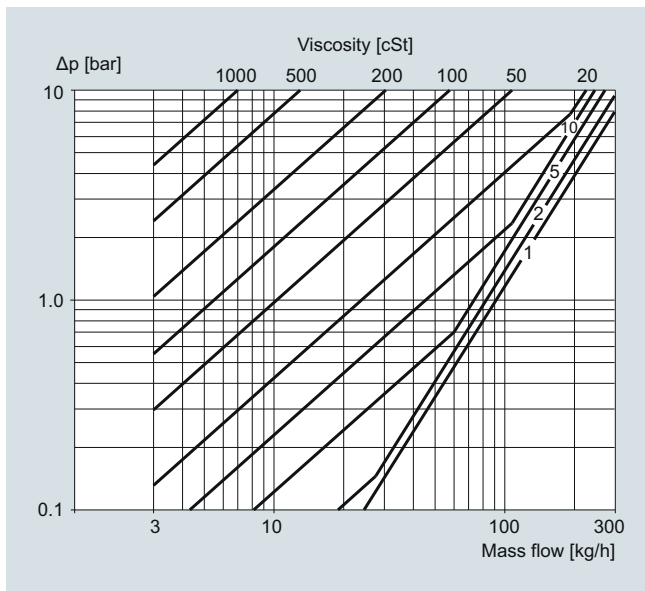

MASS 2100 DI 3 (1/8"), pressure drop for density = 1 000 kg/m<sup>3</sup>

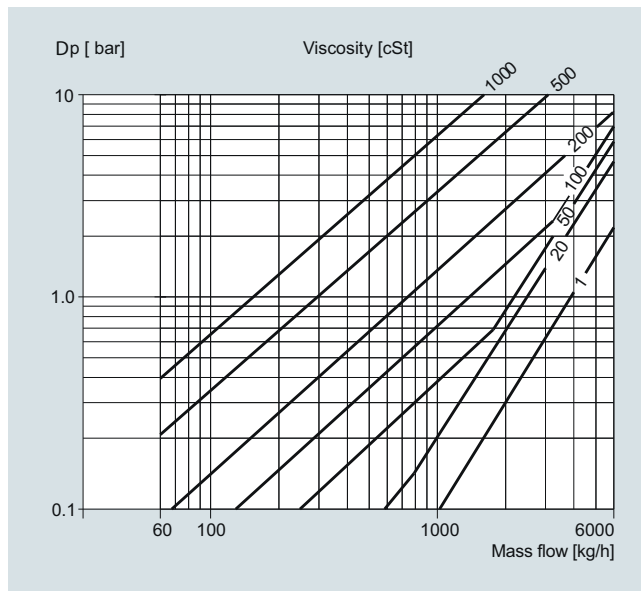

MASS 2100 DI 15 (1/2"), pressure drop for density = 101 500 kg/m<sup>3</sup>

## Flow Measurement



SITRANS FC (Coriolis)

Sensors and Flowmeter systems



### SITRANS FC MASS 2100 and FC300 DN 4 sensors

#### Technical specifications (continued)

#### Pressure drop FC300 DN4

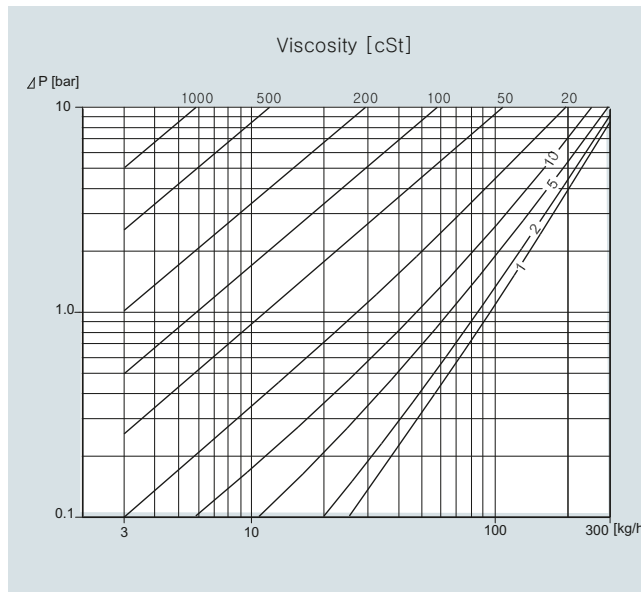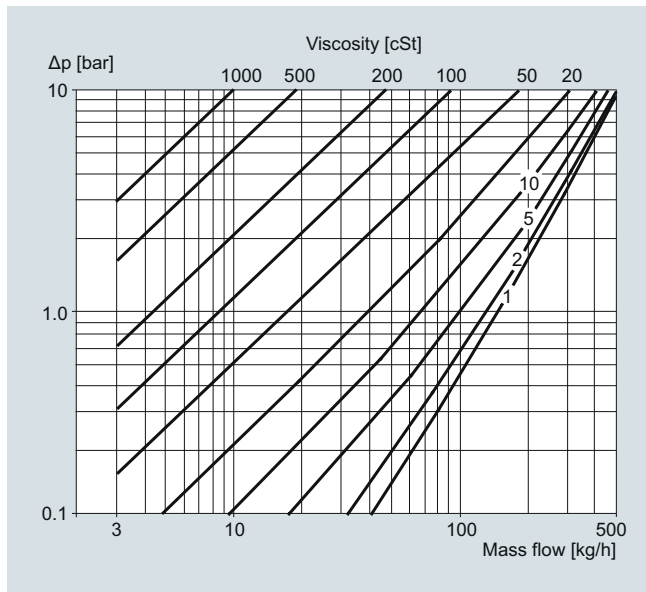


#### Pressure/temperature curves MASS 2100 DI 3 ... 15

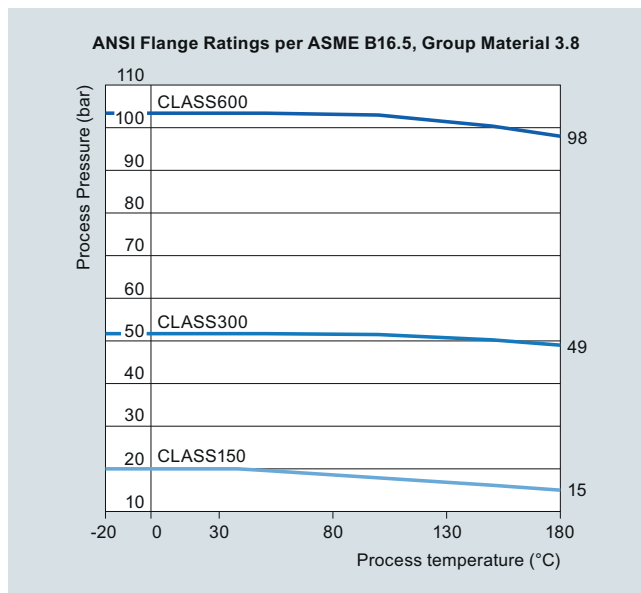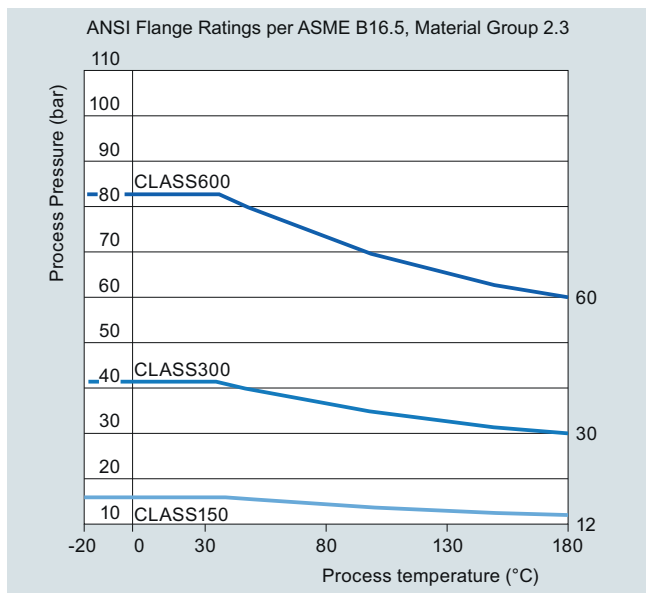





**Technical specifications** (continued)

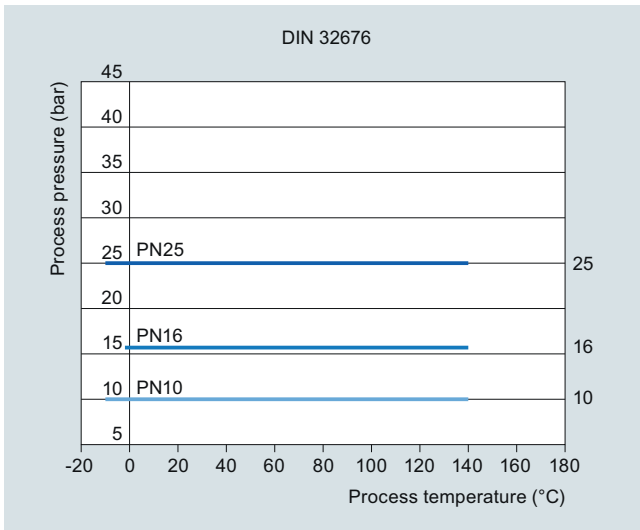


DIN 32676 flanges stainless steel (PN 10 ... PN 25)

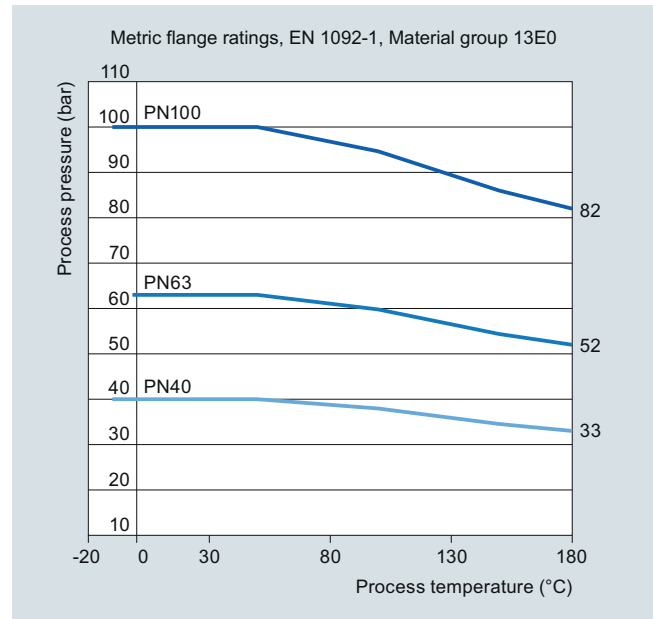

EN 1092 flanges stainless steel (PN 40 ... PN 100)

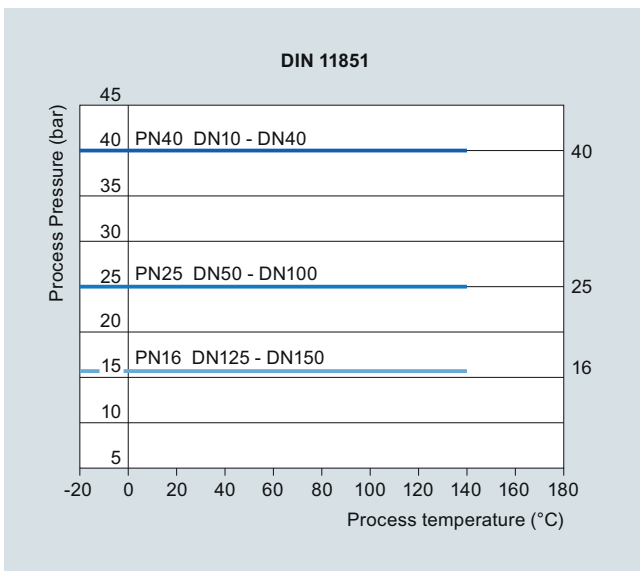

DIN 11851 flanges stainless steel (PN 25 ... PN 40)

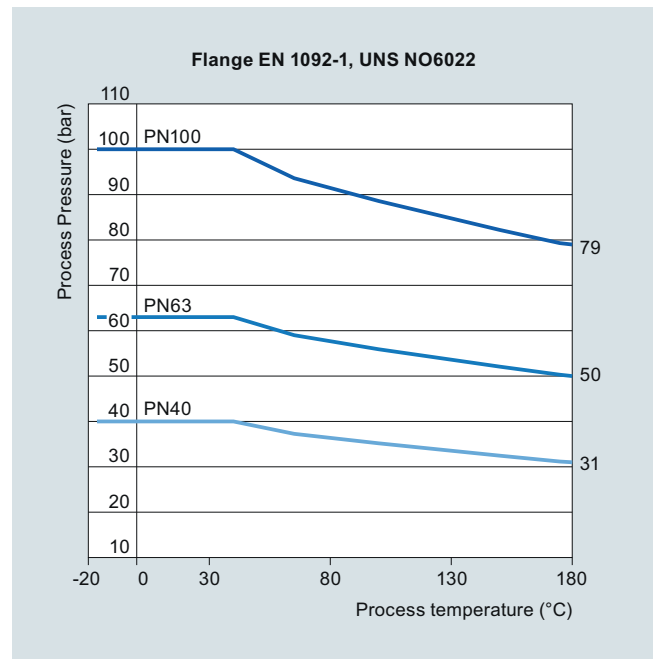

EN 1092 flanges Hastelloy C22/2.4602 (PN 40 ... PN 100)

## Flow Measurement


SITRANS FC (Coriolis)

Sensors and Flowmeter systems


### SITRANS FC MASS 2100 and FC300 DN 4 sensors

#### Technical specifications (continued)

3

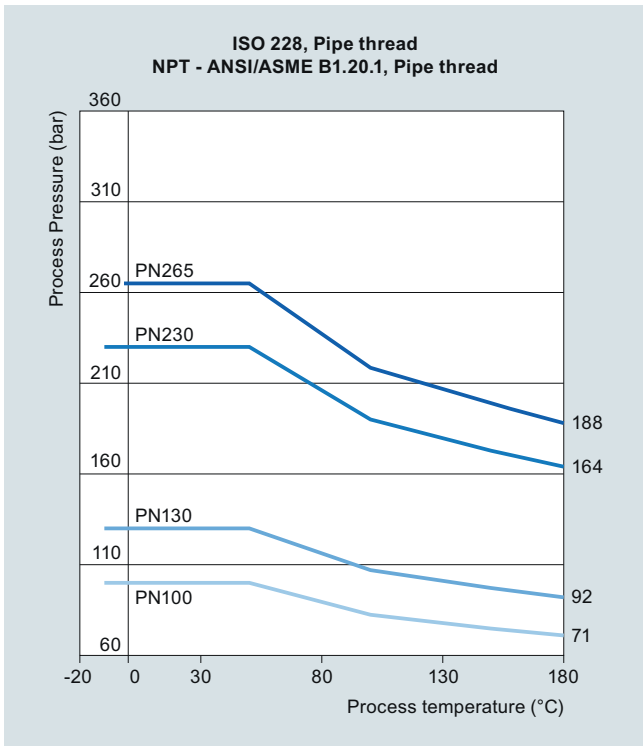

ISO 228 and NPT pipe thread stainless steel (PN 100 ... PN 265)

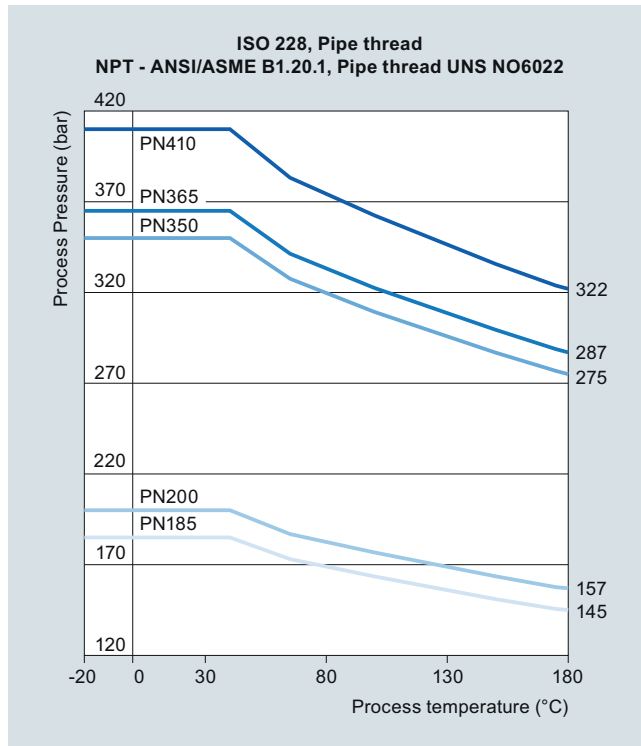


ISO 218 and NPT pipe thread stainless steel (PN 185 ... PN 410)

For further information on the PED standard and requirements, see the pressure equipment directives 2014/68/EU.


**Dimensional drawings**

MASS 2100 DI 1.5 (1/16")

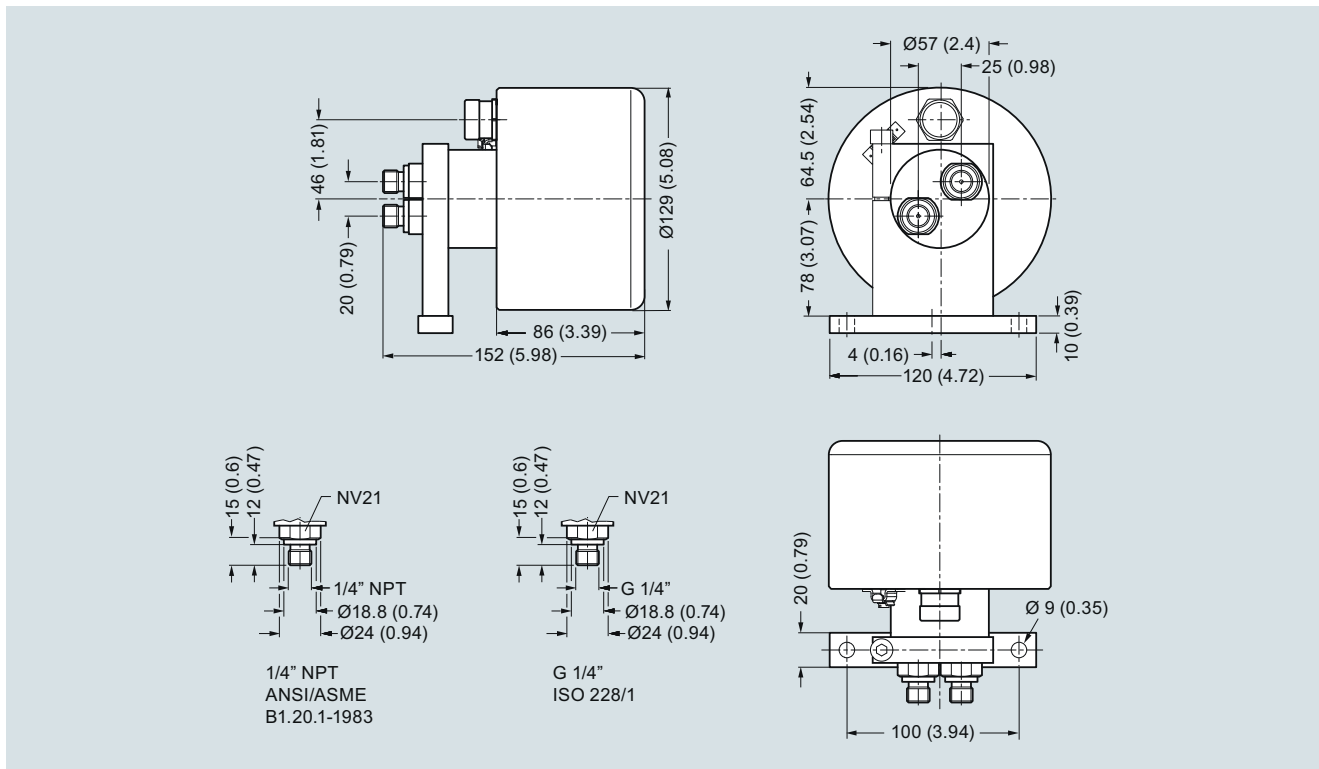

Dimensions in mm (inch)

MASS 2100 DI 1.5 High-temperature version to 180 °C (356 °F)

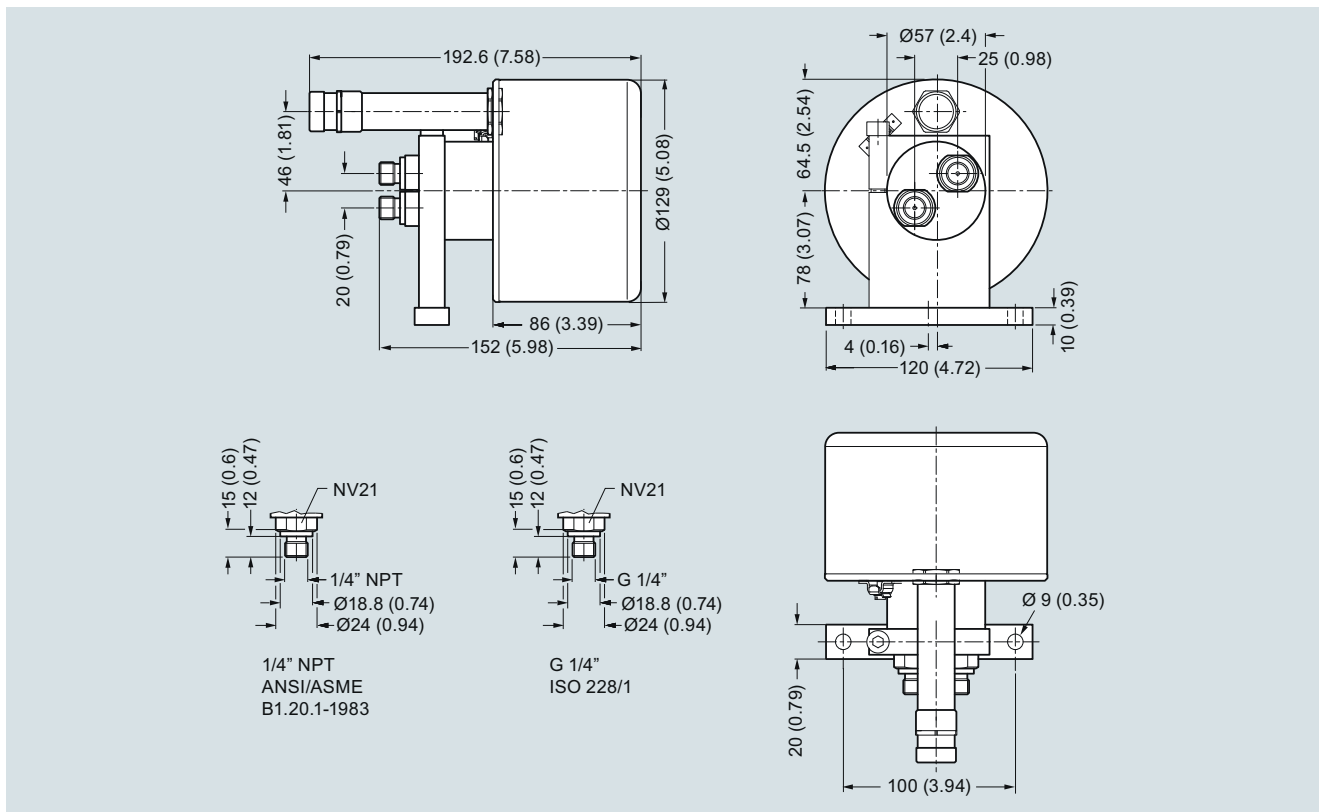

Dimensions in mm (inch)

## Flow Measurement

SITRANS FC (Coriolis)


Sensors and Flowmeter systems

### SITRANS FC MASS 2100 and FC300 DN 4 sensors

#### Dimensional drawings (continued)

#### SITRANS FC300 DN 4


3

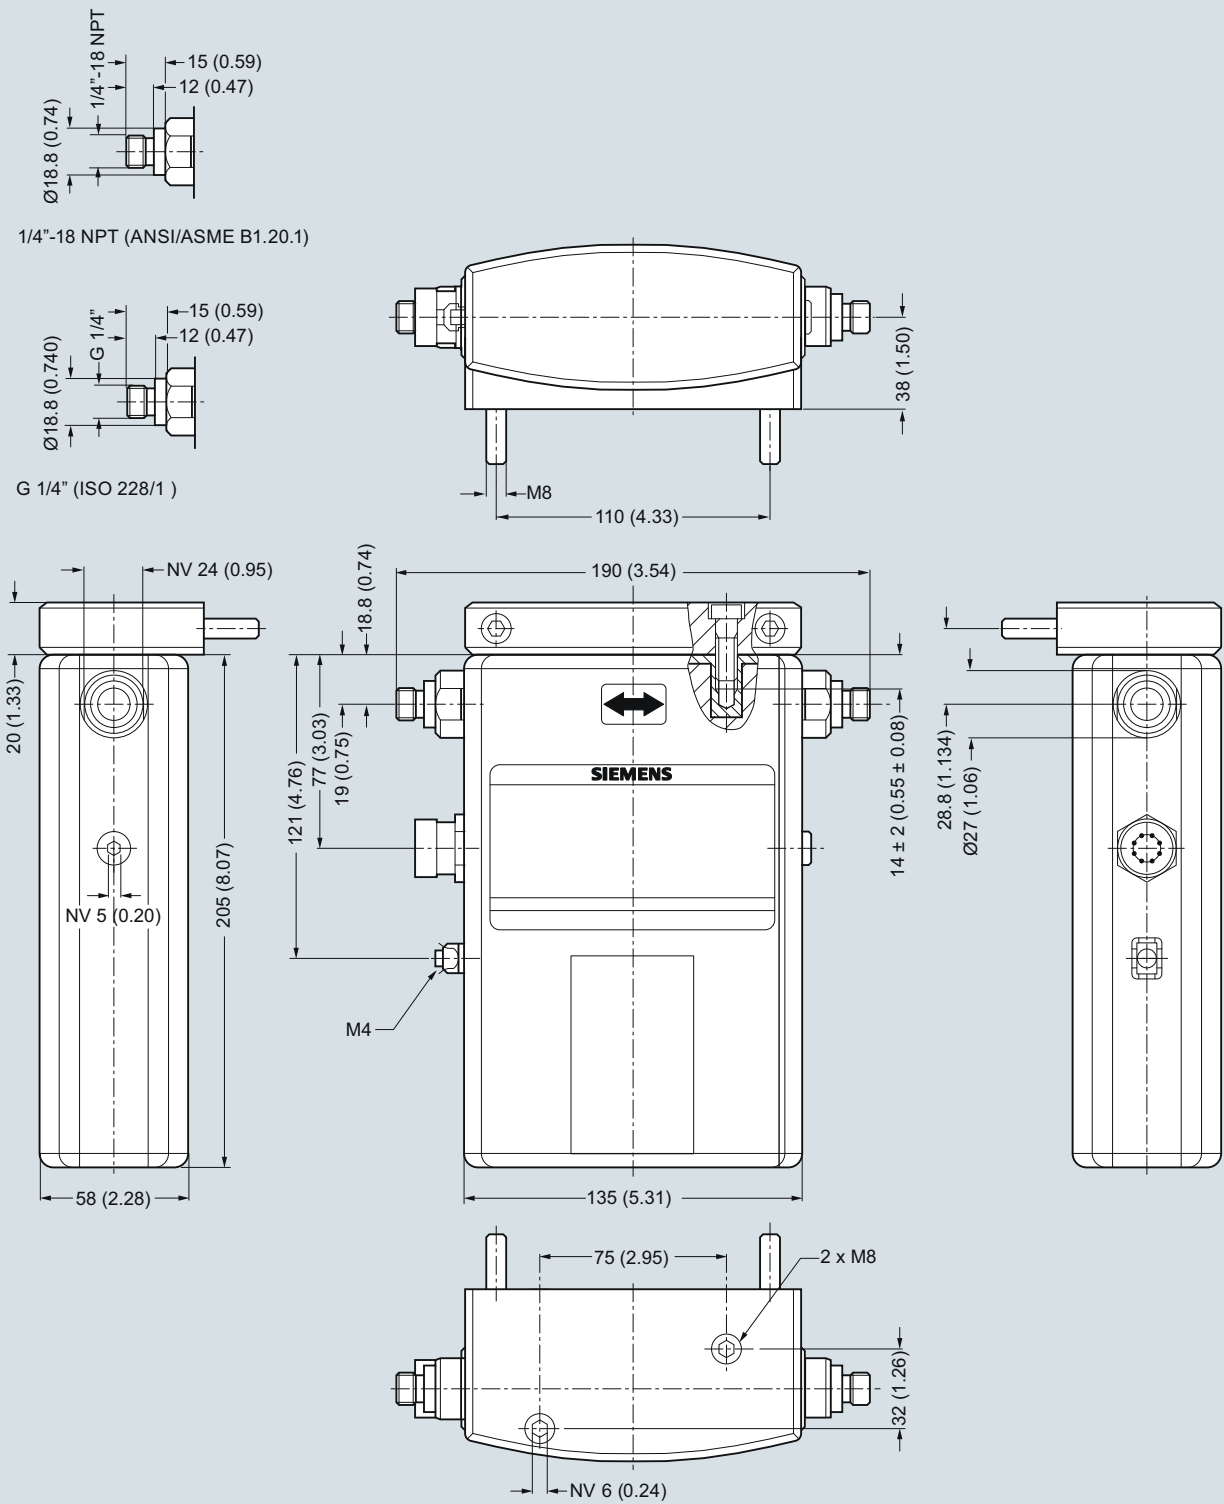

SITRANS FC300, weight 3.5 kg (7.7 lb), dimensions in mm (inch)

#### Dimensional drawings (continued)

##### MASS 2100 sensor for analog cable connection

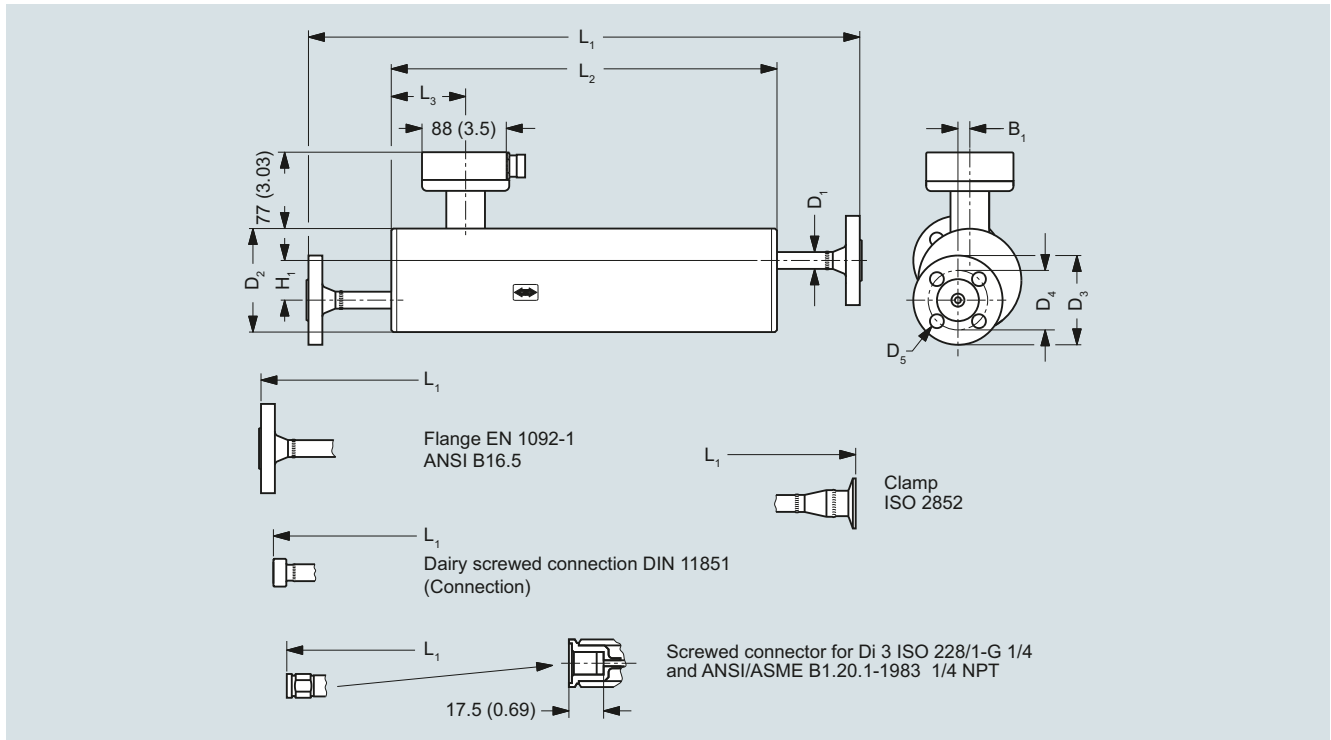

Dimensions in mm (inch)

Sensor size	Connections			L1	L2	L3	H1	B1	D1	D2	D3	D4	D5
DI (inch)	Type	Pressure rating	Size	mm (inch)									
DI 3 (1/8)	Pipe thread ISO 228/1 - G $\frac{1}{4}$ (female)	PN 100	$\frac{1}{4}$ "	470 (18.50)	280 (11.02)	75.5 (2.97)	60 (2.36)	0	21.3 (0.84)	104 (4.09)	-	-	-
		PN 230	$\frac{1}{4}$ "	470 (18.50)	280 (11.02)	75.5 (2.97)	60 (2.36)	0	21.3 (0.84)	104 (4.09)	-	-	-
		PN 350	$\frac{1}{4}$ "	470 (18.50)	280 (11.02)	75.5 (2.97)	60 (2.36)	0	21.3 (0.84)	104 (4.09)	-	-	-
	Pipe thread ANSI/ASME B 1.20.1 - $\frac{1}{4}$ " NPT (female)	PN 100	$\frac{1}{4}$ "	470 (18.50)	280 (11.02)	75.5 (2.97)	60 (2.36)	0	21.3 (0.84)	104 (4.09)	-	-	-
		PN 230	$\frac{1}{4}$ "	470 (18.50)	280 (11.02)	75.5 (2.97)	60 (2.36)	0	21.3 (0.84)	104 (4.09)	-	-	-
		PN 350	$\frac{1}{4}$ "	470 (18.50)	280 (11.02)	75.5 (2.97)	60 (2.36)	0	21.3 (0.84)	104 (4.09)	-	-	-

## Flow Measurement

SITRANS FC (Coriolis)

Sensors and Flowmeter systems

### SITRANS FC MASS 2100 and FC300 DN 4 sensors

#### Dimensional drawings (continued)

Sensor size	Connections			L1	L2	L3	H1	B1	D1	D2	D3	D4	D5
	DI (inch)	Type	Pressure rating	Size	mm (inch)								
DI 6 (1/4)	Pipe thread ISO 228/1 - G1/4 (male)	PN 100	1/4"	564 (22.20)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	-	-	-
		PN 265	1/4"	564 (22.20)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	-	-	-
		PN 410	1/4"	564 (22.20)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	-	-	-
	Pipe thread ANSI/ASME B 1.20.1 - 1/4" NPT (male)	PN 100	1/4"	564 (22.20)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	-	-	-
		PN 265	1/4"	564 (22.20)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	-	-	-
		PN 410	1/4"	564 (22.20)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	-	-	-
Flange EN 1092-1	PN 40	DN 10	562 (22.13)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	90	60	14	
		DN 15	640 (25.20)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	90	60	14	
	PN 100	DN 10	582 (22.91)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	100	70	14	
		DN 15	653 (25.71)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	100	70	14	
Flange ANSI B16.5	Class 150	1/2"	627 (24.69)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	88.9	60.5	15.7	
		3/4"	672 (26.46)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	88.9	60.5	15.7	
	Class 600	1/2"	610 (24.02)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	95.3	66.5	15.7	
		3/4"	695 (27.36)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	95.3	66.5	15.7	
Screwed connection DIN 11851	PN 40	DN 10	534 (21.02)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	-	-	-	
		DN 15	574 (22.60)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	-	-	-	
Clamp ISO 2852	PN 16	25 mm	572 (22.52)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	-	-	-	
Hygienic screwed ISO 2853		DN 25	575 (22.64)	390 (15.35)	62 (2.44)	40 (1.57)	12 (0.47)	17 (0.67)	104 (4.09)	-	-	-	

#### SITRANS FC MASS 2100 and FC300 DN 4 sensors

#### Dimensional drawings (continued)

Sensor size	Connections			L1	L2	L3	H1	B1	D1	D2	D3	D4	D5
	DI (inch)	Type	Pressure rating										
DN 15 (½)	Pipe thread ISO 228/1 – G½ (male)	PN 100	½"	618 (24.33)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	-	-	-
		PN 130	½"	618 (24.33)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	-	-	-
		PN 200	½"	618 (24.33)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	-	-	-
	Pipe thread ANSI/ASME B 1.20.1 – ½" NPT (male)	PN 100	½"	618 (24.33)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	-	-	-
		PN 130	½"	618 (24.33)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	-	-	-
		PN 200	½"	618 (24.33)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	-	-	-
Flange EN 1092-1	PN 40	DN 15		622 (24.49)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	95	65	14
		DN 25		724 (28.50)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	95	65	14
	PN 100	DN 15		635 (25.00)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	105	75	14
		DN 25		760 (29.92)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	105	75	14
Flange ANSI B16.5	Class 150	½"		641 (25.24)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	88.9	60.5	15.7
		¾"		719 (25.24)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	88.9	60.5	15.7
	Class 600	½"		661 (26.02)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	95.3	66.5	15.7
		¾"		742 (29.21)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	95.3	66.5	15.7
Screwed connection DIN 11851	PN 40	DN 15		588 (23.15)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	-	-	-
		DN 25		674 (26.54)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	-	-	-
Clamp ISO 2852	PN 16	DN 25		626 (24.65)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	-	-	-
Hygienic screwed ISO 2853		DN 25		629 (24.76)	444 (17.48)	75 (2.97)	44 (1.73)	20 (0.79)	21.3 (0.84)	129 (5.08)	-	-	-

<sup>1)</sup> For Hastelloy L1 is 628 mm (24.72 inch)

## Flow Measurement

SITRANS FC (Coriolis)


Sensors and Flowmeter systems

### SITRANS FC MASS 2100 and FC300 DN 4 sensors

#### Dimensional drawings (continued)


#### Compact with FCT030

3

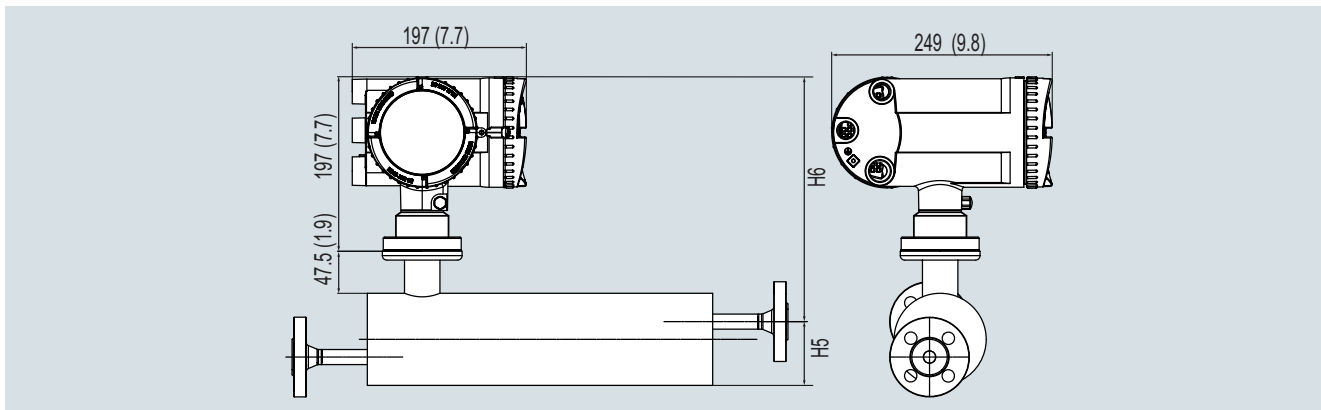


Dimensions in mm (inch)

#### Transmitter FCT030 remote field mount for M20 analog cable connection

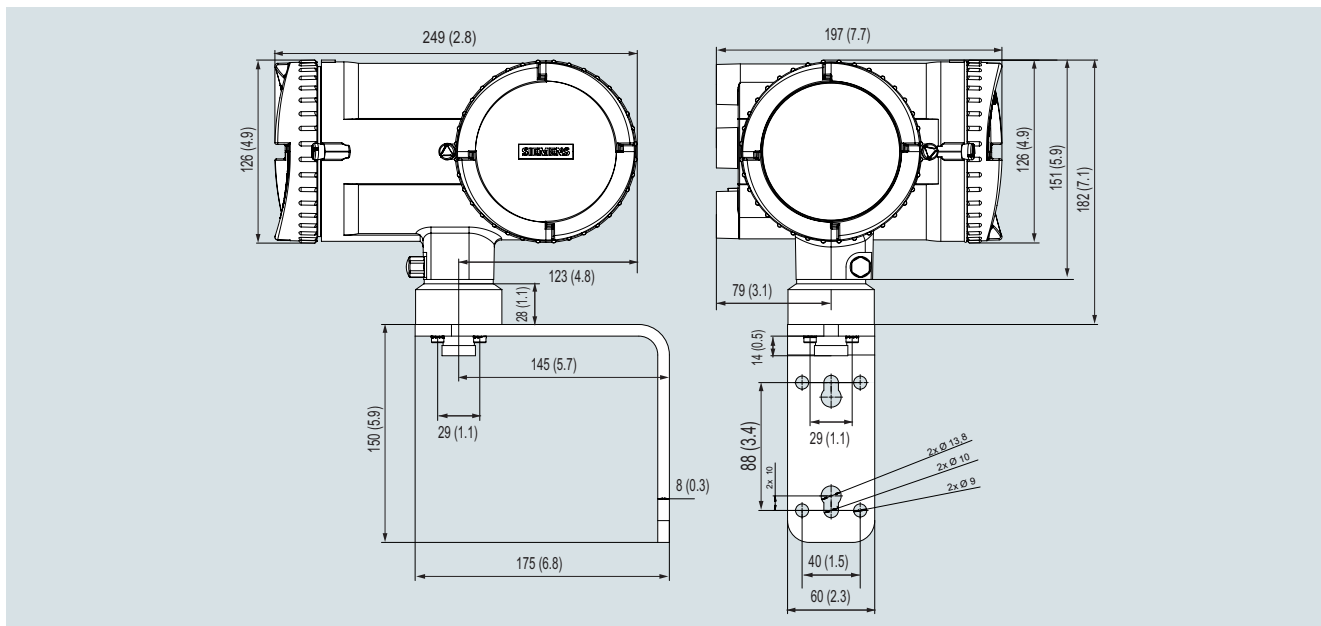

Dimensions in mm (inch)

#### Compact with FCT010

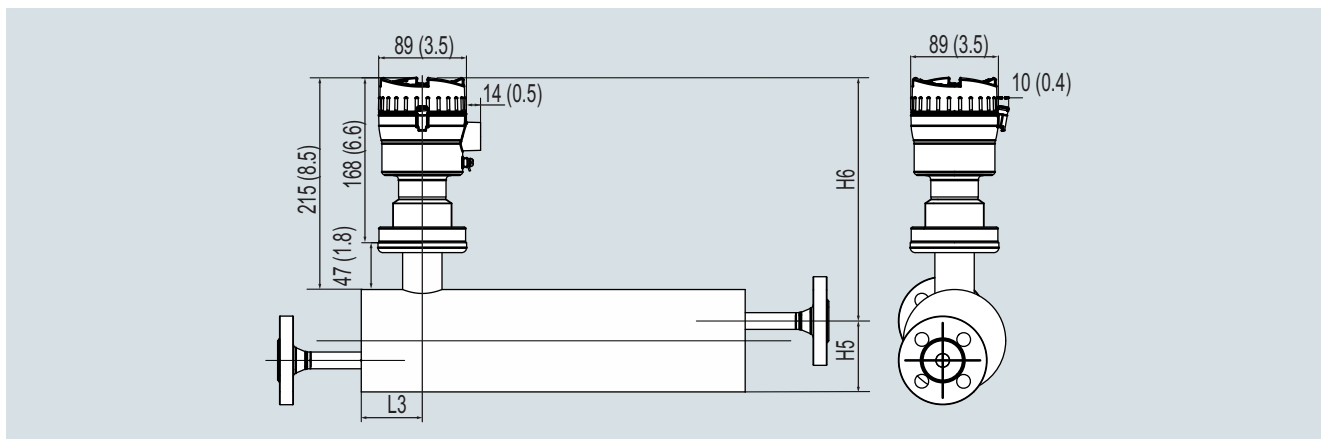

Dimensions in mm (inch)




#### Dimensional drawings (continued)

##### MASS 2100 with FCT010 transmitter compact


Sensor size	L <sub>3</sub>	H <sub>5</sub>	H <sub>6</sub>	H <sub>5</sub> + H <sub>6</sub>
DI (inch)	mm (inch)			
DI 3 (1/8)	75.5 (2.97)	82 (3.23)	237 (9.33)	319 (12.56)
DI 6 (1/4)	62 (2.44)	72 (2.83)	247 (9.72)	319 (12.56)
DN 15 (1/2)	75 (2.97)	86.5 (3.41)	257 (10.11)	343.5 (13.52)

##### Dimensions for the FCT010 remote mounted (for analogue cable connections for MASS 2100 / FC300 DN4)

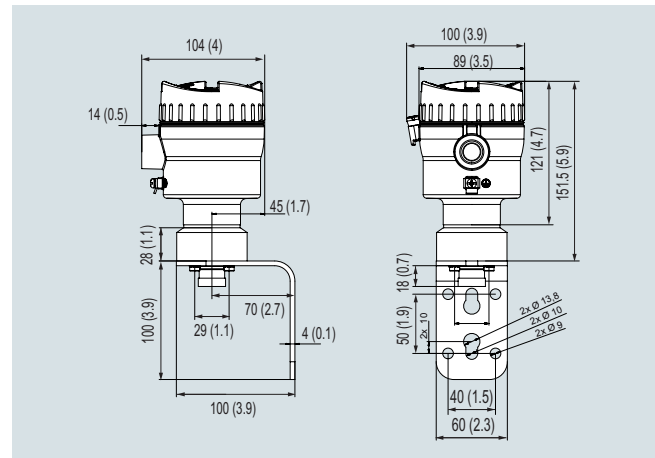

Dimensions in mm (inch)

##### Transmitter FCT030 remote field mount for M12 digital cable connection

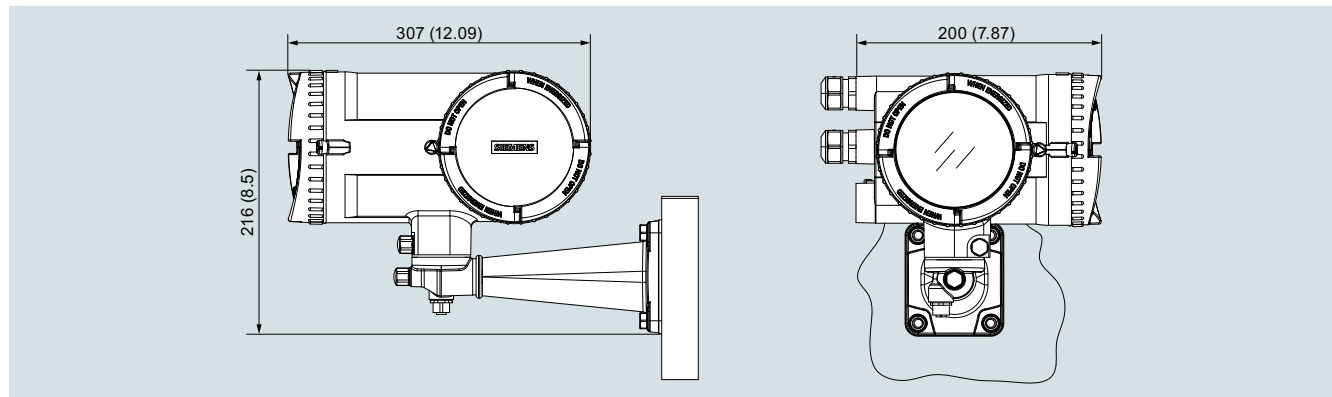

Dimensions in mm (inch)

##### MASS 2100 sensor with "heating jacket"

Sensor size	Connections heated			L <sub>5</sub>	H <sub>3</sub>	B <sub>2</sub>	D <sub>6</sub>	D <sub>7</sub>	D <sub>8</sub>
DI (inch)	Type	Pressure rating	Size	mm (inch)					
DI 3 (1/8)	EN 1092-1	PN 40	DN 15	234 (9.21)	122 (4.8)	22 (0.87)	95 (3.74)	65 (2.56)	14 (0.55)
	ANSI B16.5	Class 150	1/2"	234 (9.21)	131.6 (5.18)	22 (0.87)	88.9 (3.5)	60.5 (2.38)	15.7 (0.62)
DI 6 (1/4)	EN 1092-1	PN 40	DN 15	234 (9.21)	112 (4.41)	22.7 (0.89)	95 (3.74)	65 (2.56)	65 (2.56)
	ANSI B16.5	Class 150	1/2"	234 (9.21)	121.6 (4.79)	22.7 (0.89)	88.9 (3.5)	60.5 (2.38)	60.5 (2.38)
DN 15 (1/2)	EN 1092-1	PN 40	DN 15	234 (9.21)	126.5 (4.98)	31.5 (1.24)	95 (3.74)	65 (2.56)	65 (2.56)
	ANSI B16.5	Class 150	1/2"	234 (9.21)	136.1 (5.36)	31.5 (1.24)	88.9 (3.5)	60.5 (2.38)	60.5 (2.38)

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### MASS 2100 / FC300 DN 4 with FCT030 transmitter

##### Overview



Sensors MASS 2100 and FC300 DN 4 with FCT010 / FCT030 transmitters

The SITRANS MASS 2100 and FC300 DN 4 system consists of a SITRANS sensor and a SITRANS FCT030 transmitter.

The flowmeter comes in a compact and remote design depending for all MASS 2100 DI 3 to DI 15.

MASS 2100 DI 1.5 and FC300 DN4 are only available with analogue connection of the FCT030 transmitter.

The flowmeter is based on the latest developments within digital signal processing technology – engineered for high measuring performance:

- Fast response to rapid changes in flow
- Fast dosing applications
- High immunity against process noise
- High turndown ratio of flowrates
- Suitable for liquid and gas service
- Easy to install, commission and maintain

FCT030 is available with current output HART 7.5, Modbus RS 485 RTU, PROFIBUS DP or PROFIBUS PA as standard on Channel 1. Additional functions can be freely configured for analog, pulse, frequency, relay or status output or binary input.

The transmitter comes with a user-configurable graphical display and SensorFlash, a microSD card for configuration backup, firmware update and data storage.

##### Benefits

- High accuracy better than 0.1 % of mass flow rate
- Large dynamic turn-down ratio better than 500:1
- Densitometer performance available through density accuracy (depending upon sensor size) ranging from 0.0005 to 0.0015 g/cm<sup>3</sup> with a typical repeatability better than 0.0001 to 0.0002 g/cm<sup>3</sup>
- Single continuous tube design, with no internal welds, reductions or flow splitters offers optimal hygiene, safety and CIP cleanability for food and beverage and pharmaceutical applications
- Markets biggest wall thickness, ensuring optimal life-time and corrosion resistance and high-pressure durability
- Balanced pipe design with little mechanical energy-loss, ensures optimal performance and stability under non-ideal and unstable process conditions (pressure, temperature, density-changes etc.)
- Full bore design provides lower pressure loss due to same internal diameter throughout the entire sensor
- 4-wire Pt1000 temperature measurement ensures optimum accuracy on mass flow, density and fraction flow
- Multi-plug electrical connector enables true “plug & play”
- Sensor pipe available in high-quality stainless steel AISI 316L/1.4435 or Hastelloy C22/2.4602 offering optimum corrosion resistance
- Centre-block design decouples process noise from the environment such as vibrations, pulsations, pressure shocks etc. making installation flexible and versatile
- Rugged and space-saving sensor design in stainless steel matching all environments
- High-pressure program as standard

### Technical specifications

Sensors MASS 2100 / FC300 DN 4 with FCT030 transmitter	
<b>Sizes mm ( inch)</b>	MASS 2100 DI 1.5 (1/16) MASS 2100 DI 3 (1/8") MASS 2100 DI 6 (1/4") MASS 2100 DI 15 (1/2") FC300 DN 4 (1/6")
<b>Accuracy</b>	± 0.10 % for liquids additional ±0.40 for gases
<b>Repeatability</b>	± 0.05 %
<b>Flow range Q norm (liquids)</b> (water @ 1 bar pressure loss) (Q <sub>nom</sub> )	
• DI 1.5	19 kg/h (42 lb/h)
• DI 3	90 kg/h (198 lb/h)
• DI 6	500 kg/h (1 102 lb/h)
• DI 15	3 800 kg/h (8 370 lb/h)
• DN 4	140 kg/h (308 lb/h)
<b>Architecture</b>	Compact: DI 3, DI 6, DI 15 Remote digital: DI 3, DI 6, DI 15 Remote analogue: DI 1.5, DI 3, DI 6, DI 15, DN 4
Display	Full graphical display, 240 × 160 pixels with selection of 6 languages
Power supply	20 ... 90 V DC ± 10 %; 100 ... 240 V AC ± 10 %, 47 ... 63 Hz ± 10 %
<b>Material</b>	
• Sensor	
- Wetted parts	316L stainless steel or Hastelloy C 22
- Enclosure	316L stainless steel
• Transmitter	Aluminum with corrosion-resistant coating Class C4
<b>Enclosure rating</b>	IP67 <sup>1)</sup>
<b>Pressure ratings</b>	
• Measuring tubes	
- 316L	Up to 265 bar (3 844 psi), depending on size and process connection
- Nickel Alloy C4	Up to 410 bar (5 945 psi), depending on size and process connection
• Sensor enclosure	No pressure containment
Temperature ratings	
• Process medium	-50 ... +180 °C (-58 ... +356 °F)
• Ambient	-20 ... +50 °C (-4 ... +122 °F) <sup>1)</sup>

Sensors MASS 2100 / FC300 DN 4 with FCT030 transmitter	
<b>Process connections (depending on size and pressure rating)</b>	
• Flanges	EN 1092-1 B1, ANSI/ASME B16.5
• Pipe threads	ASME B1.20 (NPT), ISO 228
• Hygienic threads	DIN 11851, ISO 2853/BS 4825 part 4 (SS3016)
• Hygienic clamps	ISO Clamp 2852
<b>Approvals</b>	
• Hazardous area	ATEX, IECEx, EAC Ex, CSA, cCSAus, EAC
• Pressure equipment	PED
<b>NAMUR</b>	NAMUR-compliant (e.g. NE 21, NE 41, NE 107 and NE 132)
<b>I/O</b>	Up to 4 channels combining analog, relay or digital outputs and binary input
<b>Communication</b>	HART PROFIBUS PA PROFIBUS DP Modbus RTU (RS 485)
<b>EMC performance</b>	
• Emission	EN 55011/CISPR-11 (Class A)
• Immunity	EN/IEC 61326-1 (Industry)
<b>Mechanical load</b>	18 ... 1 000 Hz random The flow meter will mechanically tolerate 3.17 g RMS in all directions. Flow accuracy cannot be guaranteed under all conditions.

<sup>1)</sup> If operating outdoors, avoid direct sunlight, particularly in warm climatic regions.

## Flow Measurement

SITRANS FC (Coriolis)

Sensors and Flowmeter systems

### MASS 2100 / FC300 DN 4 with FCT030 transmitter

#### Selection and ordering data

#### Article No.

#### Article No.

SITRANS FC sensors MASS 2100/FC300 with FCT030 transmitter

7ME4813- Ord. code

SITRANS FC sensors MASS 2100/FC300 with FCT030 transmitter

7ME4813- Ord. code

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Sensor type and connector size

MASS 2100 DI 1.5, 1/4"	1 G
MASS 2100 DI 3, 1/4"	3 A
MASS 2100 DI 3, 1/4" Heated w. DIN	3 B
MASS 2100 DI 3, 1/4" Heated w. ANSI	3 C
FC300 DN 4, 1/4"	4 A
MASS 2100 DI 6, 1/4"	6 A
MASS 2100 DI 6, 1/4" Heated w. EN	6 B
MASS 2100 DI 6, 1/4" Heated w. ANSI	6 C
MASS 2100 DI 6, DN 10	6 D
MASS 2100 DI 6, DN 10 Heated w. EN	6 E
MASS 2100 DI 6, DN 10 Heated w. ANSI	6 F
MASS 2100 DI 6, DN 15 (1/2")	6 G
MASS 2100 DI 6, DN 15 (1/2") Heated w. EN	6 H
MASS 2100 DI 6, DN 15 (1/2") Heated w. ANSI	6 J
MASS 2100 DI 6, DN 20 (3/4")	6 K
MASS 2100 DI 6, DN 20 (3/4") Heated w. EN	6 L
MASS 2100 DI 6, DN 20 (3/4") Heated w. ANSI	6 M
MASS 2100 DI 6, DN 25 (1")	6 N
MASS 2100 DI 6, DN 25 (1") Heated w. EN	6 P
MASS 2100 DI 6, DN 25 (1") Heated w. ANSI	6 Q
MASS 2100 DI 15, DN 15 (1/2")	7 A
MASS 2100 DI 15, DN 15 (1/2") Heated w. EN	7 B
MASS 2100 DI 15, DN 15 (1/2") Heated w. ANSI	7 C
MASS 2100 DI 15, DN 20 (3/4")	7 D
MASS 2100 DI 15, DN 20 (3/4") Heated w. EN	7 E
MASS 2100 DI 15, DN 20 (3/4") Heated w. ANSI	7 F
MASS 2100 DI 15, DN 25 (1")	7 G
MASS 2100 DI 15, DN 25 (1") Heated w. EN	7 H
MASS 2100 DI 15, DN 25 (1") Heated w. ANSI	7 J

#### Process connection/Pressure

No connections (spare part transmitter)	A 0
EN 1092-1 B1, PN 40	A 1
EN 1092-1 B1, PN 100	A 3
ASME B16.5, RF, Class 150	D 1
ASME B16.5, RF, Class 600	D 3
DIN 11851 crewed connection	F 1
ISO 2852 hygienic clamped	J 1
ISO 2853 hygienic screwed	J 5
ISO 228-1 pipe thread, PN 100	C 1
ISO 228-1 pipe thread, PN 130	C 2
ISO 228-1 pipe thread, PN 200	C 3
ISO 228-1 pipe thread, PN 230	C 4
ISO 228-1 pipe thread, PN 265	C 5
ISO 228-1 pipe thread, PN 350	C 6
ISO 228-1 pipe thread, PN 365	C 7
ISO 228-1 pipe thread, PN 410	C 8
NPT ASME B 1.20.1 pipe thread, PN 100	N 1
NPT ASME B 1.20.1 pipe thread, PN 130	N 2
NPT ASME B 1.20.1 pipe thread, PN 200	N 3
NPT ASME B 1.20.1 pipe thread, PN 230	N 4
NPT ASME B 1.20.1 pipe thread, PN 265	N 5
NPT ASME B 1.20.1 pipe thread, PN 350	N 6
NPT ASME B 1.20.1 pipe thread, PN 365	N 7
NPT ASME B 1.20.1 pipe thread, PN 410	N 8

#### Tube material (wetted) and max. operational temperature

AISI 316L/EN 1.4435, max. 115 °C	1
AISI 316L/EN 1.4435, max. 125 °C	2
AISI 316L/EN 1.4435, max. 180 °C	3
Hastelloy C22/UNS N06022/EN 2.4602, max. 115 °C	5
Hastelloy C22/UNS N06022/EN 2.4602, max. 125 °C	6
Hastelloy C22/UNS N06022/EN 2.4602, max. 180 °C	7

#### Calibration

Mass flow calibration 2 flow x 2 points	1
Mass flow calibration 2 flow x 2 points + density calibration	4
Standard fraction (selectable by menu) incl density calibration	8
Individual fraction (on demand)	9

N O Y

Selection and ordering data	Article No.	Order code
<b>SITRANS FC sensors MASS 2100/FC300 with FCT030 transmitter</b>	<b>7ME4813-</b>	<b>Ord. code</b>
<b>Mounting style, transmitter housing and material</b>		
Compact mounted, IP67, Aluminium transmitter housing (DI 3, DI 6 and DI 15 )	<b>D</b>	
Remote field mounted, IP67, Aluminium housing, M12 socket for digital cable connection (DI 3, DI 6 and DI 15 only)	<b>G</b>	
Remote field mount, IP67, Aluminium housing, terminal box for digital cable connection (DI 3, DI 6 and DI 15)	<b>K</b>	
Wall mount aluminum transmitter housing, M12 socket for digital cable connection (DI 3, DI 6 and DI 15 )	<b>U</b>	
Remote field mount, IP67, Aluminium transmitter housing, analog cable connection with M20 connectors	<b>Z</b>	<b>P O D</b>
Remote wall mount, IP67, aluminum transmitter housing, analog cable connection with M20 connectors	<b>Z</b>	<b>P O E</b>
<b>Ex approvals</b>		
Non-Ex		
ATEX Zone 1 / 21		
IECEx Zone 1 / 21 (in preparation)		
USA (FM, CSA, UL), Zone 1/Div 1	<b>A</b>	
Canada (CSA, UL), Zone 1/Div 1	<b>C</b>	
EAC Zone 1 / 21	<b>F</b>	
	<b>H</b>	
	<b>M</b>	
	<b>U</b>	
<b>Local User Interface</b>		
Blind		<b>1</b>
Graphical, 240 x 160 pixels, glass lid		<b>3</b>
<b>Further designs</b>		
Please add "-Z" to Article No. and specify Order code(s).		
<b>Cable glands</b>		
None (mechanical sensor)		<b>A00</b>
Metric, no glands		<b>A01</b>
Metric, plastic		<b>A02</b>
Metric, brass/Ni plated		<b>A05</b>
Metric, stainless steel		<b>A06</b>
NPT, no glands		<b>A11</b>
NPT, plastic		<b>A12</b>
NPT, brass/Ni plated		<b>A15</b>
NPT, stainless steel		<b>A16</b>
Integral M12 socket		<b>A20</b>
<b>SW functions &amp; CT approvals</b>		
Standard		<b>B11</b>
<b>I/O configuration Ch1</b>		
None (replacement sensor)		<b>E00</b>
4 ... 20 mA, HART, active/passive output (non-Ex)		<b>E02</b>
4 ... 20 mA, HART, active Ex		<b>E06</b>
4 ... 20 mA, HART, passive Ex		<b>E07</b>
PROFIBUS PA		<b>E10</b>
PROFIBUS DP		<b>E11</b>
Modbus RTU RS 485 (none-Ex)		<b>E14</b>
<b>I/O configuration Ch2, Ch3 and Ch4</b>		
None		<b>F00</b>
Non Ex: Sig O, None, None		<b>F01</b>
Non Ex: Sig O, Sig I/O, None		<b>F02</b>
Non Ex: Sig O, Sig I/O, Sig I/O		<b>F03</b>
Non Ex: Sig O, Sig I/O, R		<b>F04</b>
Non Ex: Sig O, R, R		<b>F05</b>
Non Ex: Sig O, R, None		<b>F06</b>
Ex: pSig O, None, None		<b>F11</b>
Ex: pSig O, pSig I/O, None		<b>F12</b>
Ex: pSig O, pSig I/O, pSig I/O		<b>F13</b>
Ex: pSig O, pSig I/O, R		<b>F14</b>
Ex: pSig O, R, R		<b>F15</b>
Ex: pSig O, R, None		<b>F16</b>
Ex: aSig O, None, None		<b>F21</b>
Ex: aSig O, aSig I/O, None		<b>F22</b>
Ex: aSig O, aSig I/O, aSig I/O		<b>F23</b>
Ex: aSig O, aSig I/O, R		<b>F24</b>
Ex: aSig O, R, R		<b>F25</b>
Ex: aSig O, R, None		<b>F26</b>

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### MASS 2100 / FC300 DN 4 with FCT030 transmitter

#### Selection and ordering data

#### Order code

##### Further designs

Please add "-Z" to Article No. and specify Order code(s).

##### Certificates

Press test certificate CRN	<b>C01</b>
Press test certificate PED	<b>C02</b>
Material certificate EN 10204-3.1	<b>C12</b>
Welding inspection report	<b>C13</b>
Factory certificate according to EN 10204 2.2	<b>C14</b>
Factory certificate according to EN 10204 2.1	<b>C15</b>
Cleaning for oil and grease/ASTM-A380	<b>C50</b>

##### Sensor data storage

Sensor with SensorFlash for FCT	<b>S20</b>
Sensor with SensorProm for MASS 6000 (in preparation)	<b>S21</b>

##### SD-Card accessibility via USB

(not allowed in USA by Patent)

Mass storage enabled	<b>S30</b>
----------------------	------------

##### Digital cable sensor-transmitter

None	<b>L50</b>
5 m (16.4 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L51</b>
5 m (16.4 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L52</b>
10 m (32.8 ft) sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L55</b>
10 m (32.8 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L56</b>
25 m (82 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L59</b>
25 m (82 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L60</b>
50 m (164 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L63</b>
50 m (164 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L64</b>
75 m (246 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted	<b>L67</b>
75 m (246 ft), sensor cable, 4 wire, without plugs for terminal connection	<b>L68</b>

##### Analog cable sensor-transmitter

1 m cable, analog, with 2 × M20 connectors	<b>L85</b>
2 m cable, analog with 2 × M20 connectors	<b>L86</b>
5 m cable, analog with 2 × M20 connectors	<b>L87</b>
10 m cable, analog with 2 × M20 connectors	<b>L88</b>
15 m cable, analog with 2 × M20 connectors	<b>L89</b>

##### Additional data

Please add "-Z" to Article No. and specify Order code(s) and plain text.



##### Tag name

Tag name plate, stainless steel	<b>Y17</b>
---------------------------------	------------

##### Extended calibration

Multi-point high, (5 flows × 2 passes), 10 ... 100 % of $Q_{nom}$	<b>Y61</b>
Multi-point high, (10 flows × 1 pass), 10 ... 100 % of $Q_{nom}$	<b>Y63</b>

#### Accessories for MASS 2100 and FC300 DN 4 with FCT030 transmitter

Description	Article No.	
Mounting bracket for flow sensor MASS 2100 DI 1.5	<b>A5E02590427</b>	
Mounting bracket for FC300 DN 4 in AISI 304	<b>A5E02590439</b>	

### Overview



Sensors MASS 2100 and FC300 DN 4 with FCT010 / FCT030 transmitters

The SITRANS MASS 2100 and FC300 DN 4 system consists of a SITRANS sensor and a SITRANS FCT010 transmitter. The flowmeter comes in a compact design for all MASS 2100 DI 3 to DI 15.

MASS 2100 DI 1.5 to DI 15 and FC300 DN4 are available as remote FCT010 transmitter with analogue connection. Intended for integration into OEM skids, machines or pre-assembled plant systems, the flowmeter is based on the latest developments within digital signal processing technology - engineered for high measuring performance:

- Fast response to rapid changes in flow
- Fast dosing applications with control in host system
- High immunity against process noise
- High turndown ratio of flowrates
- Suitable for liquid and gas service
- Easy to install, commission and maintain

The FCT010 transmitter delivers true multi-parameter measurements i.e. massflow, density, temperature.

FCT010 is available with Modbus RTU (RS 485) multi-drop serial communication. The flowmeter is supplied with SensorFlash, a microSD card containing all relevant certificates.

### Benefits

- High accuracy better than 0.1 % of mass flow rate
- Large dynamic turn-down ratio better than 500:1
- Densitometer performance available through density accuracy (depending upon sensor size) ranging from 0.0005 to 0.0015 g/cm<sup>3</sup> with a typical repeatability better than 0.0001 to 0.0002 g/cm<sup>3</sup>
- Single continuous tube design, with no internal welds, reductions or flow splitters offers optimal hygiene, safety and CIP cleanability for food and beverage and pharmaceutical applications
- Markets biggest wall thickness, ensuring optimal life-time and corrosion resistance and high-pressure durability
- Balanced pipe design with little mechanical energy-loss, ensures optimal performance and stability under non-ideal and unstable process conditions (pressure, temperature, density-changes etc.)
- Full bore design provides lower pressure loss due to same internal diameter throughout the entire sensor
- 4-wire Pt1000 temperature measurement ensures optimum accuracy on mass flow, density and fraction flow
- Multi-plug electrical connector enables true "plug & play"
- Sensor pipe available in high-quality stainless steel AISI 316L/1.4435 or Hastelloy C22/2.4602 offering optimum corrosion resistance
- Centre-block design decouples process noise from the environment such as vibrations, pulsations, pressure shocks etc. making installation flexible and versatile
- Rugged and space-saving sensor design in stainless steel matching all environments
- High-pressure program as standard

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### MASS 2100 / FC300 DN 4 with FCT010 transmitter

#### Technical specifications

Sensors MASS 2100 / FC300 DN 4 with FCT010 transmitter	
<b>Sizes mm (inch)</b>	MASS 2100 DI 1.5 (1/16) MASS 2100 DI 3 (1/8") MASS 2100 DI 6 (1/4") MASS 2100 DI 15 (1/2") FC300 DN 4 (1/6")
<b>Accuracy</b>	± 0.10 % for liquids additional ±0.40 for gases
<b>Repeatability</b>	± 0.05 %
<b>Flow range Q norm (liquids)</b> (water @ 1 bar pressure loss) (Q <sub>nom</sub> )	
• DI 1,5	19 kg/h (42 lb/h)
• DI 3	90 kg/h (198 lb/h)
• DI 6	500 kg/h (1 102 lb/h)
• DI 15	3 800 kg/h (8 370 lb/h)
• DN 4	140 kg/h (308 lb/h)
<b>Architecture</b>	Compact: DI 3, DI 6, DI 15 Remote analogue: DI 1.5, DI 3, DI 6, DI 15, DN 4
<b>Power supply</b>	12-27 V DC; 1.1 W for Ex d: 12 – 24 V DC; Intrinsic safety power supply: Ui: 20 V, Ii: 484 mA, Pi: 2.3 W, Li: 0.6 uH, Ci: 1.9 nF.
<b>Material</b>	
• Sensor	
- Wetted parts	316L stainless steel or Hastelloy C 22
- Enclosure	316L stainless steel
• Transmitter	Aluminum with corrosion-resistant coating Class C4
<b>Enclosure rating</b>	IP67 <sup>1)</sup>
<b>Pressure ratings</b>	
• Measuring tubes	
- 316L	Up to 265 bar (3 844 psi), depending on size and process connection
- Nickel Alloy C4	Up to 410 bar (5 945 psi), depending on size and process connection
• Sensor enclosure	No pressure containment
<b>Temperature ratings</b>	
• Process medium	-50 ... +180 °C (-58 ... +356 °F)
• Ambient	-20 ... +50 °C (-4 ... +122 °F) <sup>1)</sup>

Sensors MASS 2100 / FC300 DN 4 with FCT010 transmitter	
<b>Process connections (depending on size and pressure rating)</b>	
• Flanges	EN 1092-1 B1, ANSI/ASME B16.5
• Pipe threads	ASME B1.20 (NPT), ISO 228
• Hygienic threads	DIN 11851, ISO 2853/BS 4825 part 4 (SS3016)
• Hygienic clamps	ISO Clamp 2852
<b>Approvals</b>	
• Hazardous area	ATEX, IECEx, EAC Ex, CSA, cCSAus, EAC
• Pressure equipment	PED
<b>NAMUR</b>	NAMUR-compliant (e.g. NE 21, NE 41, NE 107 and NE 132)
<b>I/O</b>	Up to 4 channels combining analog, relay or digital outputs and binary input
<b>Communication</b>	Modbus RTU (RS 485)
<b>EMC performance</b>	
• Emission	EN 55011/CISPR-11 (Class B)
• Immunity	EN/IEC 61326-1 (Industry)
<b>Mechanical load</b>	18 ... 1 000 Hz random  The flow meter will mechanically tolerate 3.17 g RMS in all directions. Flow accuracy cannot be guaranteed under all conditions.

<sup>1)</sup> If operating outdoors, avoid direct sunlight, particularly in warm climatic regions.



Selection and ordering data	Article No.	Article No.
<b>SITRANS FC sensors MASS 2100/FC300 with FCT010 transmitter</b> ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	<b>7ME4811-</b> Ord. code	<b>7ME4811-</b> Ord. code
<b>Sensor type and connector size</b> MASS 2100 DI 1.5, 1/4" <b>1 G</b> MASS 2100 DI 3, 1/4" <b>3 A</b> MASS 2100 DI 3, 1/4" Heated w. DIN <b>3 B</b> MASS 2100 DI 3, 1/4" Heated w. ANSI <b>3 C</b> FC300 DN 4, 1/4" <b>4 A</b> MASS 2100 DI 6, 1/4" <b>6 A</b> MASS 2100 DI 6, 1/4" Heated w. EN <b>6 B</b> MASS 2100 DI 6, 1/4" Heated w. ANSI <b>6 C</b> MASS 2100 DI 6, DN 10 <b>6 D</b> MASS 2100 DI 6, DN 10 Heated w. EN <b>6 E</b> MASS 2100 DI 6, DN 10 Heated w. ANSI <b>6 F</b> MASS 2100 DI 6, DN 15 (1/2") <b>6 G</b> MASS 2100 DI 6, DN 15 (1/2") Heated w. EN <b>6 H</b> MASS 2100 DI 6, DN 15 (1/2") Heated w. ANSI <b>6 J</b> MASS 2100 DI 6, DN 20 (3/4") <b>6 K</b> MASS 2100 DI 6, DN 20 (3/4") Heated w. EN <b>6 L</b> MASS 2100 DI 6, DN 20 (3/4") Heated w. ANSI <b>6 M</b> MASS 2100 DI 6, DN 25 (1") <b>6 N</b> MASS 2100 DI 6, DN 25 (1") Heated w. EN <b>6 P</b> MASS 2100 DI 6, DN 25 (1") Heated w. ANSI <b>6 Q</b> MASS 2100 DI 15, DN 15 (1/2") <b>7 A</b> MASS 2100 DI 15, DN 15 (1/2") Heated w. EN <b>7 B</b> MASS 2100 DI 15, DN 15 (1/2") Heated w. ANSI <b>7 C</b> MASS 2100 DI 15, DN 20 (3/4") <b>7 D</b> MASS 2100 DI 15, DN 20 (3/4") Heated w. EN <b>7 E</b> MASS 2100 DI 15, DN 20 (3/4") Heated w. ANSI <b>7 F</b> MASS 2100 DI 15, DN 25 (1") <b>7 G</b> MASS 2100 DI 15, DN 25 (1") Heated w. EN <b>7 H</b> MASS 2100 DI 15, DN 25 (1") Heated w. ANSI <b>7 J</b>	<b>SITRANS FC sensors MASS 2100/FC300 with FCT010 transmitter</b> ISO 228-1 pipe thread, PN 265 <b>C 5</b> ISO 228-1 pipe thread, PN 350 <b>C 6</b> ISO 228-1 pipe thread, PN 365 <b>C 7</b> ISO 228-1 pipe thread, PN 410 <b>C 8</b> NPT ASME B 1.20.1 pipe thread, PN 100 <b>N 1</b> NPT ASME B 1.20.1 pipe thread, PN 130 <b>N 2</b> NPT ASME B 1.20.1 pipe thread, PN 200 <b>N 3</b> NPT ASME B 1.20.1 pipe thread, PN 230 <b>N 4</b> NPT ASME B 1.20.1 pipe thread, PN 265 <b>N 5</b> NPT ASME B 1.20.1 pipe thread, PN 350 <b>N 6</b> NPT ASME B 1.20.1 pipe thread, PN 365 <b>N 7</b> NPT ASME B 1.20.1 pipe thread, PN 410 <b>N 8</b> <b>Tube material (wetted) and max. operational temperature</b> AISI 316L/EN 1.4435, max 115 °C <b>1</b> AISI 316L/EN 1.4435, max 125 °C <b>2</b> AISI 316L/EN 1.4435, max 180 °C <b>3</b> Hastelloy C22/UNS N06022/EN 2.4602, max. 115 °C <b>5</b> Hastelloy C22/UNS N06022/EN 2.4602, max. 125 °C <b>6</b> Hastelloy C22/UNS N06022/EN 2.4602, max. 180 °C <b>7</b> <b>Calibration</b> Mass flow calibration 2 flow × 2 points <b>1</b> Mass flow calibration 2 flow × 2 points + density calibration <b>4</b> <b>Mounting style, transmitter housing and material</b> Compact mounted, IP67, Aluminium transmitter housing (DI 3, DI 6 and DI 15 only) <b>D</b> Remote mounted, IP67, Aluminium transmitter housing, analog cable connection with M20 connectors <b>Z P 0 D</b> <b>Ex approvals</b> Non-Ex <b>A</b> ATEX Zone 1 / 21 <b>C</b> IECEx Zone 1 / 21 (in preparation) <b>F</b> USA (FM, CSA, UL), Zone 1/Div 1 <b>H</b> Canada (CSA, UL), Zone 1/Div 1 <b>M</b> EAC Zone 1 / 21 <b>U</b> <b>Local User Interface</b> Blind <b>1</b>	
<b>Process connection/Pressure</b> No connections (spare part transmitter) <b>A 0</b> EN 1092-1 B1, PN 40 <b>A 1</b> EN 1092-1 B1, PN 100 <b>A 3</b> ASME B16.5, RF, Class 150 <b>D 1</b> ASME B16.5, RF, Class 600 <b>D 3</b> DIN 11851 screwed connection <b>F 1</b> ISO 2852 hygienic clamped <b>J 1</b> ISO 2853 hygienic screwed <b>J 5</b> ISO 228-1 pipe thread, PN 100 <b>C 1</b> ISO 228-1 pipe thread, PN 130 <b>C 2</b> ISO 228-1 pipe thread, PN 200 <b>C 3</b> ISO 228-1 pipe thread, PN 230 <b>C 4</b>		

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### MASS 2100 / FC300 DN 4 with FCT010 transmitter

##### Selection and ordering data

##### Order code

###### Further designs

Please add "-Z" to Article No. and specify Order code(s).

###### Cable glands

None (mechanical sensor)  
Metric, no glands  
Metric, plastic  
Metric, brass/Ni plated  
Metric, stainless steel  
NPT, no glands  
NPT, plastic  
NPT, brass/Ni plated  
NPT, stainless steel  
Integral M12 socket

A00  
A01  
A02  
A05  
A06  
A11  
A12  
A15  
A16  
A20

###### SW functions & CT approvals

Standard

B11

###### I/O configuration Ch1

Modbus RTU RS 485

E14

###### I/O configuration Ch2, Ch3 and Ch4

None

F00

###### Certificates

Press test certificate CRN  
Press test certificate PED  
Material certificate EN 10204-3.1  
Welding inspection report  
Factory certificate according to EN 10204 2.2  
Factory certificate according to EN 10204 2.1  
Cleaning for oil and grease/ASTM-A380  
Cleaned according to PWIS

C01  
C02  
C12  
C13  
C14  
C15  
C50  
C51

###### Digital cable sensor-transmitter

None  
5 m (16.4 ft), sensor cable, 4 wire, with 2 pcs M12 plugs mounted  
5 m (16.4 ft), sensor cable, 4 wire, without plugs for terminal connection  
5 m (16.4 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted  
10 m (32.8 ft) standard with M12 connectors fitted  
10 m (32.8 ft), standard, without plugs  
10 m (32.8 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted  
25 m (82 ft), standard with M12 connectors fitted  
25 m (82 ft), standard, without plugs  
25 m (82 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted  
50 m (164 ft), standard with M12 connectors fitted  
50 m (164 ft), standard, without plugs  
50 m (164 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted  
75 m (246 ft), standard with M12 connectors fitted  
75 m (246 ft), standard, without plugs  
75 m (246 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted

L50  
L51  
L52  
L53  
L55  
L56  
L57  
L59  
L60  
L61  
L63  
L64  
L65  
L67  
L68  
L69

##### Order code

###### Further designs

Please add "-Z" to Article No. and specify Order code(s).

###### Analog cable sensor-transmitter

1 m cable, analog, with 2 × M20 connectors  
2 m cable, analog, with 2 × M20 connectors  
5 m cable, analog, with 2 × M20 connectors  
10 m cable, analog, with 2 × M20 connectors  
15 m cable, analog, with 2 × M20 connectors

L85  
L86  
L87  
L88  
L89

###### Additional data

Please add "-Z" to Article No. and specify Order code(s) and plain text.

###### Tag name

Tag name plate, stainless steel

Y17

###### Extended calibration

Multi-point high, (5 flows × 2 passes), 10 ... 100 % of  $Q_{nom}$   
Multi-point high, (10 flows × 1 pass), 10 ... 100 % of  $Q_{nom}$

Y61  
Y63

#### Accessories for MASS 2100 and FC300 DN 4 with FCT010 transmitter

##### Description

##### Article No.


SITRANS I300 – Isolating power supply – Ex barrier

A5E39832532



Mounting bracket for flow sensor MASS 2100 DI 1.5

A5E02590427



Mounting bracket for FC300 DN 4 in AISI 304

A5E02590439



#### Overview



Sensors MASS 2100 and FC300 DN 4 (left) with FCT070 transmitter (right)

Full integration in the Siemens SIMATIC systems PCS7 or in TIA portal with FCT070 Faceplates with the ET 200SP ST & HF powerful IO system for compact control cabinets.

The SITRANS MASS 2100 and FC300 DN 4 system consists of a SITRANS sensor and a SITRANS FCT070 transmitter.

The flowmeter comes in a compact design for all MASS 2100 DI 3 to DI 15.

MASS 2100 DI and FC300 DN 4 the DSL is remote mounted with a analogue connection.

The complete flowmeter system consists of a sensor and a SIMATIC ET 200SP ST & HF Coriolis module FCT070 transmitter.

TM FCT070 offers real-time data processing and the display of all measuring and status data of the Coriolis flowmeter.

For hazardous area the MASS 2100 and the FSC300 sensor can be placed in Ex Zone 1 or Class 1 Div 1 locations. Together with the SITRANS I300 power/barrier module the FCT070 transmitter can be place in Zone 2 or Div 2 areas.

#### Benefits

- High accuracy better than 0.1 % of mass flow rate
- Large dynamic turn-down ratio better than 500:1
- Densitometer performance available through density accuracy (depending upon sensor size) ranging from 0.0005 to 0.0015 g/cm<sup>3</sup> with a typical repeatability better than 0.0001 to 0.0002 g/cm<sup>3</sup>
- Single continuous tube design, with no internal welds, reductions or flow splitters offers optimal hygiene, safety and CIP cleanability for food and beverage and pharmaceutical applications
- Markets biggest wall thickness, ensuring optimal life-time and corrosion resistance and high-pressure durability
- Balanced pipe design with little mechanical energy-loss, ensures optimal performance and stability under non-ideal and unstable process conditions (pressure, temperature, density-changes etc.)
- Full bore design provides lower pressure loss due to same internal diameter throughout the entire sensor
- 4-wire Pt1000 temperature measurement ensures optimum accuracy on mass flow, density and fraction flow
- Multi-plug electrical connector enables true "plug & play"
- Sensor pipe available in high-quality stainless steel AISI 316L/1.4435 or Hastelloy C22/2.4602 offering optimum corrosion resistance
- Centre-block design decouples process noise from the environment such as vibrations, pulsations, pressure shocks etc. making installation flexible and versatile
- Rugged and space-saving sensor design in stainless steel matching all environments
- High-pressure program as standard
- Full hazardous area solutions
- Easy integration into automation process control as TIA portal and PCS7
- Easy selection and integration of flow meters via TIA-Selector
- Cost effective integration of Coriolis flow meters for PLC controlled machines
- SITRANS FCT070 ET 200SP technology module and can combined with all other SIMATIC ET200 ST & HF modules
- The FCT070 has all high -end transmitter functionality integrated including the advanced fraction tables on board
- Fast and trouble-free communication between the flow meter and the PLC through digital data communication with up to 10 ms update rate
- Integrated advanced Two-stage batch controller functionality without additional modules. I/Os are onboard

## Flow Measurement

SITRANS FC (Coriolis)

Sensors and Flowmeter systems

### MASS 2100 / FC300 DN 4 with FCT070 transmitter

#### Technical specifications

Sensors MASS 2100 / FC300 DN 4 with FCT070 transmitter	
<b>Sizes mm (inch)</b>	MASS 2100 DI 1.5 (1/16) MASS 2100 DI 3 (1/8") MASS 2100 DI 6 (1/4") MASS 2100 DI 15 (1/2") FC300 DN 4 (1/6")
<b>Accuracy</b>	± 0.10 % for liquids additional ±0.40 for gases
<b>Repeatability</b>	± 0.05 %
<b>Flow range Q norm (liquids)</b> (water @ 1 bar pressure loss) (Q <sub>nom</sub> )	
• DI 1.5	19 kg/h (42 lb/h)
• DI 3	90 kg/h (198 lb/h)
• DI 6	500 kg/h (1 102 lb/h)
• DI 15	3 800 kg/h (8 370 lb/h)
• DN 4	140 kg/h (308 lb/h)
<b>Architecture</b>	Remote configuration
<b>System integration</b>	PCS7 and TIA portal with faceplates
<b>Power supply</b>	24 V DC; 19.2 ... 28.8 V
<b>Material</b>	
• Sensor	
- Wetted parts	316L stainless steel or Hastelloy C 22
- Enclosure	316L stainless steel
• Transmitter	Aluminum with corrosion-resistant coating Class C4
<b>Enclosure rating</b>	Sensor: IP67 FCT070 transmitter: IP20
<b>Pressure ratings</b>	
• Measuring tubes	
- 316L	Up to 265 bar (3 844 psi), depending on size and process connection
- Nickel Alloy C4	Up to 410 bar (5 945 psi), depending on size and process connection
• Sensor enclosure	No pressure containment
<b>Temperature ratings</b>	
• Process medium	-50 ... +180 °C (-58 ... +356 °F)
• Ambient	-40 ... +60 °C (-4 ... +122 °F) <sup>1)</sup>

Sensors MASS 2100 / FC300 DN 4 with FCT070 transmitter	
<b>Process connections (depending on size and pressure rating)</b>	
• Flanges	EN 1092-1 B1, ANSI/ASME B16.5
• Pipe threads	ASME B1.20 (NPT), ISO 228
• Hygienic threads	DIN 11851, ISO 2853/BS 4825 part 4 (SS3016)
• Hygienic clamps	ISO Clamp 2852
<b>Approvals</b>	
• Hazardous area	Sensor : ATEX, IECEx, EAC Ex, CSA, cCSAus, EAC FCT070 transmitter: Zone 2 & Class 1 Div 2 ATEX, IECEx, EAC Ex, CSA, cCSAus, FM; NEPSI, EAC PED
• Pressure equipment	
<b>NAMUR</b>	NAMUR-compliant (e.g. NE 21, NE 41, NE 107 and NE 132)
<b>I/O</b>	2 digital Input and 2 digital output Single and 2 stage batch function
<b>Communication</b>	Integrated PROFINET for SIMATIC integration and other PROFINET Controllers
<b>Totalizer</b>	3 totalizer
<b>EMC performance</b>	
• Emission	EN 55011/CISPR-11 (Class A)
• Immunity	EN/IEC 61326-1 (Industry)
<b>Mechanical load</b>	18 ... 1 000 Hz random The flow meter will mechanically tolerate 3.17 g RMS in all directions. Flow accuracy cannot be guaranteed under all conditions.

<sup>1)</sup> If operating outdoors, avoid direct sunlight, particularly in warm climatic regions.

Selection and ordering data	Article No.	Article No.
<b>SITRANS FC sensors</b> <b>MASS 2100/FC300 DN 4</b> <b>with DSL ready for FCT070</b>	<b>7ME4817-</b>	<b>7ME4817-</b>
Ord. code	Ord. code	Ord. code
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
<b>Sensor type and connector size</b>		
MASS 2100 DI 1.5, 1/4"	<b>1 G</b>	
MASS 2100 DI 3, 1/4"	<b>3 A</b>	
MASS 2100 DI 3, 1/4" Heated w. DIN	<b>3 B</b>	
MASS 2100 DI 3, 1/4" Heated w. ANSI	<b>3 C</b>	
FC300 DN 4, 1/4"	<b>4 A</b>	
MASS 2100 DI 6, 1/4"	<b>6 A</b>	
MASS 2100 DI 6, 1/4" Heated w. EN	<b>6 B</b>	
MASS 2100 DI 6, 1/4" Heated w. ANSI	<b>6 C</b>	
MASS 2100 DI 6, DN 10	<b>6 D</b>	
MASS 2100 DI 6, DN 10 Heated w. EN	<b>6 E</b>	
MASS 2100 DI 6, DN 10 Heated w. ANSI	<b>6 F</b>	
MASS 2100 DI 6, DN 15 (1/2")	<b>6 G</b>	
MASS 2100 DI 6, DN 15 (1/2") Heated w. EN	<b>6 H</b>	
MASS 2100 DI 6, DN 15 (1/2") Heated w. ANSI	<b>6 J</b>	
MASS 2100 DI 6, DN 20 (3/4")	<b>6 K</b>	
MASS 2100 DI 6, DN 20 (3/4") Heated w. EN	<b>6 L</b>	
MASS 2100 DI 6, DN 20 (3/4") Heated w. ANSI	<b>6 M</b>	
MASS 2100 DI 6, DN 25 (1")	<b>6 N</b>	
MASS 2100 DI 6, DN 25 (1") Heated w. EN	<b>6 P</b>	
MASS 2100 DI 6, DN 25 (1") Heated w. ANSI	<b>6 Q</b>	
MASS 2100 DI 15, DN 15 (1/2")	<b>7 A</b>	
MASS 2100 DI 15, DN 15 (1/2") Heated w. EN	<b>7 B</b>	
MASS 2100 DI 15, DN 15 (1/2") Heated w. ANSI	<b>7 C</b>	
MASS 2100 DI 15, DN 20 (3/4")	<b>7 D</b>	
MASS 2100 DI 15, DN 20 (3/4") Heated w. EN	<b>7 E</b>	
MASS 2100 DI 15, DN 20 (3/4") Heated w. ANSI	<b>7 F</b>	
MASS 2100 DI 15, DN 25 (1")	<b>7 G</b>	
MASS 2100 DI 15, DN 25 (1") Heated w. EN	<b>7 H</b>	
MASS 2100 DI 15, DN 25 (1") Heated w. ANSI	<b>7 J</b>	
<b>Process connection/Pressure</b>		
No connections (spare part transmitter)	<b>A 0</b>	
EN 1092-1 B1, PN 40	<b>A 1</b>	
EN 1092-1 B1, PN 100	<b>A 3</b>	
ASME B16.5, RF, Class 150	<b>D 1</b>	
ASME B16.5, RF, Class 600	<b>D 3</b>	
DIN 11851 crewed connection	<b>F 1</b>	
ISO 2852 hygienic clamped	<b>J 1</b>	
ISO 2853 hygienic screwed	<b>J 5</b>	
ISO 228-1 pipe thread, PN 100	<b>C 1</b>	
ISO 228-1 ipe thread, PN 130	<b>C 2</b>	
ISO 228-1 pipe thread, PN 200	<b>C 3</b>	
<b>SITRANS FC sensors</b> <b>MASS 2100/FC300 DN 4</b> <b>with DSL ready for FCT070</b>		
ISO 228-1 ipe thread, PN 230	<b>C 4</b>	
ISO 228-1 ipe thread, PN 265	<b>C 5</b>	
ISO 228-1 pipe thread, PN 350	<b>C 6</b>	
ISO 228-1 pipe thread, PN 365	<b>C 7</b>	
ISO 228-1 pipe thread, PN 410	<b>C 8</b>	
NPT ASME B 1.20.1 pipe thread, PN 100	<b>N 1</b>	
NPT ASME B 1.20.1 pipe thread, PN 130	<b>N 2</b>	
NPT ASME B 1.20.1 pipe thread, PN 200	<b>N 3</b>	
NPT ASME B 1.20.1 pipe thread, PN 230	<b>N 4</b>	
NPT ASME B 1.20.1 pipe thread, PN 265	<b>N 5</b>	
NPT ASME B 1.20.1 pipe thread, PN 350	<b>N 6</b>	
NPT ASME B 1.20.1 pipe thread, PN 365	<b>N 7</b>	
NPT ASME B 1.20.1 pipe thread, PN 410	<b>N 8</b>	
<b>Tube material (wetted)</b> <b>and max. operational temperature</b>		
AISI 316L/EN 1.4435, max. 115 °C	<b>1</b>	
AISI 316L/EN 1.4435, max. 125 °C	<b>2</b>	
AISI 316L/EN 1.4435, max. 180 °C	<b>3</b>	
Hastelloy C22/UNS N06022/EN 2.4602, max. 115 °C	<b>5</b>	
Hastelloy C22/UNS N06022/EN 2.4602, max. 125 °C	<b>6</b>	
Hastelloy C22/UNS N06022/EN 2.4602, max. 180 °C	<b>7</b>	
<b>Calibration</b>		
Mass flow calibration 2 flow × 2 points	<b>1</b>	
Mass flow calibration 2 flow × 2 points + density calibration	<b>4</b>	
<b>Mounting style, transmitter housing and material</b>		
Compact mounted, IP67, Aluminium transmitter housing (DI 3, DI 6 and DI 15 )	<b>D</b>	
Remote field mount, IP67, Aluminium transmitter housing, analog cable connection with M20 connectors	<b>Z</b>	<b>P 0 D</b>
<b>Ex approvals</b>		
Non-Ex		<b>A</b>
ATEX Zone 1 / 21		<b>C</b>
IECEX Zone 1 / 21 (in preparation)		<b>F</b>
USA (FM, CSA, UL), Zone 1/Div 1		<b>H</b>
Canada (CSA, UL), Zone 1/Div 1		<b>M</b>
EAC Zone 1 / 21		<b>U</b>
<b>Local User Interface</b>		
Blind		<b>1</b>

## Flow Measurement

### SITRANS FC (Coriolis)

#### Sensors and Flowmeter systems

#### MASS 2100 / FC300 DN 4 with FCT070 transmitter

##### Selection and ordering data

###### Further designs

Please add "-Z" to Article No. and specify Order code(s).

###### Cable glands

None (mechanical sensor)  
Metric, no glands  
Metric, plastic  
Metric, brass/Ni plated  
Metric, stainless steel  
NPT, no glands  
NPT, plastic  
NPT, brass/Ni plated  
NPT, stainless steel  
Integral M12 socket

##### Order code

A00  
A01  
A02  
A05  
A06  
A11  
A12  
A15  
A16  
A20

###### SW functions & CT approvals

Standard

B10

###### I/O configuration Ch1

None (replacement sensor)

E00

###### I/O configuration Ch2, Ch3 and Ch4

None

F00

###### Certificates

Press test certificate CRN  
Press test certificate PED  
Material certificate EN 10204-3.1  
Welding inspection report  
Factory certificate according to EN 10204 2.2  
Factory certificate according to EN 10204 2.1  
Cleaning for oil and grease/ASTM-A380

C01  
C02  
C12  
C13  
C14  
C15  
C50

###### Digital cable sensor-transmitter

None  
5 m (16.4 ft), sensor cable, 4 wire, without plugs for terminal connection  
5 m (16.4 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted  
10 m (32.8 ft), sensor cable, 4 wire, without plugs for terminal connection  
10 m (32.8 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted  
25 m (82 ft), sensor cable, 4 wire, without plugs for terminal connection  
25 m (82 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted  
50 m (164 ft), sensor cable, 4 wire, without plugs for terminal connection  
50 m (164 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted  
75 m (246 ft), sensor cable, 4 wire, without plugs for terminal connection  
75 m (246 ft), sensor cable, 4 wire, with 1 pcs M12 plugs mounted

L50  
L52  
L53  
L56  
L57  
L60  
L61  
L64  
L65  
L68  
L69

##### Order code

###### Further designs

Please add "-Z" to Article No. and specify Order code(s).

###### Analog cable sensor-transmitter

1 m cable, analog, with 2 × M20 connectors  
2 m cable, analog with 2 × M20 connectors  
5 m cable, analog with 2 × M20 connectors  
10 m cable, analog with 2 × M20 connectors  
15 m cable, analog with 2 × M20 connectors

L85  
L86  
L87  
L88  
L89

###### Additional data

Please add "-Z" to Article No. and specify Order code(s) and plain text.

###### Tag name

Tag name plate, stainless steel

Y17

###### Extended calibration

Multi-point high, (5 flows × 2 passes), 10 ... 100 % of  $Q_{nom}$   
Multi-point high, (10 flows × 1 pass), 10 ... 100 % of  $Q_{nom}$

Y61  
Y63

##### Description

##### Article No.


SITRANS FCT070  
Transmitter for ET 200SP

7ME4138-6AA00-0BB1



BU20-P12+A0+4B, PU1  
Baseunit plate for ET 200SP

6ES7193-6BP20-0BB0  
6ES7193-6BP20-0BB1



SITRANS I300  
Isolating power supply – Ex barrier

A5E39832532



##### Accessories for MASS 2100 and FC300 DN 4 with FCT070 transmitter

##### Description

##### Article No.

Mounting bracket for flow sensor  
MASS 2100 DI 1.5

A5E02590427



Mounting bracket for FC300 DN 4  
in AISI 304















A5E02590439





### Selection and ordering data

#### Accessories and spare parts for flowmeters

Description	Article No.		Description	Article No.	
CT connector Tampor cover for CT locking. Fits over the M12 connector at both sensor and transmitter ends of the remote system cable (2 pcs.)	<b>A5E31478498</b>		Standard cable (non-Ex) f with M12 connector on one side, PO insulation and PUR sleeve, gray, -40 ... +80 °C (-40 ... +176 °F)		
Bag of glands (metric) in black plastic <sup>1)</sup>	<b>A5E03907414</b>		<ul style="list-style-type: none"> <li>• 5 m (16.4 ft)</li> <li>• 10 m (32.8 ft)</li> <li>• 25 m (82 ft)</li> <li>• 50 m (164 ft)</li> <li>• 75 m (246 ft)</li> <li>• 150 m (492 ft)</li> </ul>		
Bag of glands, (metric) in gray plastic Ex e/i <sup>1)</sup>	<b>A5E03907424</b>		Standard cable (Ex) with 2 x M12 connectors, PO insulation and PUR sleeve, blue, -40 ... +80 °C (-40 ... +176 °F)	<b>A5E03914929</b> <b>A5E03914962</b> <b>A5E03914995</b> <b>A5E03915004</b> <b>A5E03915074</b> <b>A5E03915088</b>	
Bag of glands (metric) in AISI 316 SS Ex e/i <sup>1)</sup>	<b>A5E03907429</b>		Standard cable (Ex) for termination, PO insulation and PUR sleeve, blue, -40 ... +80 °C (-40 ... +176 °F)	<b>A5E03914945</b> <b>A5E03914973</b> <b>A5E03914984</b> <b>A5E03915015</b> <b>A5E03915057</b> <b>A5E03915100</b>	
Bag of glands (metric) in Ni-plated brass Ex e/i <sup>1)</sup>	<b>A5E03907430</b>		Standard cable (Ex) with M12 connector on one side, PO insulation and PUR sleeve, blue, -40 ... +80 °C (-40 ... +176 °F)	<b>A5E03914945</b> <b>A5E03914973</b> <b>A5E03914984</b> <b>A5E03915015</b> <b>A5E03915057</b> <b>A5E03915100</b>	
Bag of glands (NPT) in black plastic <sup>2)</sup>	<b>A5E03907435</b>		Standard cable (Ex) with M12 connector on one side, PO insulation and PUR sleeve, blue, -40 ... +80 °C (-40 ... +176 °F)		
Bag of glands (NPT) in gray plastic Ex e/i <sup>2)</sup>	<b>A5E03907451</b>		Standard cable (Ex) with M12 connector on one side, PO insulation and PUR sleeve, blue, -40 ... +80 °C (-40 ... +176 °F)		
Bag of glands (NPT) in AISI 316 SS Ex e/i <sup>2)</sup>	<b>A5E03907467</b>		Standard cable (Ex) with M12 connector on one side, PO insulation and PUR sleeve, blue, -40 ... +80 °C (-40 ... +176 °F)		
Bag of glands (NPT) in Ni-plated brass Ex e/i <sup>2)</sup>	<b>A5E03907473</b>		Standard cable (non-Ex) with 2 x M12 connectors, PO insulation and PUR sleeve, gray, -40 ... +80 °C (-40 ... +176 °F)	<b>A5E03914805</b> <b>A5E03914850</b> <b>A5E03914853</b> <b>A5E03914859</b> <b>A5E03914861</b> <b>A5E03914874</b>	
Standard cable (non-Ex) with 2 x M12 connectors, PO insulation and PUR sleeve, gray, -40 ... +80 °C (-40 ... +176 °F)			Analog signal cable For analog cable connection between MASS 2100/ FC300 sensor and FCT010/FCT030/FCT070 transmitters. 5 × 2 × Ø 0.34 mm screened and twisted in pairs. Blue PVC insulation and sleeve. With two M20 connectors, female/female.		
Standard cable (non-Ex) for termination, PO insulation and PUR sleeve, gray, -40 ... +80 °C (-40 ... +176 °F)			<ul style="list-style-type: none"> <li>• 5 m (16.4 ft)</li> <li>• 10 m (32.8 ft)</li> <li>• 25 m (82 ft)</li> <li>• 50 m (164 ft)</li> <li>• 75 m (246 ft)</li> <li>• 150 m (492 ft)</li> </ul>	<b>A5E03914833</b> <b>A5E03914849</b> <b>A5E03914854</b> <b>A5E03914856</b> <b>A5E03914864</b> <b>A5E03914873</b>	
			<ul style="list-style-type: none"> <li>• 1 m (3.28 ft)</li> <li>• 2 m (6.56 ft)</li> <li>• 5 m (16.4 ft)</li> <li>• 10 m (32.8 ft)</li> <li>• 15 m (49.21 ft)</li> </ul>	<b>A5E42815465</b> <b>A5E42521862</b> <b>A5E42522447</b> <b>A5E42523233</b> <b>A5E42523347</b>	

<sup>1)</sup> 2 pcs M20; 1 pce M25 with single and dual cable inserts.

<sup>2)</sup> 2 pcs 1/2" NPT; 1 pce 1/2" NPT with single and dual cable inserts.

## Flow Measurement



### SITRANS FC (Coriolis)

#### Spare parts





#### Digital - Spare parts

#### Selection and ordering data (continued)







##### Heating jacket for FCS400

Description	Article No.	
Heating jacket, indoor use, 0 ... 200 °C (32 ...392 °F) max. temperature. Complete with 5 m (16.4 ft) high temperature cable fitted. Dedicated plug connection to included controller <ul style="list-style-type: none"> <li>• 230 V AC</li> <li>- DN 15 electric</li> <li>- DN 25 electric</li> <li>- DN 50 electric</li> <li>• 115 V AC</li> <li>- DN 15 electric</li> <li>- DN 25 electric</li> <li>- DN 50 electric</li> </ul>	A5E33035287 A5E33035324 A5E33035325  A5E32877520 A5E32877556 A5E32877557	
Heating jacket controller, IP65. Digital display for 0 ... 200 °C (32 ...392 °F) control setpoint <ul style="list-style-type: none"> <li>• 230 V AC</li> <li>• 115 V AC</li> </ul>	A5E03839193 A5E03839194	

##### Spare parts - sensor FCS400/FCS300 and MASS 2100/FC300

Description	Article No.	
Blind lid in painted aluminum with silicone o-ring seal	A5E03549295	
Sensor housing <ul style="list-style-type: none"> <li>• Metric</li> <li>• NPT</li> </ul>	A5E03549313 A5E03906080	
Bag of loose parts for sensor; including cable strain relief components, washer, seals, silicone o-rings, and assorted screws	A5E03549324	
M12 option for sensor housing in stainless steel. Pre-wired and potted to replace M12 socket in DSL housing	A5E03906095	










##### Spare parts - Transmitter FCT030 field mount enclosure (all FW versions)

Description	Article No.	
Display lid in painted aluminum with Ex glass plate and silicone o-ring seal Ex and Non-Ex	A5E03549344	
Blind lid in painted aluminum with silicone o-ring seal	A5E03549429	
Bag of loose spare parts; including cable strain relief components, mounting tool, seals and gasket, assorted screws and washers, hex cap nut, blind connectors, and silicone o-rings	A5E03549396	
Mounting bracket - FCT030 field mount; in painted aluminum for pipe or wall mounting of transmitter FCT030 remote version. Including lock ring, pressure pads and seal cap	A5E03906091	
M12 option - remote - in painted aluminum. Pre-wired and potted replacement M12 connection for FCT030 field mount transmitter remote version	A5E03906104	
Remote terminal house painted aluminum for sensor cable termination at FCT030 transmitter remote version. Pre-wired and potted <ul style="list-style-type: none"> <li>• M20</li> <li>• NPT</li> </ul>	A5E03906112 A5E03906130	












**Selection and ordering data** (continued)

**Spare parts - Transmitter FCT030 (FW 3.1)**

Description	Article No.	
Display and keypad assembly for field mount enclosure, with Siemens logo. For HW 2 and FW 3.1 version	<b>A5E03548971</b>	
Sensor cassette (compact) (HW version 2, FW 3.1.x)	<b>A5E03549142</b>	
Sensor cassette (remote) (HW version 2, FW 3.1.x)	<b>A5E03549098</b>	
Frontend cassette Spare part frontend cassette for remote version of FC430 and cassette for FC410 For firmware V 3.x	<b>A5E03549191</b>	
Power supply for field mount enclosure 100 ... 240 V AC, 47 ... 63 Hz, 24 ... 90 V DC (HW version 2 and FW 3.1.x)	<b>A5E03549413</b>	
Transmitter cassette (active) 4 ... 20 mA output and HART 7.2 (HW version 2 and FW 3.1.x)	<b>A5E03549357</b>	
Transmitter cassette (passive) 4 ... 20 mA output and HART 7.2 (HW version 2 and FW 3.1.x)	<b>A5E03549383</b>	
I/O assembly Advise Order code F40 to F97, Selection and Ordering data <sup>1)</sup>	<b>A5E03939114</b>	
SensorFlash (micro SD card 1G)	<b>A5E03915258</b>	

<sup>1)</sup> The I/O configuration must be stated in the "Remark" field.  
The I/O configuration is found in the F option of the ordering code. e.g. code "F40" for ordering Ch2 Active Current/Freq/Pulse, Ch3 Active Current/Freq/Pulse, Ch4 Active Input.

**Spare parts FCT030 - Fieldmount enclosure (FW 4.0)**

Description	Article No.	
Display and keypad assembly • From firmware 4.0, with Siemens logo	<b>A5E37705139</b>	
• From firmware 4.0, neutral version - no company logo	<b>A5E39844362</b>	
Power supply for field mount enclosure FCT030 V 4.0 Fieldmount 100 ... 240 V AC, 47 ... 63 Hz 19.2 ... 28.8 V DC	<b>A5E38264471</b>	
Sensor cassette (compact) for systems without DSL and for systems with analog sensor connection, HW version 3, FW version 4.0	<b>A5E41526318</b>	
Sensor cassette (remote) Ex barrier module digital sensor connection (HW version 3, FW version 4.0)	<b>A5E03549098</b>	
Sensor cassette (remote) for systems with DSL, HW version 3, FW version 4.0	<b>A5E03549098</b>	
Frontend cassette Spare part frontend DSL for remote version. For firmware V 4.0	<b>A5E41526286</b>	
SensorFlash (micro SD card 4G)	<b>A5E38288507</b>	
Transmitter cassette for firmware 4.0 • Ch1 E02: I/O and comm (active/passive) 4 ... 20 mA output and HART 7.5, Non-Ex	<b>A5E38013040</b>	
• Ch1 E06: I/O and comm (-active) 4 ... 20 mA output and HART 7.5, Ex	<b>A5E38012278</b>	
• Ch1 E07: I/O and comm (-passive) 4 ... 20 mA output and HART 7.5, Ex	<b>A5E38013025</b>	
• Ch1 E10: Communication PROFIBUS PA, Non-Ex & Ex	<b>A5E41216315</b>	
• Ch1 E11: Communication PROFIBUS DP, Non-Ex	<b>A5E41216042</b>	
• Ch1: Communication Modbus RTU 485, Ex	<b>A5E38013054</b>	
• Ch1: Communication Modbus RTU 485, Non-Ex	<b>A5E38013069</b>	



# Flow Measurement

## SITRANS FC (Coriolis)

### Spare parts

#### Digital - Spare parts


#### Selection and ordering data (continued)

Description	Article No.		Description	Article No.	
I/O Cassette for firmware 4.0			Adapter cable for FCS400 sensor with new transmitter DSL/FCT010/FCT030 Version 4.0	<b>A5E50371933</b>	
• Ch2: Current/Frequ./Pulse, Ch3: None, Ch4: None, F01, Non-Ex	<b>A5E38006256</b>		Remote adapter for wall bracket M20 cable connection		
• Ch2: Current/Frequ./Pulse, Ch3: Current/Frequ./Pulse, Ch4: None, F02, Non-Ex	<b>A5E38006558</b>		• Ex	<b>A5E42404417</b>	
• Ch2: Current/Frequ./Pulse, Ch3: Current/Frequ./Pulse, Ch4: Current/Frequ./Pulse, F03, Non-Ex	<b>A5E38006598</b>		• Non-Ex	<b>A5E42846478</b>	
• Ch2: Current/Frequ./Pulse, Ch3: Current/Frequ./Pulse, Ch4: Relay, F04, Non-Ex	<b>A5E38006896</b>		Wall bracket for FCT030 for M20 analog cable connector	<b>A5E42404426</b>	
• Ch2: Current/Frequ./Pulse, Ch3: Relay, Ch4: Relay, F05, Non-Ex	<b>A5E38006900</b>		Wall bracket for FCT010 for M20 analog cable connector	<b>A5E42404447</b>	
• Ch2: Current/Frequ./Pulse, Ch3: Relay, Ch4: None, F06, Non-Ex	<b>A5E38011432</b>		Compact adapter for DSL/FCT030 For upgrade from MASS 2100 DI 3, DI 6, DI 15 with MASS 6000 compact to DSL/FCT030		
• Ch2: Current/Frequ./Pulse, Ch3: None, Ch4: None, F11, Ex-passive	<b>A5E38011478</b>		• Ex	<b>A5E42846758</b>	
• Ch2: Current/Frequ./Pulse, Ch3: Current/Frequ./Pulse, Ch4: None, F12, Ex-passive	<b>A5E38011509</b>		• Non-Ex	<b>A5E42846760</b>	
• Ch2: Current/Frequ./Pulse, Ch3: Current/Frequ./Pulse, Ch4: Current/Frequ./Pulse, F13, Ex-passive	<b>A5E38011541</b>		Compact adapter for DSL/FCT030 FCS300 and FCS400 (DN 100 and DN 150 sensor) adapter for compact mount DSL, FCT010 or FCT030	<b>TBD</b>	
• Ch2: Current/Frequ./Pulse, Ch3: Current/Frequ./Pulse, Ch4: Relay, F14, Ex-passive	<b>A5E38011600</b>		Ex and Non-Ex		
• Ch2: Current/Frequ./Pulse, Ch3: Relay, Ch4: Relay, F15, Ex-active	<b>A5E38011618</b>				
• Ch2: Current/Frequ./Pulse, Ch3: Relay, Ch4: None, F16, Ex-active	<b>A5E38011908</b>				
• Ch2: Current/Frequ./Pulse, Ch3: None, Ch4: None, F21, Ex-active	<b>A5E38012039</b>				
• Ch2: Current/Frequ./Pulse, Ch3: Current/Frequ./Pulse, Ch4: None, F22, Ex-active	<b>A5E38012056</b>				
• Ch2: Current/Frequ./Pulse, Ch3: Current/Frequ./Pulse, Ch4: Current/Frequ./Pulse, F23, Ex-active	<b>A5E38012121</b>				
• Ch2: Current/Frequ./Pulse, Ch3: Relay, Ch4: Relay, F24, Ex-active	<b>A5E38019235</b>				
• Ch2: Current/Frequ./Pulse, Ch3: Current/Frequ./Pulse, Ch4: Relay, F25, Ex-passive	<b>A5E38019263</b>				
• Ch2: Current/Frequ./Pulse, Ch3: Relay, Ch4: None, F26, Ex-passive	<b>A5E38019378</b>				

#### Selection and ordering data (continued)

##### Spare parts - FCT030 wall mount enclosure

Description	Article No.	
Display and keypad -assembly • For wall mount enclosure, Siemens logo  • For wall mount enclosure, neutral version	<b>A5E37697615</b>  <b>A5E39844261</b>	
Power supply for wall mount 100 ... 240 V AC, 47 ... 63 Hz 19.2 ... 28.8 V DC	<b>A5E38263021</b>	
Sensor cassette for FCT030 wall mounting enclosure	<b>TBD</b>	
Foam insert set for wall mount with connectors	<b>A5E38287828</b>	
Wall mount enclosure front Versions: • blind, Siemens version • blind, neutral version - no company logo • with glass	<b>A5E</b>	

Description	Article No.	
Wall mount enclosure bracket for pipe mounting	<b>A5E38288020</b>	
Wall bracket panel mounting	<b>A5E38288032</b>	
Bag of loose spare parts for wall mount including cable strain relief components, mounting tool, seals and gasket, assorted screws and washers, hex cap nut, blind connectors and O-rings	<b>A5E38288072</b>	
Metall kit PSU cover back pane for wall mount enclosure	<b>A5E38415145</b>	
Power input cover plate for wall mount enclosure	<b>A5E38415205</b>	

## Flow Measurement

SITRANS FC (Coriolis)

Spare parts

### MASS 6000 Generation - Spare parts

#### Overview



MASS 6000 is based on digital signal processing technology – engineered for high performance, fast flow step response, fast batching applications, high immunity against process noise, easy to install, commission and maintain.

This product is not longer available. Repair and spare parts for MASS 6000 (all models and variants) can still be ordered. See spare part list.

3

#### Selection and ordering data

##### Accessories and spare parts for MASS 6000 generation

Description	Article No.	
<b>Cable with multiple plug</b> Standard blue cable between MASS 6000 and MASS 2100, 5 × 2 × 0.34 mm <sup>2</sup> twisted and screened in pairs. Temperature range -20 ... +110 °C (-4 ... +230 °F) • 5 m (16.4 ft) • 10 m (32.8 ft) • 25 m (82 ft) • 50 m (164 ft) • 75 m (246 ft) • 150 m (492 ft)	FDK:083H3015 FDK:083H3016 FDK:083H3017 FDK:083H3018 FDK:085U0229 FDK:083H3055	
<b>Adapter for MASS 2100</b> M23 electrical adapter for MASS 2100 DI 3, DI 6, DI 15, DI 25 and DI 40	FDK:083L8889	
<b>M20 connector for cable mounting</b>	FDK:083H5056	
<b>2 kB SENSORPROM unit, including programming</b> (Sensor Serial No. and Article No. must be specified by ordering)	FDK:083H4410	

Description	Article No.	
<b>Cable glands, screwed entries type in polyamide</b> 100 °C (212 °F), black, 2 pcs. • M20  • ½" NPT	A5E00822490  A5E00822501	
<b>Sun lid</b> for MASS 6000 transmitter (frame and lid)	A5E02328485	








#### Add-on module

Description	Article No.	
HART <sup>1)</sup>	FDK:085U0226	
PROFIBUS PA Profile 3 <sup>1)</sup>	FDK:085U0236	
PROFIBUS DP Profile 3	FDK:085U0237	
MODBUS RTU RS 485	FDK:085U0234	
FOUNDATION Fieldbus H1 <sup>1)</sup>	A5E02054250	
DeviceNet	FDK:085U0229	

<sup>1)</sup> Modules are rated Ex i when used with MASS 6000 Ex d.

#### MASS 6000 Generation - Spare parts

#### Spare parts for compact or remote IP67 version

Description	Article No.	
<b>MASS 6000 transmitter IP67/NEMA 6</b> Note: No CE declaration Fibre glass reinforced polyamide and without connection board 1 current output 1 frq./pulse output 1 relay output • 115/230 V AC, 50/60 Hz  • 24 V AC/DC	<b>7ME4110-1AA10-1AA0</b> <b>7ME4110-1AA20-1AA0</b>	
<b>Wall mounting unit for IP67/NEMA 6 version</b> with wall bracket, without connection board but with • 4 x M20 cable glands • 4 x 1/2" NPT cable glands	<b>FDK:085U1018</b> <b>A5E01164211</b>	
<b>Connection board/PCB</b> Supply voltage: 115/230 V/24 V AC/DC	<b>FDK:083H4260</b>	
<b>Terminal box kit</b> • M20 cable glands • 1/2" NPT cable glands  Change from remote to safe area compact mounting of MASS 6000 IP67/NEMA 6 with MASS 2100.  The kit consists of a terminal box in polyamide incl. connection board, cable and connector between PCB and sensor pedestal, PCB, seal and screws (4 pcs.) for mounting on sensor.  Not approved for hazardous locations	<b>A5E00832338</b> <b>A5E00832342</b>	
<b>Terminal box, in polyamide, inclusive lid</b> • M20 cable glands • 1/2" NPT cable glands  Not approved for hazardous locations	<b>FDK:085U1050</b> <b>FDK:085U1052</b>	
<b>Terminal box - lid in polyamide</b>	<b>FDK:085U1003</b>	
<b>Display and keypad</b> • Siemens Front	<b>FDK:085U1039</b>	

#### Add-on spare parts required due to RoHs directives and EoL for EU and EU related countries

Description	Article No.	
<b>MASS 6000 IP67</b> Spare part PCB main • 230 V • 24 V	<b>A5E41718138</b> <b>A5E41718346</b>	
<b>MASS 6000 19"/IP20</b> Spare part PCB main • 1 current, 230 V • 3 current, 230 V • 1 current, 24 V • 3 current, 24 V	<b>A5E43226138</b> <b>A5E43226145</b> <b>A5E43226154</b> <b>A5E43226168</b>	
<b>MASS 6000 19"/IP20 Ex</b> Spare part PCB main • 1 current, 230 V • 3 current, 230 V • 1 current, 24 V • 3 current, 24 V	<b>A5E43226277</b> <b>A5E43226342</b> <b>A5E43226441</b> <b>A5E43226455</b>	
<b>MASS 6000 Ex d, spare part PCB</b> Stainless steel, without module	<b>FDK:083H3061</b>	
<b>MASS 6000 Ex d, spare part barriere</b> Stainless steel	<b>A5E41718720</b>	
<b>MASS 6000 19"/IP20, barriere PCB, Ex</b>	<b>A5E41718669</b>	
<b>MASS 6000 Ex d, connection board</b> Stainless steel	<b>A5E41718522</b>	

# Flow Measurement

## SITRANS FC (Coriolis)

### Spare parts


#### MASS 6000 Generation - Spare parts

#### Selection and ordering data (continued)

##### Accessories






#### Enclosure (without PCB, connection board)

Description	Article No.
IP66/NEMA 4X, wall mounting enclosure for 19" inserts, 21 TE	<b>FDK:083F5037</b>





#### Enclosure

Description	Article No.
Panel mounting enclosure for 19" insert (21 TE); IP65/NEMA 2 enclosure in ABS plastic for front panel mounting	<b>FDK:083F5030</b>
Panel mounting enclosure for 19" insert (42 TE); IP65/NEMA 2 enclosure in ABS plastic for front panel mounting	<b>FDK:083F5031</b>
Back of panel mounting enclosure for 19" insert (21 TE); IP20/NEMA 1 enclosure in aluminum	<b>FDK:083F5032</b>
Back of panel mounting enclosure for 19" insert (42 TE); IP20/NEMA 1 enclosure in aluminum	<b>FDK:083F5033</b>
Front cover (7 TE) for panel mounting enclosure	<b>FDK:083F4525</b>



#### Connection boards/PCB for MASS 6000 and MASS 2100 sensors

Description	Article No.
<b>Connection board MASS 6000 for 19" IP20 rack mounting version</b> • 24 V, 115/230 V	<b>FDK:083H4272</b>
<b>Connection board MASS 6000 Ex [ia] IIC for 19" IP20 rack mounting version</b> • 24 V, 115/230 V	<b>FDK:083H4273</b>
<b>Connection board MASS 6000 for 19" wall mounting version, for enclosure</b> <b>FDK:083F5037/FDK:083F5038</b> • 24 V, 115/230 V	<b>FDK:083H4274</b>
<b>Connection board MASS 6000 Ex [ia] IIC for 19" wall mounting version, for enclosure</b> <b>FDK:083F5037/FDK:083F5038</b> • 24 V, 115/230 V	<b>FDK:083H4275</b>


#### Connection boards/PCB for MASS 6000 and MC2 sensors

Description	Article No.
<b>Connection board MASS 6000 for 19" IP20 rack mounting version</b> • 24 V, 115/230 V	<b>FDK:083H4272</b>
<b>Connection board MASS 6000 for Ex application<sup>1)</sup> and 19" IP20 rack mounting version</b> (connection board MASS 6000 to MC2 sensors Ex-approved) • 24 V, 115/230 V	<b>FDK:083H4294</b>
<b>Connection board MASS 6000 for 19" wall mounting version, for enclosure</b> <b>FDK:083F5037/FDK:083F5038</b> • 24 V, 115/230 V	<b>FDK:083H4274</b>
<b>Connection board MASS 6000 for Ex application<sup>1)</sup> and 19" wall mounting version (connection board MASS 6000 to MC2 sensors Ex-approved), for enclosure</b> <b>FDK:083F5037/FDK:083F5038</b> • 24 V, 115/230 V	<b>FDK:083H4295</b>

<sup>1)</sup> Attention (Ex application): MC2 Ex version sensors must only be connected to connection board FDK:083H4294 or FDK:083H4295.




Description	Article No.
Wall mounting enclosure in ABS plastic IP65 with connection board/PCB for Ex application connected to MC2 Ex sensors	<b>FDK:083H4296</b>



#### Selection and ordering data (continued)


##### Spare parts 19" versions

Enclosure (without PCB, connection board)

Description	Article No.	
<b>IP66/NEMA 4X, wall mounting enclosure for 19" inserts (without back plates). Use with PCB A5E02559813 or A5E02559814</b> <ul style="list-style-type: none"> <li>• 21 TE</li> </ul>	<b>FDK:083F5037</b>	
<ul style="list-style-type: none"> <li>• 42 TE</li> </ul>	<b>FDK:083F5038</b>	
<b>Display unit for 19" versions</b> Order the Display and Keypad accessory from MASS 6000 IP67 compact/remote (FDK:085U1039) and use the display part only for replacement	<b>FDK:083U1039</b>	

##### Accessories

Add-on module for remote and compact MASS 6000 Ex d

Description	Article No.	
HART (Ex-i)	<b>FDK:085U0226</b>	
PROFIBUS PA Profile 3 (Ex-i)	<b>FDK:085U0236</b>	
FOUNDATION Fieldbus H1 (Ex-i)	<b>A5E02054250</b>	

##### Operating instructions for SITRANS F add-on modules

Description	Article No.	
HART	<b>A5E03089708</b>	
• English		
Profibus PA/DP	<b>A5E00726137</b>	
• English		
• German	<b>A5E01026429</b>	
MODBUS	<b>A5E00753974</b>	
• English		
• German	<b>A5E03089262</b>	
FOUNDATION Fieldbus	<b>A5E02318728</b>	
• English		
• German	<b>A5E02488856</b>	
DeviceNet	<b>A5E03089720</b>	
• English		

This device is shipped with Safety Notes and a DVD containing further SITRANS FC literature.

All literature is available to download for free, in a range of languages, at

[www.siemens.com/processinstrumentation/documentation](http://www.siemens.com/processinstrumentation/documentation)



## Flow Measurement

### SITRANS FC (Coriolis)

#### Spare parts

#### SIFLOW FC070

#### Overview



SIFLOW FC070 is based on the SIMATIC S7-300 and the MASS 6000 technology.

The SIFLOW FC070 transmitter can be analogue connected with the Sitrans FC MASS 2100 DI 1.5, DI 3, DI 6, DI 15 and the FC300 DN4.

SIFLOW FC070 is available in two versions:

- SIFLOW FC070 Standard
- SIFLOW FC070 Ex & CT

The SIFLOW FC070 transmitter delivers true multi-parameter measurements i.e. mass flow, volume flow, density, temperature and fraction.

SIFLOW FC070 is designed for integration in a variety of automation systems, i.e.:

- Central mounted in S7-300, C7
- Decentralized in ET 200M for use with S7-300 and S7-400 as PROFIBUS DP/PROFINET masters
- Decentralized in ET 200M for use with any automation system using standardized PROFIBUS DP/PROFINET masters
- Stand-alone via a Modbus RTU master, i.e. SIMATIC PDM

#### Benefits

- Easy integration in SIMATIC S7 and PCS 7
- Support of SIMATIC PDM configuration tool via Modbus
- Dedicated mass flow chip with high-performance ASIC technology
- True 30 Hz update rate securing fast batching and step response
- Superior noise immunity due to a DFT (Discrete Fourier Transformation) algorithm
- Front end resolution better than 0.35 ns improves zero point stability and enhances dynamic turn-down ratio on flow and density accuracy
- Built-in batch controller with two-stage control and compensation
- Digital outputs for direct batch control, frequency/pulse
- Modbus RTU RS 232/485 interface for connection to SIMATIC PDM or any other Modbus master
- Digital input for batch control, zero adjust
- Multiple LED's for easy indication of flow, error and I/O state
- SENSORPROM technology automatically configures the transmitter during start-up providing:

- Factory pre-programming with calibration data, pipe size, sensor type and I/O settings
- Any values or settings changed by the user is stored automatically
- Automatically re-programming of a new transmitter, without loss of settings and accuracy
- Transmitter replacement in less than 30 seconds
- Four-wire Pt1000 measurement ensuring optimum accuracy mass flow, density and fraction flow
- Fraction flow computation based on 3rd-order algorithm matching all applications

#### Application

SIFLOW FC070 mass flowmeters are suitable for all applications within the entire process industry, where there is a demand for accurate flow measurement. The meters are suitable for measuring on liquid and gas.

The main applications for the SIFLOW FC070 transmitter can be found in the following industries:

- Food and beverage
- Pharmaceutical
- Automotive
- Oil and gas
- Power generation and utility
- Water and waste water

#### Design

SIFLOW FC070 is designed in an IP20 SIMATIC S7-300 enclosure and for use in central and de-central cabinets where sensors: FCS200, FC300 and MASS 2100 are remotely mounted.

#### Function

The following key functionalities are available:

- Mass flow rate, volume flow rate, density, temperature and fraction flow
- Two built-in totalizers which can freely be set for counting mass, volume or fraction
- 1 frequency/pulse output
- 1 phase shifted 90°/180° frequency/pulse output
- Two-stage batch controller
- 1 digital input
- Low flow cut-off
- Empty pipe detection
- Noise filter settings for different applications
- Simulation
- Automatic zero point adjustment with zero point evaluation feed back
- Configurable upper and lower alarm and warning limits for all process values
- Comprehensive status and error reporting



### Technical specifications

<b>Measurement of</b>	Mass flow, volume flow, density, sensor temperature, fraction A flow, fraction B flow, fraction A in %	<b>Galvanic isolation</b>	All inputs, outputs and communication interfaces are galvanically isolated. Isolation voltage: 500 V
<b>Measurement functions</b>		<b>Power</b>	
• Totalizer 1	Totalization of mass flow, volume flow, fraction A, fraction B	Supply	24 V DC nominal
• Totalizer 2	Totalization of mass flow, volume flow, fraction A, fraction B	Tolerance	20.4 V DC ... 28.8 V DC
• Single and 2-stage batch function	Batching function with the use of one or two outputs for dosing in high and low speed	Consumption	Max. 7.2 W
• 4 programmable limits	4 programmable high/low limits for mass flow, volume flow, density, sensor temperature, fraction A flow, fraction B flow, fraction A in %. Limits will generate an alarm if reached	Fuse	T1 A/125 V, not replaceable by operator
<b>Digital input</b>		<b>Environment</b>	
Functions	Start batch, stop batch, start/stop batch, hold/continue batch, reset totalizer 1, reset totalizer 2, reset totalizer 1 and 2, zero adjust, force frequency output, freeze frequency output	Ambient temperature	Storage: -40 °C ... +70 °C (-40 °F ... +158 °F)
High signal	<ul style="list-style-type: none"> <li>Nominal voltage: 24 V DC</li> <li>Lower limit: 15 V DC</li> <li>Upper limit: 30 V DC</li> <li>Current: 2 ... 15 mA</li> </ul>	Operation conditions	Horizontally mounted rail: <ul style="list-style-type: none"> <li>SIFLOW FC070 Standard: 0 ... +60 °C (32 ... +140 °F)</li> <li>SIFLOW FC070 Ex CT: -40 ... +60 °C (-40 ... +140 °F)</li> </ul> Vertically mounted rail: <ul style="list-style-type: none"> <li>SIFLOW FC070 Standard: 0 ... 45 °C (32 ... 113 °F)</li> <li>SIFLOW FC070 Ex CT: -40 ... +45 °C (-40 ... +113 °F)</li> </ul>
Low signal	<ul style="list-style-type: none"> <li>Nominal voltage: 0 V DC</li> <li>Lower limit: -3 V DC</li> <li>Upper limit: 5 V DC</li> <li>Current: -15 ... +15 mA</li> </ul>	Altitude	Operation: -1 000 ... 2 000 m (pressure 795 ... 1 080 hPa)
Input	Approx. 10 kΩ	<b>Enclosure</b>	
Switching	Max. 100 Hz	Material	Noryl, color: anthracite
<b>Digital output 1 and 2</b>		Rating	IP20/NEMA 2 according to IEC 60529
Functions	<ul style="list-style-type: none"> <li>Output 1: Pulse, frequency, redundancy pulse, redundancy frequency 2-stage batch, batch</li> <li>Output 2: Redundancy pulse, redundancy frequency, 2-stage batch</li> </ul>	Mechanical load	According to SIMATIC standards (S7-300 devices)
Voltage supply	3 ... 30 V DC (passive output)	<b>Ex approvals</b>	
Switching current	Max. 30 mA at 30 V DC	• SIFLOW FC070 Standard	ATEX: II 3G Ex nA II T4
Voltage drop	≤ 3 V DC at max. current	• SIFLOW FC070 Ex CT	ATEX, IECEx, EAC Ex, FM, CSA, INMETRO - Zone 2: Ex nA [ia] IIC T4
Leakage current	≤ 0.4 mA at max. voltage 30 V DC		FM - Class I, Div. 2: Grp. A, B, C, D (interface to Class I+II+III, Div. 1)
Load resistance	1 ... 10 kΩ	<b>Custody transfer approvals</b>	
Switching frequency	0 ... 12 kHz 50 % duty cycle	SIFLOW FC070 Ex CT	Compressed gaseous fuel measuring systems for vehicles NTEP for USA and Canada, approval no: 97-111A3
Functions	Pulse, frequency, redundancy pulse, redundancy frequency 2-stage batch, batch	<b>EMC performance</b>	
<b>Communication</b>		Emission	EN 55011/CISPR-11
Modbus RS 232C	<ul style="list-style-type: none"> <li>Max. baud rate: 115 200 baud</li> <li>Max. line length: 15 m at 115 200 baud</li> <li>Signal level: according to EIA-RS 232C</li> </ul>	Immunity	EN/IEC 61326-1
Modbus RS 485	<ul style="list-style-type: none"> <li>Max. baud rate: 115 200 baud</li> <li>Max. line length: 1 200 m at 115 200 baud</li> <li>Signal level: according to EIA-RS 485</li> <li>Bus termination: Integrated. Can be enabled by inserting wire jumpers.</li> </ul>	<b>Certification</b>	
		CE mark	Low voltage directive RoHS
		<b>NAMUR</b>	Within the limits according to "General recommendations" with error criteria A in accordance with NE 21
		<b>Programming tools</b>	
		SIMATIC S7	Configuration through backplane P-BUS, PLC program and WinCC flexible
		SIMATIC PCS7	Configuration through backplane P-BUS and PLC/WinCC faceplates, certified driver
		SIMATIC PDM	Through Modbus port RS 232C and RS 485, certified driver

## Flow Measurement

### SITRANS FC (Coriolis)

#### Spare parts

#### SIFLOW FC070

#### Selection and ordering data

Description	Article No.
<b>SIFLOW FC070 flow transmitter</b> Remember to order 40 pin front plug connector.	<b>7ME4120-2DH20-0EA0</b>
<b>40 pin front plug</b> with screw contacts	<b>6ES7392-1AM00-0AA0</b>
<b>40 pin plug</b> with spring contacts	<b>6ES7392-1BM01-0AA0</b>
<b>SIFLOW FC070 Ex flow transmitter</b> Remember to order 20 pin front plug connector.	<b>7ME4120-2DH21-0EA0</b>
<b>20 pin front plug</b> with screw contacts	<b>6ES7392-1AJ00-0AA0</b>
<b>20 pin plug</b> with spring contacts	<b>6ES7392-1BJ00-0AA0</b>





#### Operating instructions for SITRANS F C SIFLOW FC070

Description	Article No.
<b>SIFLOW FC070 system manual</b>	
• English	<b>A5E00924779</b>
• German	<b>A5E00924776</b>
<b>SIFLOW FC070 with S7</b>	
• English	<b>A5E02254228</b>
• German	<b>A5E02665536</b>
<b>SIFLOW FC070 with PCS 7</b>	
• English	<b>A5E03694109</b>


All literature is available to download for free, in a range of languages, at

[www.siemens.com/processinstrumentation/documentation](http://www.siemens.com/processinstrumentation/documentation)


#### Accessories

Description	Article No.	
<b>Cable with multiplug</b> for connecting MASS 2100, FCS200 and FC300 sensors, 5 × 2 × 0.34 mm <sup>2</sup> twisted and screened in pairs. Temperature range -20 °C ... +110 °C (-4 °F ... +230 °F) • 5 m (16.4 ft) • 10 m (32.8 ft) • 25 m (82 ft) • 50 m (164 ft) • 75 m (246 ft) • 150 m (492 ft)	<b>FDK:083H3015</b> <b>FDK:083H3016</b> <b>FDK:083H3017</b> <b>FDK:083H3018</b> <b>FDK:083H3054</b> <b>FDK:083H3055</b>	
<b>Cable without multiplug</b> for connecting MC2 sensors, 5 × 2 × 0.34 mm <sup>2</sup> twisted and screened in pairs. Temperature range -20 °C ... +110 °C (-4 °F ... +230 °F) • 10 m (32.8 ft) • 25 m (82 ft) • 75 m (246 ft) • 150 m (492 ft)	<b>FDK:083H3001</b> <b>FDK:083H3002</b> <b>FDK:083H3003</b> <b>FDK:083H3004</b>	
<b>SIMATIC S7-300 rail</b> The mechanical mounting rack of the SIMATIC S7-300 • 160 mm (6.3") • 482 mm (18.9") • 530 mm (20.8") • 830 mm (32.7") • 2 000 mm (78.7")	<b>6ES7390-1AB60-0AA0</b> <b>6ES7390-1AE80-0AA0</b> <b>6ES7390-1AF30-0AA0</b> <b>6ES7390-1AJ30-0AA0</b> <b>6ES7390-1BC00-0AA0</b>	
<b>SIMATIC S7-300, stabilized power supply PS307</b> • Input: 120/230 V AC • Output: 24 V DC/2 A	<b>6ES7307-1BA01-0AA0</b>	

**Dimensional drawings**

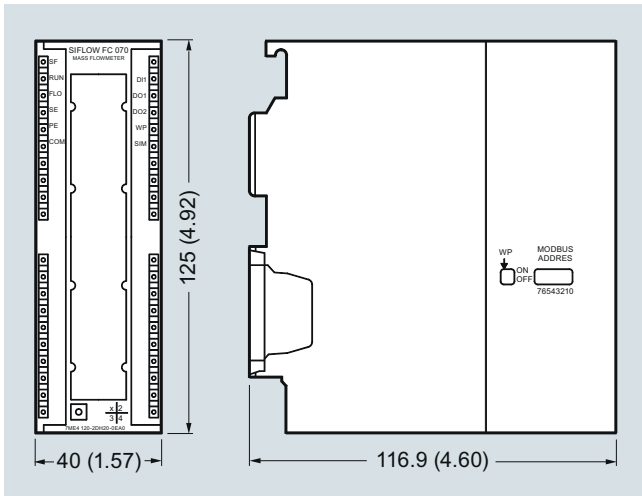


SIFLOW FC070, dimensions in mm (inch)

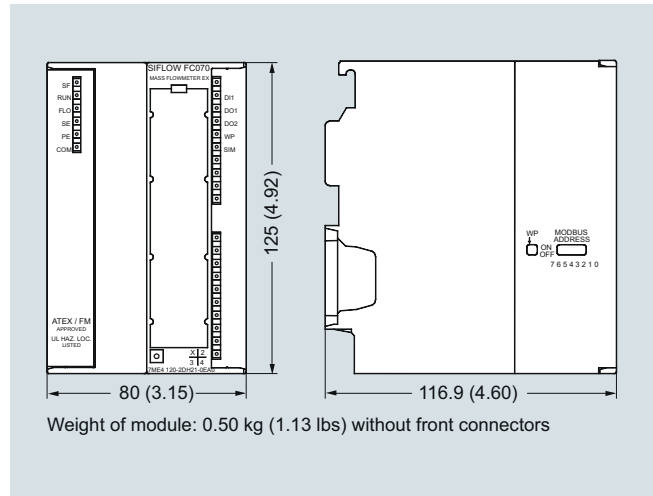


Weight of module: 0.50 kg (1.13 lbs) without front connectors

SIFLOW FC070 Ex CT, dimensions in mm (inch)

**Circuit diagrams**

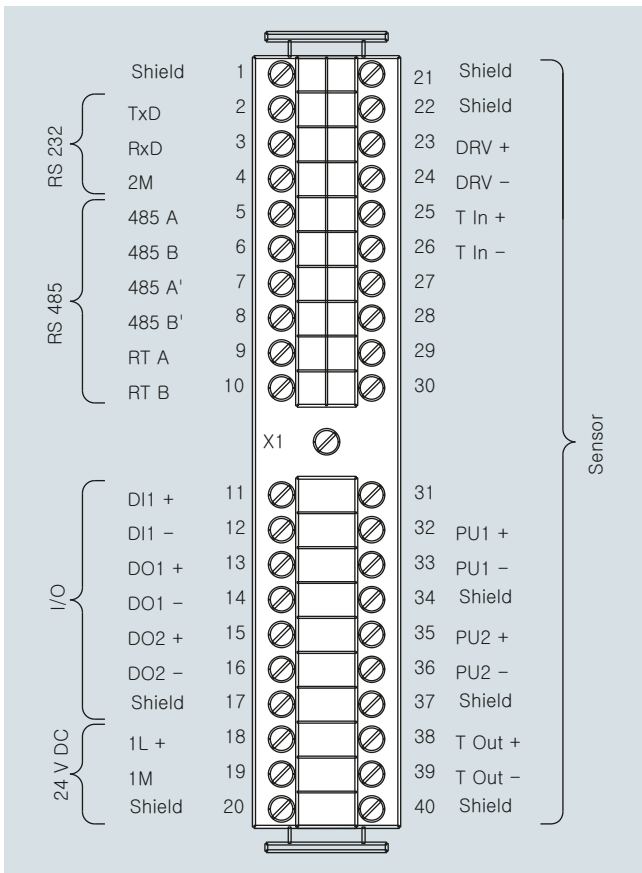

SIFLOW FC070, electrical connection

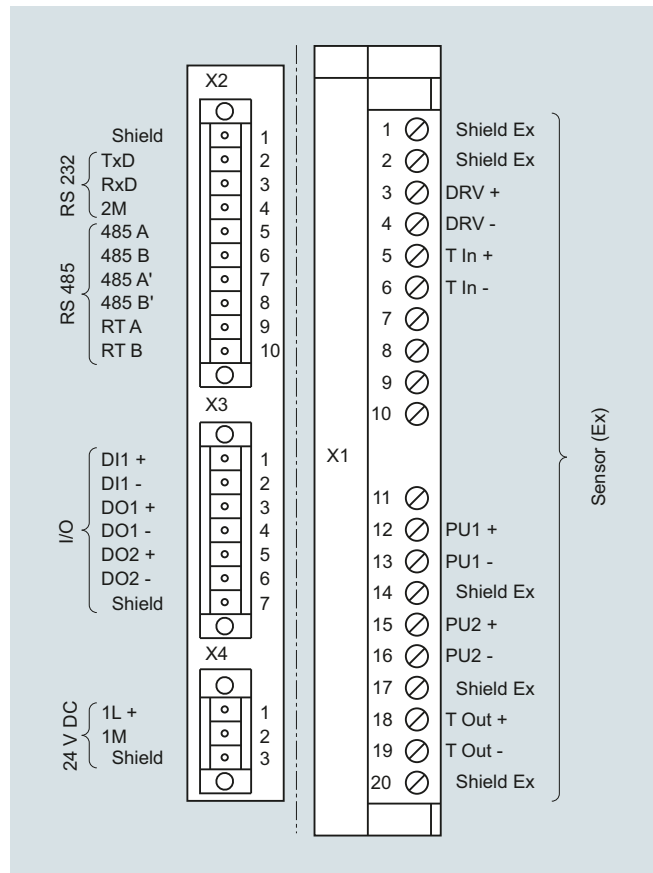

SIFLOW FC070 Ex CT, electrical connection

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### Introduction

#### Overview

Siemens offers two types of ultrasonic flowmeters, inline flowmeters and clamp-on flowmeters. This offers the end user the maximum flexibility to choose the technology that best fits his needs. This following chapter shows the inline versions.



SITRANS FS inline ultrasonic flowmeters measure flow of electrically conductive and non-conductive liquids.

#### Benefits

- Greater flexibility:
  - Sensor sizes from DN 50 to 1200 mm (2" to 48")
  - Inline retrofit as 1-path and 2-path up to DN 1200 mm (2" to 48")
  - Compact and remote transmitter installation
  - HART and PROFIBUS PA communication
  - Mains or battery powered solutions
  - Dedicated transmitter portfolio for HVAC, power generation, utility and general industry as well as more demanding applications
- Easier service:
  - Exchange of the transducers without interrupting operation
  - Battery lifetime of up to 6 years
- Approvals/certificates:
  - Custody transfer approvals within district heating
  - ATEX
  - Standard with calibration certificate

#### Application

Inline ultrasonic flowmeters are suitable for measuring the flow of liquids with good acoustic permeability, independent of conductivity, viscosity, temperature, density and pressure.

- max. 3 % solids
- max. 3 % air and gas
- max. 350 cSt

The main applications can be found in the following sectors:

- Raw water intake for water treatment plants
- Treated waste water
- Power generation and utility
- Irrigation systems
- Cooling water plants within the industry and in power stations
- Plants transporting non-conductive liquids
- Custody transfer - district heating (MID-004)
- HART/4 to 20 mA output
- PROFIBUS PA
- ATEX

## Application

Please see Product selector on the Internet, since some constraints might be related to some of the features: [www.pia-portal.automation.siemens.com](http://www.pia-portal.automation.siemens.com)



	SONO 3300/ FUS060	SONO 3100/ FUS060	SONOKIT/ FUS060, FUS080	FUE380	FUS380
	7ME3300...	7ME3100...	7ME3210.../ 7ME3220...	7ME3410...	7ME3400...
<b>Industry</b>					
Water, treated waste water	XXX	XX	XXX		XXX
Irrigation	XX	XX	XXX		XXX
Utility, district heating water, cooling	XXX	XX	XXX	XXX	XXX
Utility, district heating, CT approvals required				XXX	
Cryogenic fluids (only on request)		XXX			
Onshore and Offshore applications	XX	XXX	XX		X
<b>Design</b>					
Compact transmitter mounted on pipe				•	•
Remote transmitter- Sensor up to 100 m	•	•	•	•	•
Transducers can be replaced under pressure		•	•		
Retrofit on existing steel pipes/non weldable			•		
<b>Transmitter enclosure</b>					
Polyamid, IP67			•	•	•
Die-cast aluminum (painted), IP65	•	•	•		
<b>Communication</b>					
HART	•	•	•		
PROFIBUS PA	•	•	•		
<b>Power supply</b>					
3.6 V Battery			•	•	•
115 ... 230 V AC	•	•	•	•	•
115 ... 230 V AC and 3.6 V battery backup			•	•	•
24 V AC/DC	•	•	•		
<b>Accuracy</b>					
0.25 % (4 path system on request)		•			
0.50 %	•	•	•	•	•
<b>Sensor design</b>					
1- path ultrasonic measurement		•	•		
2-path ultrasonic measurement	•	•	•	•	•
4-path ultrasonic measurement (special request)		•	•		
<b>Dimension</b>					
DN 50	2"	•		Die- cast bronze	Die- cast bronze
DN 65	2½"	•		Die- cast bronze	Die- cast bronze
DN 80	3"	•		Die- cast bronze	Die- cast bronze
DN 100	4"	•	•	1-path only	•
DN 125	5"	•	•	1-path only	•
DN 150	6"	•	•	1-path only	•
DN 200	8"	•	•	•	•
DN 250	10"	•	•	•	•
DN 300	12"	•	•	•	•
DN 350	14"	•	•	•	•
DN 400	16"	•	•	•	•
DN 500	20"	•	•	•	•
DN 600	24"	•	•	•	•
DN 700	28"	•	•	•	•
DN 800	32"	•	•	•	•
DN 900	36"	•	•	•	•
DN 1000	40"	•	•	•	•
DN 1200	48"	•	•	•	•

X = can be used, XX = often used, XXX = most often used, • = available

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### System information

#### Application (continued)


Please see Product selector on the Internet, since some constraints might be related to some of the features: [www.pia-portal.automation.siemens.com](http://www.pia-portal.automation.siemens.com)



	SONO 3300/ FUS060	SONO 3100/ FUS060	SONOKIT/ FUS060, FUS080	FUE380	FUS380
	7ME3300...	7ME3100...	7ME3210.../ 7ME3220...	7ME3410...	7ME3400...
<b>Process connection</b>					
Flanges	•	•		•	•
Flangeless (for weld-in)		•			
<b>Flanges norm</b>					
EN 1092-1	•	•		•	•
EN 1759-1	•	•			
ANSI B16.5		•			
<b>Pressure rating</b>					
PN 6			•		
PN 10	•	•	•		
PN 16	•	•	•	•	•
PN 25		•	•	•	•
PN 40	•	•	•	•	•
Class 150	•	•			
Class 300	•	•			
<b>Pipe, flange</b>					
Carbon steel	•	•	•	•	•
Die cast bronze (DN 50, 65, 80)				•	•
<b>Media temperature</b>					
°C					°F
-20		•	•		-4
-10	•	•	•		+14
+2	•	•	•	Min. 5 °C ( 41 °F)	•
+60	•	•	•	•	•
+120	•	•	•	Compact	Compact
+150	•	•	•	Die cast bronze	Die cast bronze
+160	•	•	•	•	•
+190	•	•	•	•	•
+200	•	•	•	•	•
<b>Measuring principle</b>					
Transit time principle	•	•	•	•	•
<b>Approvals</b>					
<u>Custody transfer approval</u>					
MID, MI-004, EN 1434 (European energy meter standard)				•	
Other country-specific type approval available for:					
• Russia	•	•	•	•	•
• China (CPA/CMC)				•	
• Korea KC	•	•	•	•	•
<u>Ex approval</u>					
Ex d ATEX		•	•		
Ex i ATEX	•	•	•		
• = available					

## Function

### Physical principle (single path)

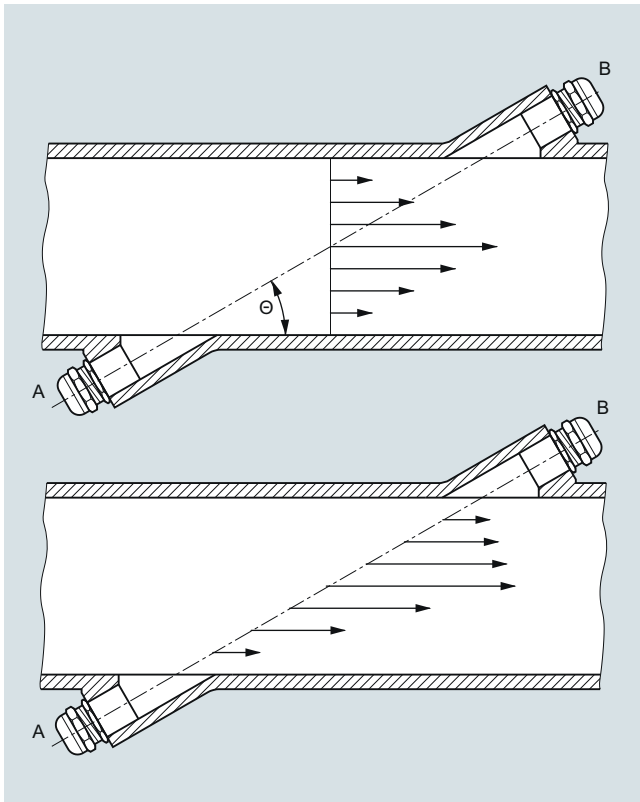

Velocity distribution along sound path

A sound wave traveling in the same direction as the liquid flow arrives at point B from point A in a shorter time than the sound wave traveling against the direction of flow (from point B to A). The difference in sound transit time indicates the flow velocity in the pipe.

Since delay time is measured at short intervals both in and against flow direction, viscosity and temperature have no influence on measurement accuracy.

### Measuring principle

In SITRANS F US flowmeters the two ultrasonic transducers are placed at an angle  $\theta$  in relation to the pipe axis. The transducers function as transmitters and receivers of the ultrasonic signals. Measurement is performed by determining the time the ultrasonic signal takes to travel with and against the flow. The principle can be expressed as follows:

$$v = K \cdot (t_{B,A} - t_{A,B}) / (t_{A,B} + t_{B,A}) = K \cdot \Delta t / t^2$$

$v$  = Average flow velocity

$t$  = Transit time

$K$  = Proportional pipe geometry factor


This measuring principle offers the advantage that it is independent of variations in the actual sound velocity of the liquid, i.e. independent of the temperature.

Proportional factor  $K$  is determined by wet calibration.

### Direct signal processing

The ultrasonic signal is sent directly between the transducers. The advantage gained sending signals from point to point is an extremely good signal strength.

### 2-path solution

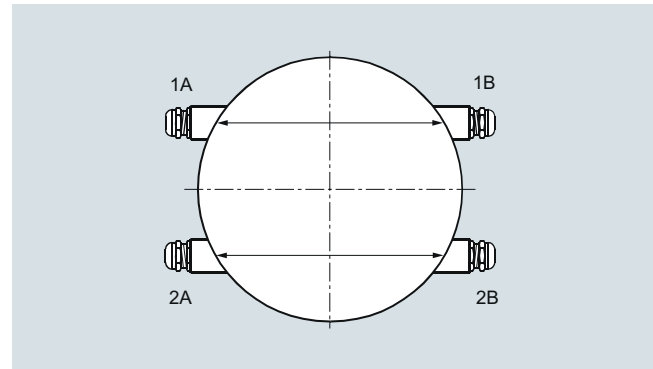

Ultrasonic 2-path flow meter with 4 transducers. In the upper path transducers 1A/1B and in the lower path 2A / 2B are displayed.

The accuracy of ultrasonic flowmeters depends on the pipe geometry before and after the flowmeter and the number of ultrasonic measuring paths.

When water flows through a pipe, it has a tendency to swirl and/or flow with different velocities inside the pipe, depending on the pipe design.

A 2-path ultrasonic flowmeter offers:

- less sensitivity to upstream obstruction like bends, pumps or valves.
- high security in the measurements as the meter continues to measure even if, for some reason, one path stops working.

Typical straight inlet requirements are upstream  $10 \times D_1$  ( $D_1$  = diameter of the flowmeter) and downstream  $3 \times D_1$ .

Typical accuracy that can be reached with 2-path ultrasonic flowmetering is  $\pm 0.5\%$  with installations according to above demands.

# Flow Measurement


SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

## System information

## Technical specifications

3

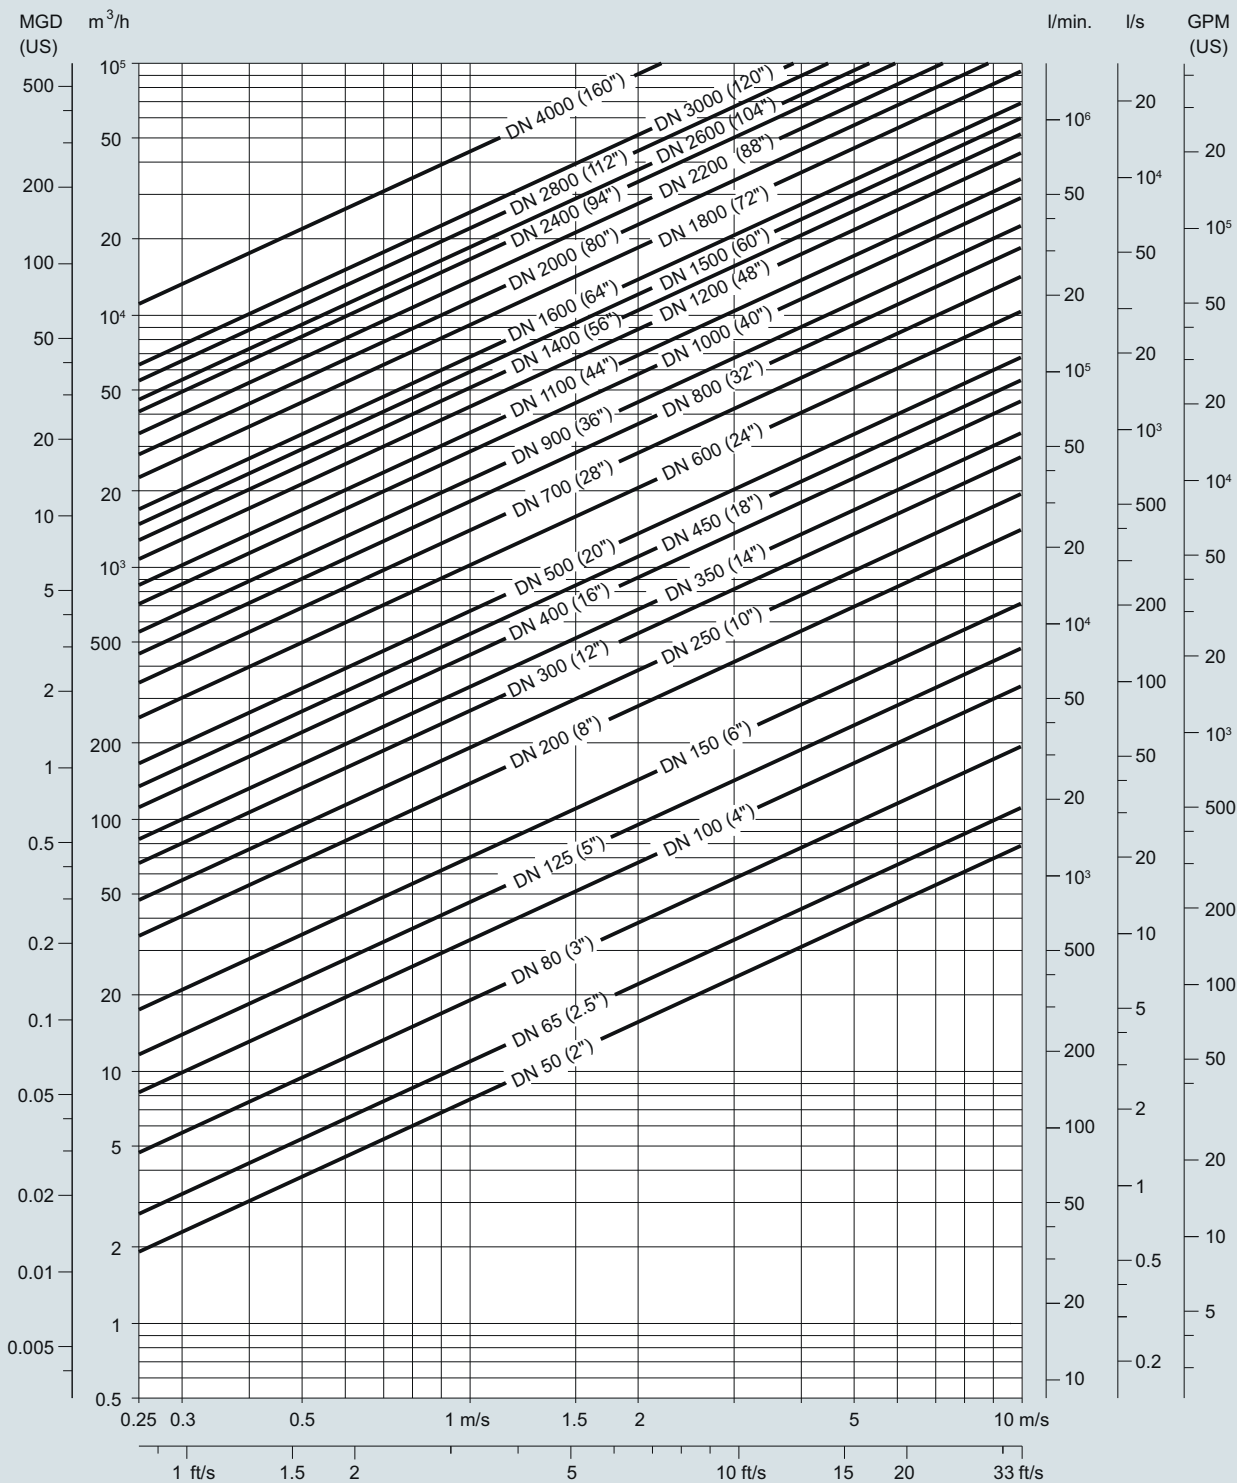

Nominal size and flow



#### Technical specifications (continued)

##### Guidelines for selection of sensor

- Min. measuring range: 0 ... 1 m/s
- Max. measuring range: 0 ... 10 m/s

Nominal flow velocity:

- Normal: 1 ... 3 m/s
- Minimum: not permanently below 0.5 m/s
- Maximum: up to 8 m/s

Flow velocity calculation formula:

- $v = (4 \times Q_{\max}) / (\pi \times D_i^2 \times 3600)$
- $v$  in m/s,  $Q_{\max}$  in m<sup>3</sup>/h,  $D_i$  in m

Additional to the flow velocity check it is recommended to observe the Reynolds number (Re):


The optimal performance of the flowmeter is with a Re above 10 000, which is typical for flow velocities (water) above 0.5 m/s. Avoid an Re value between 2000 and 5000. In order to observe this and to be above the recommended 0.5 m/s flow velocity limit the sensor size must be reduced.

Re formula:  $Re = V \times D_i / \text{Viscosity}$

$V$  in m/s,  $D_i$  in m, Viscosity in cSt ( $X \times E^{-6} \text{ m}^2/\text{s}$ )

Example: Viscosity for water at 20 °C =  $1 \times E^{-6} \text{ m}^2/\text{s}$

##### Inlet and outlet conditions

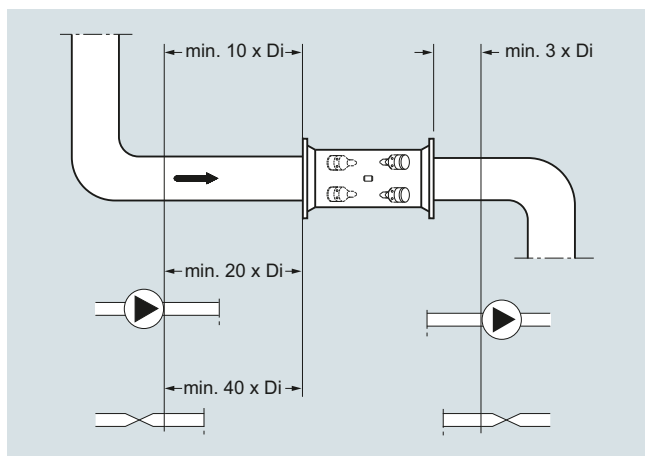

Recommended inlets and outlets

To maximize performance inlet and outlet must be straight. There must be a certain distance between flowmeter and bends, pumps and valves. It is also important to centre the flowmeter in relation to pipe flanges and gaskets.

Valves must always be installed after the flowmeter. The only exception is installation of the sensor in a vertical pipe. In this case a valve below the sensor is necessary to allow zero point adjustment. It is important to select a valve which does not alter the flow when fully open.

Recommended inlet/outlet	SONO 3300, SONO 3100, SONOKIT 2-path	FUS380/ FUE380 <sup>1)</sup>	SONOKIT 1-path
	90° bend	10 x $D_i$	10 x $D_i$
Fully opened valve	10 x $D_i$	10 x $D_i$	20 x $D_i$
Partially opened valve	40 x $D_i$	40 x $D_i$	40 x $D_i$
2 x 90° bends in same plane	15 x $D_i$	15 x $D_i$	25 x $D_i$
2 x 90° bends in two planes	20 x $D_i$	20 x $D_i$	40 x $D_i$
Reductions (Outlet 0 x $D_i$ )	10 x $D_i$	10 x $D_i$	20 x $D_i$
Pumps	20 x $D_i$	20 x $D_i$	40 x $D_i$
Outlet	3 x $D_i$	3 x $D_i$	3 x $D_i$


<sup>1)</sup> Inlet for FUE380 approved systems: Minimum straight inlet pipe: 1.5 m, but note further recommendations above.

##### Reductions

The flowmeter can be installed between two reducers (e.g. DIN 28545). At 8° the pressure drop curve below applies.

##### Example:

A flow velocity of 3 m/s ( $V$ ) in a sensor with a diameter reduction from DN 250 to DN 200 ( $d_1/d_2 = 0.8$ ) gives a pressure drop of 3 mbar.

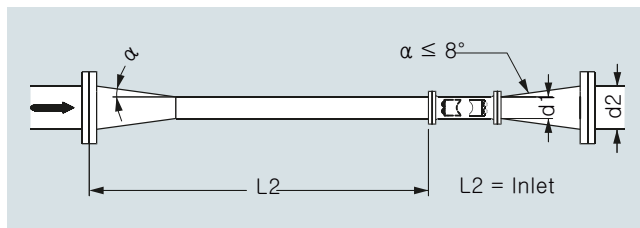


## Flow Measurement

### SITRANS FS (ultrasonic)


#### Inline ultrasonic flowmeters

#### System information

#### Technical specifications (continued)


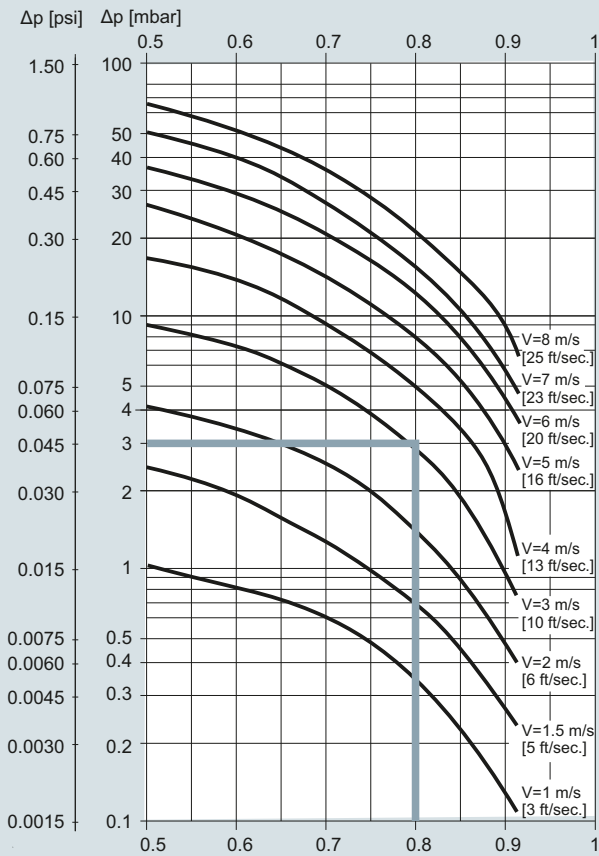


The sensor must always be completely filled with liquid:

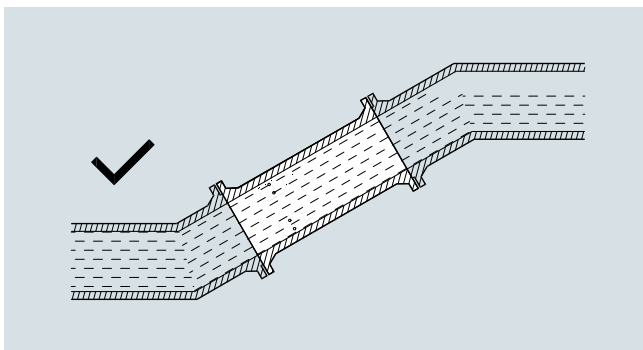


The following installations must be avoided:


- Installation at the highest point of the pipe system
- Installation in vertical pipes with free outlet

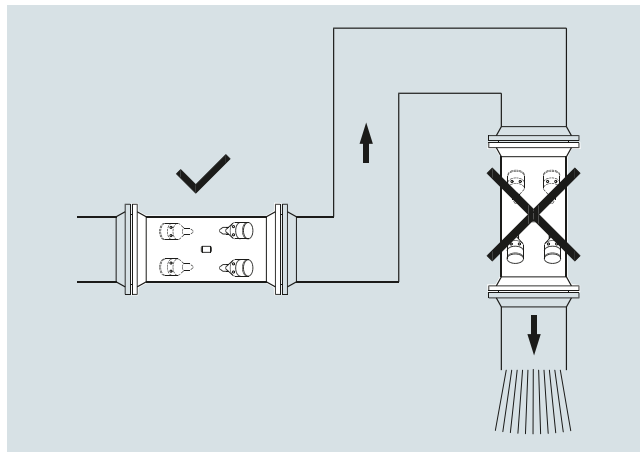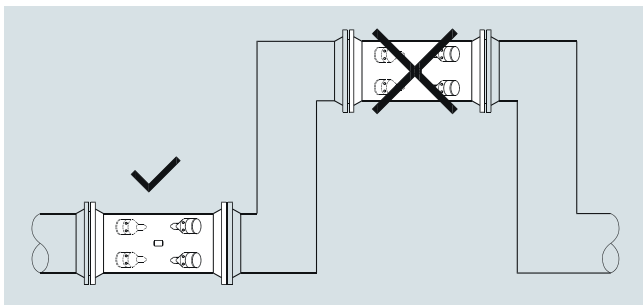

With partially full pipes or pipes with free outlet the flowmeter should be located in a U-shaped tube:


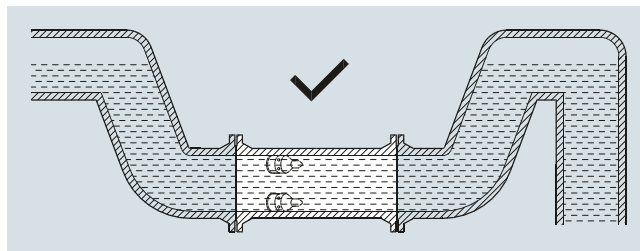


Installing the transducers in horizontal position is recommended:

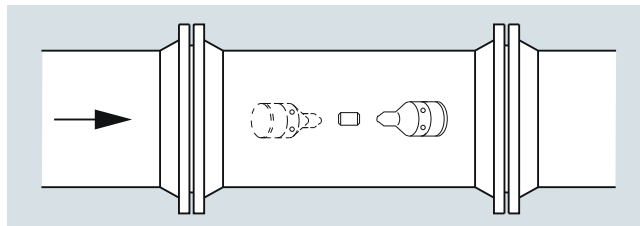


#### Technical specifications (continued)

##### Pressure/temperature curve to EN (DIN) flanges

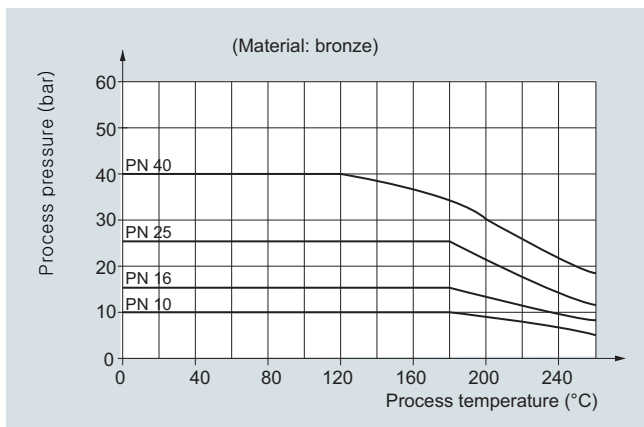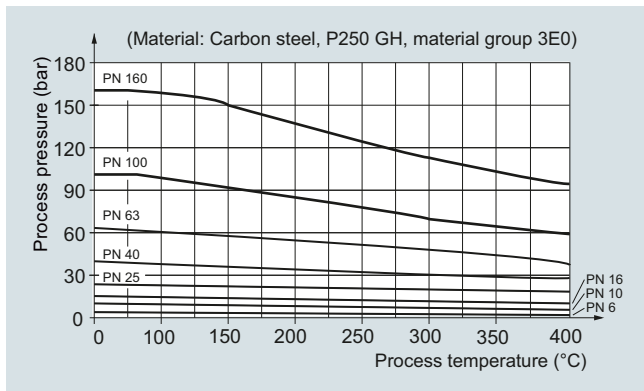

##### Pressure/temperature curve to ANSI B16.5 flanges

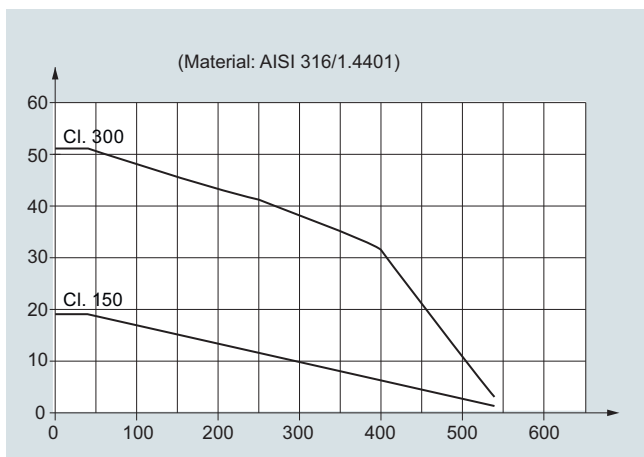

**Note:** The pressure/temperature curves only assist in the selection of a system. No responsibility is taken for the correctness of the information. For exact data please refer to the PED requirements.

##### Reference conditions

To ensure continuous accurate measurement, flowmeters must be calibrated. The calibration is conducted at Siemens flow facilities with traceable instruments referring directly to the physical unit of measurement according to the International System of Units (SI).


Therefore the calibration certificate ensures recognition of the test results worldwide, including the US (NIST traceability).

Siemens offer accredited calibrations assured to ISO 17025. Siemens Flow Instruments accredited laboratories are recognized by ILAC MRA (International Laboratory Accreditation Corporation - Mutual Recognition Arrangement) ensuring international traceability and recognition of the test results worldwide.

Flowmeter calibration data are stored in the internal EEPROM of the transmitter FUS060 or FUS080.

The system accuracy refers to the following systems:

SONO 3300/FUS060, SONO 3100/FUS060<sup>1)</sup> which are typically calibrated on the frequency output.

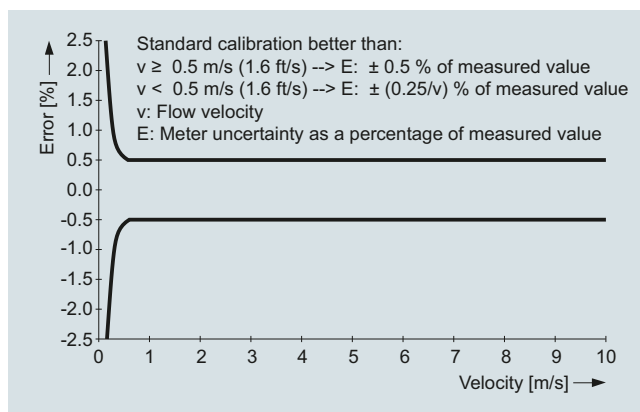

##### Typical calibration reference conditions:

Fluid	Water
Fluid temperature	22 ± 5 °C
Ambient temperature	22 ± 5 °C
Supply voltage	115/230 V AC +10 ... -15 % DC 24 V +25 ... -15 %, AC 24 V ± 15 %
Straight inlet length	20 x D <sub>i</sub>
Outlet	3 x D <sub>i</sub>
Rangeability	0 ... 1 m/s to 0 ... 10 m/s
Repeatability	Better than 0.25 % in the range 0.5 ... 10 m/s
Linearity (for water)	
• Reynolds number 1000 < Re < 5000	Better than 1 %
• Reynolds number > 5000	Better than 0.5 %

<sup>1)</sup> Only systems with transmitter FUS060. For systems with transmitter FUS080 see the sections FUS380 and FUE380.

##### Additional effects of deviations from reference conditions

- Current output: As frequency output (± 0.1 % of actual flow +0.05 % FSO)
- Effect of ambient temperature: Frequency/pulse output: < 0.005 % SPAN/K; Current output: < ± 0.0075 % SPAN/K
- Effect of supply voltage: 0.005 % of measuring value at 1 % change

## Flow Measurement

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

### SITRANS FUS060 transmitter

#### Overview



SITRANS FUS060 is a transit time based transmitter designed for ultrasonic flowmetering with dedicated sensors in the FUS inline series up to DN 500. SITRANS FUS060 is engineered for high performance and is suitable for 1- and 2-path flowmeters.

#### Benefits

- Superior signal resolution for optimum turn down ratio
- Simple menu-based local operation with two-line display and four optical input elements, for unlimited use in potentially explosive atmospheres
- Self-monitoring and diagnostic
- Operate up to 2 paths
- ATEX II G Ex dem [ia/ib] IIC T6/T4/T3 Gb
- Remote installation up to 120 m from sensor
- 1 analog output (4 to 20 mA) standard with HART-protocol, 1 digital frequency or pulse output, 1 relay output for limit, alarms, flow direction
- PROFIBUS PA Profile 2, 1 digital frequency or pulse output

#### Application

The main application for flowmeters with the transmitter SITRANS FUS060 is measurement volume of water and waste water.

#### Design

The transmitter type FUS060 is designed for remote installation in non-hazardous or hazardous areas.

The transmitter is designed for use in a flowmeter system together with sensors type SONOKIT, SONO 3300 and SONO 3100.


The FUS060 is ordered as part of a complete flowmeter system. It can be ordered separately as spare part and manually programmed with the sensor data.

#### Function


##### Displays and keypad

Operation of the SITRANS FUS060 transmitter can be carried out using:

- Keypad and display unit
- HART communicator
- PC/laptop and SIMATIC PDM software via HART communication
- PC/laptop and SIMATIC PDM software using PROFIBUS PA communication

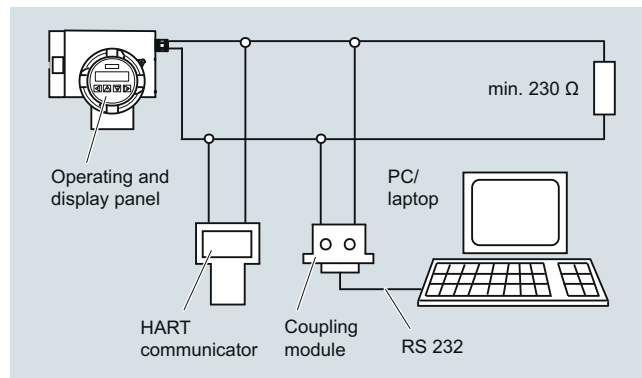


HART communication

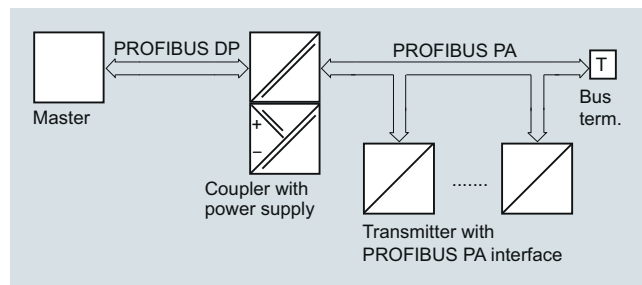

PROFIBUS PA communication

The operating and display panel permits simple operation without supplementary equipment. It is not necessary to open the housing. All changes to a setting can therefore also be carried out in the potentially explosive atmosphere.

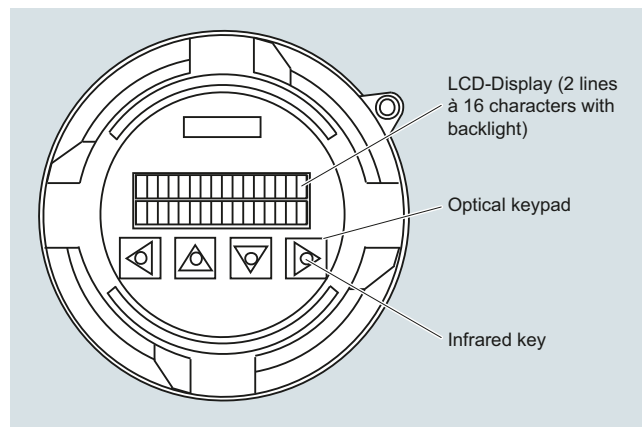

Operating and display panel

### Function (continued)

The individual functions and parameters are selected using a hierarchical, multi-language input menu and four infrared keys. The parameters can be specifically selected and modified using codes, e.g.:

- Operating parameters such as measuring range, physical dimensions, device information
- Limits for flow, totalizer, ultrasonic velocity or ultrasonic amplitude
- Noise suppression using damping, error stages and hysteresis
- Display parameters (freely-configurable display)
- Display in volume or mass dimensions
- Density as constant input value for conversion of volume into mass dimensions
- Forward/backward measurement
- Flow direction
- Diagnostics functions and control values
- Functions of the PROFIBUS PA output: flow, net quantity (volume or mass), ultrasonic velocity, ultrasonic amplitude, forward quantity (volume or mass), backward quantity (volume or mass)
- Functions of the analog output: flow, ultrasonic velocity or ultrasonic amplitude
- Functions of digital output 1: pulse output, frequency output, limit, flow direction or device status
- Functions of digital output 2: limit, flow direction or device status
- Simulation of output signal via analog output, digital output 1 and digital output 2

The HART protocol is implemented via the analog output (current output). Using this communication facility, the device can be parameterized with a PC/laptop and SIMATIC PDM software in addition to local operation.

In the version with PROFIBUS PA, the analog output is replaced by the digital PROFIBUS PA output. The device can then be parameterized via PROFIBUS communication and with SIMATIC PDM in addition to local operation.

### Integration

The transmitter output is often used as input for an automation system or as input for systems of remote reading.

The SITRANS FUS060 transmitter offers current, pulse and relay outputs as standard output functions and supports HART or Profibus PA communication.

The settings of the transmitter output functions are individually programmed via keypad and display menu.

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### SITRANS FUS060 transmitter

#### Technical specifications

##### Input

Measurement	Flow by measuring the transit time difference of ultrasonic signals through ultrasonic transducers in DN 100 ... 500 (4 ... 20") 2-path sensor pipes: 1-path or 2-path
Nominal sizes and number of paths	2-path DN 100 ... 500 (4 ... 20")
Max. cable length	20 m (395 ft) (shielded coaxial cable). For Ex version the transducer cable length is restricted to 3 m (9.84 ft) in order to meet requirements for electrical immunity.

##### Analog output

Function	Current output programmable for flow, sound velocity or amplitude level. Active current output (13.2 V < open loop voltage < 15.8 V)
• Signal range	4 ... 20 mA
• Upper limit	20 ... 22.5 mA, adjustable
• Signal on alarm	3.6 mA, 22 mA, or 24 mA
• Load	Max. 600 Ω; for non Ex version ≤ 230 Ω for HART communication ≤ 330 Ω for Ex-version
• Only PROFIBUS PA version:	Analog output omitted, is replaced by digital PROFIBUS PA interface

##### Digital output 1

Function	Pulse, frequency or status output - programmable for pulses, frequency, alarm, limit or status.
• Active or passive signal, can be configured with positive or negative logic	Active: 24 V DC, ≤ 24 mA, R <sub>i</sub> = 300 Ω Passive: open collector, 30 V DC, ≤ 200 mA
• For explosion protection (ATEX version) and PROFIBUS PA version	Only passive: open collector 30 V DC, ≤ 100 mA
• Output function, configurable	Pulse output <ul style="list-style-type: none"> <li>• Adjustable pulse significance ≤ 5 000 pulses/s</li> <li>• Adjustable pulse width ≥ 0.1 ms</li> </ul> Frequency response <ul style="list-style-type: none"> <li>• f<sub>END</sub> selectable up to 10 kHz</li> </ul> Limit for flow, totalizers, ultrasonic velocity or ultrasonic amplitude device status, flow direction

##### Digital output 2

Function	Relay output - programmable for alarm, limit or status indication.
• Relay, NC or NO contact	Switching capacity max. 5 W Max. 50 V DC, max. 200 mA DC Self-resetting fuse, R <sub>i</sub> = 9 Ω
• For explosion protection (ATEX version)	Max. 30 V DC, max. 100 mA DC, 50 mA AC (cf. EC-Type Examination certificate)
• Output function, configurable	Limit for flow, ultrasonic velocity or ultrasonic amplitude flow direction device status
• Only PROFIBUS PA version:	Digital output 2 omitted

##### Communication via analog output 4 ... 20 mA

• PC/laptop or HART communicator with SITRANS F flowmeter	
- Load with connection of coupling module	min. 230 Ω (max. 330 Ω for Ex-version)
- Load with connection of HART communicator	min. 230 Ω
- Cable	2-wire shielded ≤ 3 km (≤ 1.86 miles) Multi-core shielded ≤ 1.5 km (≤ 0.93 miles)
- Protocol	HART, version 5.1

##### Communication via PROFIBUS PA interface

• Power supply	Layers 1 + 2 according to PROFIBUS PA Communication system according to IEC 61158/EN 50170
• Current consumption from bus	Separate supply, four-wire device Permissible bus voltage 9 ... 32 V See certificates and approvals
	10 mA; ≤ 15 mA in event of error with electronic current limiting

##### Electrical isolation

Outputs electrically isolated from power supply and from another

##### Accuracy

Error in measurement (at reference conditions)	
• Pulse output	≤ ± 0,5 % of measured value at 0,5 ... 10 m/s or ≤ ± 0,25/V[m/s]% of measured value at flow < 0,5 m/s
• Analog output 4 ... 20 mA	As pulse output plus ± 0.1 % of measured value, ± 20 μA
• Repeatability	≤ ± 0,25 % of measured value at 0,5 ... 10 m/s
Reference conditions (water)	
• Process temperature in the connected sensor	25 °C ± 5 °C (77 °F ± 9 °F)
• Ambient temperature at the transmitter	25 °C ± 5 °C (77 °F ± 9 °F)
• Transmitter warming-up time	30 min.

#### Technical specifications (continued)

##### Rated operation conditions

###### Ambient conditions

Ambient temperature

- Operation -20 ... +50 °C (-4 ... +122 °F)
  - In potentially explosive atmospheres Observe temperature classes
  - Storage -25 ... +80 °C (-13 ... +176 °F)
- Enclosure rating IP65 (NEMA 4)
- Electromagnetic compatibility For use in industrial environments
- Emitted interference To EN 55011 / CISPR-11
  - Noise immunity To EN/IEC 61326-1 (Industry)

###### Medium conditions

The measuring media must be ultrasonic signal compatible. It must be homogeneous and not two-phased to transfer the acoustic ultrasonic signals.

- Process temperature -200 ... +250 °C (-328 ... +482 °F) (not directly influenced by medium temperature)
- Gases/solids Influence accuracy of measurement (approx. max. 3 % gases or solids)

##### Design

Separate version Transmitter is connected to the transducers via 3 ... 120 m (9.8 ft ... 395 ft) long specially shielded cables (coaxial cable)

For ATEX versions mounted in the Ex area only with 3 m (9.8 ft) long cables.

Enclosure material Die-cast aluminium, painted

Wall mounting bracket (standard and special) Stainless steel (standard: always incl.)

Weight of transmitter 4.4 kg (9.7 lb)

Electrical connection Cable glands (always incl.)

- Power supply and outputs
  - 2 x M20 (HART)/M25 (PROFIBUS) or
  - 2 x ½"-NPT (HART)
- Transducers/sensor
  - 2/4 x M16 or
  - 2/4 x ½"-NPT

##### Display and controls

Display LCD, two lines with 16 characters each

- Multi-display: 2 freely-selectable values are displayed simultaneously in two lines
- Flow, volume, mass flow, mass, flow velocity, speed of sound, ultrasonic signal information, current, frequency, alarm information

Operation 4 infrared keys, hierarchical menu shown with codes

##### Power supply

Supply voltage

- Standard version 120 ... 230 V AC ± 15 % (50/60 Hz) or 19 ... 30 V DC/21 ... 26 V AC

- Ex version 19 ... 30 V DC/21 ... 26 V AC

Power failure No effect for at least 1 period (> 20 ms)

Power consumption Approx. 10 VA/10 W

##### Certificates and approvals

Explosion protection ATEX II 2  
G Ex dem [ia/ib] IIC T6/T4/T3 Gb

T6 for media < 85 °C (185 °F)  
T5 for media < 100 °C (212 °F)  
T4 for media < 135 °C (275 °F)  
T3 for media < 200 °C (392 °F)

##### Coaxial cable

###### Standard Coaxial cable (75 Ω)

Coaxial cable with SMB straight plug on one end for connection to the FUS060

Pre-terminated, can be shortened on sensor side

Outside diameter Ø 5.8 mm

Length 3, 15, 30, 60, 90, 120 m (9.84, 49.21, 98.43, 196.85, 295.28, 393.70 ft) between sensor and transmitter

Material (outside jacket) black PE

Ambient temperature -10 ... +70 °C (14 ... 158 °F)

###### High temperature Coaxial cable (75 Ω)

Coaxial cable with SMB straight plug on one end for connection to the FUS060

Outside diameter Ø 5.13 mm (first 0.3 m (0.98 ft) part to the transducer), Ø 5.8 mm (for remaining cable to the transmitter – with SMB plug at the end) and between these is a black hot melt junction Ø 16 mm (length 70 mm)

Fix terminated, can NOT be shortened

Length 3, 15, 30 m (9.84, 49.21, 98.43 t) between sensor and transmitter (max. 3 m (9.84 ft)) transducer cable length for Ex area mounted transmitters)

Material (outside jacket) Brown PTFE (0.3 m (0.98 ft) part) and black PE (for remaining cable)

Ambient temperature -200 ... +200 °C (-328 ... +392 °F) (brown PTFE transducer part) and -10 ... +70 °C (14 ... 158 °F) (black PE for remaining transmitter cable part)





## Flow Measurement

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

### SITRANS FUS060 transmitter

#### Selection and ordering data




##### Transmitter FUS060 operating instructions, accessories and spare parts

##### Operating instructions


Description	Article No.
• English	A5E01204521
• German	A5E02123845

All literature is available to download for free, in a range of languages, at <https://www.siemens.com/processinstrumentation/documentation>

##### Accessories

Description	Article No.	
Standard wall mounting bracket	7ME5933-0AC04	
Special wall-/pipe mounting bracket kit	7ME5933-0AC05	
Safety clamp for electronic cover with glass plate (7ME5933-0AC01)	7ME5933-0AC06	

##### Process Device Manager SIMATIC PDM

<b>SIMATIC PDM</b> For more details about SIMATIC PDF please go to chapter 8 "Digitalization and Communication".	<b>See the Selection and Ordering data on chapter 8 "Digitalization and Communication"</b>	
---	--	--


##### HART modem for communication with FUS060 HART, PC and SIMATIC PDM

<b>HART modem</b> With USB connection	7MF4997-1DB	
--	-------------	--

##### Spare parts

SITRANS FUS060 transmitter, available standard and Ex versions















The transmitter configuration is made in the flowmeter order codes (together with the sensors). The information below is for spare part ordering only and with fixed standardized pre-settings for a DN 2000 2-path system.

Description	Version	Enclosure	Supply	Article No.	
FUS060, 230 V, HART, Metric cable glands	Transmitter for remote connection	IP65 (NEMA 4)	115 ... 230 V AC 50/60 Hz	7ME3050-2BA10-1BA1	
FUS060, 230 V, HART, Imperial cable glands	Transmitter for remote connection	IP65 (NEMA 4)	115 ... 230 V AC 50/60 Hz	7ME3050-2BA10-1BA2	
FUS060, 230 V, PROFIBUS, Metric cable glands	Transmitter for remote connection	IP65 (NEMA 4)	115 ... 230 V AC 50/60 Hz	7ME3050-2BA10-1DA1	
FUS060, 230 V, PROFIBUS, Imperial cable glands	Transmitter for remote connection	IP65 (NEMA 4)	115 ... 230 V AC 50/60 Hz	7ME3050-2BA10-1DA2	
FUS060, 24 V, HART, Metric cable glands	Transmitter for remote connection	IP65 (NEMA 4)	19 ... 30 V DC/ 21 ... 26 V AC	7ME3050-2BA20-1BA1	
FUS060, 24 V, HART, Imperial cable glands	Transmitter for remote connection	IP65 (NEMA 4)	19 ... 30 V DC/ 21 ... 26 V AC	7ME3050-2BA20-1BA2	
FUS060, 24 V, PROFIBUS, Metric cable glands	Transmitter for remote connection	IP65 (NEMA 4)	19 ... 30 V DC/ 21 ... 26 V AC	7ME3050-2BA20-1DA1	
FUS060, 24 V, PROFIBUS, Imperial cable glands	Transmitter for remote connection	IP65 (NEMA 4)	19 ... 30 V DC/ 21 ... 26 V AC	7ME3050-2BA20-1DA2	
FUS060, ATEX, 24 V, HART, Metric cable glands	Transmitter for remote connection	IP65 (NEMA 4) ATEX approval	19 ... 30 V DC/ 21 ... 26 V AC	7ME3050-2BA21-1CA1	

Ordering of pre-configured FUS060 spare transmitters only via PVR (product variation request - special request).



#### Selection and ordering data (continued)

Description	Article No.		Description	Article No.	
Operating/Display module	<b>7ME5933-0AC00</b>		M25 cable gland set for the FUS060 PA (M25) power and output connection, grey PA plastic, 2 pcs. <ul style="list-style-type: none"> <li>cables Ø 9 ... 16 mm (0.35" ... 0.63")</li> <li>-40 ... +100 °C (-40 ... +212 °F)</li> </ul>	<b>A5E02246378</b>	
Electronics cover with glass plate (non Ex). Die cast aluminum, with corrosion-resistant Basic Polyester powder coating (min. 60 µm)	<b>7ME5933-0AC01</b>		M16x1.5 cable gland set for FUS060 (M16) sensor connection, gray PA plastic, 2 pcs. and 2 pcs. blind. <ul style="list-style-type: none"> <li>cables Ø 5 ... 9 mm (0.20" ... 0.35")</li> <li>-40 ... +100 °C (-40 ... +212 °F)</li> </ul>	<b>A5E02593526</b>	
Cover for sensor cable and gasket. Die cast aluminum, with corrosion-resistant Basic Polyester powder coating (min. 60 µm)	<b>7ME5933-0AC02</b>		M16 x 1.5 cable gland set for FUS060 (M16) sensor connection, brass chrome, 2 pcs. and 2 pcs. blind <ul style="list-style-type: none"> <li>cables Ø 5 ... 9 mm (0.20" ... 0.35")</li> <li>-20 ... +105 °C (-4 ... +221 °F)</li> </ul>	<b>A5E02246369</b>	
Cover for mains supply/communication. Die cast aluminum, with corrosion-resistant Basic Polyester powder coating (min. 60 µm)	<b>7ME5933-0AC03</b>		½" NPT cable gland set for FUS060 (NPT) sensor connection, 4 pcs. M16 bush to ½" NPT and 4 pcs. ½" NPT grey PA plastic glands <ul style="list-style-type: none"> <li>cables Ø 5 ... 9 mm (0.20" ... 0.35")</li> <li>-20 ... +100 °C (-4 ... +212 °F)</li> </ul>	<b>A5E02247877</b>	
FUS060 Sensor connection PCBA, Standard versions only, 1 pc.	<b>A5E02551331</b>		<b>Cables for FUS060</b>		
FUS060 Sensor connection PCBA, ATEX version only, 1 pc.	<b>A5E02551334</b>		<b>Description</b>	<b>Article No.</b>	
M20 cable gland set for FUS060 (M20) power and output connection, grey PA plastic, 2 pcs. <ul style="list-style-type: none"> <li>cables Ø 6 ... 12 mm (0.24" ... 0.47")</li> <li>-40 ... +100 °C (-40 ... +212 °F)</li> </ul>	<b>A5E02246350</b>		Coaxial cable for FUS060, (75 Ω, max. 70 °C (158 °F), black PVC), (2 pcs.) <ul style="list-style-type: none"> <li>3 m (9.84 ft)</li> <li>15 m (49.21 ft)</li> <li>30 m (98.43 ft)</li> <li>60 m (196.85 ft)</li> <li>90 m (295.28 ft)</li> <li>120 m (393.70 ft)</li> </ul>	<b>A5E00875101</b> <b>A5E00861432</b> <b>A5E01278662</b> <b>A5E01278682</b> <b>A5E01278687</b> <b>A5E01278698</b>	
M20 cable gland set for FUS060 ATEX version power and output connection, PA plastic, 1x in blue (ATEX Ex i) and 1x grey (ATEX Ex-e) <ul style="list-style-type: none"> <li>cables Ø 5 ... 9 mm (0.20" ... 0.35")</li> <li>-20 ... +95 °C (-4 ... +203 °F)</li> </ul>	<b>A5E02246356</b>		High temp. coaxial cable for FUS060; with 0.3 m brown PTFE high temp. transducer part, max. 200 °C (392 °F) and black PVC for remaining transmitter part with SMB plug, max. 70 °C (158 °F); impedance 75 Ω, (2 pcs.) <ul style="list-style-type: none"> <li>3 m (9.84 ft)</li> <li>15 m (49.21 ft)</li> <li>30 m (98.43 ft)</li> </ul>	<b>A5E00875105</b> <b>A5E00861435</b> <b>A5E01196952</b>	
1/2" NPT cable gland set for FUS060 (NPT) power and output connection, grey PA plastic, 2 pcs. <ul style="list-style-type: none"> <li>cables Ø 6 ... 12 mm (0.24" ... 0.47")</li> <li>-40 ... +100 °C (-40 ... +212 °F)</li> </ul>	<b>A5E02246396</b>		Special coaxial cable sets for low temperature cryogenic systems; with SMB plug for transmitter SITRANS FUS060, PTFE material, temp. -200 ... +200 °C (-328 ... +392 °F), impedance 75 Ω, (2 pcs.) <ul style="list-style-type: none"> <li>10 m (32.84 ft)</li> <li>15 m (49.21 ft)</li> <li>30 m (98.43 ft)</li> <li>40 m (131.23 ft)</li> </ul>	<b>A5E02085593</b> <b>A5E03262088</b> <b>A5E02085644</b> <b>A5E02085649</b>	


## Flow Measurement

SITRANS FS (ultrasonic)


Inline ultrasonic flowmeters

### SITRANS FUS060 transmitter

#### Dimensional drawings

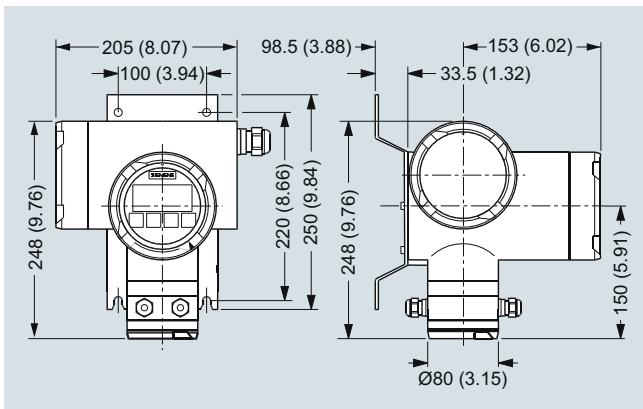


SITRANS FUS060 with standard mounting bracket, dimensions in mm (inch)

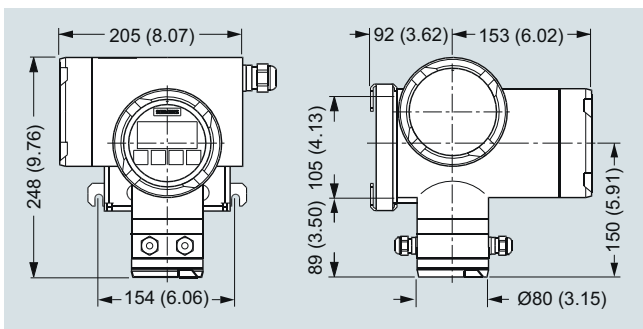

SITRANS FUS060 with optional special mounting bracket, dimensions in mm (inch)

#### Circuit diagrams

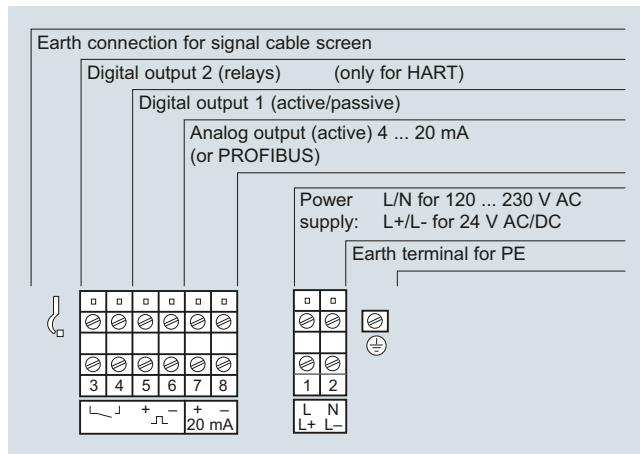

Electrical connection SITRANS FUS060

#### Overview



SITRANS FUS080 is a transit time based transmitter designed for ultrasonic flow metering with any sensor in the FUS inline series SONOKIT, FUS380 and FUE380 up to DN 1200.

The ultrasonic flowmeter transmitter SITRANS FUS080 comes as battery or mains powered version. The SITRANS FUS080 is designed to measure flow water applications.

The SONOKIT retrofit flowmeter series are shown from page 3/282. The standard flowmeter series SITRANS FUS380 is described from page 3/292. The type approved flowmeter series for flow metering in energy meter custody transfer systems are named SITRANS FUE380.

#### Benefits

- Battery-powered up to 6 years
- 115/230 V mains-powered with back-up battery option in case of mains power failure
- Fast measuring frequency 15 Hz/0.5 Hz (230 V AC/Battery)
- Easy one button straight forward display
- IrDA optical interface for local communication
- 2-path measuring principle for optimum accuracy
- Compact or remote mounting
- Measures on all district water qualities and water conductivities
- No pressure drop
- Long-term stability
- 2 galvanic isolated digital outputs for easy connection to a calculator (potential free)
- 1 analog 4 to 20 mA output
- Bidirectional measurement, with 2 totalizers and outputs
- Dynamic range  $Q_i$  (min) :  $Q_s$  (max) up to 1:400
- Compact version with triax cables for highest EMC-protection

#### Application

The main application for flowmeters with the transmitter SITRANS FUS080 is measurement of water flow in district heating plants, local networks, boiler stations, substations, chiller plants, irrigations plants and other general water applications.

#### Design

The transmitter type SITRANS FUS080 is designed with fiber-glass reinforced polyamide enclosure for remote or compact installation in normal areas. The remote versions are available with up to 30 meter distance from flowmeter to transmitter. When ordering as a compact version in the series FUS380 and FUE380 the transducer cables are pre-mounted at the sensor.

The transmitter is available in an IP67/NEMA 4X/6 enclosure and is designed for use in the flowmeters series:

- SONOKIT (1-path or 2-path)
- FUS380 (2-path)
- FUE380 (2-path)

The transmitter FUS080 is always ordered as part of a complete flowmeter system.

It can be manually ordered separately as spare part pre-programmed with the given sensor data.

#### Integration

The flowmeter pulse output is often used as input for an energy meter or as input for digital systems for remote reading.

SITRANS FUS380 has two pulse outputs, with functions that can be individually selected.

The settings of the transmitter, e. g. flow and pulse output rate, are defined when ordering the complete flowmeter.

If the flowmeter forms part of an energy meter system for custody transfer, no further approvals are needed, except eventually local approvals on the flowmeter.

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### SITRANS FUS080/FUE080 transmitter

#### Technical specifications

##### Input

Measurement	Flow by measuring the transit time difference of ultrasonic signals through ultrasonic transducers in the sensor pipes. Supporting of 1-path or 2-path sensors in sizes DN 50 ... 1200 measuring on water
Measuring rate	0.5 Hz
<ul style="list-style-type: none"> <li>Battery mode</li> <li>Mains supply</li> <li>Back-up mode</li> </ul>	Up to 15 Hz 0.5 Hz (at mains supply drop)
Flow rate	0.02 ... 9 m/s (0.065 ... 29.5 ft/s), bidirectional flow metering

##### Output

	2 pulse or status outputs (A and B), individual galvanically isolated MOS relay outputs, passive mode, max. $\pm 35$ V AC/DC, max. 50 mA
Max. pulse frequency	100 Hz at $Q_s$ ( $Q_{max}$ )
Pulse value and length	Selectable with the ordering of the flowmeter
Output A function	Pulse: forward, reverse, forward net, reverse net (preset: forward)
Output B function	Pulse: forward, reverse, forward net, reverse net (preset: forward) or alarm indication or call-up indication (preset: alarm)
Pulse value A and B	0.1 l/p, 0.25 l/p, 0.5 l/p, 1 l/p, 2.5 l/p, 10 l/p, 25 l/p, 50 l/p, 100 l/p, 250 l/p, 500 l/p, 1 m <sup>3</sup> /p, 2.5 m <sup>3</sup> /p, 5 m <sup>3</sup> /p, 10 m <sup>3</sup> /p, 25 m <sup>3</sup> /p, 50 m <sup>3</sup> /p, 100 m <sup>3</sup> /p, 250 m <sup>3</sup> /p, 500 m <sup>3</sup> /p, 1 000 m <sup>3</sup> /p
Pulse length (depending on $Q_{max}$ by DN selection)	5, 10, 20, 50, 100, 200, 500 ms (standard 5 ms)
Alarm indication	Path 1 (F1), path 2 (F2) internal, failure (F3, F4), powers supply warning or low battery indication (F5), $Q_{max}$ overflow (F6), pulse overflow (F7, F8), internal data logger warning (F9)
Analog output	Passive current output 4 ... 20 mA Data span pre-selectable depending on pipe size

##### Rated operation conditions

<u>Ambient conditions</u>	
Ambient temperature	-10 ... +60 °C (14 ... 140 °F) (MID version: max. +55 °C (131 °F))
<ul style="list-style-type: none"> <li>Operation</li> <li>Storage</li> </ul>	-40 ... +85 °C (-40 ... +185 °F) (battery included)
Enclosure rating	IP67/NEMA 4X/6 to EN 60529 and DIN 40050
Electromagnetic compatibility	To EN 55011/CISPR-11
<ul style="list-style-type: none"> <li>Emitted interference</li> <li>Immunity</li> <li>MID approved (FUE380 series)</li> </ul>	To EN/IEC 61326-1 (Industry) Environment class E2 and M1
Mechanical vibration	2 g, 1 ... 800 Hz sinusoidal in all directions according to IEC 68-2-6
Weight of transmitter	Approx. 1.5 kg (3.3 lb)

##### Design

Enclosure material	Fibre-glass reinforced polyamide, light gray color
Wall mounting kit	IP67/NEMA 4X/6 terminal box for the wall mounting of the transmitter, fiber-glass reinforced polyamide with stainless steel bracket, cable glands entries: 2 x 2 M20 or PG 13.5 for power supply and outputs and 2 x M20 or PG 13.5 for the sensor cables, glands (supply and outputs and double cable entries for sensor cables) are included.
Sensor cable	Coaxial cable sets for remote transmitter up to 30 m (98.4 ft) long transducer cable, 75 $\Omega$ impedance, cables sets are prepared for the connection to the sensors Triax cables or integral version

##### Display and controls

Display	LCD, 8 digits, additional 2 digits and symbols for status information
Resolution	Totalized information can be displayed with 1, 2 or 3 decimals or automatic adjustment (default)
Display setting	Flow unit: Preset: m <sup>3</sup> /h Volume unit: Preset: m <sup>3</sup>
Push button	One push button for menu selection and display information
Communication (IrDA optical eye)	IrDA – optical communication and control interface with Modbus RTU protocol for read or write transmitter settings and data via PC and PDM tool

##### Power supply

Battery	D-cell battery pack, 3.6 V LiSOCl (Lithium Thionyl Chloride, 34 Ah), replaceable, life- and working-time up to 6 years
Mains	87 ... 265 V AC (50 ... 60 Hz) or 87 ... 265 V AC (50 ... 60 Hz) with D-cell single battery backup, 2.6 V LiSOCl (Lithium Thionyl Chloride, 17 Ah), replaceable, life time up to 8 years

##### Power consumption

Mains version	Approx. 2.5 VA
---------------	----------------

**Technical specifications (continued)**

**SONOKIT, FUS380, FUE380**



The flow values and settings are predefined according to dimension selection.

The transmitter settings are changeable by using the SW tool PDM (for FUE380 series some of the setting are only readable, restriction of the approval requirements).


**Accuracy/Error in measurement:**

(at reference conditions for FUS380 and FUE380 series, SONOKIT series will differ in the accuracy)


- Pulse output
  - $\leq \pm 0.5\%$  of measured value at 0.5 ... 10 m/s or
  - $\leq \pm 0.25/V$  [m/s] % of measured value at flow < 0.5 m/s
- Repeatability  $\leq 0.25\%$  of measured value at 0.5 ... 10 m/s
- Reference conditions
  - Process temperature and ambient temperature:  $25\text{ °C} \pm 5\text{ °C}$  ( $77\text{ °F} \pm 9\text{ F}$ )
  - Transmitter Warming-up time 30 min.
  - Installation conditions of the sensor: Upstream section > 10 x DN and downstream section > 5 DN

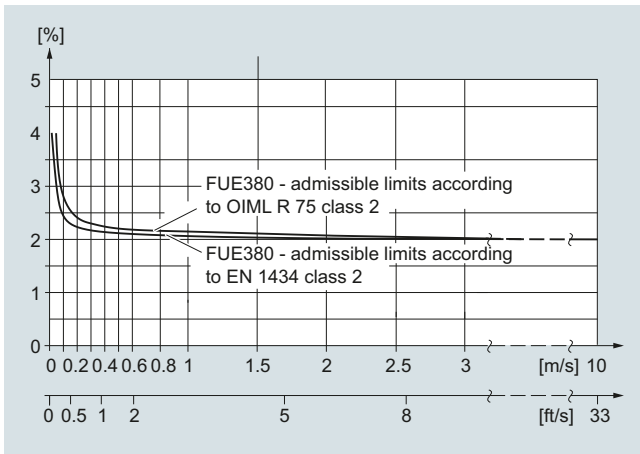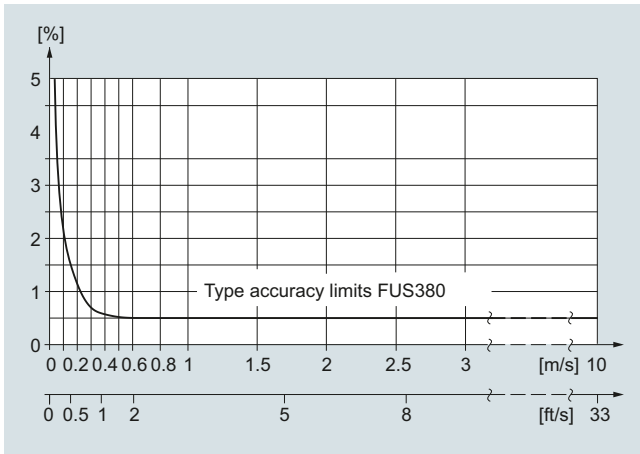


**Output configuration**

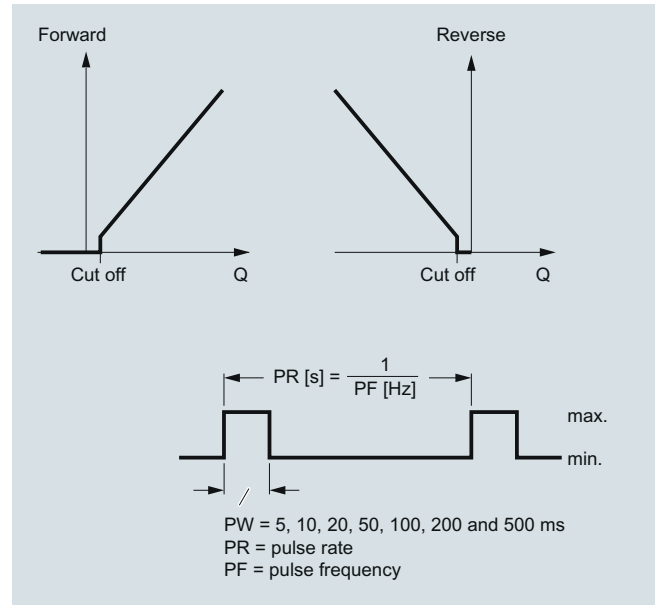

Pulse volume: output A/B configured as volume per pulse, calculated on forward/reverse or net forward/reverse flow. The volume per pulse is free scaleable (via PDM software).

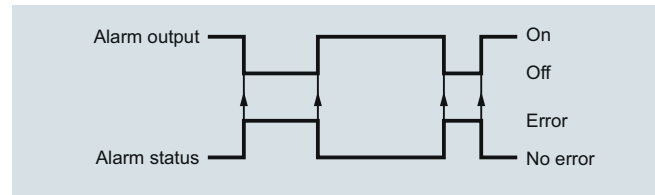

Pulse output B can be used as stated above or as alarm or call-up function.

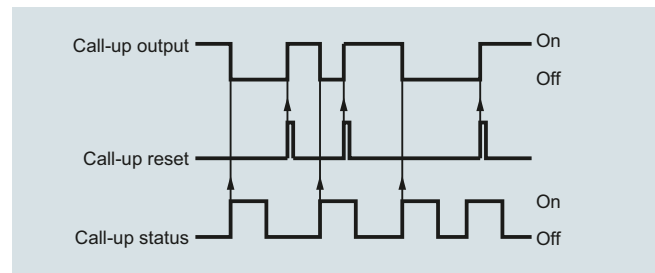

Call-up: the call-up output is active until manually reset by use of PDM tool. The call-up function is activated when an alarm is activated.

## Flow Measurement


SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters


### SITRANS FUS080/FUE080 transmitter

#### Technical specifications (continued)


##### Current output

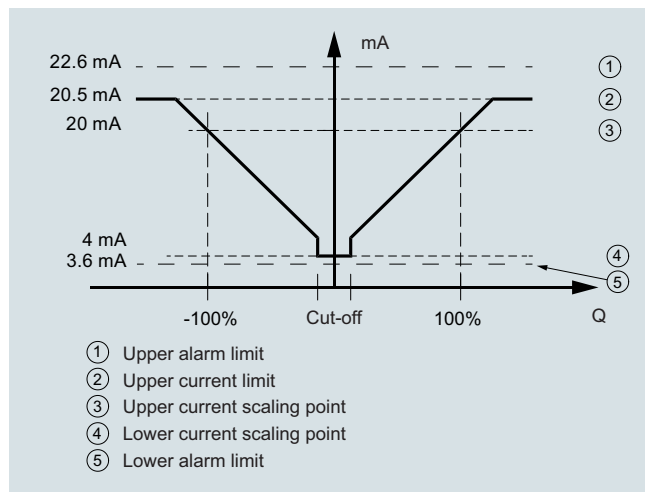

##### Bidirectional flow

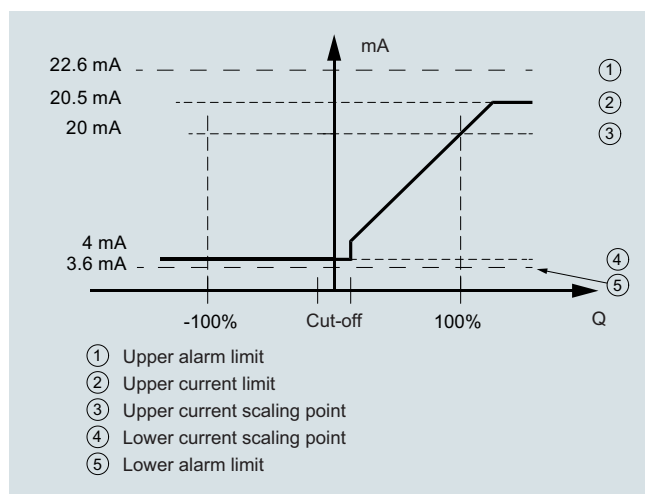

##### Positive flow

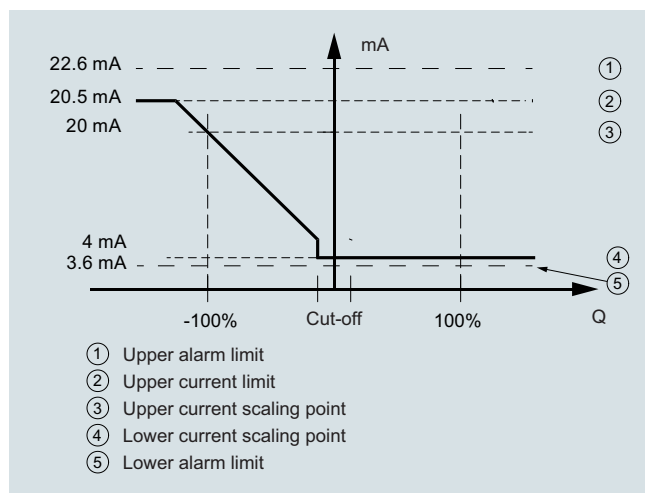

##### Negative flow

##### Sensor coaxial cable for SONOKIT series with FUS080

###### Coaxial cable

###### Standard coaxial cable (75 Ω)

Outside diameter	Ø 5.8 mm
Length	15, 30 m (49.2, 98.4 ft) between sensor and transmitter
Material (outside jacket)	Black PE
Ambient temperature	-10 ... +70 °C (14 ... 158 °F)



##### Sensor coaxial cable for FUS380 /FUE380 series

###### Coaxial cable

###### High temperature coaxial cable (75 Ω)

Outside diameter	Ø 5.13 mm (first 0.3 m (0.98 ft) part to the transducer), Ø 5.8 mm (for remaining cable to the transmitter – black holt melt junction part between (Ø 16 mm, length 70 mm)
Length	Up to 30 m (98.4 ft) between sensor and transmitter
Material (outside jacket)	Brown PTFE (0.3 m (9.84 ft) part) and black PE (for remaining cable)
Ambient temperature	-200 ... +200 °C (-328 ... +392 °F) (brown PTFE transducer part) and -10 ... +70 °C (14 ... 158 °F) (black PE for remaining transmitter cable part)





## Selection and ordering data

### Transmitter FUS080 operating instructions, accessories and spare parts




#### Operating instructions

Description	Article No.
for use with SONOKIT • English	<b>A5E03059912</b>
integrated in FUS/FUE380 • English • German	<b>A5E00730100</b> <b>A5E00740611</b>


All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/processinstrumentation/documentation>

#### Accessories

Description	Article No.	
Sun lid for FUS080 transmitter (frame and lid)	<b>A5E02328485</b>	
Brace (holder) for optical IrDA eye	<b>A5E00695277</b>	
IrDA infrared interface adapter with USB for data acquisition with 1.2 m (3.9 ft) cable	<b>FDK:087L4163</b>	


#### Process Device Manager SIMATIC PDM

SIMATIC PDM	See the Selection and Ordering data on chapter 8 "Digitalization and Communication"	
For more details about SIMATIC PDF please go to chapter 8 "Digitalization and Communication".		

#### Spare parts


A spare part transmitter can be ordered for a specific system. In the description of the following spare part transmitters the related transmitter Article No. found on the device silver front label is noted.

Spare part transmitter for FUS380 systems (7ME3400)

Description	Article No.	
FUS080 transmitter 3.6 V battery (no battery included, to be ordered separate) as spare part transmitter for FUS380 flowmeter series. Transmitter Article No. 7ME3450-0AA10-2AA0	<b>A5E02729700</b>	
FUS080 transmitter 3.6 V battery (battery included) as spare part transmitter for FUS380 flowmeter series <sup>1)</sup> . Transmitter Article No. 7ME3450-0AA10-2AA0	<b>A5E02729035</b>	
FUS080 transmitter 230 V mains as spare part transmitter for FUS380 flowmeter series. Transmitter Article No. 7ME3450-0AA10-2AA0	<b>A5E02699309</b>	
FUS080 transmitter 230 V mains with backup-battery as spare part transmitter for FUS380 flowmeter series. Transmitter Article No. 7ME3450-0AA40-2AA0	<b>A5E02729610</b>	


Description	Article No.
When ordering: Inform on flowmeter order no. and flowmeter serial no. (e.g. 7ME3400-xxxxx-xxxx-Z, XX.... and xxxxxxHxxx)	

Spare part transmitter for FUE380 approved systems (7ME3410) (only with MID approval marks, no MID verification – only a complete flowmeter can be MID-verified, i.e. sensor together with the transmitter)

Description	Article No.	
FUE080 transmitter 3.6 V battery (no battery included, to be ordered separate) as spare part transmitter for FUE380 flowmeter series. Transmitter Article No. 7ME3450-0AA10-2AB0.	<b>A5E02734600</b>	
FUE080 transmitter 3.6 V battery (battery included) as spare part transmitter for FUE380 flowmeter series <sup>1)</sup> . Transmitter Article No. 7ME3450-0AA20-2AB0	<b>A5E02734568</b>	
FUE080 transmitter 230 V mains as spare part transmitter for FUE380 flowmeter series. Transmitter Article No. 7ME3450-0AA30-2AB0	<b>A5E02734539</b>	
FUE080 transmitter 230 V mains with backup-battery as spare part transmitter for FUE380 flowmeter series. Transmitter Article No. 7ME3450-0AA40-2AB0	<b>A5E02734585</b>	

When ordering: Inform on flowmeter order no. and flowmeter serial no. (e.g. 7ME3410-xxxxx-xxxx-Z, XX.... and xxxxxxHxxx)

Spare part transmitter for SONOKIT systems (7ME3210/7ME3220)

Description	Article No.	
FUS080 transmitter 3.6 V battery (no battery included, to be ordered separate) as spare part transmitter for SONOKIT flowmeters. Transmitter Article No. 7ME3450-0AA10-2AA0	<b>A5E03048726</b>	
FUS080 transmitter 3.6 V battery (no battery included) as spare part transmitter for SONOKIT flowmeters <sup>1)</sup> . Transmitter Article No. 7ME3450-0AA20-2AA0	<b>A5E03048714</b>	
FUS080 transmitter 230 V mains as spare part transmitter for SONOKIT flowmeters. Transmitter Article No. 7ME3450-0AA30-2AA0	<b>A5E03048701</b>	
FUS080 transmitter 230 V mains with backup-battery as spare part transmitter for SONOKIT flowmeters. Transmitter Article No. 7ME3450-0AA40-2AA0	<b>A5E03048719</b>	

When ordering: Inform on flowmeter order no. and flowmeter serial no. (e.g. 7ME3220-xxxxx-xxxx-Z, XX.... and xxxxxxHxxx)

<sup>1)</sup> Lithium batteries are subject to special transportation regulations according to United Nations "Regulation of Dangerous Goods, UN 3090 and UN 3091". Special transport documentation is required to observe these regulations. This may influence both transport time and costs.

## Flow Measurement











### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### SITRANS FUS080/FUE080 transmitter

#### Selection and ordering data (continued)

Spare part transmitter for FUS880 retrofitting systems (7ME3440)

Description	Article No.		Description	Article No.	
<p><b>Sparepart FUS080 transmitter 3.6 V, incl. 3.6V dual battery pack, USA version</b></p> <p>Transmitter Article No.: 7ME3450-0AA20-1CA0; Label, 0: Siemens FUS080 transmitter; Version, 0: Without connection box; Enclosure, A: IP67/NEMA 4X/6; Code A: Standard; Supply Voltage, 2: 3.6V DC battery; Ex. Approval, 0: no Ex approval; Display, 1: With display and unit label; Region version, C: USA: AcFt,CFS; Application, A: Standard FUS080 (for SITRANS Retrofit - 7ME344); Code, 0: Standard</p>	<b>A5E03412669</b>		<p>Internal battery pack, one set of 2 D-cell (3.6 V 34 Ah)<sup>1)</sup></p> <ul style="list-style-type: none"> <li>1 pc. pack</li> <li>24 pcs. pack</li> </ul>	<b>A5E02679676</b> <b>A5E02896941</b>	
			<p>Single battery back-up to main supply (17 Ah)<sup>1)</sup></p>	<b>A5E02679923</b>	
			<p>Battery cover for transmitter FUS080</p>	<b>A5E00694468</b>	
<p><b>FUS080 transmitter for FUS880 retrofit systems, USA version,</b></p> <p>incl. wall-mounting kit, 2 transducers and 2 pcs. 60 ft (20 m) of cables.</p> <p>Label, 0: Siemens FUS080 transmitter; Diameter, 0A: None; Wall Thickness, A: None; Pipe Material, 0: No Pipe; Track configuration, 1: 1-Track; Region version, 2: USA: AcFt, CFS; Transmitter, D: FUS080, IP67, Battery, Remote, unit label; Template, A: None; Transducer coax cable, 4: 20 m with gland</p>	<b>7ME3440-0AA01-2DA4</b>		<p>PG 13.5 cable gland set for FUS080 power and output connection, black PA plastic, 2 pcs.</p> <ul style="list-style-type: none"> <li>cables Ø 6 ... 12 mm (0.24" ... 0.47")</li> <li>-40 ... +100 °C (-40 ... +212 °F)</li> </ul>	<b>FDK:083G0228</b>	
			<p>PG 13.5 cable gland set (two cable entries) for FUS080 sensor connection, black PA plastic, 2 pcs.</p> <ul style="list-style-type: none"> <li>cables Ø 6 ... 12 mm (0.24" ... 0.47")</li> <li>-40 ... +100 °C (-40 ... +212 °F)</li> </ul>	<b>A5E00694500</b>	
			<p>SITRANS FUS/FUE380 wall mounting kit for remote transmitter mounting, including connection plate (DN 50 ... 1200/2" ... 48")</p>	<b>A5E00694509</b>	
<p><b>FUS080 transmitter for FUS880 retrofit systems, USA version,</b></p> <p>incl. wall-mounting kit, 4 transducers and 4 pcs. 60 ft (20 m) of cables:</p> <p>Label, 0: Siemens FUS080 transmitter; Diameter, 0A: None; Wall Thickness, A: None; Pipe Material, 0: No Pipe; Track configuration, 3: 2-Track (X-Configuration); Region version, 2: USA: AcFt, CFS; Transmitter, D: FUS080, IP67, Battery, Remote, unit label; Template, A: None; Transducer coax cable, 4: 20 m with gland</p>	<b>7ME3440-0AA03-2DA4</b>		<p>SITRANS FUS/FUE380 terminal box for compact transmitter mounting, including connection plate, (bronze sensors only, DN 50 ... 80/2" ... 3")</p>	<b>A5E01208138</b>	
			<p>SITRANS FUS/FUE380 terminal box for compact transmitter mounting, including connection plate, (steel sensors only, DN 100 ... 1200/4" ... 48")</p>	<b>A5E00694660</b>	
			<p>FUS080 display and keypad with Siemens logo</p>	<b>A5E00873496</b>	
			<p>FUS080 display and keypad neutral (without logo)</p>	<b>A5E33147123</b>	


<sup>1)</sup> Lithium batteries are subject to special transportation regulations according to United Nations "Regulation of Dangerous Goods, UN 3090 and UN 3091". Special transport documentation is required to observe these regulations. This may influence both transport time and costs.




#### Selection and ordering data (continued)

Downloads for DEVICE description FUE380  
<http://support.automation.siemens.com/WW/view/en/17320235>


#### Sensor cables for FUS380/FUE380 flowmeters

Description	Article No.	
<b>DN 50 ... DN 80 flowmeters</b>		
Coaxial cable for FUS080; with 0.3 m brown PTFE high temp. transducer part, max. 200 °C (392 °F) and black PVC for remaining transmitter part, max. 70 °C (158 °F); impedance 75 Ω		
5 m (16.4 ft) cable set (4 pcs.) for DN 50 ... DN 80 (2" ... 3") remote mounting	<b>A5E01208092</b>	
10 m (32.8 ft) cable set (4 pcs.) for DN 50 ... DN 80 (2" ... 3") remote mounting	<b>A5E01208114</b>	
20 m (65.6 ft) cable set (4 pcs.) for DN 50 ... DN 80 (2" ... 3") remote mounting	<b>A5E01208117</b>	
30 m (98.4 ft) cable set (4 pcs.) for DN 50 ... DN 80 (2" ... 3") remote mounting	<b>A5E01208121</b>	
0.5 m (1.64 ft) cable set (4 pcs.) for DN 50 ... DN 80 (2" ... 3") for compact version of FUS380/FUE380	<b>A5E01208126</b>	
<b>DN 100 ... DN 1200 flowmeters</b>		
Coaxial cable for FUS080; with 0.3 m brown PTFE high temp. transducer part, max. 200 °C (392 °F) and black PVC for remaining transmitter part, max. 70 °C (158 °F); impedance 75 Ω		
5 m (16.4 ft) cable set (4 pcs.) for DN 100 ... DN 1200 (4" ... 48") remote mounting	<b>A5E00695476</b>	
10 m (32.8 ft) cable set (4 pcs.) for DN 100 ... DN 1200 (4" ... 48") remote mounting	<b>A5E00695479</b>	
20 m (65.6 ft) cable set (4 pcs.) for DN 100 ... DN 1200 (4" ... 48") remote mounting	<b>A5E00695480</b>	
30 m (98.4 ft) cable set (4 pcs.) for DN 100 ... DN 1200 (4" ... 48") remote mounting	<b>A5E00695483</b>	
1 m (3.28 ft) cable set (4 pcs.) for DN 100 ... DN 1200 (4" ... 48") for compact version of FUS380/FUE380	<b>A5E00695486</b>	

#### Sensor cables for SONOKIT flowmeter with FUS080

Description	Article No.	
15 m (49.2 ft) cable set (2 pcs.) remote mounting with SONOKIT flowmeters	<b>A5E02478541</b>	
30 m (98.4 ft) cable set (2 pcs.) remote mounting with SONOKIT flowmeters	<b>A5E02478551</b>	


#### Sensor cables for FUS880 retrofitting system (7ME3440)

Description	Article No.	
<b>Coaxial cable with transducer connection</b>		
for use in FUS880 and SONO 3300 sensors; with 0.3 m brown PTFE high temperature transducer part, max. 200 °C (392 °F) and black PVC for the remaining transmitter part, max. 70 °C (158 °F); cable impedance 75 W.W.		
• 1 × 10 m (32.8 ft)	<b>FDK:085L2400</b>	
• 1 × 20 m (65.6 ft)	<b>FDK:085L2401</b>	
• 1 × 30 m (98.4 ft)	<b>FDK:085L2402</b>	
<b>Transducer spare part set of two transducers with gaskets for STRANS FUS880 retrofitting systems</b>	<b>FDK:087H3007</b>	


**Flow Measurement**

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

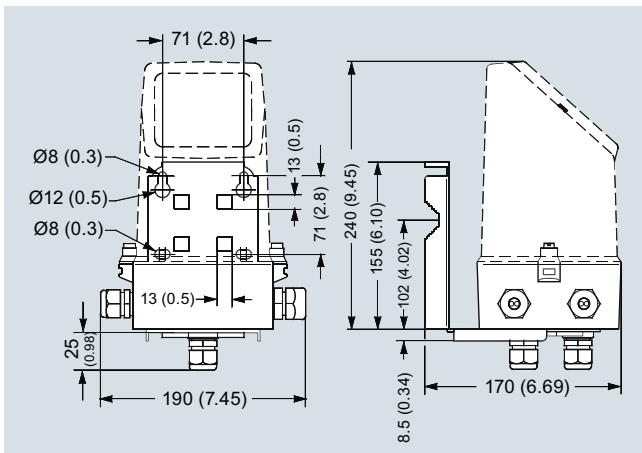
**SITRANS FUS080/FUE080 transmitter****Dimensional drawings*****FUS080 transmitter IP67/NEMA 4X/6, wall mounting and compact mounting***

Transmitter wall mounted, dimensions in mm (inch)

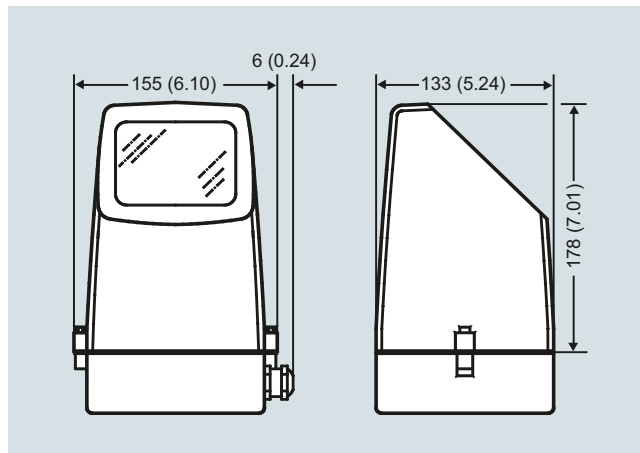


Transmitter compact mounted, dimensions in mm (inch)

**Circuit diagrams**

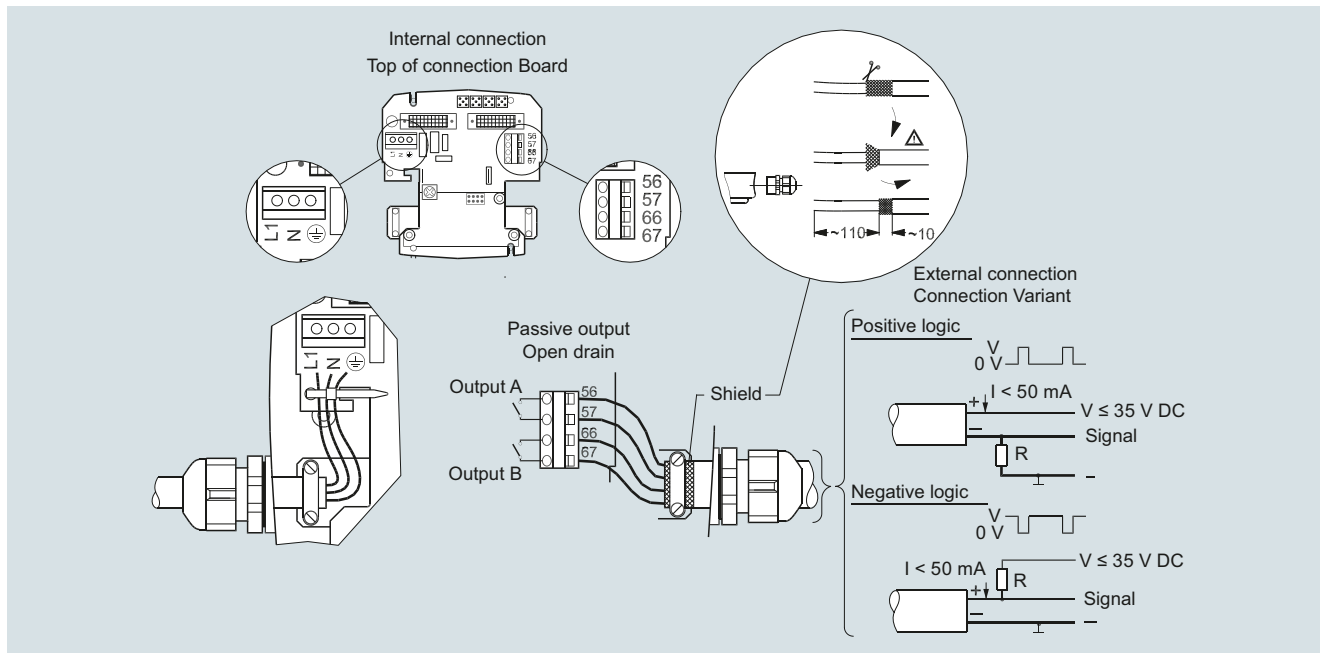

Electrical connection of SITRANS FUS080

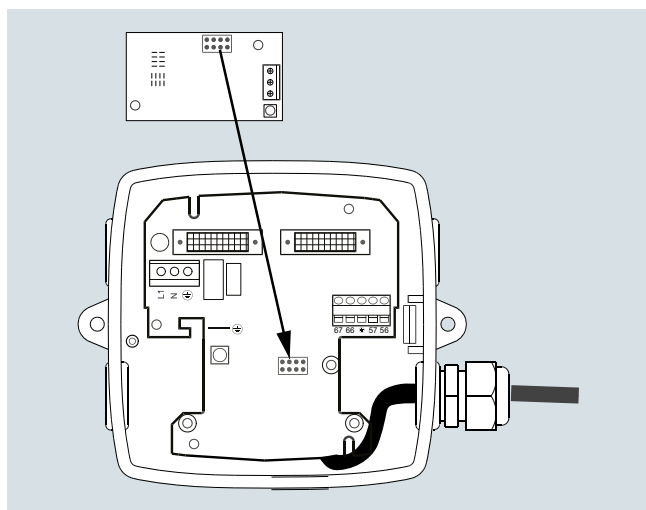

Analog module SITRANS FUS380

## Flow Measurement

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

### SONO 3300/FUS060 flowmeter

#### Overview



The combination of SONO 3300 sensor and FUS060 transmitter is ideal for applications within the general industry. Measurements are independent of liquid temperature, density, pressure and conductivity. Transducers cannot be replaced.

#### Benefits

- Robust remote transmitter FUS060
- Robust design for industrial applications
- Measures all liquids less than 350 cSt, conductive or non-conductive
- No pressure drop
- Reliable and accurate flow measurements
- Long-time stability
- ATEX approval

#### Application

The main application for SONO 3300/FUS060 ultrasonic flowmeter is measurement of volume.

SONO 3300/FUS060 can be used for water and treated waste water.

#### Design

The SONO 3300/FUS060 consists of a casted sensor (DN 50 to 80 (2" to 3")), welded pipes (DN 100 to 300 (4" to 12")) and a transmitter FUS060.

The transmitter can only be mounted separately.

The internal signal cables from transducers to sensor connection box are protected from an aggressive environment by stainless steel pipes.

#### Sensor installation

See system information.

### Technical specifications

The transmitter related to this system is the SITRANS FUS060. Technical specifications to the FUS060 see page 3/254.

#### 2-path sensor with flanges and inline transducers

##### Error in measurement

Error in measurement at reference conditions	$V > 0.5 \dots 10 \text{ m/s}$ , $\pm 0.5 \%$ of rate ( $v = \text{flow speed}$ )
Max. flow velocity	10 m/s (32 ft/s)
Nominal size	DN 50, DN 65, DN 80, DN 100, DN 125, DN 150, DN 200, DN 250, DN 300 (2" ... 12")
Media temperature	Separate version: $-10 \dots +160 \text{ }^\circ\text{C}$ (14 ... 320 $^\circ\text{F}$ )
Ambient temperature (sensor)	Separate version: $-20 \dots +60 \text{ }^\circ\text{C}$ (-4 ... +140 $^\circ\text{F}$ ) Storage: $-40 \dots +85 \text{ }^\circ\text{C}$ (-40 ... +185 $^\circ\text{F}$ )
Enclosure	Standard version: IP67 (NEMA 4X/NEMA 6) ATEX version: As standard, but with ATEX approval (see below)

##### Process connections

PN designated EN 1092-1 type 11 (B)	<ul style="list-style-type: none"> <li>• DN 50 ... 300 (2" ... 12"), PN 40</li> <li>• DN 100 ... 300 (4" ... 12"), PN 16</li> <li>• DN 200 ... 300 (8" ... 12"), PN 10</li> </ul>
Class designated EN 1759-1	<ul style="list-style-type: none"> <li>• DN 50 ... 300 (2" ... 12"), class 150</li> <li>• DN 50 ... 300 (2" ... 12"), class 300</li> </ul>
Transducer	Inline version welded into pipe

##### Materials


Pipe	<ul style="list-style-type: none"> <li>• DN 50 ... DN 80 (2" ... 3"): Cast steel EN 1.1131-GS-15Mn5</li> <li>• DN 100 ... DN 300 (4" ... 12"): Carbon steel EN 1.0345-P235GH</li> </ul>
Flange	<ul style="list-style-type: none"> <li>• DN 50 ... DN 300 (2" ... 12"): EN 1.0025-S235JRG2</li> </ul>
Class	ASTM A105
Transducer	Stainless steel AISI 316 or similar

##### Certificates and approvals

Conformity certificate	The devices are supplied as standard with a Siemens Certificate of Conformity on DVD.
Material certificate	Material certificate according to EN 10204-3.1 available
NDT examination report	Extended material certificate is optionally available on special request (PVR)
Calibration report	A standard calibration report is shipped with each flowmeter.
Extended accredited ISO/IEC 17025 calibration certificates	Optionally available
Approvals	No custody transfer approvals
Ex approval	System ATEX approval for SONO 3300 with remote transmitter FUS060-Ex (ATEX II 2 G Ex dem [ia/ib] IIC T6/T4/T3 Gb)  For Ex version the transducer cable length is restricted to 3 m (9.84 ft), in order to meet requirements.

The sensors are approved according to EU directive 2014/68/EU regarding fluid group 1, classified in category III. Design according to EN 13480 (PED Directive).

#### Coax cable between sensor SONO 3300 and transmitter FUS060

Standard Coax cable (75 $\Omega$ )	Coax cable with SMB straight plug on one end for the FUS060 connector	
Outside diameter	$\varnothing 5.8 \text{ mm}$	
Length	3, 15, 30, 60, 90, 120 m (9.84, 49.21, 98.43, 196.85, 295.28, 393.70 ft) between sensor and transmitter	
Material (outside jacket)	black PE	
Ambient temperature	$-10 \dots +70 \text{ }^\circ\text{C}$ (14 ... 158 $^\circ\text{F}$ )	
High temperature Coax cable (75 $\Omega$ )	Coax cable with SMB straight plug on one end for the FUS060 connector	
Outside diameter	$\varnothing 5.13 \text{ mm}$ (first 0.3 m (9.84 ft) part to the transducer), $\varnothing 5.8 \text{ mm}$ (for remaining cable to the transmitter – with SMB plug at the end) and between these is a black hot melt junction $\varnothing 16 \text{ mm}$ (length 70 mm)	
Length	3, 15, 30, 60, 90, 120 m (9.84, 49.21, 98.43, 196.85, 295.28, 393.70 ft) between sensor and transmitter (max. 3 m (9.84 ft)) transducer cable length for Ex area mounted transmitters	
Material (outside jacket)	Brown PTFE (0.3 m (9.84 ft) part) and black PE (for remaining cable)	
Ambient temperature	$-200 \dots +200 \text{ }^\circ\text{C}$ (-328 ... +392 $^\circ\text{F}$ ) (brown PTFE transducer part) and $-10 \dots +70 \text{ }^\circ\text{C}$ (14 ... 158 $^\circ\text{F}$ ) (black PE for remaining transmitter cable part)	

## Flow Measurement

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

### SONO 3300/FUS060 flowmeter

#### Selection and ordering data

Sensor SONO 3300 with transmitter FUS060		Article No.
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		7ME3300-0 -
Diameter	Qn setting [m <sup>3</sup> /h]	
DN 50 (2")	10	1 A
DN 50 (2")	26	1 B
DN 50 (2")	60	1 D
DN 65 (2½")	15	1 E
DN 65 (2½")	42	1 F
DN 65 (2½")	100	1 H
DN 80 (3")	20	1 J
DN 80 (3")	60	1 K
DN 80 (3")	150	1 M
DN 100 (4")	36	1 N
DN 100 (4")	100	1 P
DN 100 (4")	230	1 R
DN 125 (5")	50	1 S
DN 125 (5")	150	1 T
DN 125 (5")	360	1 V
DN 150 (6")	80	2 A
DN 150 (6")	220	2 B
DN 150 (6")	500	2 D
DN 200 (8")	120	2 E
DN 200 (8")	380	2 F
DN 200 (8")	900	2 H
DN 250 (10")	200	2 J
DN 250 (10")	600	2 K
DN 250 (10")	1400	2 M
DN 300 (12")	300	2 N
DN 300 (12")	850	2 P
DN 300 (12")	2200	2 R
Flange norm and pressure rating		
(All sizes are not available in all pressure ratings)		
EN 1092-1		
<ul style="list-style-type: none"> <li>• PN 10 (DN 200 ... 300)</li> <li>• PN 16 (DN 80 ... 300)</li> <li>• PN 40 (DN 50 ... 300)</li> </ul>		B C E
ANSI B16.5		
<ul style="list-style-type: none"> <li>• Class 150 (DN 50 ... 300)</li> <li>• Class 300 (DN 50 ... 300)</li> </ul>		H J
Sensor type (approval) and transmitter mounting		
IP67 standard, remote transmitter		1
IP67 Ex-version (ATEX), remote transmitter (Ex-version)		3
Cable gland entries in FUS060 and SONO 3300		
Cable glands M20 in sensor and in transmitter M25/20/16 x 1.5		1
Transmitter version of SITRANS FUS060		
IP65 (NEMA 4), 120/230 V AC		N
IP65 (NEMA 4), 24 V AC/DC		P
IP65 (NEMA 4), 24 V AC/DC, Ex-version (ATEX)		Q

#### Article No.

Sensor SONO 3300 with transmitter FUS060		Article No.
7ME3300-0 -		
FUS060 output module		
HART, 4 ... 20 mA, 1 pulse output, 1 relay		B
HART, Ex version, 4 ... 20 mA, 1 pulse output, 1 relay		C
PROFIBUS PA, 1 pulse/frequency		D
Transducer coaxial cable		
4 x 3 m, max. 70 °C (158 °F), the only option for Ex i		0
4 x 15 m, max. 70 °C (158 °F)		1
4 x 30 m, high temp. max.200 °C (392 °F)		2
4 x 30 m, max. 70 °C (158 °F)		3
4 x 60 m, max. 70 °C (158 °F)		4
4 x 90 m, max. 70 °C (158 °F)		5
4 x 120 m, max. 70 °C (158 °F)		6
4 x 3 m, high temp. max. 200 °C (392 °F), the only option for Ex i		7
4 x 15 m, high temp. max. 200 °C (392 °F)		8
Additional information		Order code
Please add "-Z" to Article No. and specify Order code(s) and plain text.		
Calibration		
Production calibration DN 50 ... DN 300 (with certificate, 2 x 3 points in 10 %, 25 % and 100 % Qn)		Included
Accredited Siemens ISO/IEC 17025 calibration for DN 50 to DN 200 with Qn as selected in Diameter. Calibration certificate: 2 x 5 points in 5 %, 10 %, 25 %, 50% and 100 % Qn (max. flow 630 m <sup>3</sup> /h).		D20
Accredited Siemens ISO/IEC 17025 calibration for DN 200 to DN 300 with Qn as selected in Diameter. Calibration certificate: 2 x 5 points in 5 %, 10 %, 25 %, 50 % and 100 % Qn (max. flow 2000 m <sup>3</sup> /h).		D21
Material certificate		
EN 10204-3.1		F10
Tag name plate		
Stainless steel TAG plate (1 x 24 x 80 mm), wire fixed. Font size depends on text length: 8 mm for 1 ... 10 characters, 4 mm for 11 ... 20 characters (specify in plain text).		Y17

Please use online Product selector to get latest updates:

<https://www.pia-portal.automation.siemens.com>

#### Selection and ordering data (continued)

#### Flowmeter SONO 3300 with FUS060 operating instructions, accessories and spare parts

##### Operating instructions

Description	Article No.
SITRANS FUS060	
• English	<b>A5E01204521</b>
• German	<b>A5E02123845</b>
SITRANS F US SONO 3300	
• English	<b>A5E01365400</b>
• German	<b>A5E02690975</b>


All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/processinstrumentation/documentation>

##### Accessories

##### Potting kit

Description	Article No.
Potting kit for terminal box of SONO 3200 transducers for IP68/NEMA 6P (not for Ex sensors)	<b>FDK:085L2403</b>




##### Spare parts

##### Cables for SONO 3300 with FUS060

(only as spare parts)


Description	Article No.
Coax cable for FUS060, (75 Ω, max. 70 °C (158 °F), black PVC) (2 pcs.)	
• 3 (9.84)	<b>A5E00875101</b>
• 15 (49.21)	<b>A5E00861432</b>
• 30 (98.43)	<b>A5E01278662</b>
• 60 (196.85)	<b>A5E01278682</b>
• 90 (295.28)	<b>A5E01278687</b>
• 120 (393.70)	<b>A5E01278698</b>
High temp. coaxial cable for FUS060; with 0.3 m brown PTFE high temp. transducer part (max. 200 °C (392 °F)) and black PVC transmitter part with SMB plug (max. 70 °C (158 °F)); impedance 75 Ω (2 pcs.)	
• 3 (9.84)	<b>A5E00875105</b>
• 15 (49.21)	<b>A5E00861435</b>
• 30 (98.43)	<b>A5E01196952</b>




##### Cable glands (for the SONO 3300 terminal box)

(only as spare parts)


Description	Article No.
Type M20, material nickel plated brass, 2x cables Ø 5 ... 6 mm, temperature range -25 ... +200 °C (-13 ... +392 °F) (2 pcs.)	<b>A5E02246329</b>




Description	Article No.
SONO 3300 terminal box lid, in stainless steel painted black (1 pc.)	<b>FDK:085U1505</b>




Description	Article No.
Gasket for SONO 3300 terminal lid in EPDM (1 pc.)	<b>FDK:085U1820</b>



Description	Article No.
SONO 3300 stainless steel terminal box (1 pc.), M20 cable gland version, incl. lid in stainless steel (painted black) and gasket in EPDM	<b>A5E00836867</b>



Description	Article No.
Coax cable connecting plate (1 pc.) for SONO 3300 terminal box and use with transmitter type FUS060	<b>A5E02593568</b>




## Flow Measurement

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

### SONO 3300/FUS060 flowmeter

#### Dimensional drawings

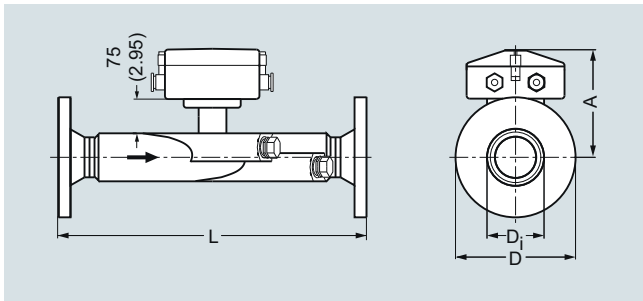

Sensor SONO 3300, dimensions in mm (inch)


DN	EN 1092-1																	
	PN 10				PN 16				PN 40									
	L <sup>1)</sup>		D		Di		L <sup>1)</sup>		D		Di		L <sup>1)</sup>		D		Di	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
50													475	18.70	165	6.50	52.60	2.07
65													475	18.70	185	7.28	62.70	2.47
80							380	14.96	200	7.87	78.00	3.07	400	15.75	200	7.87	78.00	3.07
100							375	14.76	220	8.66	102.40	4.00	400	15.75	235	9.25	102.40	4.00
125							375	14.76	250	9.84	128.30	5.05	400	15.75	270	10.63	128.30	5.05
150							360	14.17	285	11.22	154.20	6.07	400	15.75	300	11.81	154.20	6.07
200	400	15.75	340	13.39	207.30	8.16	400	15.75	340	13.39	207.30	8.16	450	17.72	375	14.76	206.50	8.13
250	400	15.75	395	15.55	260.40	10.25	400	15.75	405	15.94	260.40	10.25	500	19.69	450	17.72	258.80	10.19
300	400	15.75	445	17.52	309.70	12.19	420	16.54	460	18.11	309.70	12.19	500	19.69	515	20.28	307.90	12.12

DN	ANSI												Weight <sup>2)</sup>					
	150 lb				300 lb				EN and ANSI		EN		ANSI					
	L <sup>1)</sup>		D		Di		L <sup>1)</sup>		D		Di		A		EN		ANSI	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	kg	lbs
50 mm/2"	510	20.08	152	5.98	52.6	2.07	520	20.47	165	6.50	52.6	2.07	180	7.09	14	30.9	17	37.5
65 mm/2½"	510	20.08	178	7.01	62.7	2.47	520	20.47	190	7.48	62.7	2.47	186	7.32	16	35.3	20	44
80 mm/3"	420	16.54	191	7.52	78.0	3.07	440	17.32	210	8.27	78.0	3.07	193	7.60	19	42	23	51
100 mm/4"	420	16.54	229	9.01	102.4	4.03	440	17.32	254	10	102.4	4.03	205	8.07	25	55	35	78
125 mm/5"	440	17.32	254	10.00	128.3	5.05	460	18.11	279	10.98	128.3	5.05	218	8.58	29	64	40	89
150 mm/6"	430	16.93	279	10.98	154.2	6.07	450	17.71	318	12.52	154.2	6.07	232	9.13	35	78	50	111
200 mm/8"	480	18.90	343	13.50	202.7	7.98	500	19.69	381	15	202.7	7.98	256	10.08	54	119	72	160
250 mm/10"	490	19.29	406	15.98	254.5	10.02	520	20.47	444	17.48	254.5	10.03	283	11.14	85	189	98	217
300 mm/12"	550	21.65	483	19.02	306.3	12.06	580	22.83	521	20.51	306.3	12.06	309	12.17	115	256	142	322

<sup>1)</sup> Length tolerance (mm): DN 50 ... 100 +2/-3, DN 125 ... 200 +3/-4, DN 250 ... 300 +4/-5

<sup>2)</sup> Approximate weights without transmitter FUS060 - weight of FUS060 is 4.4 kg (9.7 lb)

#### Circuit diagrams

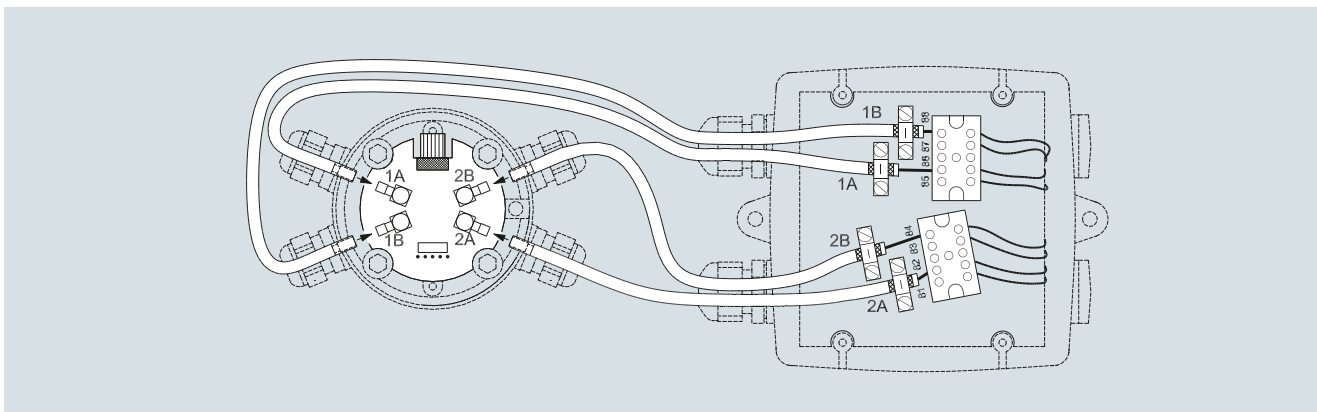

Electrical connection of SITRANS FUS060 and SONO 3300



## Overview



SONO3100/FUS060

The combination of the SONO 3100 sensor and the FUS060 transmitter is ideal for applications where process shut-down is impossible during service and where there is a need for extreme high/low temperatures and pressures.

Transducers can be changed without interrupting operation. SONO 3100 can optionally be delivered as a 1-path or 2-path solution.

## Benefits

- Transducers can be replaced under pressure
- Measurement of all liquids less than 350 Cst, conductive or non-conductive
- No pressure drop
- Reliable and accurate flow measurements
- Long-time stability
- On request as special versions:
  - Special sensor material, e.g. Duplex, stainless steel
  - High/low temperature sensor version: +250 °C (+482 °F)/-200 °C (-328 °F) sensors
  - Pressure rating 430 bar (6235 psi)
  - Special sensor sizes down to DN 25
  - 1-path or 2-path sensor technology

## Application

The main application for SONO 3100 in combination with transmitter type FUS060 is to measure volume flow within:

- Water and waste water

## Design

The SONO 3100 in combination with FUS060 consists of a SONO 3100 sensor, SONO 3200 transducers with O-rings or flanges depending on selection - and a FUS060 transmitter.

SONO 3100 is basically supplied in a 2-path solution with flanges in sizes from DN 100 to DN 500 and without flanges in sizes from DN 100 to DN 300.

2-path standard, 1-path special versions available on request, depending on size (DN 25 to DN 500).

SONO 3100 is as standard available in carbon steel from DN 100 to DN 500.

FUS060 is designed for remote wall mounting only.

## Technical specifications

The transmitter related to this system is the SITRANS FUS060. The technical specifications to the FUS060 see page 3/254.

### 2-paths sensor fitted with four SONO 3200 transducers

#### Error in measurement

Error in measurement at reference conditions	$V > 0.5 \dots 10 \text{ m/s}$ , $< \pm 0.5 \%$ of rate ( $v = \text{flow velocity}$ )
Max. flow velocity	10 m/s (32 ft)
Nominal size	DN 100 ... 500 (4 ... 20")
Media temperature	
• Standard	-10 ... +200 °C (14 ... 392 °F)
• ATEX Ex d version	-20 ... +180 °C (-4 ... +356 °F)
• ATEX Ex i version	-10 ... +190 °C (14 ... 374 °F)
• Specials	-200 °C (-328 °F) or up to 250 °C (482 °F)
Ambient temperature	
• Standard and Ex-i version	-20 ... +60 °C (-4 ... +140 °F)
• Ex d version	-20 ... +180 °C (-4 ... +356 °F)
Enclosure	IP67 (NEMA 4X/6)/IP68 (NEMA 6P) and ATEX (see below)

#### Process connections

<u>PN designated EN 1092-1, type 11 (B)</u>	
Pipe material carbon steel	<ul style="list-style-type: none"> <li>• DN 200 ... DN 500 (8" ... 20"), PN 10</li> <li>• DN 100 ... DN 500 (4" ... 20"), PN 16</li> <li>• DN 200 ... DN 500 (8" ... 20"), PN 25</li> <li>• DN 100 ... DN 500 (4" ... 20"), PN 40</li> </ul>
<u>Class designated EN 1759-1</u>	
Pipe material carbon steel	<ul style="list-style-type: none"> <li>• DN 100 ... DN 500 (4" ... 20") Class 150</li> <li>• DN 100 ... DN 300 (4" ... 12") Class 300</li> </ul>
<u>Without flanges (EN 10217), weld-in version only in carbon steel</u>	<ul style="list-style-type: none"> <li>• DN 350 ... DN 500 (14" ... 20"), PN 10</li> <li>• DN 100 ... DN 500 (4" ... 20"), PN 16</li> <li>• DN 200 ... DN 500 (8" ... 20"), PN 25</li> <li>• DN 100 ... DN 500 (4" ... 20"), PN 40</li> </ul>
Transducer SONO 3200	O-ring or flange versions

#### Materials

Pipe	Steel EN 1.0345-P235GH
Flange	
PN	EN 10025-S235JRG2, 1E1
Class	ASTM A105, 1, 1
Transducer body	Stainless steel AISI 316 or similar
Transducer terminal house	Stainless steel AISI 316 or plastic PA 6.6

## Flow Measurement

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

### SONO 3100/FUS060 flowmeter

#### Technical specifications (continued)

##### Certificates and approvals

System ATEX approval for SONO 3100 together with transmitter FUS060-Ex	ATEX II 2 G Ex dem [ia/ib] IIC T6/T4/T3 Gb or ATEX II 2G Ex d IIC T3-T6 Gb with SONO 3200 Ex d transducers (for standard FUS060 transmitter, installed outside of Ex zone)  For FUS060 Ex version the trans- ducer cable length is restricted to 3 m (9.84 ft), in order to meet require- ments for electrical immunity.
Conformity certificate CE	The devices are supplied as standard with a Siemens Certificate of Confor- mity on DVD.
Material certificates	Material certificate according to EN 10204-3.1 is optionally available.
NDT examination report	Extended material certificate is optionally available.
Pressure certificate	Pressure test according EN 1024-2.3 optionally available
Calibration report	A standard calibration report is shipped with each flowmeter.  Optionally available: Extended accredited ISO/IEC 17025 calibration certificates
Approvals	No custody transfer approvals

The sensor SONO 3100 with transmitter FUS060 conforms to Product Family Standard EN 61326/A3 appendix A (Title: Electrical Equipment for Measurement control and laboratory use – EMC requirements).

The sensors are approved according to EU directive 2014/68/EU regarding fluid group 1, classified in category III. Design according to EN 13480 (PED Directive).

The SONO 3100 as weld-in version does not include the flanges. Thus, it can neither be tested nor approved according to PED. After the installation, all installation-related activities (welding, pressure test etc.) are the responsibility of the customer.

#### Selection and ordering data

#### Article No.

SITRANS F US SONO 3100 sensor 2-path		7ME3100-
<a href="#">Click on the Article No. for the online configuration in the PIA Life Cycle Portal.</a>		
Diameter	Qn setting [m <sup>3</sup> /h]	
DN 100 (4")	28	1 N
DN 100 (4")	100	1 P
DN 100 (4")	220	1 R
DN 125 (5")	44	1 S
DN 125 (5")	150	1 T
DN 125 (5")	360	1 V
DN 150 (6")	64	2 A
DN 150 (6")	220	2 B
DN 150 (6")	500	2 D
DN 200 (8")	110	2 E
DN 200 (8")	380	2 F
DN 200 (8")	900	2 H
DN 250 (10")	180	2 J
DN 250 (10")	600	2 K
DN 250 (10")	1300	2 M
DN 300 (12")	300	2 N
DN 300 (12")	850	2 P
DN 300 (12")	2200	2 R
DN 350 (14")	350	2 S
DN 350 (14")	1000	2 T
DN 350 (14")	2800 <sup>1)</sup>	2 V
DN 400 (16")	450	3 A
DN 400 (16")	1300	3 B
DN 400 (16")	3600	3 D
DN 500 (20")	1300	3 J
DN 500 (20")	2200	3 K
DN 500 (20")	4200 <sup>1)</sup>	3 M
<b>Flange norm and pressure rating</b> (All sizes are not available in all pressure ratings)		
EN 1092-1		
<ul style="list-style-type: none"> <li>• PN 10 (DN 200 ... 600)</li> <li>• PN 16 (DN 100 ... 600)</li> <li>• PN 25 (DN 200 ... 600)</li> <li>• PN 40 (DN 100 ... 500)</li> </ul>		
ANSI B16.5		
<ul style="list-style-type: none"> <li>• Class 150 (DN 100 ... 300)</li> <li>• Class 300 (DN 100 ... 300)</li> </ul>		
Pipe without flanges (EN 10217) (weld-in version) <sup>2)</sup>		
<ul style="list-style-type: none"> <li>• PN 10 (DN 200 ... 600)</li> <li>• PN 16 (DN 100 ... 600)</li> <li>• PN 25 (DN 200 ... 600)</li> <li>• PN 40 (DN 100 ... 500)</li> </ul>		
		B C D E
		H J
		P Q R S

Selection and ordering data	Article No.	Order code
<b>SITRANS F US SONO 3100 sensor 2-path</b>	<b>7ME3100-</b>	
<b>Pipe and flange material</b> Carbon steel (DN 100 ... 1200)	<b>1</b>	
<b>Transducer type and approval</b> IP67 (NEMA 4X/6) PA housing, PN 40, O-ring, 50 mm, 100 °C (212 °F) (DN 100 ... 600)	<b>1</b>	
IP68 SS housing, PN 40, O-ring, 50 mm, 200 °C (392 °F) (DN 100 ... 600)	<b>2</b>	
IP68 SS housing, PN 40, O-ring, 50 mm, 180 °C (356 °F), Ex d ATEX approval (only with standard FUS060) (DN 100 ... 600)	<b>3</b>	
IP67 (NEMA 4X/6) PA housing, PN 40, flange, 88 mm, 100 °C (212 °F) (DN 100 ... 300)	<b>4</b>	
IP68 SS housing, PN 40, flange, 88 mm, 200 °C (392 °F) (DN 100 ... 300)	<b>5</b>	
IP68 SS housing, PN 40, flange, 88 mm, 180 °C (356 °F), Ex d ATEX approval (only with standard FUS060) (DN 100 ... 300)	<b>6</b>	
IP67 SS housing, PN 40, O-ring, 50 mm, 90 °C (374 °F), Ex i ATEX approval (only with FUS060 Ex-version) (DN 100 ... 600)	<b>7</b>	
IP67 SS housing, PN 40, flange, 88 mm, 190 °C (374 °F), Ex i ATEX approval (only with FUS060 Ex-version) (DN 100 ... 300)	<b>8</b>	
<b>Cable gland entries</b> Cable glands M20 in transducers and in transmitter M25/20/16 x 1.5	<b>1</b>	
Cable glands ½" NPT in transducers and in transmitter	<b>2</b>	
<b>Transmitter version of SITRANS FUS060</b> IP65 (NEMA 4), 120/230 V AC	<b>N</b>	
IP65 (NEMA 4), 24 V AC/DC	<b>P</b>	
IP65 (NEMA 4), 24 V AC/DC, Ex-version (ATEX)	<b>Q</b>	
<b>FUS060 output module</b> HART, 1 pulse output, 1 relay	<b>B</b>	
HART Ex, 1 pulse output, 1 relay	<b>C</b>	
PROFIBUS PA, 1 pulse/frequency	<b>D</b>	
<b>Transducer coaxial cable</b> 4 x 3 m, max. 70 °C (158 °F), the only option for Ex i	<b>0</b>	
4 x 15 m, max. 70 °C (158 °F)	<b>1</b>	
4 x 30 m, high temp. max. 200 °C (392 °F)	<b>2</b>	
4 x 30 m, max. 70 °C (158 °F)	<b>3</b>	
4 x 60 m, max. 70 °C (158 °F)	<b>4</b>	
4 x 90 m, max. 70 °C (158 °F)	<b>5</b>	
4 x 120 m, max. 70 °C (158 °F)	<b>6</b>	
4 x 3 m, high temp. max. 200 °C (392 °F), the only option for Ex i	<b>7</b>	
4 x 15 m, high temp. max. 200 °C (392 °F)	<b>8</b>	
		<b>Additional information</b>
		Please add <b>"-Z"</b> to Article No. and specify Order code(s) and plain text.
		<b>Calibration</b> Production calibration DN 100 ... DN 600 (with certificate)
		<b>Included</b>
		Accredited Siemens ISO/IEC 17025 calibration for DN 100 to DN 200 with Qn as selected in diameter. Calibration certificate: 2 x 5 points in 5 %, 10 %, 25 %, 50 % and 100 % Qn (max. flow 630 m <sup>3</sup> /h).
		<b>D20</b>
		Accredited Siemens ISO/IEC 17025 calibration for DN 200 to DN 600 with Qn as selected in diameter. Calibration certificate: 2 x 5 points in 5 %, 10 %, 25 %, 50 % and 100 % Qn (max. flow 2800 m <sup>3</sup> /h).
		<b>D21</b>
		Accredited Siemens ISO/IEC 17025 calibration for DN 400 to DN 600 with Qn as selected in diameter. Calibration certificate: 2 x 5 points in 5 %, 10 %, 25 %, 50 % and 100 % Qn (max. flow 8000 m <sup>3</sup> /h).
		<b>D22</b>
		<b>Material certificate</b> EN 10204-3.1
		<b>F10</b>
		EN 10204-3.1 and 100 % NDT on weldings, DN 100 ... DN 400
		<b>F11</b>
		EN 10204-3.1 and 100 % NDT on weldings, DN 500 ... DN 600
		<b>F12</b>
		<b>Pressure certificate</b> EN 10204-2.3
		<b>Tag name plate</b> Stainless steel TAG plate (1 x 24 x 80 mm), wire fixed. Font size depends on text length: 8 mm for 1 ... 10 characters, 4 mm for 11 ... 20 characters (specify in plain text).
		<b>Y17</b>
		Please use online Product selector to get latest updates: <a href="https://www.pia-portal.automation.siemens.com">https://www.pia-portal.automation.siemens.com</a>

<sup>1)</sup> Reduced Q value during calibration (Qn setting unchanged).

<sup>2)</sup> For weld-in sensor versions according to EN 10217 (flangeless sensors 7ME3100-xxYxx-xxxx, Y = P, Q, R, S) the tube roundness shall be agreed via the PVR process (only if the factor of Du / Wxx > 100).

## Flow Measurement

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

### SONO 3100/FUS060 flowmeter

#### Selection and ordering data (continued)

#### Flowmeter SONO 3100 operating instructions, accessories and spare parts

##### Operating instructions

Description	Article No.
SITRANS FUS060	
• English	<b>A5E01204521</b>
• German	<b>A5E02123845</b>
SITRANS F US SONO 3100	
• English	<b>A5E00814513</b>

This device is shipped with Safety Notes and a DVD containing further SITRANS F US literature.

All literature is available to download for free, in a range of languages, at <http://www.siemens.com/processinstrumentation/documentation>

##### Accessories

Description	Article No.
Potting kit for terminal box of SONO 3200 transducers for IP68/NEMA 6P (not for Ex sensors)	<b>FDK:085L2403</b>



##### Tools for transducer SONO 3200

Description	Article No.
Extraction tool for replacement of SONO 3200 O-ring transducers under pressure and for hot-tapping (working conditions: typically water, max. 40 bar and max. 60 °C (max. 580 psi and max. 140 °F)), 50 mm (1.97") transducers	<b>FDK:085B5331</b>



##### Spare parts

Transducer SONO 3200 spare parts, complete units

Type	Material	Gasket	Pressure rating	Terminal housing	Approv.	Temp. range [°C (°F)]	Length mm (inch)	Article No.
O-ring	316 SS	O-ring	PN 40	Plastic, PA 6.6 M20		-20 ... +100 (-4 ... +212)	50 (1.97)	<b>FDK:085B5453</b>
O-ring	316 SS	O-ring	PN 40	316 SS M20		-20 ... +200 (-4 ... +392)	50 (1.97)	<b>FDK:085B5450</b>
O-ring	316 SS	O-ring	PN 40	316 SS M20	Ex d <sup>1)</sup>	-20 ... +180 (-4 ... +356)	50 (1.97)	<b>FDK:085B5451</b>
O-ring	316 SS	O-ring	PN 40	316 SS M20	Ex-i <sup>2)</sup>	-10 ... +190 (14 ... 374)	50 (1.97)	<b>A5E00836448</b>
O-ring	316 SS	O-ring	PN 40	Plastic, PA 6.6 ½" NPT		-20 ... +100 (-4 ... +212)	50 (1.97)	<b>A5E00839472</b>
O-ring	316 SS	O-ring	PN 40	316 SS ½" NPT		-20 ... +200 (-4 ... +392)	50 (1.97)	<b>A5E00839431</b>
Flange	316 SS	Graphite	PN 40	Plastic, PA 6.6 M20		-20 ... +100 (-4 ... +212)	88 (3.47)	<b>FDK:085B5461</b>
Flange	316 SS	Graphite	PN 40	316 SS M20		-20 ... +200 (-4 ... +392)	88 (3.47)	<b>FDK:085B5462</b>
Flange	316 SS	Graphite	PN 40	316 SS M20	Ex d <sup>1)</sup>	-20 ... +180 (-4 ... +356)	88 (3.47)	<b>FDK:085B5463</b>
Flange	316 SS	Graphite	PN 40	316 SS M20	Ex-i <sup>2)</sup>	-10 ... +190 (14 ... 374)	88 (3.47)	<b>A5E00836465</b>
Flange	316 SS	Graphite	PN 40	Plastic, PA 6.6 ½" NPT		-20 ... +100 (-4 ... +212)	88 (3.47)	<b>A5E00839479</b>
Flange	316 SS	Graphite	PN 40	316 SS ½" NPT		-20 ... +200 (-4 ... +392)	88 (3.47)	<b>A5E00839440</b>
Flange	316 SS	Copper ring	PN 40	316 SS PG 13.5 (cryogenic version)		-200 ... +100 (-328 ... +212)	88 (3.47)	<b>FDK:085B5416</b>
Flat flange	316 SS	Flat gasket	PN 40	316 SS M20 (cryogenic version)		-200 ... +100 (-328 ... +212)	88 (3.47)	<b>A5E02593524</b>

<sup>1)</sup> ATEX (Ex) IIC 2G Ex d IIC T3- T6 Gb

<sup>2)</sup> For systems with FUS060 ATEX IIC 2G Ex dem [ia/ib] T6/T4/T3



##### Terminal housing for SONO 3200 sensor

Type	Pressure rating	Material	Temp. range [°C (°F)]	Article No.
Terminal housing (M20 cable gland)	N/A	PA 6.6	-20 ... +100 (-4 ... +212)	<b>FDK:085B5501</b>
Terminal housing (M20 cable gland)	N/A	ASTM 316	-20 ... +200 (-4 ... +392)	<b>FDK:085B5504</b>
Terminal housing (½" NPT cable gland)	N/A	PA 6.6	-20 ... +100 (-4 ... +212)	<b>A5E00839460</b>
Terminal housing (½" NPT cable gland)	N/A	ASTM 316	-20 ... +200 (-4 ... +392)	<b>A5E00839427</b>
Ex d <sup>1)</sup> terminal housing (M20 cable gland)	N/A	ASTM 316	-20 ... +180 (-4 ... +356)	<b>FDK:085B5505</b>
Ex-i <sup>2)</sup> terminal housing (M20 cable gland)	N/A	ASTM 316	-10 ... +190 (14 ... 374)	<b>A5E00835255</b>








**Selection and ordering data** (continued)

SONO 3200 spare parts, transducer body without terminal housing, including insert

Type	Material	Gasket	Pressure rating	Temp. range [°C (°F)]	Length mm (inch)	Article No.	
O-ring	316 SS	O-ring	PN 40	-20 ... +200 (-4 ... +392)	50 (1.97)	<b>FDK:085B1405</b>	
Flange	316 SS	Graphite	PN 40	-20 ... +200 (-4 ... +392)	88 (3.47)	<b>FDK:085B1464</b>	

Transducer SONO 3200 gaskets

Type	Pressure rating	Material	Temperature range [°C (°F)]	Article No.	
Gasket O-ring (3 pcs. for o-ring transducers)	PN 40	FKM	-20 ... +200 (-4 ... +392)	<b>FDK:085B1089</b>	
Gasket flange	PN 40/160	Graphite	-20 ... +200 (-4 ... +392)	<b>FDK:085B1080</b>	
Gasket and 12 mm (0.47") bolts and nuts for flange transducers (4 pcs.)	PN 40	AISI 316 or equal	-20 ... +200 (-4 ... +392)	<b>FDK:085B1083</b>	
Gasket and 16 mm (0.63") bolts and nuts for flange transducers (4 pcs.)	PN 160	Graphite, 316 SS	-20 ... +200 (-4 ... +392)	<b>FDK:085B1084</b>	
Gasket for cryogenics transducer with flat flange (2 pcs.)	PN 40	Graphite/metal composite	-200 ... +100 (-328 ... +212)	<b>A5E02593522</b>	

**Flow Measurement**


SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters



**SONO 3100/FUS060 flowmeter****Selection and ordering data** (continued)SONO 3200 cable glands

Description	Article No.	
Black PA plastic, cable Ø 5 ... 13 mm (1 pc.), temperature range -20 ... 100 °C (-4 ... +212 °F)	<b>A5E02246304</b>	
½" NPT gray PA plastic, cable Ø 5 ... 9 mm (1 pc.), temperature range -20 ... 100 °C (-4 ... +212 °F)	<b>A5E02246309</b>	
½" NPT chrome plated brass, cable Ø 5 ... 9 mm (1 pc.), temperature range -40 ... 100 °C (-40 ... +212 °F)	<b>A5E02246258</b>	
M20 stainless steel, cable Ø 4 ... 6 mm (1 pc.), temperature range -25 ... 200 °C (-13 ... +392 °F), Ex i approval	<b>A5E02246194</b>	
M20 Stainless steel, cable Ø 5 ... 8 mm (1 pc.) temperature range -60 ... 180 °C (-76 ... +356 °F), Ex d approval	<b>A5E02246311</b>	

Cables for SONO 3100 with FUS060

Description	Article No.	
Coaxial cable for FUS060, (75 Ω, max. 70 °C (158 °F), black PVC), (2 pcs.)		
• 3 m (9.84ft)	<b>A5E00875101</b>	
• 15 m (49.21ft)	<b>A5E00861432</b>	
• 30 m (98.43ft)	<b>A5E01278662</b>	
• 60 m (196.85ft)	<b>A5E01278682</b>	
• 90 m (295.28ft)	<b>A5E01278687</b>	
• 120 m (393.70ft)	<b>A5E01278698</b>	
High temp. coaxial cable for FUS060; with 0.3 m brown PTFE high temp. transducer part, max 200 °C (392 °F) and black PVC for remaining transmitter part with SMB plug, max. 70 °C (158 °F); impedance 75 Ω, (2 pcs.)		
• 3 m (9.84ft)	<b>A5E00875105</b>	
• 15 m (49.21ft)	<b>A5E00861435</b>	
• 30 m (98.43ft)	<b>A5E01196952</b>	
SITRANS F US special coaxial cable sets for low temperature cryogenic systems, with SMB-plug for transmitter SITRANS FUS060, PTFE material, temp. -200 ... +200 °C (-328 ... +392 °F), impedance 75 Ω, (2 pcs.)		
• 10 m (32.84ft)	<b>A5E02085593</b>	
• 15 m (49.21ft)	<b>A5E03262088</b>	
• 30 m (98.43ft)	<b>A5E02085644</b>	
• 40 m (131.23ft)	<b>A5E02085649</b>	

### Dimensional drawings

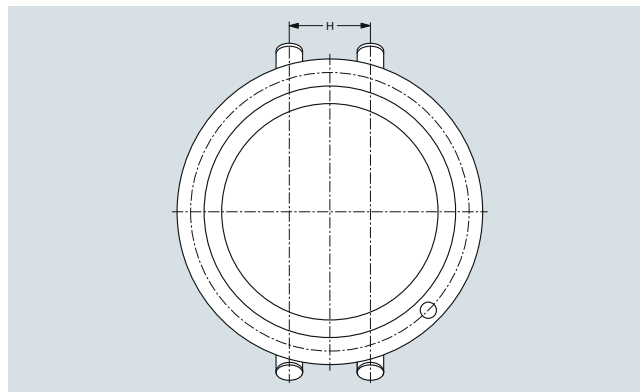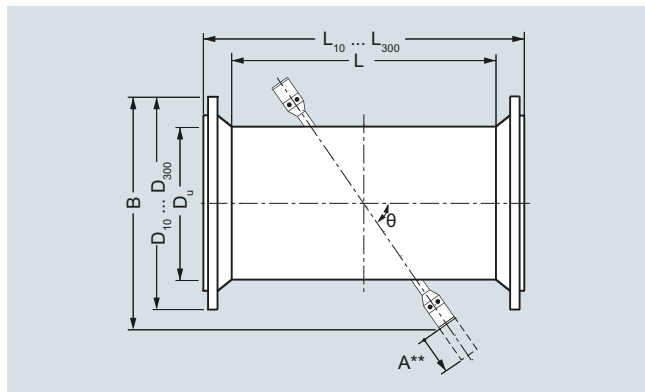

### Sensor SONO 3100 with EN norm

DN	D <sub>U</sub> [mm]	L <sup>1) 4)</sup> [mm]	B <sup>5)</sup> [mm]	θ [°]	H [mm]	PN10			PN16			PN25			PN40		
						W <sub>min</sub> <sup>2)</sup> [mm]	D <sub>10</sub> [mm]	L <sub>10</sub> <sup>1)</sup> [mm]	W <sub>min</sub> <sup>2)</sup> [mm]	D <sub>16</sub> [mm]	L <sub>16</sub> <sup>1)</sup> [mm]	W <sub>min</sub> <sup>2)</sup> [mm]	D <sub>25</sub> [mm]	L <sub>25</sub> <sup>1)</sup> [mm]	W <sub>min</sub> <sup>2)</sup> [mm]	D <sub>40</sub> [mm]	L <sub>40</sub> <sup>1)</sup> [mm]
100	114.3	860	305	45 <sup>3)</sup>	42.8	-	-	-	3.6	220	960	-	-	-	3.6	235	990
125	139.7	862	325	45 <sup>3)</sup>	64.5	-	-	-	4.0	250	970	-	-	-	4.0	270	990
150	168.3	862	350	45 <sup>3)</sup>	78.1	-	-	-	4.5	285	970	-	-	-	4.5	300	1010
200	219.1	668	430	45 <sup>3)</sup>	102.1	6.3	340	790	6.3	340	790	6.3	360	820	6.3	375	840
250	273.0	714	480	45 <sup>3)</sup>	127.6	6.3	395	850	6.3	405	850	7.1	425	890	7.1	450	920
300	323.9	607	525	45 <sup>3)</sup>	151.8	7.1	445	740	7.1	460	760	8.0	485	790	8.0	515	830
350	355.6	639	550	45 <sup>3)</sup>	166.4	8.0	505	770	8.0	520	800	8.0	555	840	8.8	580	880
400	406.4	703	600	45 <sup>3)</sup>	191.3	8.0	565	850	8.0	580	875	8.8	620	925	11.1	660	975
500	508.0	797	690	45 <sup>3)</sup>	241.1	7.1	670	950	8.0	715	980	10.0	730	1050	14.2	755	1080
600	610.0	912	830	60	294.8	7.1	780	1075	8.8	840	1105	11.0	845	1165	-	-	-

<sup>1)</sup> Length tolerance (mm): DN 100 +2/-3, DN 125 ... 200 +3/-4, DN 250 ... 400 +4/-5, DN 500 ... 600 +5/-6

<sup>2)</sup> Wall thickness for pressure rates PN 6 ... 40. For weld-in sensor versions according EN10217 (flangeless sensors 7ME3100-xxYxx-xxxx, Y=P, Q, R, S) the tube roundness shall be agreed via the PVR process (only if the factor of Du/Wxx > 100). W<sub>min</sub> wall thickness are min. values. The delivered sensor can have larger wall thicknesses to meet the selected pressure rate. Any specific required wall thickness must be ordered as PVR.

<sup>3)</sup> For all sensors with flange transducers path angle are 60°.

<sup>4)</sup> L is the length of sensor versions without flanges (weld-in version). For weld-in sensor versions according to EN 10217 (flangeless sensors 7ME3100-xxYxx-xxxx, Y = P, Q, R, S) the tube roundness shall be agreed via the PVR process (only if the factor of Du/Wxx > 100).

<sup>5)</sup> B dimension value is an approximate information and may differ a little by flange pressure rate.

A\*\*) Space required for replacement of transducer min. 230 mm (9.1 inch).

### SONO 3100, 2-path

Nominal diam. DN	Flange type - Weight [kg (lbs)]			
	PN 10	PN 16	PN 25	PN 40
100 (4")	-	32 (70.5)	-	35 (77.2)
125 (5")	-	38 (83.8)	-	44 (97.0)
150 (6")	-	45 (99.2)	-	52 (114.6)
200 (8")	59 (130.0)	58 (127.9)	70 (154.3)	79 (174.2)
250 (10")	73 (161.0)	75 (163.3)	96 (211.6)	117 (257.9)
300 (12")	83 (183.0)	92 (202.8)	114 (251.3)	151 (332.9)
350 (14")	98 (216.0)	113 (249.1)	145 (332.9)	191 (421.1)
400 (16")	119 (262.4)	141 (310.9)	191 (421.1)	275 (606.3)
500 (20")	153 (337.3)	207 (456.4)	284 (626.0)	379 (836.0)
600 (24")	193 (425.5)	276 (608.5)	363 (800.3)	-

Weight of system incl. process flanges and standard O-ring transducers. For sensors with flange transducer please add approx. 10 kg (22.05 lbs). For SS terminal housings instead of the standard PA housing add approx. 5 kg (11.03 lbs).



## Flow Measurement

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

### SONO 3100/FUS060 flowmeter

#### Dimensional drawings (continued)

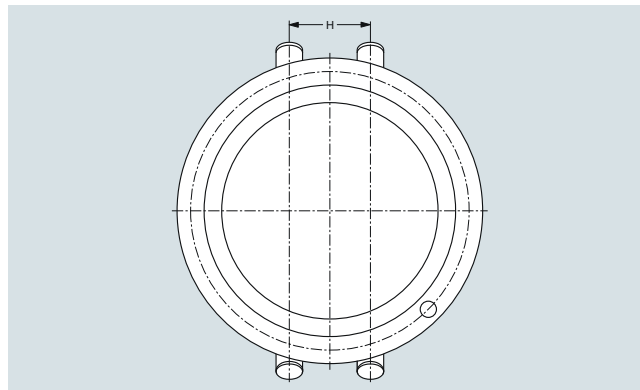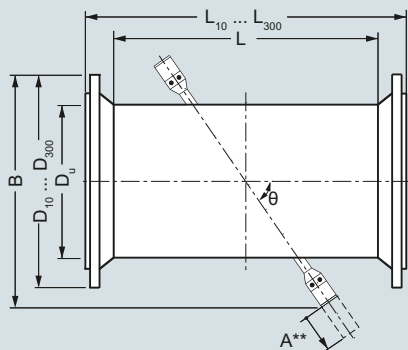

#### Sensor SONO 3100 with ANSI norm

Size (DN)	D <sub>U</sub>	L <sup>1) 4)</sup>	B <sup>5)</sup>	θ	H	Class 150			Class 300		
						W <sub>min</sub> <sup>2)</sup>	D <sub>150</sub>	L <sub>150</sub> <sup>1)</sup>	W <sub>min</sub> <sup>2)</sup>	D <sub>300</sub>	L <sub>300</sub> <sup>1)</sup>
inch (mm)	[inch]	[inch]	[inch]	[°]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]
4" (100)	4.50	33.86	12.01	45 <sup>3)</sup>	1.69	0.14	9.00	39.86	0.25	10.00	40.62
5" (125)	5.50	33.94	12.80	45 <sup>3)</sup>	2.54	0.15	10.00	40.94	0.27	11.00	41.70
6" (150)	6.63	33.94	13.78	45 <sup>3)</sup>	3.07	0.16	11.00	40.94	0.30	12.50	41.70
8" (200)	8.63	26.30	16.93	45 <sup>3)</sup>	4.02	0.16	13.50	34.30	0.29	15.00	35.06
10" (250)	10.75	28.11	18.90	45 <sup>3)</sup>	5.02	0.18	16.00	36.11	0.34	17.50	37.35
12" (300)	12.75	23.90	20.67	45 <sup>3)</sup>	5.98	0.20	19.00	32.90	0.39	20.50	34.14
14" (350)	14.00	25.16	21.65	45 <sup>3)</sup>	6.55	0.21	21.00	35.16	-	-	-
16" (400)	16.00	27.68	23.62	45 <sup>3)</sup>	7.53	0.22	23.50	33.74	-	-	-
20" (500)	20.00	31.38	27.17	45 <sup>3)</sup>	9.49	0.26	27.50	42.76	-	-	-
24" (600)	24.00	35.91	32.68	60	11.61	0.30	32.00	47.91	-	-	-

<sup>1)</sup> Length tolerance (mm): 4" +0.08"/-0.12" (+2/-3 mm), 5" ... 8" +0.12"/-0.16" (+3/-4mm), 10" ... 16" +0.16"/-0.20" (+4/-5 mm), 20" ... 24" +0.20"/-0.24" (+5/-6 mm)

<sup>2)</sup> Minimum wall thickness for pressure rates Class 150 or Class 300. For weld-in sensor versions according to EN 10217 (flangeless sensors 7ME3100-xxYxx-xxxx, Y = P, Q, R, S) the tube roundness shall be agreed via the PVR process (only if the factor of D<sub>u</sub>/W<sub>xx</sub> > 100). W<sub>min</sub> wall thickness are min. values. The delivered sensor can have larger wall thicknesses to meet the selected pressure rate. Any specific required wall thickness to be ordered as PVR.

<sup>3)</sup> For all sensors with flange transducers path angle are 60°.

<sup>4)</sup> L is the length of sensor versions without flanges (weld-in version). For weld-in sensor versions according to EN 10217 (flangeless sensors 7ME3100-xxYxx-xxxx, Y = P, Q, R, S) the tube roundness shall be agreed via the PVR process (only if the factor of D<sub>u</sub>/W<sub>xx</sub> > 100).

<sup>5)</sup> B dimension value is an approximate information and may differ a little by flange pressure rate.

A\*\*) Space required for replacement of transducer min. 230 mm (9.1 inch).


#### Approximate weights for SONO 3100 sensor with ANSI B16.5 flanges

Nominal size		Weight <sup>1)</sup> [kg (lbs)]			
DN	DN	Class 150		Class 300	
[inch]	[mm]	[kg]	[lbs]	[kg]	[lbs]
4"	100	32	70.5	35	77.2
5"	125	38	83.8	44	97.0
6"	150	45	99.2	52	114.6
8"	200	58	127.9	79	174.2
10"	250	75	165.3	117	257.9
12"	300	92	202.8	151	332.9
14"	350	113	249.1	-	-
16"	400	141	310.9	-	-
20"	500	207	456.4	-	-
24"	600	276	608.5	-	-

<sup>1)</sup> Weight of system incl. process flanges and standard O-ring transducers. For sensors with flange transducer please add approx. 10 kg (22.05 lbs). For SS terminal housings instead of the standard PA housing add approx. 5 kg (11.03 lb).



**Circuit diagrams**

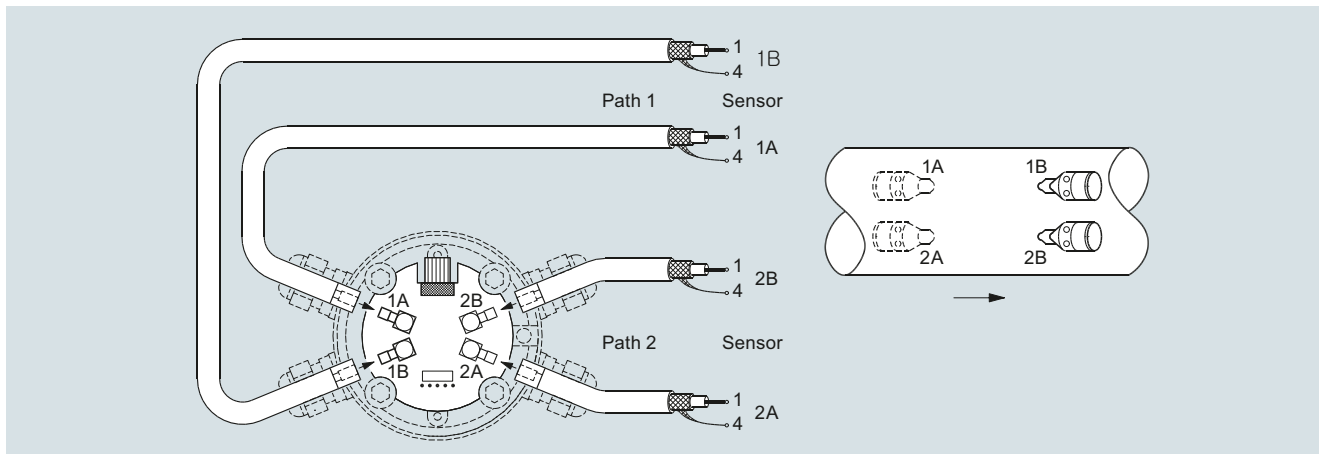

Electrical connection of SITRANS FUS060 and SONO 3100

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### SONOKIT flowmeter (with FUS060 or FUS080)

#### Overview



SONOKIT is a transit time based ultrasonic flowmeter for retrofitting on existing pipelines.

The kit offers all necessary parts and special tools to make the installation as 1-path or 2-path flowmeter.

The set is made for installation on empty pipes or pipes under pressure without process shut-down (hot-tap).

Please contact Siemens for further information on hot-tap tools and instructions.

SONOKIT has inline transducers (in contact with media) which assure superior accuracy and performance.

#### Benefits

- Cost-effective solution – contains all the necessary components for retrofitting
- SONOKIT is easy to install in pipeline sizes DN 200 to DN 3000 (8" to 120") 1-path DN 100 to DN 2400 (4" to 96").
- No bypass installation necessary – withstands pressures up to 40 bar (580 psi) and media temperatures between -20 °C and +200 °C (-4 °F and +392 °F)
- High accuracy – the bigger the pipe, the more accurate the result
- Solid construction and no moving parts for a 100 % maintenance and obstruction-free flowmeter
- The SONOKIT comes with transducers in IP68 enclosure.
- Available in a robust version that can be buried and withstands constant flooding.
- Inline transducers assure superior accuracy and performance.
- Automatic calculation of the calibration factor when pipe geometry data are entered in the transmitter.
- FST030 transmitter, modified for inline HART or Modbus
- FUS080 transmitter, battery or mains-powered

#### Application

- Raw water intake for water treatment plants
- Water distribution systems
- Irrigation systems
- Power generation (energy and water)
- District heating plants
- Cooling water plants within the industry and in power stations
- Systems within the oil and refinery business
- Sewage treatment plants
- Plants transporting non-conductive liquids

#### Design

The SONOKIT package box contains all necessary parts to build an ultrasonic flowmeter on existing pipes depending on choices at ordering:

- Papers to wrap around pipes for alignment of sensors
- Transducer alignment tools
- Mounting plates, transducer holders and SONO 3200 transducers
- Transducer cables
- SITRANS FUS060 or FUS080 transmitter for wall mounting
- For pipes bigger DN500 (20") please order FST030 transmitter separately (FDK-085X6329)

#### Technical specifications

The transmitter related to this system is the SITRANS FUS080 or FST030.

Technical specifications on pages 3/260 and 3/331.

#### Accuracy

Typical, depending on accuracy of measurements of installation

- 2-path:  $\leq \pm (0.5 \dots 1.5 \%)$
- 1-path:  $\leq \pm (1 \dots 3 \%)$

#### Note:

Accuracy depends on the accuracy of the measurements taken at location. This means that inaccurate measurements of angles, distance between transducers, wall thickness and pipe diameter have a direct effect on the accuracy. Values measured are entered into the memory of the FUS060 or FUS080 transmitter.

#### Requirements for pipes

<b>Size</b>	FUS060: DN 100 ... DN 3000 (4" ... 120") FUS080: DN 100 ... DN 1200 (4" ... 48")
Line pressure	max. 40 bar (580 psi)
Media temperature	
• Standard version	-10 ... +200 °C (14 ... 392 °F)
• ATEX Ex d version (FUS060)	-20 ... +180 °C (-4 ... +356 °F)
• ATEX Ex i version (FUS060)	-10 ... +190 °C (14 ... 374 °F)
Ambient temperature sensor	
• Standard and Ex-i version	-20 ... +60 °C (-4 ... +140 °F)
• Ex d version	-20 ... +180 °C (-4 ... +356 °F)
<b>Transducer enclosure/ approvals/certificates</b>	
Standard version	IP67 (NEMA 6)/IP68 (NEMA 6P)
Ex approval	System ATEX approval for SONO 3200 Ex i transducers together with transmitter FUS060-Ex: ATEX II 2 G Ex dem [ia/Ib] IIC T6/T4/T3 Gb or ATEX II 2G Ex d T3-T6 Gb with SONO 3200 Ex d transducers (for standard FUS060 transmitter, installed outside of Ex zone)
Material certificates	EN 10204-3.1 material certificate on transducer mounting parts
<b>Transducer materials</b>	
Terminal housing	Standard version: PA 6.6, 100 °C (212 °F) or stainless steel AISI 316, 200 °C (392 °F)
Transducer body	Standard version: Stainless steel AISI 316, 200 °C (392 °F)

#### Technical specifications (continued)

Materials of existing pipeline	
Steel	Transducer holder: EN 10273 or EN 10216 (P235GH) Mounting plates <sup>1)</sup> : EN 10273 or EN 10216 (P235GH)
Concrete	Transducer holder: Stainless steel AISI 316 or similar Mounting plates <sup>1)</sup> : (not included)
Stainless steel	Transducer holder: Stainless steel AISI 316 or similar Mounting plates <sup>1)</sup> : Stainless steel AISI 316 or similar
Pipe wall thickness	
Steel pipe (AISI 316 and St. 37.2 or corresponding material)	Transducer and holder available in length L = 160, allowing a pipe wall thickness up to 20 mm (0.79")
Concrete pipe	Transducer and holder available in length L = 230, allowing a pipe wall thickness up to 200 mm (7.9") and pipe sizes ≥ DN 600.


<b>Dimension of the package box</b> (L x W x H)	856 x 390 x 344 mm (33.7" x 15.4" x 13.5")
<b>Weight example of a package</b> (standard 2-path with FUS060)	approx. 53 kg (116.8 lb)
Certificates and approvals	
Conformity certificate	The devices are supplied as standard with a Siemens Certificate of Conformity on a DVD.
Material certificate	Material certificate for the transducer parts according to EN 10204-3.1 is optionally available.
Approvals	No custody transfer approvals

**Information on PED approval:**  
The SONOKIT includes the pipe mounting parts only and therefore it cannot be PED-approved. After the installation, all installation-related activities (welding, pressure test etc.) are the responsibility of the customer.


<sup>1)</sup> Mounting plates are only included for empty pipe installation types (refer to selection "A"). For hot tap mounting the mounting plates are not included (refer to selection "B").

#### Installation requirements

The space requirements (in mm) around the pipe for retrofitting a SITRANS F US ultrasonic flowmeter type SONOKIT are given below:

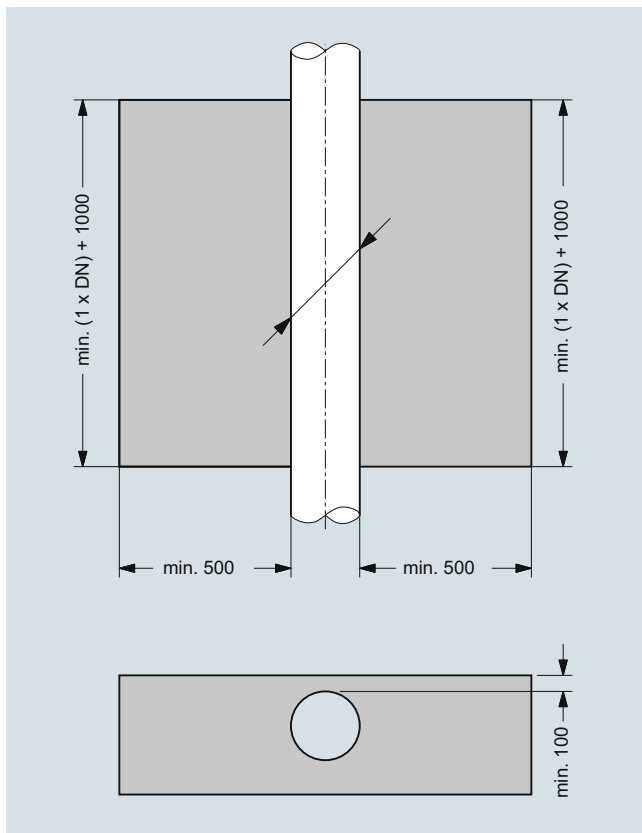

Empty pipe installation

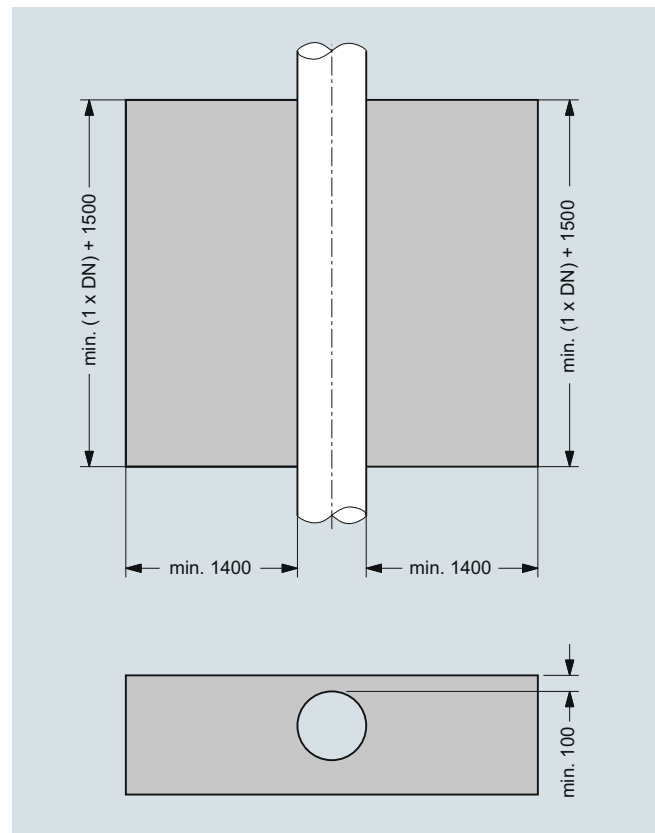

Hot-tap installation

# Flow Measurement

## SITRANS FS (ultrasonic)

### Inline ultrasonic flowmeters

#### SONOKIT flowmeter (with FUS060 or FUS080)

3

#### Selection and ordering data

SITRANS F US SONOKIT 1-path sensor		Article No.	Ord. Code
<a href="#">Click on the Article No. for the online configuration in the PIA Life Cycle Portal.</a>		7ME3210-	
Diameter	Qn setting [m <sup>3</sup> /h]		
DN 100 (4")	100	1 P	
DN 125 (5")	150	1 T	
DN 150 (6")	220	2 B	
DN 200 (8")	380	2 F	
DN 250 (10")	600	2 K	
DN 300 (12")	850	2 P	
DN 350 (14")	1000	2 T	
DN 400 (16")	1300	3 B	
DN 450 (18")	1700	3 F	
DN 500 (20")	2200	3 K	
DN 550 (22")	2600	3 P	
DN 600 (24")	3200	3 T	
DN 650 (26")	3600	4 B	
DN 700 (28")	4200	4 F	
DN 750 (30")	4800	4 K	
DN 800 (32")	5500	4 P	
DN 900 (36")	7500	5 B	
DN 1000 (40")	9000	5 K	
DN 1100 (44")	10000	5 P	
DN 1200 (48")	13200	5 T	
Installation method <sup>1)</sup>			
Empty pipe (incl. transducer holder and mounting plates). Alignment rods and tools must be ordered as accessories.		A	
Hot tap, mounting under pressure (mounting plates <b>not</b> incl.). Special mounting tools to be ordered separately.		B	
Transducer holder			
Carbon steel, length = 160 mm, mounting plates in carbon steel		1	
Stainless steel, length = 160 mm, mounting plates in stainless steel		2	
Stainless steel, length = 230 mm, for concrete pipe (DN 600 ... 2400)		3	
Transducer type and approval			
IP67 (NEMA 4X/6) PA housing, PN 40, O-ring, 100 °C (212 °F), no approval		1	
IP68 SS housing, PN 40, O-ring, 180 °C (356 °F), Ex d, ATEX approval (only with standard FUS060)		2	
IP68 PA housing, Sylgard potting kit, PN 40, O-ring, 100 °C (212 °F), no approval		3	
IP68 SS housing, Sylgard potting kit, PN 40, O-ring, 200 °C (392 °F), no approval		4	
IP67 SS housing, PN 40, O-ring, 190 °C (374 °F), Ex i type, ATEX approval (only with FUS060 Ex)		5	

#### Article No.

SITRANS F US SONOKIT 1-path sensor		Article No.	Ord. Code
<b>Cable gland entries</b> Cable glands M20 in transducers and in transmitter M25/20/16 x 1.5 (FUS080 only M20)		1	
Cable glands ½" NPT in transducers and in transmitter (only with FUS060)		2	
Transmitter version of SITRANS FUS060 (only DN 100 ... 2400)			
IP65 (NEMA 4), 120/230 V AC		N	
IP65 (NEMA 4), 24 V AC/DC		P	
IP65 (NEMA 4), 24 V AC/DC, Ex-version		Q	
Transmitter version of SITRANS FUS080 (only DN 100 ... 1200)			
PDM software tool and IrDA-adaptor, which are needed for settings update, to be ordered separately, see FUS080 accessories			
IP67/NEMA 4X/6 115 ... 230 V AC		U	
IP67/NEMA 4X/6 3.6 V battery version, incl. dual battery pack		V	
IP67/NEMA 4X/6 115 ... 230 V AC, incl. 3.6 V single battery backup		W	
IP67/NEMA 4X/6 3.6 V battery version (no battery pack included) <sup>2)</sup>		X	
Transmitter output module			
Transmitter SITRANS FUS080			
Pulse and/or alarm output (standard for FUS080)		A	
Transmitter SITRANS FUS060			
HART, 1 pulse output, 1 relay		B	
HART Ex version, 1 pulse output, 1 relay		C	
PROFIBUS PA, 1 pulse/frequency		D	
Transducer coaxial cables (with FUS080 only, 15 and 30 m, 70 °C (158 °F) cable types)			
2 x 3 m, max. 70 °C (158 °F), the only option for Ex i		0	
2 x 15 m, max. 70 °C (158 °F)		1	
2 x 30 m, high temp. max. 200 °C (392 °F)		2	
2 x 30 m, max. 70 °C (158 °F)		3	
2 x 60 m, max. 70 °C (158 °F)		4	
2 x 90 m, max. 70 °C (158 °F)		5	
2 x 120 m, max. 70 °C (158 °F)		6	
2 x 3 m, high temp. max. 200 °C (392 °F), the only option for Ex i		7	
2 x 15 m, high temp. max. 200 °C (392 °F)		8	
Special version (add Order code):			
No transducer cable, cable length 2 x 3 m, the only option for Ex i		9	R O A
No transducer cable, cable length 2 x 15 m		9	R O B
No transducer cable, cable length 2 x 30 m		9	R O C
No transducer cable, cable length 2 x 60 m		9	R O D
No transducer cable, cable length 2 x 90 m		9	R O E
No transducer cable, cable length 2 x 120 m		9	R O F

<sup>1)</sup> Mounting tools must be ordered separately as "-Z"-options.

<sup>2)</sup> Lithium batteries are subject to special transportation regulations according to United Nations "Regulation of Dangerous Goods, UN 3090 and UN 3091". Special transport documentation is required to observe these regulations. This may influence both transport time and costs."

Selection and ordering data		Article No.	Article No.																																																						
<b>Additional information</b>																																																									
Please add <b>"-Z"</b> to Article No. and specify Order code(s) and plain text.																																																									
<b>Material certificate</b>																																																									
EN 10204-3.1, transducer body material	<b>F30</b>																																																								
EN 10204-3.1, transducer body material	<b>F31</b>																																																								
EN 10204-3.1, mounting plate material	<b>F32</b>																																																								
<b>Regional specific approval</b>																																																									
KCC marking for Korea	<b>W28</b>																																																								
<b>Tag name plate</b>																																																									
Stainless steel TAG plate (1 x 24 x 80 mm), wire fixed. Font size depends on text length: 8 mm for 1 ... 10 characters, 4 mm for 11 ... 20 characters (specify in plain text).	<b>Y17</b>																																																								
<b>Accessories</b>																																																									
Alignment rods-set for DN 100 ... 650 (4" ... 26") Ø = 25 mm, L = 500 mm, 3 pcs.	<b>S10</b>																																																								
Alignment rods-set for DN 700 ... 1900 (28" ... 76") Ø = 25 mm, L = 500 mm, 6 pcs.	<b>S11</b>																																																								
Alignment rods-set for DN 2000 ... 2400 (80" ... 96") Ø = 25 mm, L = 500 mm, 8 pcs.	<b>S12</b>																																																								
Spanner key for transducer mounting type SONO 3200 O-ring type	<b>T11</b>																																																								
Tool set with various mounting/spare parts for SONOKIT installation	<b>T12</b>																																																								
<b>Operating instructions</b>																																																									
<b>Description</b>	<b>Article No.</b>																																																								
SITRANS FUS060																																																									
• English	<b>A5E01204521</b>																																																								
• German	<b>A5E02123845</b>																																																								
SITRANS FUS080																																																									
• English	<b>A5E03059912</b>																																																								
• German	<b>A5E31628428</b>																																																								
SITRANS F US SONOKIT 1-path																																																									
• English	<b>A5E00814557</b>																																																								
• German	<b>A5E02610428</b>																																																								
<p>All literature is available to download for free, in a range of languages, at <a href="https://www.siemens.com/processinstrumentation/documentation">https://www.siemens.com/processinstrumentation/documentation</a></p> <p>Please use online Product selector to get latest updates: <a href="http://www.pia-portal.automation.siemens.com">www.pia-portal.automation.siemens.com</a></p>																																																									
		<b>SITRANS F US SONOKIT 2-path sensor</b>	<b>7ME3220-</b> Ord. Code																																																						
		<p>Click on the Article No. for the online configuration in the PIA Life Cycle Portal.</p> <table border="1"> <thead> <tr> <th>Diameter</th> <th>Qn setting [m<sup>3</sup>/h]</th> <th></th> </tr> </thead> <tbody> <tr><td>DN 200 (8")</td><td>380</td><td><b>2 F</b></td></tr> <tr><td>DN 250 (10")</td><td>600</td><td><b>2 K</b></td></tr> <tr><td>DN 300 (12")</td><td>850</td><td><b>2 P</b></td></tr> <tr><td>DN 350 (14")</td><td>1000</td><td><b>2 T</b></td></tr> <tr><td>DN 400 (16")</td><td>1300</td><td><b>3 B</b></td></tr> <tr><td>DN 450 (18")</td><td>1700</td><td><b>3 F</b></td></tr> <tr><td>DN 500 (20")</td><td>2200</td><td><b>3 K</b></td></tr> <tr><td>DN 550 (22")</td><td>2600</td><td><b>3 P</b></td></tr> <tr><td>DN 600 (24")</td><td>3200</td><td><b>3 T</b></td></tr> <tr><td>DN 650 (26")</td><td>3600</td><td><b>4 B</b></td></tr> <tr><td>DN 700 (28")</td><td>4200</td><td><b>4 F</b></td></tr> <tr><td>DN 750 (30")</td><td>4800</td><td><b>4 K</b></td></tr> <tr><td>DN 800 (32")</td><td>5500</td><td><b>4 P</b></td></tr> <tr><td>DN 900 (36")</td><td>7500</td><td><b>5 B</b></td></tr> <tr><td>DN 1000 (40")</td><td>9000</td><td><b>5 K</b></td></tr> <tr><td>DN 1100 (44")</td><td>10000</td><td><b>5 P</b></td></tr> <tr><td>DN 1200 (48")</td><td>13200</td><td><b>5 T</b></td></tr> </tbody> </table>	Diameter	Qn setting [m <sup>3</sup> /h]		DN 200 (8")	380	<b>2 F</b>	DN 250 (10")	600	<b>2 K</b>	DN 300 (12")	850	<b>2 P</b>	DN 350 (14")	1000	<b>2 T</b>	DN 400 (16")	1300	<b>3 B</b>	DN 450 (18")	1700	<b>3 F</b>	DN 500 (20")	2200	<b>3 K</b>	DN 550 (22")	2600	<b>3 P</b>	DN 600 (24")	3200	<b>3 T</b>	DN 650 (26")	3600	<b>4 B</b>	DN 700 (28")	4200	<b>4 F</b>	DN 750 (30")	4800	<b>4 K</b>	DN 800 (32")	5500	<b>4 P</b>	DN 900 (36")	7500	<b>5 B</b>	DN 1000 (40")	9000	<b>5 K</b>	DN 1100 (44")	10000	<b>5 P</b>	DN 1200 (48")	13200	<b>5 T</b>	
Diameter	Qn setting [m <sup>3</sup> /h]																																																								
DN 200 (8")	380	<b>2 F</b>																																																							
DN 250 (10")	600	<b>2 K</b>																																																							
DN 300 (12")	850	<b>2 P</b>																																																							
DN 350 (14")	1000	<b>2 T</b>																																																							
DN 400 (16")	1300	<b>3 B</b>																																																							
DN 450 (18")	1700	<b>3 F</b>																																																							
DN 500 (20")	2200	<b>3 K</b>																																																							
DN 550 (22")	2600	<b>3 P</b>																																																							
DN 600 (24")	3200	<b>3 T</b>																																																							
DN 650 (26")	3600	<b>4 B</b>																																																							
DN 700 (28")	4200	<b>4 F</b>																																																							
DN 750 (30")	4800	<b>4 K</b>																																																							
DN 800 (32")	5500	<b>4 P</b>																																																							
DN 900 (36")	7500	<b>5 B</b>																																																							
DN 1000 (40")	9000	<b>5 K</b>																																																							
DN 1100 (44")	10000	<b>5 P</b>																																																							
DN 1200 (48")	13200	<b>5 T</b>																																																							
		<b>Installation method<sup>1)</sup></b>																																																							
		Empty pipe (incl. transducer holder and mounting plates). Alignment rods and tools must be ordered as accessories.	<b>A</b>																																																						
		Hot tap, mounting under pressure (mounting plates <b>not</b> incl.). Special mounting tools to be ordered separately.	<b>B</b>																																																						
		<b>Transducer holder</b>																																																							
		Carbon steel, length = 160 mm, mounting plates in carbon steel	<b>1</b>																																																						
		Stainless steel, length = 160 mm, mounting plates in stainless steel	<b>2</b>																																																						
		Stainless steel, length = 230 mm, for concrete pipe (DN 600 ... 3000)	<b>3</b>																																																						

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### SONOKIT flowmeter (with FUS060 or FUS080)

#### Selection and ordering data

#### Article No.

#### Article No.

#### SITRANS F US SONOKIT 2-path sensor

7ME3220-

Ord.  
Code

#### Transducer type and approval

IP67 (NEMA 4X/6) PA housing, PN 40, O-ring, 100 °C (212 °F), no approval

1

IP68 SS housing, PN 40, O-ring, 180 °C (356 °F), Ex d, ATEX approval (only with standard FUS060)

2

IP68 PA housing, Sylgard potting kit, PN 40, O-ring, 100 °C (212 °F), no approval

3

IP68 SS housing, Sylgard potting kit, PN 40, O-ring, 200 °C (392 °F), no approval

4

IP67 SS housing, PN 40, O-ring, 190 °C (374 °F), Ex i type, ATEX approval (only with FUS060 Ex)

5

#### Cable gland entries

Cable glands M20 in transducers and in transmitter M25/20/16 x 1.5 (FUS080 only M20)

1

Cable glands ½" NPT in transducers and in transmitter (only with FUS060)

2

#### Transmitter version of SITRANS FUS060 (only DN 200 ... 500)

IP65 (NEMA 4), 120/230 V AC

N

IP65 (NEMA 4), 24 V AC/DC

P

IP65 (NEMA 4), 24 V AC/DC, Ex-version

Q

#### Transmitter version of SITRANS FUS080 (only DN 200 ... 1200)

PDM software tool and IrDA-adaptor, which are needed for settings update, to be ordered separately, see FUS080 accessories

U

IP67/NEMA 4X/6 115 ... 230 V AC

V

IP67/NEMA 4X/6 3.6 V battery version, incl. dual battery pack

W

IP67/NEMA 4X/6 115 ... 230 V AC, incl. 3.6 V single battery backup

X

IP67/NEMA 4X/6 3.6 V battery version (no battery pack included)<sup>2)</sup>

#### Transmitter output module

##### Transmitter SITRANS FUS080

Pulse and/or alarm output (standard for FUS080)

A

##### Transmitter SITRANS FUS060

HART, 1 pulse output, 1 relay

B

HART Ex version, 1 pulse output, 1 relay

C

PROFIBUS PA, 1 pulse/frequency

D

#### SITRANS F US SONOKIT 2-path sensor

7ME3220-

Ord.  
Code

#### Transducer coaxial cables (with FUS080 only, 15 and 30 m, 70 °C (158 °F) cable types)

4 x 3 m, max. 70 °C (158 °F), the only option for Ex i

0

4 x 15 m, max. 70 °C (158 °F)

1

4 x 30 m, high temp. max. 200 °C (392 °F)

2

4 x 30 m, max. 70 °C (158 °F)

3

4 x 60 m, max. 70 °C (158 °F) (up to DN 3000)

4

4 x 90 m, max. 70 °C (158 °F) (up to DN 3000)

5

4 x 120 m, max. 70 °C (158 °F) (up to DN 3000)

6

4 x 3 m, high temp. max. 200 °C (392 °F), the only option for Ex i

7

4 x 15 m, high temp. max. 200 °C (392 °F)

8

#### Special version (add Order code):

No transducer cable, cable length 4 x 3 m, the only option for Ex i

9

R O A

No transducer cable, cable length 4 x 15 m

9

R O B

No transducer cable, cable length 4 x 30 m

9

R O C

No transducer cable, cable length 4 x 60 m (up to DN 3000)

9

R O D

No transducer cable, cable length 4 x 90 m (up to DN 3000)

9

R O E

No transducer cable, cable length 4 x 120 m (up to DN 3000)

9

R O F

<sup>1)</sup> Mounting tools must be ordered separately as "-Z"-options.

<sup>2)</sup> Lithium batteries are subject to special transportation regulations according to United Nations "Regulation of Dangerous Goods, UN 3090 and UN 3091". Special transport documentation is required to observe these regulations. This may influence both transport time and costs."

#### Additional information

Please add "-Z" to Article No. and specify Order code(s) and plain text.

#### Material certificate

EN 10204-3.1, transducer body material

F30

EN 10204-3.1, transducer body material

F31

EN 10204-3.1, mounting plate material

F32

#### Regional specific approval

KCC marking for Korea

W28

#### Tag name plate

Stainless steel TAG plate (1 x 24 x 80 mm), wire fixed.

Y17

Font size depends on text length:

8 mm for 1 ... 10 characters, 4 mm for 11 ... 20 characters (specify in plain text).

#### Accessories

Alignment rods-set for DN 100 ... 750 (4" ... 30")  
Ø = 25 mm, L = 500 mm, 3 pcs.

S10

Alignment rods-set for DN 800 ... 2100 (32" ... 84")  
Ø = 25 mm, L = 500 mm, 6 pcs.

S11

Alignment rods-set for DN 2200 ... 3000 (88" ... 120")  
Ø = 25 mm, L = 500 mm, 8 pcs.

S12

Spanner key for transducer mounting type SONO 3200 O-ring type

T11

Tool set with various mounting/spare parts for SONOKIT installation

T12

#### Selection and ordering data (continued)

##### Operating instructions

Description	Article No.
SITRANS FUS060	
• English	<b>A5E01204521</b>
• German	<b>A5E02123845</b>
SITRANS FUS080	
• English	<b>A5E03059912</b>
• German	<b>A5E31628428</b>
SITRANS F US SONOKIT 2-path	
• English	<b>A5E02445496</b>
• German	<b>A5E02554972</b>

All literature is available to download for free, in a range of languages, at

<https://www.siemens.com/processinstrumentation/documentation>

Please use online Product selector to get latest updates:

<https://www.pia-portal.automation.siemens.com>

##### Flowmeter SONOKIT accessories and spare parts

##### Accessories


##### Potting kit for SONO 3200 terminal housing

Description	Article No.
Potting kit for terminal box of SONO 3200 transducers for IP68/NEMA 6P (not for Ex sensors)	<b>FDK:085L2403</b>



##### Tools for SONO 3200 transducers and SONOKIT

Description	Article No.
Extraction tool for replacement of SONO 3200 O-ring transducers under pressure and for hot-tapping (working conditions: typically water, max. 40 bar and max. 60 °C (max. 580 psi and max. 140 °F))	
For transducer length:	
• Up to 160 mm (6.3")	<b>FDK:085B5333</b>
• Up to 230 mm (9.1")	<b>FDK:085B5335</b>
Angle measurement tool for SONOKIT	<b>FDK:085B5330</b>
Hot-tap drilling tool for SONOKIT, the extraction tool is required, max. pressure 40 bar (580 psi)	<b>FDK:085B5392</b>
Alignment tool for SONOKIT (typically for hot-tapping) For use on pipe sizes in the range DN 300 ... DN 1200	<b>FDK:085B5393</b>
Alignment rods-set for DN 100 ... 650 (4" ... 26"), Ø = 25 mm, L = 500 mm, 3 pcs.	<b>A5E02609214</b>
Alignment rods-set for DN 700 ... 1900 (28" ... 76"), Ø = 25 mm, L = 500 mm, 6 pcs.	<b>A5E02609215</b>
Alignment rods-set for DN 2000 ... 3000 (80" ... 120"), Ø = 25 mm, L = 500 mm, 10 pcs.	<b>A5E02609216</b>
Spanner key for transducer mounting type SONO 3200 O-ring type	<b>A5E02609218</b>
Tool set with various mounting/spare parts for SONOKIT installation	<b>A5E02609219</b>



## Flow Measurement

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

### SONOKIT flowmeter (with FUS060 or FUS080)

#### Selection and ordering data (continued)

##### Spare parts

Transducer SONO 3200 spare parts, complete transducer with 1/2"-NPT cable glands

Transducer type	Material	Gasket	Pressure rating	Terminal housing	Approval	Temperature range [°C (°F)]	Length [mm (inch)]	Article No.
O-ring	316 SS	O-ring	PN 40	Plastic PA 6.6		-20 ... +100 (-420 ... +212)	160 (6.3)	<b>A5E00839476</b>
O-ring	316 SS	O-ring	PN 40	316 SS		-20 ... +200 <sup>1)</sup> (-4 ... +392)	160 (6.3)	<b>A5E00839435</b>
O-ring	316 SS	O-ring	PN 40	Plastic PA 6.6		-20 ... +100 (-4 ... +212)	230 (9.41)	<b>A5E00839477</b>
O-ring	316 SS	O-ring	PN 40	316 SS		-20 ... +200 <sup>1)</sup> (-4 ... +392)	230 (9.41)	<b>A5E00839437</b>

1) 1) 316 SS housing for -20 ... +200 °C (-4 ... +392 °F) media temp. but cable glands only for -20 ... +100 °C (-4 ... +212 °F) ambient temp.

Transducer SONO 3200 spare parts, complete transducer with M20 cable glands

Transducer type	Material	Gasket	Pressure rating	Terminal housing	Approval	Temperature range [°C (°F)]	Length [mm (inch)]	Article No.
O-ring	316 SS	O-ring	PN 40	Plastic PA 6.6		-20 ... +100 (-4 ... +212)	160 (6.3)	<b>FDK:085B5454</b>
O-ring	316 SS	O-ring	PN 40	316 SS		-20 ... +200 <sup>1)</sup> (-4 ... +392)	160 (6.3)	<b>FDK:085B5455</b>
O-ring	316 SS	O-ring	PN 40	Plastic PA 6.6		-20 ... +100 (-4 ... +212)	230 (9.41)	<b>FDK:085B5458</b>
O-ring	316 SS	O-ring	PN 40	316 SS	Ex d <sup>2)</sup>	-20 ... +180 (-4 ... +356)	160 (6.3)	<b>FDK:085B5452</b>
O-ring	316 SS	O-ring	PN 40	316 SS	Ex i <sup>3)</sup>	-10 ... +190 (14 ... 374)	160 (6.3)	<b>A5E00836462</b>
O-ring	316 SS	O-ring	PN 40	316 SS		-20 ... +200 <sup>2)</sup> (-4 ... +392)	230 (9.41)	<b>FDK:085B5459</b>

1) 316 SS housing for -20 ... +200 °C (-4 ... +392 °F) media temp. but cable glands only for -20 ... +100 °C (-4 ... +212 °F) ambient temp.

2) ATEX (Ex) IIC 2G Ex d IIC T3-T6 Gb

3) For systems with FUS060 ATEX IIC 2G Ex dem [ia/ib] T6/T4/T3

Transducer SONO 3200 spare parts, transducer terminal housing with M20 cable glands

Type	Article No.
Material: PA 6.6, Temperature range: -20 ... +100 °C (-4 ... +212 °F)	<b>FDK:085B5501</b>
Material: AISI 316, Temperature range: -20 ... +200 °C (-4 ... +392 °F)	<b>FDK:085B5504</b>
Material: AISI 316, Ex d <sup>1)</sup> , Temperature range: -20 ... +180 °C (-4 ... +356 °F)	<b>FDK:085B5505</b>
Material: AISI 316, Ex i <sup>2)</sup> , Temperature range: -10 ... +190 °C (14 ... 374 °F)	<b>A5E00835255</b>

1) ATEX (Ex) IIC 2G Ex d IIC T3-T6 Gb

2) For systems with FUS060 ATEX IIC 2G Ex dem [ia/ib] T6/T4/T3

Transducer SONO 3200 spare parts, transducer terminal housing with 1/2"-NPT cable glands

Type	Article No.
Material: PA 6.6, Temperature range: -20 ... +100 °C (-4 ... +212 °F)	<b>A5E00839460</b>
Material: AISI 316, Temperature range: -20 ... +200 °C (-4 ... +392 °F)	<b>A5E00839427</b>



#### Selection and ordering data (continued)

Transducer SONO 3200 spare parts transducer body with insert as well as insert only

Temperature range [°C (°F)]	Gasket	Length [mm (inch)]	Article No.
-20 ... +200 (-4 ... +392)	O-ring (FFKM O-ring material) <sup>1)</sup>	160 (6.3)	<b>FDK:085B1406</b>
-20 ... +200 (-4 ... +392)	O-ring (FKM 602 O-ring material) <sup>2)</sup>	160 (6.3)	<b>FDK:085B5510</b>
-20 ... +200 (-4 ... +392)	O-ring	230 (9.41)	<b>FDK:085B5511</b>

<sup>1)</sup> Chemical resistant O-ring material. Body specially for Ex-approved transducers.

<sup>2)</sup> Body specially for standard transducers.

Transducer SONO 3200 gasket

Type	Pressure rating	Material	Temperature range [°C (°F)]	Article No.
Gasket O-ring (3 pcs. for O-ring transducers)	PN 40	FKM	-20 ... +200 (-4 ... +392)	<b>FDK:085B1089</b>

Cables for SONOKIT SONO 3200 transducers with FUS060

Description	Article No.
Coax cable for FUS060, (75 Ω, max. 70 °C (158 °F), black PVC), (2 pcs.)	
• 3 m (9.84 ft)	<b>A5E00875101</b>
• 15 m (49.21 ft)	<b>A5E00861432</b>
• 30 m (98.43 ft)	<b>A5E01278662</b>
• 60 m (196.85 ft)	<b>A5E01278682</b>
• 90 m (295.28 ft)	<b>A5E01278687</b>
• 120 m (393.70 ft)	<b>A5E01278698</b>
High temp. coaxial cable for FUS060; with 0.3 m brown PTFE high temp. transducer part, max. 200 °C (392 °F) and black PVC transmitter part with SMB plug, max. 70 °C (158 °F); (impedance 75 Ω), (2 pcs.)	
• 3 (9.84)	<b>A5E00875105</b>
• 15 (49.21)	<b>A5E00861435</b>
• 30 (98.43)	<b>A5E01196952</b>

Cables for SONOKIT SONO 3200 transducers with FUS080

Description	Article No.
Coax cable for FUS060, (75 Ω, max. 70 °C (158 °F), black PVC), (2 pcs.)	
• 15 m (49.21 ft)	<b>A5E02478541</b>
• 30 m (98.43 ft)	<b>A5E02478551</b>

Transducer holder for SONOKIT SONO 3200 transducers

Description	Article No.
1-path (each incl. 1 pc.)	
• 160 mm (6.3") stainless steel 45°, DN 100 ... DN 150 (4" ... 6")	<b>FDK:085L1103</b>
• 160 mm (6.3") carbon steel 45°, DN 100 ... DN 150 (4" ... 6")	<b>FDK:085L1102</b>
• 230 mm (9.1") for concrete pipe 60°, DN 600 ... DN 2400 (24" ... 96")	<b>FDK:085L1107</b>
• 160 mm (6.3") stainless steel 60°, DN 200 ... DN 2400 (8" ... 96")	<b>FDK:085L1105</b>
• 160 mm (6.3") carbon steel 60°, DN 200 ... DN 2400 (8" ... 96")	<b>FDK:085L1104</b>
2-path (each incl. 1 pc.)	
• 230 mm (9.1") for concrete pipe 60°, DN 600 ... DN 3000 (24" ... 120")	<b>FDK:085L1111</b>
• 160 mm (6.3") stainless steel 60°, DN 200 ... DN 3000 (8" ... 120")	<b>FDK:085L1109</b>
• 160 mm (6.3") carbon steel 60°, DN 200 ... DN 3000 (8" ... 120")	<b>FDK:085L1108</b>

The other transducer holder parts are either completely in stainless steel for the concrete and stainless steel pipes (AISI 316L/1.4404 or similar). For carbon pipes the part welded onto the pipe is in carbon steel (St.37 or similar). Thread part is stainless steel (AISI 316L/1.4404 or similar).

## Flow Measurement



SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

### SONOKIT flowmeter (with FUS060 or FUS080)






#### Selection and ordering data (continued)

##### Mounting plate for SONOKIT SONO 3200 transducers


Description	Article No.	
1-path (each incl. 1 pc.)		
• Stainless steel plate, 45°, DN 100 ... DN 150 (4" ... 6")	<b>FDK:085L1113</b>	
• Carbon steel plate, 45°, DN 100 ... DN 150 (4" ... 6")	<b>FDK:085L1112</b>	
• Stainless steel plate, 60°, DN 200 ... DN 2400 (8" ... 96")	<b>FDK:085L1115</b>	
• Carbon steel plate, 60°, DN 200 ... DN 2400 (8" ... 96")	<b>FDK:085L1114</b>	
2-path (each incl. 1 pc.)		
• Stainless steel plate, 60°, DN 200 ... DN 3000 (8" ... 120")	<b>FDK:085L1119</b>	
• Carbon steel plate, 60°, DN 200 ... DN 3000 (8" ... 120")	<b>FDK:085L1118</b>	

The mounting plates are either completely in stainless steel (AISI 316L/ 1.4404 or similar) or carbon steel (St.37 or similar).


##### SONO 3200 cable glands

Description	Article No.	
Black PA plastic, cable Ø 5 ... 13 mm (1 pc.), temperature range -20 ... 100 °C (-4 ... +212 °F)	<b>A5E02246304</b>	
½" NPT grey PA plastic, cable Ø 5 ... 9 mm (1 pc.), temperature range -20 ... 100 °C (-4 ... +212 °F)	<b>A5E02246309</b>	
½" NPT chrome-plated brass, cable Ø 5 ... 9 mm (1 pc.), temperature range -40 ... 100 °C (-40 ... +212 °F)	<b>A5E02246258</b>	
M20 stainless steel, cable Ø 4 ... 6 mm (1 pc.), temperature range -25 ... 200 °C (-13 ... +392 °F), Ex i approval	<b>A5E02246194</b>	
M20 stainless steel, cable Ø 5 ... 8 mm (1 pc.), temperature range -60 ... 180 °C (-76 ... +356 °F), Ex d approval	<b>A5E02246311</b>	


**Circuit diagrams**

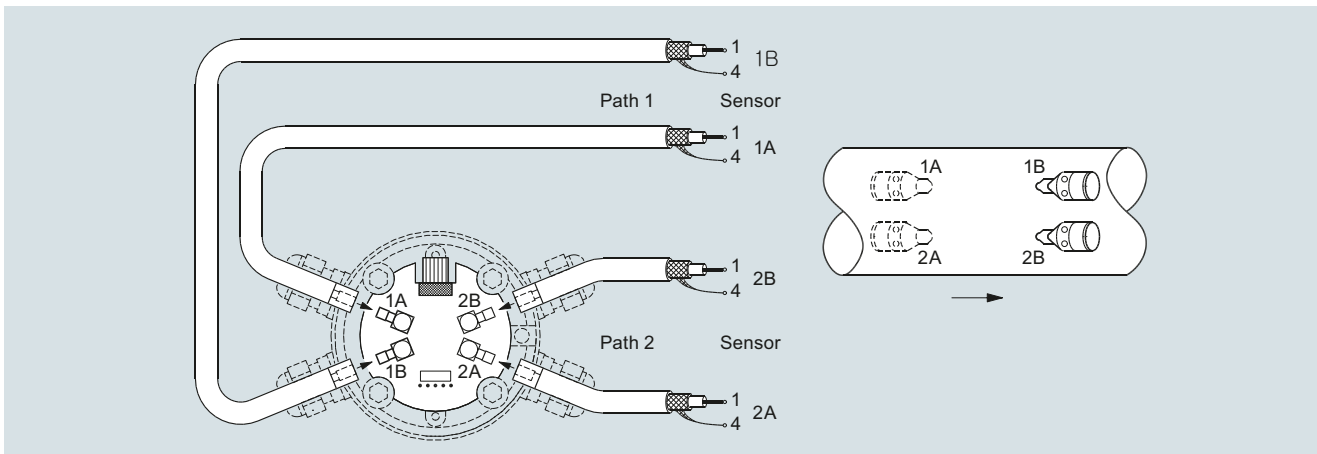


Electrical connection of SITRANS FUS060 and SONOKIT 2-path

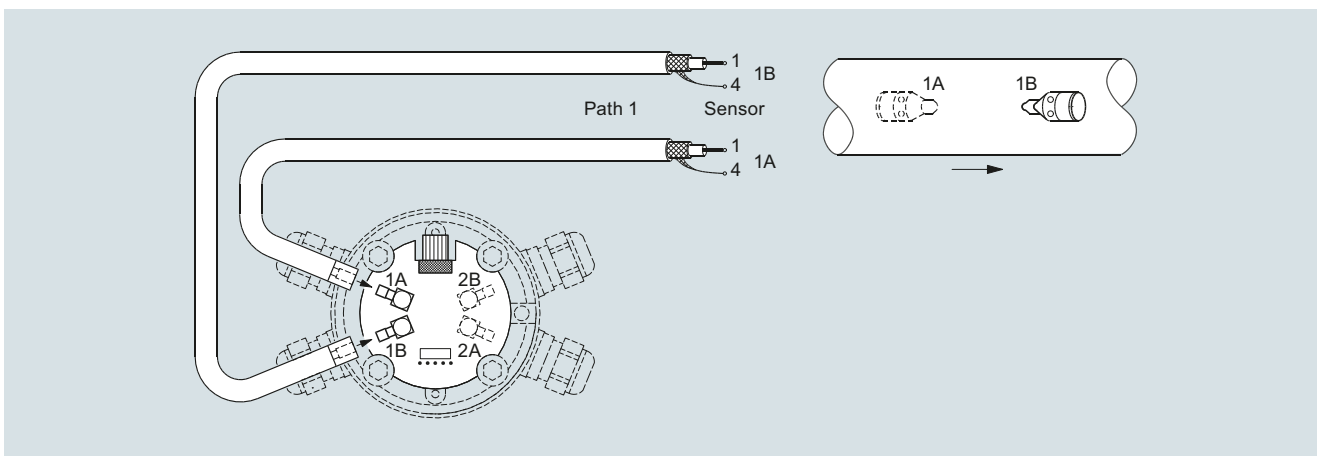

Electrical connection of SITRANS FUS060 and SONOKIT 1-path

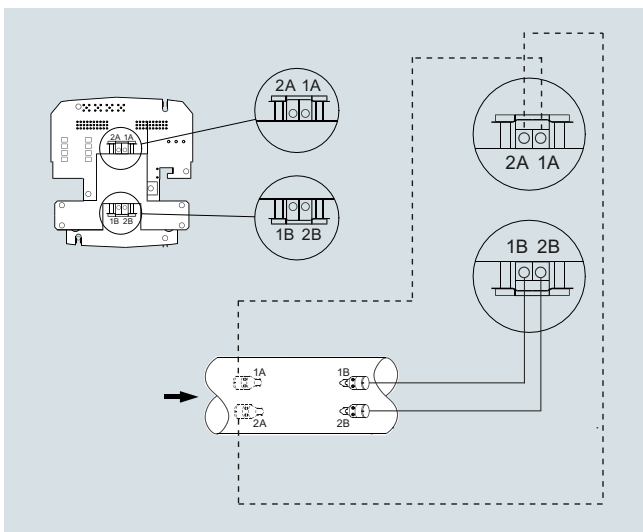

Electrical connection of SITRANS FUS080 and SONOKIT 2-path

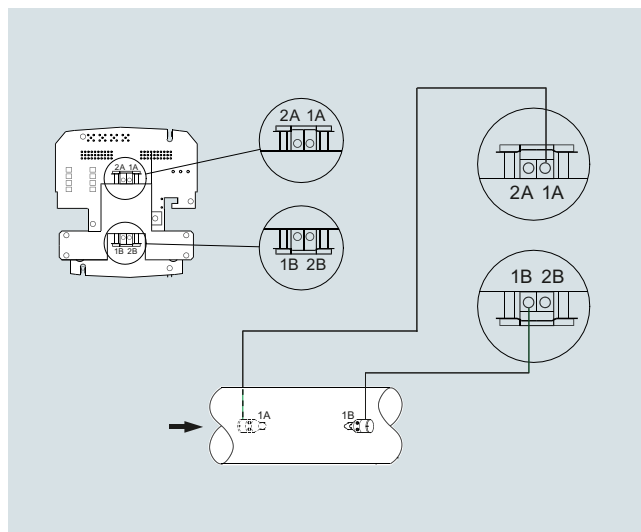

Electrical connection of SITRANS FUS080 and SONOKIT 1-path

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### SITRANS FUS380 standard flowmeter

#### Overview



The 2-path flowmeter SITRANS FUS380 comes as battery or mains-powered and is designed to measure water flow in district heating plants, local networks, boiler stations, substations, chiller plants (including glycol mixes) and other general water applications.

The type-approved flowmeter version is named SITRANS FUE380 – see page 3/301.

Technically, the meter types SITRANS FUS380 and SITRANS FUE380 are completely identical, only difference is the calibration limit and the type approval for custody transfer.

#### Benefits

- Battery-powered up to 6 years
- 115/230 V mains-powered with back-up battery option in case of mains power failure
- Fast measuring frequency 15 Hz/0.5 Hz (230 V AC/Battery)
- Easy one-button straight forward display
- 2-path measuring principle for optimum accuracy
- Compact or remote mounting
- Measures on most district water qualities and water conductivities
- No pressure drop
- Long-term stability
- 2 galvanically isolated digital outputs for easy connection to a calculator (potential-free)
- Analog output 4 to 20 mA
- Bidirectional measurement, with 2 totalizers and outputs
- Dynamic range  $q_i$  (min) :  $q_s$  (max) up to 1:400

#### Application

The main application for SITRANS FUS380 is measurement of water flow or water flow in energy meter systems in district heating networks or chilled water (including glycol mixes).

#### Design

The 2-path design of SITRANS FUS380 ensures maximum accuracy under short inlet conditions. The flowmeter consists of a flow sensor pipe, 4 transducers/transducer cables and a transmitter SITRANS FUE080.

The unit is available in a compact or a remote version. Both versions are pre-mounted with short coax-cables. Remote transmitter up to a distance of 30 m by one Sensor link cable (SSL).


Compact mounting is only possible up to 120 °C (248 °F). The sensor must be isolated to protect transmitter from heat. The transmitter is available in an IP67/NEMA 4X/6 enclosure.

#### Function

Together with the SIMATIC PDM tool the FUS380 offers the possibility of testing and verifying the flowmeter on site and creating a printed "Qualification Certificate" with specific data that defines the quality status of the measurement.

The Qualification Certificate shows information about the actual status of the flowmeter:

- General settings, flowmeter and battery information, totalizer values, and pulse output settings
- Detailed information about the transmitter and the sensor functionality, and a main parameter list for evaluating the functionality of the flowmeter

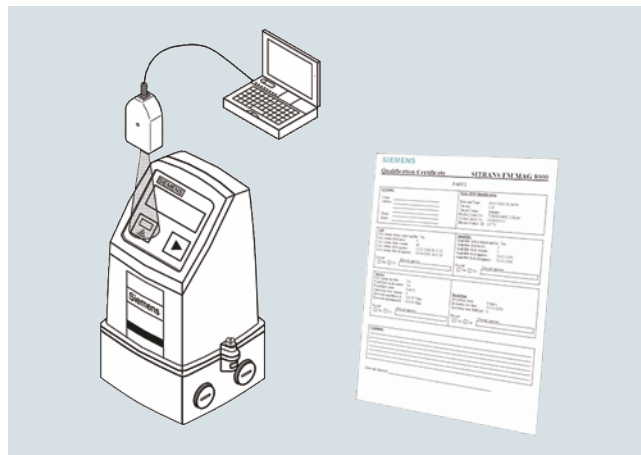

#### Integration

The flowmeter digital output is often used as input for an energy meter or as input for digital systems for remote reading.

SITRANS FUS380 has two digital output functions that can be individually selected.

Pulse output rate is defined when ordering. To get optimal benefit the pulse value must be selected as low as possible.

If the flowmeter forms part of an energy meter system for custody transfer, no further approvals are needed, except possible local approvals on the flowmeter.

**Configuration****Selection guide SITRANS FUS380, standard version**

DN	Q <sub>s</sub> (m <sup>3</sup> /h)	Q <sub>max</sub> (m <sup>3</sup> /h) (105 % of Q <sub>s</sub> )	Q <sub>p</sub> (m <sup>3</sup> /h)	Q <sub>i</sub> (m <sup>3</sup> /h) (1:100 of Q <sub>p</sub> )	Cut-off (m <sup>3</sup> /h) (95 % of Q <sub>i</sub> )	Cut-off (% of Q <sub>max</sub> )	Typical pulse value <sup>1)</sup> (l/pulse)
50	15	15.75	15	0.15	0,143	0,90	1
50	45	47.25	15	0.15	0,143	0,30	1
50	45	47.25	30	0.3	0.285	0,60	1
65	25	26.25	25	0.25	0.238	0,90	1
65	72	75.6	25	0.25	0.238	0,31	1
65	72	75.6	50	0.5	0,475	0,63	1
80	40	42	40	0.4	0,380	0,90	2.5
80	120	126	40	0.4	0,380	0,30	2.5
80	120	126	80	0.8	0,760	0,60	2.5
100	60	63	60	0.6	0,570	0,90	2.5
100	180	189	60	0.6	0,570	0,30	2.5
100	240	252	120	1.2	1,140	0,45	2.5
125	100	105	100	1	0,950	0,90	2.5
125	280	294	100	1	0,950	0,32	2.5
125	400	420	200	2	1,900	0,45	2.5
150	150	157.5	150	1.5	1,425	0,90	10
150	420	441	150	1.5	1,425	0,32	10
150	560	588	300	3	2,850	0,48	10
200	250	262.5	250	2.5	2,375	0,90	10
200	700	735	250	2.5	2,375	0,32	10
200	900	945	500	5	4,750	0,50	10
250	400	420	400	4	3,800	0,90	10
250	1120	1176	400	4	3,800	0,32	10
250	1400	1470	800	8	7,600	0,52	10
300	560	588	560	5.6	5,320	0,90	50
300	1560	1638	560	5.6	5,320	0,32	50
300	2100	2205	1120	11.2	10,640	0,48	50
350	750	787.5	750	7.5	7,125	0,90	50
350	2100	2205	750	7.5	7,125	0,32	50
350	2800	2940	1500	15	14,250	0,48	50
400	950	997.5	950	9.5	9,025	0,90	50
400	2660	2793	950	9.5	9,025	0,32	50
400	3600	3780	1900	19	18,050	0,48	50
500	1475	1548.75	1475	14.75	14,013	0,90	100
500	4130	4336.5	1475	14.75	14,013	0,32	100
500	5500	5775	2950	29.5	28,025	0,49	100
600	2150	2257.5	2150	21.5	20,425	0,90	100
600	6020	6321	2150	21.5	20,425	0,32	100
600	8000	8400	4300	43	40,850	0,49	100
700	2900	3045	2900	29	27,550	0,90	100
700	8120	8526	2900	29	27,550	0,32	100
700	10 800	11 340	5800	58	55,100	0,49	100
800	3800	3990	3800	38	36,100	0,90	100
800	10 640	11 172	3800	38	36,100	0,32	100
800	14 200	14 910	7600	76	72,200	0,48	100
900	5000	5250	3800	38	36,100	0,69	100
900	14 000	14 700	5000	50	47,500	0,32	100
900	20 000	21 000	5000	50	47,500	0,23	100
1000	6000	6300	3800	38	36,100	0,57	100
1000	16 800	17 640	6000	60	57,000	0,32	100
1000	24 000	25 200	12 000	120	114,000	0,45	100
1200	9000	9450	3800	38	36,100	0,38	100
1200	25 200	26 460	9000	90	85,500	0,32	100
1200	36 000	37 800	18 000	180	171,000	0,45	100

The values Q<sub>i</sub>, Q<sub>p</sub> and Q<sub>s</sub> are shown on the system label of the FUS380. Q<sub>i</sub> (Q<sub>min</sub>) means the minimal and Q<sub>p</sub> (Q<sub>nom</sub>) the nominal flow rate. Q<sub>s</sub> is the highest operatable flow rate. The maximum flow rate (Q<sub>max</sub>) is 105 % of Q<sub>s</sub>. The low flow cut-off is 50 % of Q<sub>i</sub>.

In order to obtain best pulse output resolution in the range Q<sub>min</sub> to Q<sub>s</sub> of approx. 100 Hz at Q<sub>s</sub>, two or three flow values for every dimension can be selected at ordering. Therefore the ordering data table also shows Q<sub>p</sub> (Q<sub>n</sub>). This flow rate is between Q<sub>i</sub> (Q<sub>min</sub>) and Q<sub>s</sub> and indicates the normal or typical flow.

To get optimal benefit of the pulses the pulse value and pulse length shall be selected as low as possible. The following calculation formula can be used for determining the shortest pulse value at a pulse length of 5 ms: L/pulse > Q<sub>s</sub> (m<sup>3</sup>/h) /360.

For example Q<sub>s</sub> = 300 m<sup>3</sup>/h; L/pulse > 300/360; L/pulse > 0.83; therefore the pulse value must be 1 l/pulse

<sup>1)</sup> Typical pulse values for SITRANS FUS380 with pulse length 5 ms. Other values are possible - please see the selections at the 7ME340 order codes.

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### SITRANS FUS380 standard flowmeter

#### Technical specifications

Sensor design	2-path sensor with flanges and inline transducers wet-calibrated from factory
Nominal size (DN 50 ... DN 80 in bronze)	DN 50, 65, 80, 100, 125, 150, 200, 250, 300, 350, 400, 500, 600, 700, 800, 1000, 1200
Pressure rate	PN 16, PN 25, PN 40 EN 1092-1 flanges: • type 01 (B): DN 100 to DN 125 • type 11 (B): DN 150 to DN 1200 • type 11 (B) 'design': DN 50 to DN 80
Pipe material	<ul style="list-style-type: none"> <li>DN 100 ... DN 1200: Carbon Steel EN 1.0345/P235 GH, painted in light-gray.</li> <li>DN 50 ... DN 80: Die-cast bronze G-CuSn10/W2.1050.01 (EN 1982)</li> </ul>
Transducer design	<ul style="list-style-type: none"> <li>DN 100 ... DN 1200: Inline version and welded onto the pipe</li> <li>DN 50 ... DN 80: Screwed into the pipe</li> </ul>
Transducer material	Stainless steel (AISI 316/1.4404)/brass (CuZn <sub>36</sub> Pb <sub>2</sub> As)

#### Sensor operating conditions

Ambient temperature	-10 ... +60 °C (14 ... 140 °F)
• Operation	(MID version: -10 ... +55 °C (14 ... 131 °F))
• Storage	-40 ... +85 °C (-40 ... +185 °F)
Measured media	Heating water, according to VDI-2035 (pH 8.2 - 10.5), industrial VdTVV information sheet 1466 and AGFW information sheet FW 510.
Media/surface temperature	
• DN 100 ... DN 1200	Remote: 2 ... 200 °C (35.6 ... 392 °F)
• DN 50 ... DN 80	Remote: 2 ... 150 °C (35.6 ... 302 °F)
• DN 50 ... DN 1200	Compact: 2 ... 120 °C (35.6 ... 248 °F)
Degree of protection	Sensor connection IP67/NEMA 4X/6
Max. flow velocity	DN 50 ... DN 1200: 9 m/s (29.5 ft/s)
Electromagnetic compatibility	
• Emitted interference	To EN 55011/CISPR-11
• Noise immunity	To EN/IEC 61326-1 (Industry)

#### Transmitter

The transmitter related to this system is the SITRANS FUS080. Technical specifications to the FUS080 see page 3/259

#### Sensor cable

Transducer cable length	Pre-mounted with short coax-cables
Sensor link cable length (SSL)	5, 10, 20, 30 m (16.4, 32.8, 65.6, 98.4 ft)

#### Certificates and approvals

Conformity certificate (CE)	The devices are supplied as standard with a Siemens Certificate of Conformity on DVD.
Material certificate	Material certificate according EN 10204-3.1 is optionally available.
Calibration report	A standard calibration report is shipped with every flowmeter.  Extended accredited ISO/IEC 17025 calibration certificates optionally available
Approvals	No custody transfer approvals

The sensors are approved according to EU directive 2014/68/EU regarding fluid group 1, classified in category III. Design according to EN 13480 (PED Directive).

#### SITRANS FUS380 uncertainty

	FUS380
Flow value setting	Predefined settings according to dimension
Approval	No approval
Flow rate $v_f$	0.02 ... 9 m/s (0.065 ... 29.5 ft/s)
Output A	Pulse: forward, reverse, forward net, reverse net (Preset: forward)
Output B	Pulse forward, reverse, forward net, reverse net, alarm, call-up (Preset: alarm)
Pulse value A & B (depending on DN value)	0.1 l/p, 0.25 l/p, 0.5 l/p, 1 l/p, 2.5 l/p, 10 l/p, 25 l/p, 50 l/p, 100 l/p, 250 l/p, 500 l/p, 1 m <sup>3</sup> /p, 2.5 m <sup>3</sup> /p, 5 m <sup>3</sup> /p, 10 m <sup>3</sup> /p, 25 m <sup>3</sup> /p, 50 m <sup>3</sup> /p, 100 m <sup>3</sup> /p, 250 m <sup>3</sup> /p, 500 m <sup>3</sup> /p, 1000 m <sup>3</sup> /p
Pulse width	5/10/20/50/100/200/500 ms
Flow unit setup	Preset: m <sup>3</sup> /h
Volume unit setup	Preset: m <sup>3</sup>

#### Flowmeter Calibration and traceability


To ensure continuous accurate measurement, flowmeters must be calibrated. The calibration is conducted at Siemens flow facilities with traceable instruments referring directly to the physical unit of measurement according to the International System of Units (SI).

Therefore, the calibration certificate ensures recognition of the test results worldwide, including the US (NIST traceability). Siemens offers accredited calibrations assured to ISO 17025 in the flow range from 0.0001 m<sup>3</sup>/h to 10 000 m<sup>3</sup>/h. Siemens Flow Instruments accredited laboratories are recognized by ILAC MRA (International Laboratory Accreditation Corporation - Mutual Recognition Arrangement) ensuring international traceability and recognition of the test results worldwide.

A standard calibration certificate with  $Q_n$  as selected flow is shipped with each SITRANS FUS380. This production calibration protocol consists of 2 x 3 points at  $Q_i$ , 10 %  $Q_p$  and  $Q_p$  (max. 4 200 m<sup>3</sup>/h).

#### Accuracy SITRANS FUS380:

± 0.5 % for 0.5 m/s < v < 10 m/s and ± 0.25/ $V_{act}$  [%] below 0.5 m/s

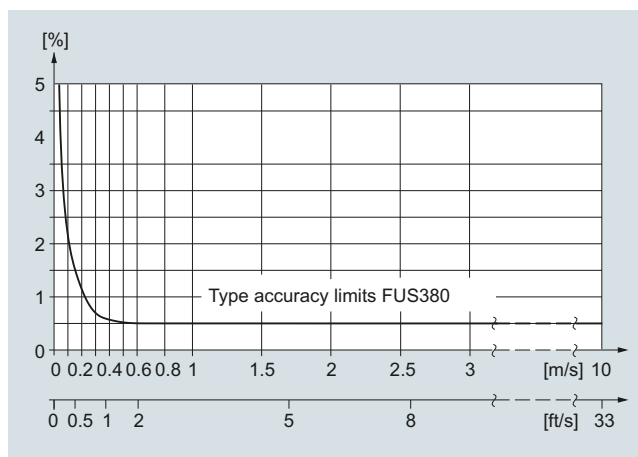

## Selection and ordering data

Article No.

Flowmeter SITRANS FUS380 (standard)



7ME3400-

Ord.  
Code

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Diameter	Approval	Pressure rating	Flow setting [m <sup>3</sup> /h]		Article No.
			Q <sub>p</sub> (Q <sub>n</sub> )	Q <sub>s</sub>	
Pipe material: Die-cast bronze					
DN 50 (2")	EN 1434	PN 40	15	15	1 A
DN 50 (2")	EN 1434	PN 40	15	45	1 C
DN 50 (2")	OIML R75	PN 40	30	45	1 D
DN 65 (2½")	EN 1434	PN 40	25	25	1 E
DN 65 (2½")	EN 1434	PN 40	25	72	1 G
DN 65 (2½")	OIML R75	PN 40	50	72	1 H
DN 80 (3")	EN 1434	PN 40	40	40	1 J
DN 80 (3")	EN 1434	PN 40	40	120	1 L
DN 80 (3")	OIML R75	PN 40	80	120	1 M
Pipe material: Carbon steel					
DN 100 (4")	EN 1434	PN 16, PN 40	60	60	1 N
DN 100 (4")	EN 1434	PN 16, PN 40	60	180	1 Q
DN 100 (4")	OIML R75	PN 16, PN 40	120	240	1 R
DN 125 (5")	EN 1434	PN 16, PN 40	100	100	1 S
DN 125 (5")	EN 1434	PN 16, PN 40	100	280	1 U
DN 125 (5")	OIML R75	PN 16, PN 40	200	400	1 V
DN 150 (6")	EN 1434	PN 16, PN 40	150	150	2 A
DN 150 (6")	EN 1434	PN 16, PN 40	150	420	2 C
DN 150 (6")	OIML R75	PN 16, PN 40	300	560	2 D
DN 200 (8")	EN 1434	PN 16, PN 25, PN 40	250	250	2 E
DN 200 (8")	EN 1434	PN 16, PN 25, PN 40	250	700	2 G
DN 200 (8")	OIML R75	PN 16, PN 25, PN 40	500	900	2 H
DN 250 (10")	EN 1434	PN 16, PN 25, PN 40	400	400	2 J
DN 250 (10")	EN 1434	PN 16, PN 25, PN 40	400	1120	2 L
DN 250 (10")	OIML R75	PN 16, PN 25, PN 40	800	1400	2 M
DN 300 (12")	EN 1434	PN 16, PN 25	560	560	2 N
DN 300 (12")	EN 1434	PN 16, PN 25	560	1560	2 Q
DN 300 (12")	OIML R75	PN 16, PN 25	1120	2100	2 R
DN 350 (14")	EN 1434	PN 16, PN 25	750	750	2 S
DN 350 (14")	EN 1434	PN 16, PN 25	750	2100	2 U
DN 350 (14")	OIML R75	PN 16, PN 25	1500	2800	2 V
DN 400 (16")	EN 1434	PN 16, PN 25	950	950	3 A
DN 400 (16")	EN 1434	PN 16, PN 25	950	2660	3 C
DN 400 (16")	OIML R75	PN 16, PN 25	1900	3600	3 D
DN 500 (20")	EN 1434	PN 16, PN 25	1475	1475	3 J
DN 500 (20")	EN 1434	PN 16, PN 25	1475	4130	3 L
DN 500 (20")	OIML R75	PN 16, PN 25	2950	5500	3 M
DN 600 (24")	EN 1434	PN 16, PN 25	2150	2150	3 S
DN 600 (24")	EN 1434	PN 16, PN 25	2150	6020	3 U
DN 600 (24")	OIML R75	PN 16, PN 25	4300	8000	3 V
DN 700 (28")	EN 1434	PN 16, PN 25	2900	2900	4 E
DN 700 (28")	EN 1434	PN 16, PN 25	2900	8120	4 G
DN 700 (28")	OIML R75	PN 16, PN 25	5800	10800	4 H
DN 800 (32")	EN 1434	PN 16, PN 25	3800	3800	4 N
DN 800 (32")	EN 1434	PN 16, PN 25	3800	10640	4 Q
DN 800 (32")	OIML R75	PN 16, PN 25	7600	14200	4 R



## Flow Measurement

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

### SITRANS FUS380 standard flowmeter

#### Selection and ordering data

Article No.

#### Flowmeter SITRANS FUS380 (standard)

7ME3400-

Ord.  
Code

Diameter	Approval	Pressure rating	Flow setting [m <sup>3</sup> /h]		Article No.
			Q <sub>p</sub> (Q <sub>n</sub> )	Q <sub>s</sub>	
Remote only					
DN 900 (36")	EN 1434	PN 16, PN 25	5000	5000	5 A
DN 900 (36")	EN 1434	PN 16, PN 25	5000	14000	5 C
DN 900 (36")	OIML R75	PN 16, PN 25	10000	20000	5 D
DN 1000 (40")	EN 1434	PN 16, PN 25	6000	6000	5 J
DN 1000 (40")	EN 1434	PN 16, PN 25	6000	16800	5 L
DN 1000 (40")	OIML R75	PN 16, PN 25	12000	24000	5 M
DN 1200 (48")	EN 1434	PN 16	9000	9000	5 S
DN 1200 (48")	EN 1434	PN 16	9000	25200	5 U
DN 1200 (48")	OIML R75	PN 16	18000	36000	5 V

#### Flange norm and pressure rating

System without sensor - only a transmitter FUS080 as spare part - settings as defined with this Article No.

EN 1092-1

- PN 16 (DN 100 ... 1200)
- PN 25 (DN 200 ... 1000)
- PN 40 (DN 50 ... 250)

#### Compact/remote connection

Note: Sensor cable always firmly connected to connection box.

Compact version, liquid max. 120 °C (248 °F)

Remote version, liquid max. 150/200 °C (302/392 °F)

Sensor link cable (SSL)

- 5 m (16.4 ft)
- 10 m (32.8 ft)
- 20 m (65.6 ft)
- 30 m (98.4 ft)

#### Pulse output value setup

To get optimal benefit of the pulses the pulse value and pulse length shall be selected as low as possible. The following calculation formula can be used for determining the shortest pulse value at a pulse length of 5 ms:  $L/\text{pulse} > Q_s (\text{m}^3/\text{h}) / 360$ . For example  $Q_s = 300 \text{ m}^3/\text{h}$ ;  $L/\text{pulse} > 300/360$ ;  $L/\text{pulse} > 0.83$ ; therefore the pulse value must be 1 l/pulse

Pulse value

- 0.1 l/pulse
- 1 l/pulse
- 2.5 l/pulse
- 10 l/pulse
- 50 l/pulse
- 100 l/pulse
- 250 l/pulse
- 1 m<sup>3</sup>/pulse
- 0.25 l/pulse
- 0.5 l/pulse
- 5 l/pulse
- 25 l/pulse
- 500 l/pulse
- 2.5 m<sup>3</sup>/pulse
- 5 m<sup>3</sup>/pulse
- 10 m<sup>3</sup>/pulse
- 25 m<sup>3</sup>/pulse
- 50 m<sup>3</sup>/pulse
- 100 m<sup>3</sup>/pulse
- 250 m<sup>3</sup>/pulse
- 500 m<sup>3</sup>/pulse
- 1000 m<sup>3</sup>/pulse

Article No.	Ord. Code
7ME3400-	
0 - A	
A	
C	
D	
E	
0	
2	
3	
4	
5	
1	
2	
3	
4	
5	
6	
7	
8	
9	NOA
9	NOB
9	NOC
9	NOD
9	NOE
9	NOF
9	NOG
9	NOH
9	NOJ
9	NOK
9	NOL
9	NOM
9	NON
9	NOP



#### Selection and ordering data

Article No.

#### Flowmeter SITRANS FUS380 (standard)

7ME3400-  
0 - AOrd.  
Code

#### Flowmeter SITRANS FUS380 (standard)

- Transmitter variant FUS080 power/analog output
- 115 ... 230 V AC
- 3.6 V Lithium battery, dual pack is included
- 115 ... 230 V AC, backup 3.6 V DC Lithium battery, single pack is included
- 3.6 V battery version (no battery pack included)
- Option with 4 ... 20 mA analog output module
- 115 ... 230 V AC
  - 115 ... 230 V AC, backup 3.6 V DC, Lithium battery, single pack is included

#### Note:

Lithium batteries are subject to special transportation regulations according to United Nations "Regulation of Dangerous Goods, UN 3090 and UN 3091". Special transport documentation is required to observe these regulations. This may influence both transport time and costs.

#### Pulse width setup

Pulse width

- 5 ms (standard)
- 10 ms
- 20 ms
- 50 ms
- 100 ms
- 200 ms
- 500 ms

2

3

4

5

6

7

8

#### Additional information

Please add "-Z" to Article No. and specify Order code(s) and plain text.

Order code

#### Calibration/certificate FUS380

Production calibration for DN 50 ... 1200 with  $Q_n$  as selected in diameter. Incl. Calibration protocol: 2 x 3 points,  $Q_i$ , 10 %  $Q_p$  and  $Q_p$  (max. 8000 m<sup>3</sup>/h).

Included

Accredited Siemens ISO/IEC 17025 calibration for DN 50 ... 200 with  $Q_n$  as selected in diameter. Certificate: 2 x 5 points,  $Q_i$ , 5 %, 10 %, 50 % and 100 % of  $Q_p$  (max. 630 m<sup>3</sup>/h).

D20

Accredited Siemens ISO/IEC 17025 calibration for DN 250 ... 600 with  $Q_n$  as selected in diameter. Certificate: 2 x 5 points, 5 %, 10 %, 50 % and 100 % of  $Q_p$  (max. 2800 m<sup>3</sup>/h).

D21

Accredited Siemens ISO/IEC 17025 calibration, DN 500 ... 1200 with  $Q_n$  as selected in diameter. Certificate: 2 x 5 points,  $Q_i$ , 5 %, 10 %, 50 % and 100 % of  $Q_p$  (max. 8000 m<sup>3</sup>/h).

D22

Output B as reverse flow pulses. No calibration/verification of this function.

E21

#### Material certificate

EN 10204-3.1 (pipe material)

C12

#### Regional specific approval

KCC marking for Korea

W28

#### Tag name plate

Stainless steel TAG plate (1 x 24 x 80 mm), wire fixed. Font size depends on text length: 8 mm for 1 ... 10 characters, 4 mm for 11 ... 20 characters (specify in plain text).

Y17

Please use online Product selector to get latest updates:

<https://www.pia-portal.automation.siemens.com>

#### Flowmeter SITRANS FUS380 operating instructions, accessories and spare parts

#### Operating instructions

Description

Article No.

- English
- German

A5E00730100

A5E00740611

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/processinstrumentation/documentation>

**For accessories and spare parts see the section about FUS080/FUE080.**


## Flow Measurement

SITRANS FS (ultrasonic)


Inline ultrasonic flowmeters

### SITRANS FUS380 standard flowmeter

#### Dimensional drawings

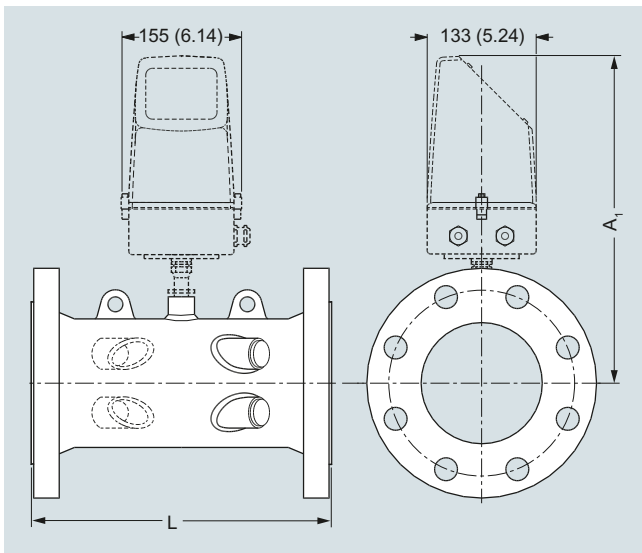

#### Transmitter IP67/NEMA 4X/6, wall mounting

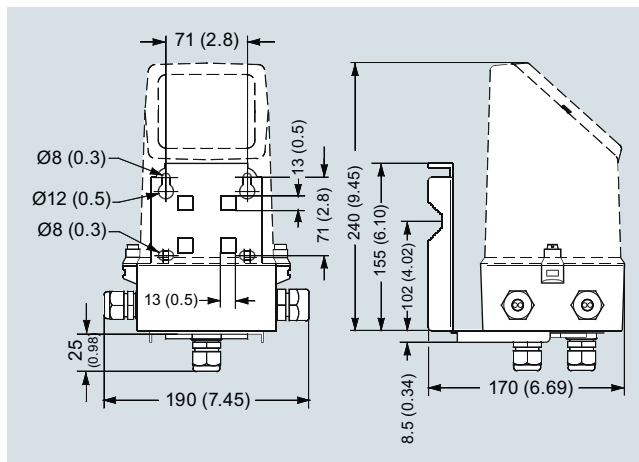

Dimensions in mm (inch)

#### Sensor dimensions for FUS380 and FUE380

Size	PN 16		PN 25		PN 40		A <sub>1</sub>	Lift hug
	L	Weight	L	Weight	L	Weight		
DN	mm	kg	mm	kg	mm	kg	mm	
50	-	-	-	-	300 +0/-2	10	350	No
65	-	-	-	-	300 +0/-2	15	363	No
80	-	-	-	-	350 +0/-2	18	370	No
100	350 +0/-2	15	-	-	350 +0/-2	18	372	No
125	350 +0/-2	18	-	-	350 +0/-2	24	385	No
150	500 +0/-3	28	-	-	500 +0/-3	34	399	No
200	500 +0/-3	38	500 +0/-3	47	500 +0/-3	55	425	Yes
250	600 +0/-3	60	600 +0/-3	76	600 +0/-3	91	452	Yes
300	500 +0/-3	66	500 +0/-3	81	-	-	478	Yes
350	550 +0/-3	94	550 +0/-3	121	-	-	495	Yes
400	600 +0/-3	124	600 +0/-3	153	-	-	520	Yes
500	625 +0/-3	194	625 +0/-3	231	-	-	570	Yes
600	750 +0/-3	303	750 +0/-3	365	-	-	622	Yes
700	875 +0/-3	361	875 +0/-3	565	-	-	673	Yes
800	1000 +0/-3	494	1000 +0/-3	770	-	-	724	Yes
900	1230 +6/-6	535	1300 +6/-6	835	-	-	775	Yes
1000	1300 +6/-6	594	1370 +6/-6	1000	-	-	826	Yes
1200	1360 +6/-6	732	-	-	-	-	928	Yes

#### Notes:

- Weight for transmitter/electronics 1.5 kg (compact version) or approximately 5 kg (remote version including 10 m cable set)
- - Means not available
- All weights are **approximate**
- For flange values - see norm EN 1092-1

**Dimensional drawings** (continued)

Size inch	PN 16		PN 25		PN 40		A <sub>1</sub> inch	Lift hug
	L inch	Weight lb	L inch	Weight lb	L inch	Weight lb		
2	-	-	-	-	11.81 +0/-0.08	22	13.78	No
2½	-	-	-	-	11.81 +0/-0.08	33	14.30	No
3	-	-	-	-	13.78 +0/-0.08	40	14.57	No
4	13.78 +0/-0.08	33	-	-	13.78 +0/-0.08	40	14.65	No
5	13.78 +0/-0.08	40	-	-	13.78 +0/-0.08	53	15.16	No
6	19.68 +0/-0.12	62	-	-	19.68 +0/-0.12	75	15.71	No
8	19.68 +0/-0.12	84	19.68 +0/-0.12	104	19.68 +0/-0.12	121	16.74	Yes
10	23.62 +0/-0.12	132	23.62 +0/-0.12	168	23.62 +0/-0.12	201	17.80	Yes
12	19.68 +0/-0.12	146	19.68 +0/-0.12	179	-	-	18.82	Yes
14	21.65 +0/-0.12	207	21.65 +0/-0.12	267	-	-	19.49	Yes
16	23.62 +0/-0.12	273	23.62 +0/-0.12	337	-	-	20.48	Yes
20	24.61 +0/-0.12	428	24.61 +0/-0.12	509	-	-	22.45	Yes
24	29.53 +0/-0.12	668	29.53 +0/-0.12	805	-	-	24.49	Yes
28	34.45 +0/-0.12	796	34.45 +0/-0.12	1246	-	-	26.50	Yes
32	39.37 +0/-0.12	1089	39.37 +0/-0.12	1698	-	-	28.51	Yes
36	48.43 +0/-0.24	1179	51.18 +0/-0.24	1841	-	-	30.52	Yes
40	51.18 +0/-0.24	1310	53.94 +0/-0.24	2205	-	-	32.52	Yes
48	53.34 +0/-0.24	1614	-	-	-	-	36.54	Yes

**Notes:**

- Weight for transmitter/electronics 3.3 lb (compact version) or approximately 11 lb (remote version including 32.8 ft cable set)
- - Means not available
- All weights are **approximate**
- For flange values - see norm EN 1092-1

## Flow Measurement


SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters


### SITRANS FUS380 standard flowmeter

#### Circuit diagrams

3

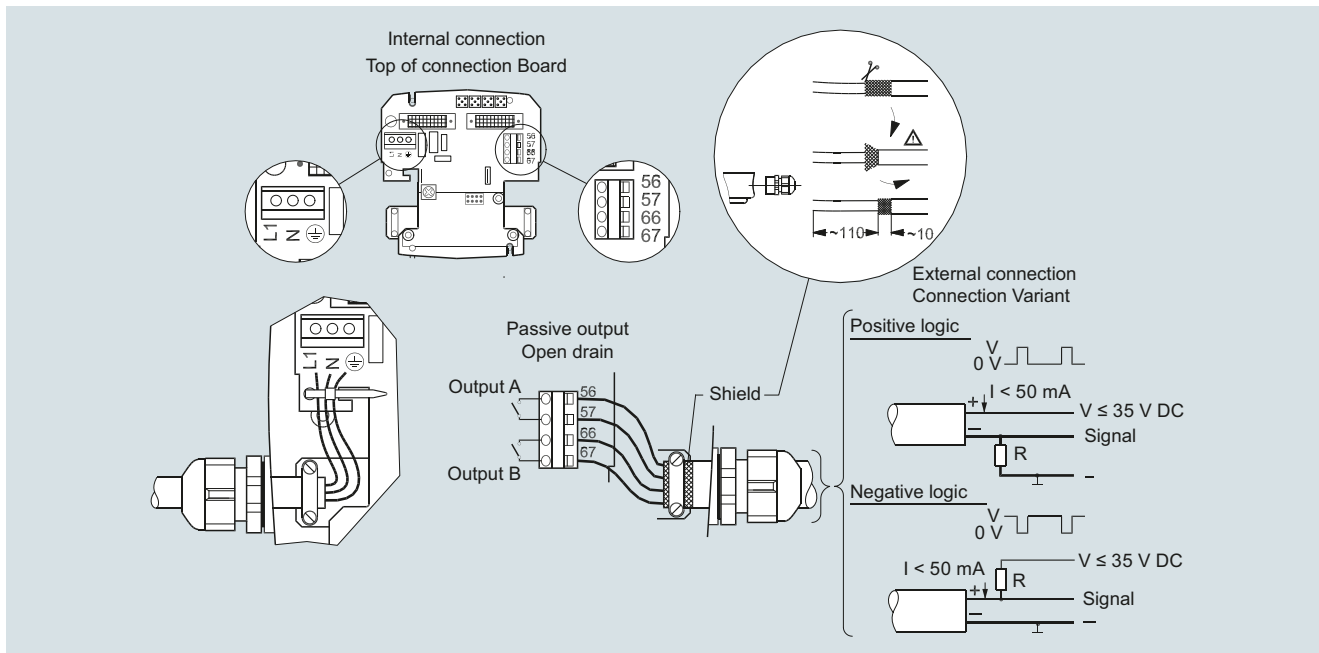

Electrical connection of transmitter SITRANS FUS/FUE380

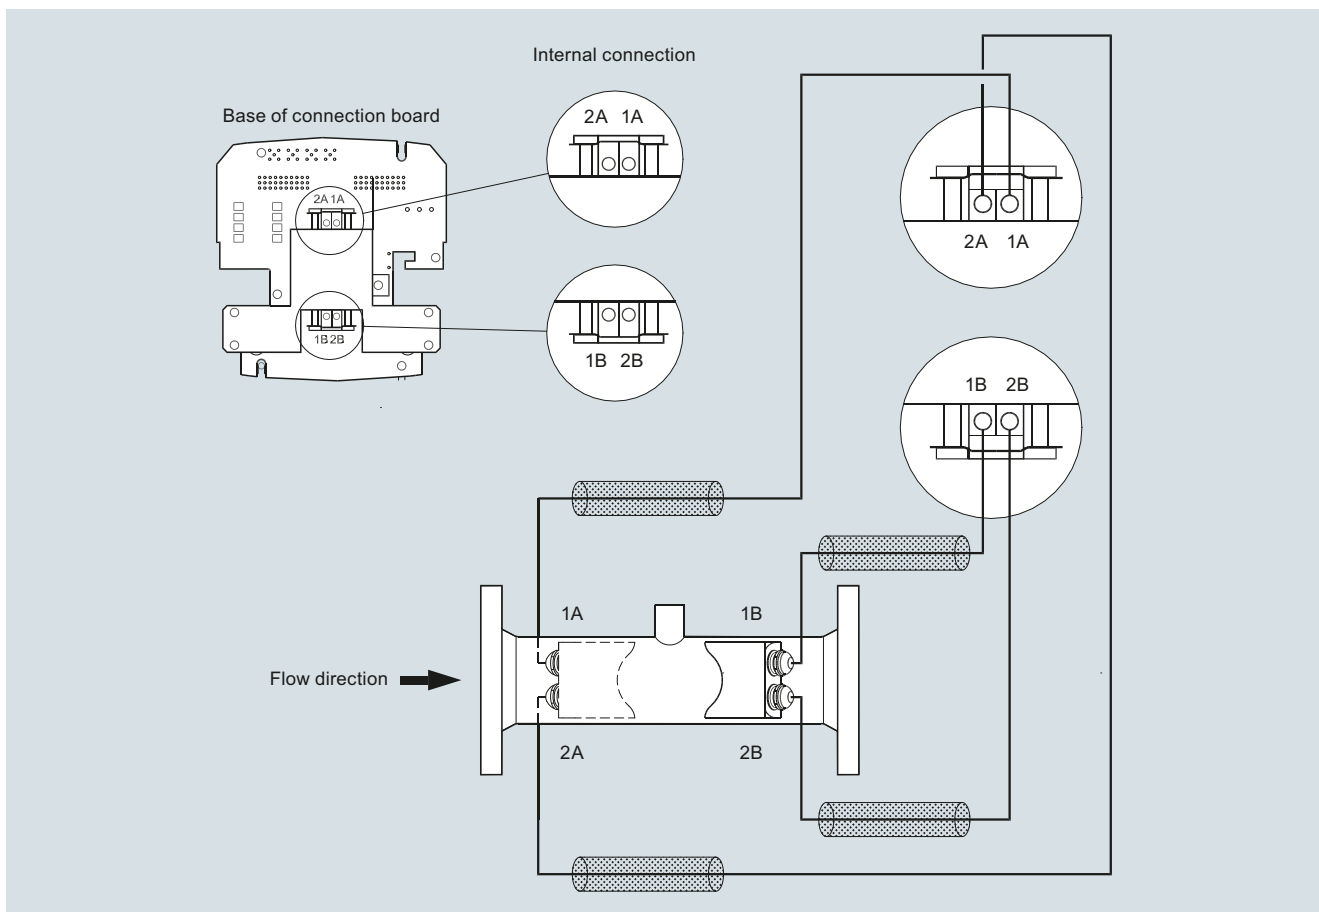

Electrical connection of sensor SITRANS FUS/FUE380

## Overview



The 2-path flowmeter SITRANS FUE380 comes as battery or mains-powered and is designed to measure water flow in district heating plants, local networks, boiler stations, substations, chiller plants (including glycol mixes without type approval) and other general water applications.

The flowmeter FUE380 is approved according to energy meter standards EN 1434 class 2, OIML R 75 class 2 and MID class 2. Metrological parameters are protected against manipulation. The type-approved flowmeter version is named SITRANS FUE380. For a standard flowmeter type FUS380 without a type approval, see the section about FUS380.

Technically, the meter types SITRANS FUS380 and SITRANS FUE380 are completely identical, only difference is the calibration limit and the type approval for custody transfer.

## Benefits

- Battery-powered up to 6 years
- 115/230 V mains-powered with back-up battery option in case of mains power failure
- Fast measuring frequency 15 Hz/0.5 Hz (230 V AC/Battery)
- Easy one-button straight forward display
- 2-path measuring principle for optimum accuracy
- Compact or remote mounting
- Measures on most district water qualities and water conductivities
- No pressure drop
- Long-term stability
- 2 galvanically isolated digital outputs for easy connection to a calculator (potential-free)
- Analog output 4 to 20 mA
- Bidirectional measurement, with 2 totalizers and outputs
- Dynamic range  $Q_i:Q_p$  up to 1:50/100 or max. range  $Q_i:Q_s$  up to 1:400

## Application

The main application for SITRANS FUE380 is measurement of water flow or water flow in energy meter systems for custody transfer in district heating networks or chilled water (including glycol mixes without type approval).

Combined with an energy calculator and a pair of temperature sensors, SITRANS FUE380 can be used as part of an energy meter system. For this purpose Siemens offers energy calculator SITRANS FUE950.

## Design

The 2-path design of SITRANS FUE380 ensures maximum accuracy under short inlet conditions. The approved flowmeter consists of a flow sensor pipe, 4 transducers/transducer cables and a transmitter SITRANS FUE080.

The unit is available in a compact or a remote version. Both versions are pre-mounted with short coax-cables. Remote transmitter up to a distance of 30 m by one Sensor link cable (SSL).

Compact mounting is only possible up to 120 °C (248 °F). The sensor must be isolated to protect transmitter from heat. The transmitter is available in an IP67/NEMA 4X/6 enclosure.

### FUE380 MI-004 approval

The SITRANS FUE380 program is type-approved according to international energy meter standard EN 1434. On 1 November 2006 the MI-004 energy meter directive became effective providing that all energy meters with a MI-004 verification label can be sold across the EU borders.

The FUE380 are MI-004 verified and labeled products according to Directive 2014/32/EU of the European Parliament and Council of 26 February, 2014 on measuring instruments, Annex IV Thermal Energy Meters (MI-004), in sizes from DN 50 to DN 1200.

The MID certification is obtained as module B + module D approvals according to the above-mentioned directive.


Module B: MI-004 Type approval according to EN 1434: 2007 (approved for media water)

Module D: Quality insurance MID approval of production

The MID system label with the approval information is placed on the side of the transmitter and on the sensor. An example of the product label is shown below:



FUE380 transmitter label (with MID first verification)

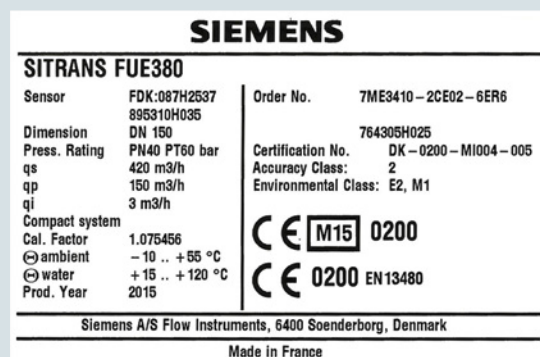

FUE380 sensor label (with MID first verification)

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### SITRANS FUE380 flowmeter with CT approval

##### Function

Together with the SIMATIC PDM tool the FUE380 offers the possibility of testing and verifying the flowmeter on site and creating a printed "Qualification Certificate" with specific data that defines the quality status of the measurement.

The Qualification Certificate shows information about the actual status of the flowmeter:

- General settings, flowmeter and battery information, totalizer values, and pulse output settings
- Detailed information about the transmitter and the sensor functionality, and a main parameter list for evaluating the functionality of the flowmeter


##### Integration

The flowmeter digital output is often used as input for an energy meter or as input for digital systems for remote reading.

SITRANS FUE380 has two digital output functions that can be individually selected.

Pulse output rate is defined when ordering. To get optimal benefit the pulse value must be selected as low as possible.

If the flowmeter forms part of an energy meter system for custody transfer, no further approvals are needed, except possible local approvals on the flowmeter.

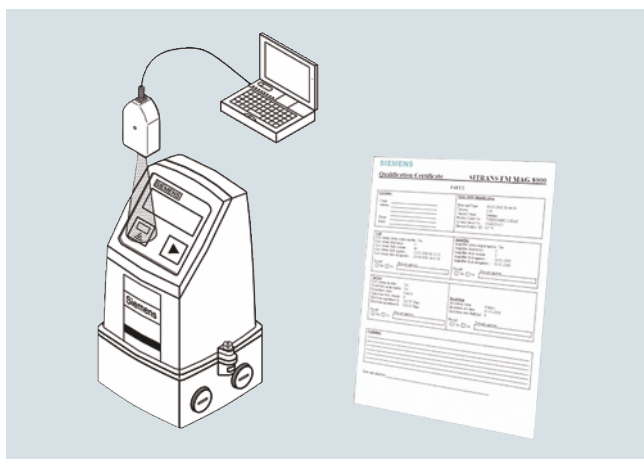

##### Configuration

#### Selection guide SITRANS FUE380, type-approved flowmeter

DN	$Q_s$ (m <sup>3</sup> /h)	$Q_{max}$ (m <sup>3</sup> /h) (105% of $Q_s$ )	$Q_p$ (m <sup>3</sup> /h)	$Q_i$ (m <sup>3</sup> /h) (1:50 of $Q_p$ )	$Q_i$ (m <sup>3</sup> /h) (1:100 of $Q_p$ ) EN 1434/MID	Cut-off (m <sup>3</sup> /h) (95% of $Q_i$ )	Cut-off (% of $Q_{max}$ )	Typical pulse value (l/pulse)
		<b>105%</b>		<b>50</b>	<b>100</b>	<b>95%</b>		
50	30	31.5	15	0.3	-	0.285	0.95	1
50	45	47.25	15	0.3	-	0.285	0.63	1
50	45	47.25	30	-	0.3	0.285	0.63	1
65	50	52.5	25	0.5	-	0.475	0.95	1
65	72	75.6	25	0.5	-	0.475	0.66	1
65	72	75.6	50	-	0.5	0.475	0.66	1
80	80	84	40	0.8	-	0.760	0.95	2.5
80	120	126	40	0.8	-	0.760	0.63	2.5
80	120	126	80	-	0.8	0.760	0.63	2.5
100	120	126	60	1.2	-	1.140	0.95	2.5
100	180	189	60	1.2	-	1.140	0.63	2.5
100	180	189	120	-	1.2	1.140	0.63	2.5
125	200	210	100	2.0	-	1.900	0.95	2.5
125	280	294	100	2.0	-	1.900	0.68	2.5
125	280	294	200	-	2.0	1.900	0.68	2.5
150	300	315	150	3.0	-	2.850	0.95	10
150	420	441	150	3.0	-	2.850	0.68	10
150	420	441	300	-	3.0	2.850	0.68	10
200	500	525	250	5.0	-	4.750	0.95	10
200	700	735	250	5.0	-	4.750	0.68	10
200	700	735	500	-	5.0	4.750	0.68	10
250	800	840	400	8.0	-	7.600	0.95	10
250	1120	1176	400	8.0	-	7.600	0.68	10
250	1120	1176	800	-	8.0	7.600	0.68	10
300	1120	1176	560	11.2	-	10.640	0.95	50

**Configuration** (continued)

DN	Q <sub>s</sub> (m <sup>3</sup> /h)	Q <sub>max</sub> (m <sup>3</sup> /h) (105% of Q <sub>s</sub> )	Q <sub>p</sub> (m <sup>3</sup> /h)	Q <sub>i</sub> (m <sup>3</sup> /h) (1:50 of Q <sub>p</sub> )	Q <sub>i</sub> (m <sup>3</sup> /h) (1:100 of Q <sub>p</sub> ) EN 1434/MID	Cut-off (m <sup>3</sup> /h) (95% of Q <sub>i</sub> )	Cut-off (% of Q <sub>max</sub> )	Typical pulse value (l/pulse)
300	1560	1638	560	11.2	-	10.640	0.68	50
300	1560	1638	1120	-	11.2	10.640	0.68	50
350	1500	1575	750	15.0	-	14.250	0.95	50
350	2100	2205	750	15.0	-	14.250	0.68	50
350	2100	2205	1500	-	15.0	14.250	0.68	50
400	1900	1995	950	19.0	-	18.050	0.95	50
400	2660	2793	950	19.0	-	18.050	0.68	50
400	2660	2793	1900	-	19.0	18.050	0.68	50
500	2950	3097.5	1475	29.5	-	28.025	0.95	100
500	4130	4336.5	1475	29.5	-	28.025	0.68	100
500	4130	4336.5	2950	-	29.5	28.025	0.68	100
600	4300	4515	2150	43.0	-	40.850	0.95	100
600	6020	6321	2150	43.0	-	40.850	0.68	100
600	6020	6321	4300	-	43.0	40.850	0.68	100
700	5800	6090	2900	58.0	-	55.100	0.95	100
700	8120	8526	2900	58.0	-	55.100	0.68	100
700	8120	8526	5800	-	58.0	55.100	0.68	100
800	7600	7980	3800	76.0	-	72.200	0.95	100
800	10 640	11 172	3800	76.0	-	72.200	0.68	100
800	10 640	11 172	7600	-	76.0	72.200	0.68	100
900	10 000	10 500	5000	100.0	-	95.000	0.95	100
900	14 000	14 700	5000	100.0	-	95.000	0.68	100
900	14 000	14 700	10 000	-	100.0	95.000	0.68	100
1000	14 000	14 700	10 000	-	100.0	95.000	0.68	100
1200	14 000	14 700	10 000	-	200.0	190.000	1.36	100

Dynamic range Q<sub>i</sub>:Q<sub>p</sub>: better than 1:100 to OIML R 75 class 2 and MID EN 1434 class 2.

Q<sub>i</sub> (Q<sub>min</sub>) means the minimal and Q<sub>p</sub> (Q<sub>nom</sub>) the nominal flow rate according to the approval requirements.

Q<sub>s</sub> is the highest operatable flow rate. The maximum flow rate (Q<sub>max</sub>) is 105 % of Q<sub>s</sub>. The low flow cut off is 95 % of Q<sub>i</sub>.

Q<sub>i</sub>, Q<sub>p</sub> and Q<sub>s</sub> are shown on the system nameplate of the FUE380.

In order to obtain best pulse output resolution in the range Q<sub>min</sub> to Q<sub>s</sub> of approx. 100 Hz at Q<sub>s</sub>, two or three flow values for every dimension can be selected at ordering. Therefore the ordering data table also shows Q<sub>p</sub> (Q<sub>n</sub>). This flow rate is between Q<sub>i</sub> (Q<sub>min</sub>) and Q<sub>s</sub> and indicates the normal or typical flow according to the approval requirements.

Note:

The minimum flow (Q<sub>i</sub>) should be checked in the PIA-selector or product master data base (PMD).

To get optimal benefit of the pulses the pulse value and pulse length shall be selected as low as possible. The following calculation formula can be used for determining the shortest pulse value at a pulse length of 5 ms: L/pulse > Q<sub>s</sub> (m<sup>3</sup>/h) /360.

For example Q<sub>s</sub> = 300 m<sup>3</sup>/h; L/pulse > 300/360; L/pulse > 0.83; therefore the pulse value must be 1 l/pulse



## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### SITRANS FUE380 flowmeter with CT approval

#### Technical specifications

Pipe design	2-path sensor with flanges and inline transducers wet-calibrated from factory
Nominal size welded version (DN 50 ... DN 80 in bronze)	DN 50, 65, 80, 100, 125, 150, 200, 250, 300, 350, 400, 500, 600, 700, 800, 900, 1000, 1200
Pressure rate	PN 16, PN 25, PN 40 EN 1092-1 EN 1092-1 flanges: • type 01 (B): DN 100 to DN 125 • type 11 (B): DN 150 to DN 200 • type 11 (B) 'design': DN 50 to DN 80
Pipe material	• DN 100 ... DN 1200: Carbon Steel EN 1.0345/P235 GH, painted in light-gray. • DN 50 ... DN 80: Die-cast bronze G-CuSn10/W2.1050.01 (EN1982)
Transducer design	• DN 100 ... DN 1200: Inline version and welded onto the pipe • DN 50 ... DN 80: Screwed into the pipe
Transducer material	Stainless steel (AISI 316/1.4404)/brass (CuZn <sub>36</sub> Pb <sub>2</sub> As)

#### Sensor operating conditions

Ambient temperature	-10 ... +60 °C (14 ... 140 °F) (MID version: -10 ... +55 °C (14 ... 131 °F)) -40 ... +85 °C (-40 ... +185 °F)
• Operation	
• Storage	
Measured media	Heating water, according to VDI-2035 (pH 8.2 - 10.5), industrial VdTUV information sheet 1466 and AGFW information sheet FW 510.
Media/surface temperature	
• DN 100 ... DN 1200	Remote: 2 ... 200 °C (35.6 ... 392 °F) MID: min. +15 °C/+59 °F
• DN 50 ... DN 80	Remote: 2 ... 150 °C (35.6 ... 302 °F) MID: min. +15 °C/+59 °F
• DN 50 ... DN 1200	Compact: 2 ... 120 °C (35.6 ... 248 °F) MID: min. +15 °C/+59 °F
Degree of protection	Sensor connection IP67/NEMA 4X/6
Electromagnetic compatibility	
• Emitted interference	To EN 55011/CISPR-11
• Noise immunity	To EN/IEC 61326-1 (Industry)
• MID	Environment class E2 and M1
Max. flow velocity at Q <sub>s</sub>	DN 50 ... DN 1200: 9 m/s (29.5 ft/s)

#### Transmitter

The transmitter related to this system is the SITRANS FUS080.

Technical specifications to the FUS080 see page 3/259.

#### Sensor cable

Transducer cable length	Pre-mounted with short coax-cables
Sensor Ink cable length (SSL)	5, 10, 20, 30 m (16.4, 32.8, 65.6, 98.4 ft)

#### Certificates and approvals

Conformity certificate (CE)	The devices are supplied as standard with a Siemens Certificate of Conformity on DVD.
Material certificate	Material certificate according EN 10204-3.1 is optionally available.
Calibration report	A standard calibration report is shipped with every flowmeter. Extended accredited ISO/IEC 17025 calibration certificates optionally available
Approvals	<ul style="list-style-type: none"> <li>Approval standards: N 1434 and OIML R 75 Class 2</li> <li>Type approval: ID, MI-004, class 2 approval and certification (according to EN 434)</li> <li>CPA/CMC (China)</li> </ul>

The sensors are approved according to EU directive 2014/68/EU regarding fluid group 1, classified in category III. Design according to EN 13480 (PED Directive).

#### Type-dependent settings

Flow value	Predefined according to EN 1434/OIML R 75/MID
Approval	Country specific
Flow rate v <sub>f</sub>	0.02 ... 9 m/s (0.065 ... 29.5 ft/s)
Output A	Preset: Forward pulses
Output B	Preset: Alarm
Pulse value A & B (depending on DN value)	Preset: See scheme – previous page Preset for SITRANS FUE950 or free selectable, depending on flow rate (Q <sub>s</sub> )
Pulse width	Preset: 5 ms
Flow unit setup	Preset: m <sup>3</sup> /h
Volume unit setup	Preset: m <sup>3</sup>

#### Flowmeter Calibration and traceability

To ensure continuous accurate measurement, flowmeters must be calibrated. The calibration is conducted at Siemens flow facilities with traceable instruments referring directly to the physical unit of measurement according to the International System of Units (SI).

Therefore, the calibration certificate ensures recognition of the test results worldwide, including the US (NIST traceability). Siemens offers accredited calibrations assured to ISO 7025 in the flow range from 0.0001 m<sup>3</sup>/h to 10 000 m<sup>3</sup>/h. Siemens Flow Instruments accredited laboratories are recognized by ILAC MRA (International Laboratory Accreditation Corporation - Mutual Recognition Arrangement) ensuring international traceability and recognition of the test results worldwide.

A standard calibration certificate with Q<sub>n</sub> as selected flow is shipped with each SITRANS FUE380. This production calibration protocol consists of 2 x 3 points at Q<sub>i</sub>, 10% Q<sub>p</sub> and Q<sub>p</sub> (max. 4 200 m<sup>3</sup>/h).


#### Typical accuracy SITRANS FUE380:

$$\pm (0.5 + 0.02 Q_p/Q) [\%]$$

Q<sub>p</sub> according to EN 1434/OIML requirements.

Example: DN 100, Q<sub>p</sub> = 60 m<sup>3</sup>/h at Q = 1.2 m<sup>3</sup>/h:

Accuracy at 1.2 m<sup>3</sup>/h = typical 1.5 %

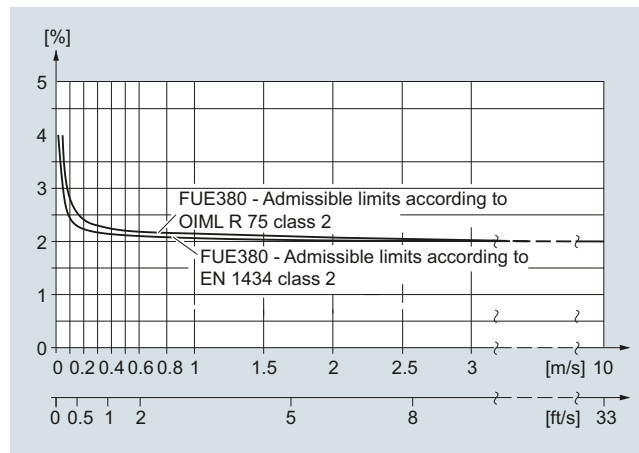

SITRANS FUE380 fulfils the requirements  $E_f = \pm (2 + 0.02 Q_p/Q_i) \max. \pm 5 \%$ , according to EN 1434 and OIML R 75, class 2 or MID requirements.



## Selection and ordering data

Article No.

Flowmeter SITRANS FUS380 (type-approved)

 ↗ 7ME3410-  
 Ord.  
 Code

↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Diameter	Approval	Pressure rating	Flow setting [m <sup>3</sup> /h]		Article No.
			Q <sub>p</sub> (Q <sub>n</sub> )	Q <sub>s</sub>	
Pipe material: Die-cast bronze					
DN 50 (2")		PN 40	15	30	1 B
DN 50 (2")		PN 40	15	45	1 C
DN 50 (2")	EN 1434	PN 40	30	45	1 D
DN 65 (2½")		PN 40	25	50	1 F
DN 65 (2½")		PN 40	25	72	1 G
DN 65 (2½")	EN 1434	PN 40	50	72	1 H
DN 80 (3")		PN 40	40	80	1 K
DN 80 (3")		PN 40	40	120	1 L
DN 80 (3")	EN 1434	PN 40	80	120	1 M
Pipe material: Carbon steel					
DN 100 (4")		PN 16, PN 40	60	120	1 P
DN 100 (4")		PN 16, PN 40	60	180	1 Q
DN 100 (4")	EN 1434	PN 16, PN 40	120	180	1 R
DN 125 (5")		PN 16, PN 40	100	200	1 T
DN 125 (5")		PN 16, PN 40	100	280	1 U
DN 125 (5")	EN 1434	PN 16, PN 40	200	280	1 V
DN 150 (6")		PN 16, PN 40	150	300	2 B
DN 150 (6")		PN 16, PN 40	150	420	2 C
DN 150 (6")	EN 1434	PN 16, PN 40	300	420	2 D
DN 200 (8")		PN 16, PN 25, PN 40	250	500	2 F
DN 200 (8")		PN 16, PN 25, PN 40	250	700	2 G
DN 200 (8")	EN 1434	PN 16, PN 25, PN 40	500	700	2 H
DN 250 (10")		PN 16, PN 25, PN 40	400	800	2 K
DN 250 (10")		PN 16, PN 25, PN 40	400	1120	2 L
DN 250 (10")	EN 1434	PN 16, PN 25, PN 40	800	1120	2 M
DN 300 (12")		PN 16, PN 25	560	1120	2 P
DN 300 (12")		PN 16, PN 25	560	1560	2 Q
DN 300 (12")	EN 1434	PN 16, PN 25	1120	1560	2 R
DN 350 (14")		PN 16, PN 25	750	1500	2 T
DN 350 (14")		PN 16, PN 25	750	2100	2 U
DN 350 (14")	EN 1434	PN 16, PN 25	1500	2100	2 V
DN 400 (16")		PN 16, PN 25	950	1900	3 B
DN 400 (16")		PN 16, PN 25	950	2660	3 C
DN 400 (16")	EN 1434	PN 16, PN 25	1900	2660	3 D
DN 500 (20")		PN 16, PN 25	1475	2950	3 K
DN 500 (20")		PN 16, PN 25	1475	4130	3 L
DN 500 (20")	EN 1434	PN 16, PN 25	2950	4130	3 M
DN 600 (24")		PN 16, PN 25	2150	4300	3 T
DN 600 (24")		PN 16, PN 25	2150	6020	3 U
DN 600 (24")	EN 1434	PN 16, PN 25	4300	6020	3 V
DN 700 (28")		PN 16, PN 25	2900	5800	4 F
DN 700 (28")		PN 16, PN 25	2900	8120	4 G
DN 700 (28")	EN 1434	PN 16, PN 25	5800	8120	4 H
DN 800 (32")		PN 16, PN 25	3800	7600	4 P
DN 800 (32")		PN 16, PN 25	3800	10640	4 Q
DN 800 (32")	EN 1434	PN 16, PN 25	7600	10640	4 R



#### Selection and ordering data

Article No.

#### Flowmeter SITRANS FUS380 (type-approved)

7ME3410-

Ord.  
Code

#### Flowmeter SITRANS FUE080 power/analog output

115 ... 230 V AC

3.6 V Lithium battery, dual pack is included

115 ... 230 V AC, backup 3.6 V DC Lithium battery, single pack is included

3.6 V battery version (no battery pack included)

Option with 4 ... 20 mA analog output module

• 115 ... 230 V AC

• 115 ... 230 V AC, backup 3.6 V DC, Lithium battery, single pack is included

Note:

Lithium batteries are subject to special transportation regulations according to United Nations "Regulation of Dangerous Goods, UN 3090 and UN 3091". Special transport documentation is required to observe these regulations. This may influence both transport time and costs.

#### Country specific design

Neutral, no approval mark

China, PA 2008-T222 C

Russia, EN 1434/OIML R75 M

MID-Approval (MI004), Language on name plate English

MID-Approval (MI004), Language on name plate German

MID-Approval (MI004), Language on name plate Polish

MID-Approval (MI004), Language on name plate French

#### Pulse width setup

Pulse width

- 5 ms (standard)
- 10 ms
- 20 ms
- 50 ms
- 100 ms
- 200 ms
- 500 ms

#### Additional information

Please add "-Z" to Article No. and specify Order code(s) and plain text.

Order code

#### Calibration/certificate FUS380

Production calibration for DN 50 ... 1200 with  $Q_n$  as selected in diameter. Incl. Calibration protocol: 2 x 3 points,  $Q_i$ , 10 %  $Q_p$  and  $Q_p$  (max. 8000 m<sup>3</sup>/h).

Included

Accredited Siemens ISO/IEC 17025 calibration for DN 50 ... 200 with  $Q_n$  as selected in diameter. Certificate: 2 x 5 points,  $Q_i$ , 5 %, 10 %, 50 % and 100 % of  $Q_p$  (max. 630 m<sup>3</sup>/h).

D20

Accredited Siemens ISO/IEC 17025 calibration for DN 250 ... 600 with  $Q_n$  as selected in diameter. Certificate: 2 x 5 points,  $Q_i$ , 5 %, 10 %, 50 % and 100 % of  $Q_p$  (max. 2800 m<sup>3</sup>/h).

D21

Accredited Siemens ISO/IEC 17025 calibration, DN 500 ... 1200 with  $Q_n$  as selected in diameter. Certificate: 2 x 5 points,  $Q_i$ , 5 %, 10 %, 50 % and 100 % of  $Q_p$  (max. 8000 m<sup>3</sup>/h).

D22

Output B as reverse flow pulses. No calibration/verification of this function.

E21

#### Material certificate

EN 10204-3.1 (pipe material)

C12

#### Tag name plate

Stainless steel TAG plate (1 x 24 x 80 mm), wire fixed. Font size depends on text length: 8 mm for 1 ... 10 characters, 4 mm for 11 ... 20 characters (specify in plain text).

Y17

Please use online Product selector to get latest updates:

<http://www.pia-selector.automation.siemens.com>

#### Flowmeter SITRANS FUE380 operating instructions, accessories and spare parts

##### Operating instructions

Description

Article No.

- English
- German

A5E00730100  
A5E00740611

All literature is available to download for free, in a range of languages, at <http://www.siemens.com/processinstrumentation/documentation>

**For accessories and spare parts see the section about FUS080/FUE080.**

## Flow Measurement


SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters


### SITRANS FUS380/FUE380 dimensional drawings and circuit diagrams

#### Dimensional drawings

##### Flowmeter SITRANS FUS380 and FUE380

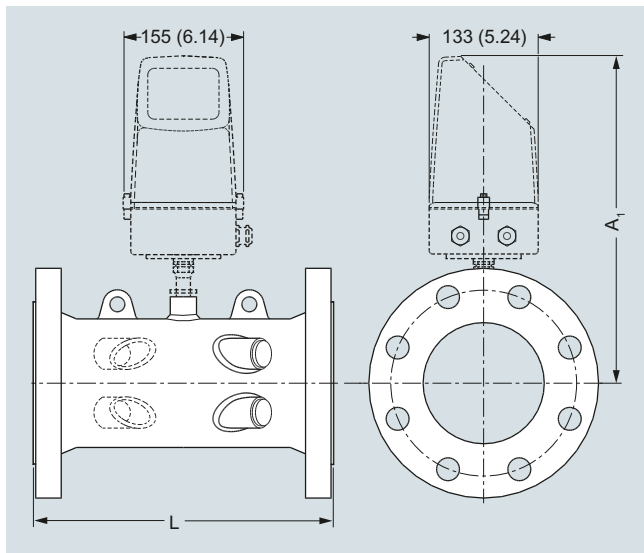

##### Transmitter IP67/NEMA 4X/6, wall mounting

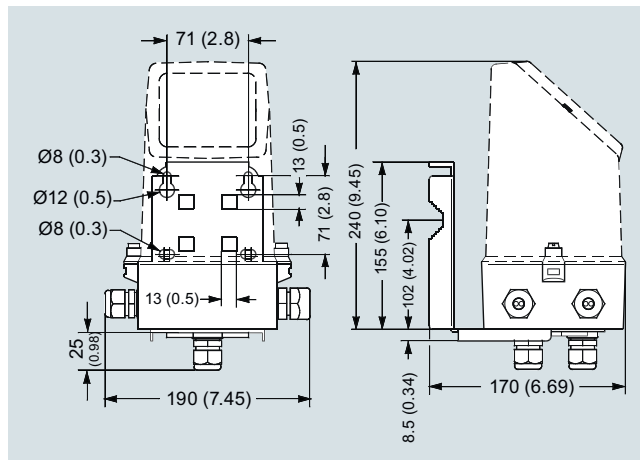

Dimensions in mm (inch)

#### Sensor dimensions for FUS380 and FUE380

Size	PN 16		PN 25		PN 40		A1	Lift hug
	L	Weight	L	Weight	L	Weight		
DN	mm	kg	mm	kg	mm	kg	mm	
50	-	-	-	-	300 +0/-2	10	350	No
65	-	-	-	-	300 +0/-2	15	363	No
80	-	-	-	-	350 +0/-2	18	370	No
100	350 +0/-2	15	-	-	350 +0/-2	18	372	No
125	350 +0/-2	18	-	-	350 +0/-2	24	385	No
150	500 +0/-3	28	-	-	500 +0/-3	34	399	No
200	500 +0/-3	38	500 +0/-3	47	500 +0/-3	55	425	Yes
250	600 +0/-3	60	600 +0/-3	76	600 +0/-3	91	452	Yes
300	500 +0/-3	66	500 +0/-3	81	-	-	478	Yes
350	550 +0/-3	94	550 +0/-3	121	-	-	495	Yes
400	600 +0/-3	124	600 +0/-3	153	-	-	520	Yes
500	625 +0/-3	194	625 +0/-3	231	-	-	570	Yes
600	750 +0/-3	303	750 +0/-3	365	-	-	622	Yes
700	875 +0/-3	361	875 +0/-3	553	-	-	673	Yes
800	1000 +0/-3	494	1000 +0/-3	770	-	-	724	Yes
900	1230 +0/-6	535	1300 +0/-6	835	-	-	775	Yes
1000	1300 +0/-6	594	1370 +0/-6	1000	-	-	826	Yes
1200	1360 +0/-6	732	-	-	-	-	928	Yes

#### Notes:

- Weight for transmitter/electronics 1.5 kg (compact version) or approximately 3 kg (remote version including 10 m cable set)
- Means not available
- All weights are **approximate**
- For flange values - see norm EN 1092-1

**Dimensional drawings** (continued)

Size	PN 16		PN 25		PN 40		A1	Lift hug
	L	Weight	L	Weight	L	Weight		
inch	inch	lb	inch	lb	inch	lb	inch	
2	-	-	-	-	11.81 +0/-0.08	22	13.78	No
2½	-	-	-	-	11.81 +0/-0.08	33	14.30	No
3	-	-	-	-	13.78 +0/-0.08	40	14.57	No
4	13.78 +0/-0.08	33	-	-	13.78 +0/-0.08	40	14.65	No
5	13.78 +0/-0.08	40	-	-	13.78 +0/-0.08	53	15.16	No
6	19.68 +0/-0.12	62	-	-	19.68 +0/-0.12	75	15.71	No
8	19.68 +0/-0.12	84	19.68 +0/-0.12	104	19.68 +0/-0.12	121	16.74	Yes
10	23.62 +0/-0.12	132	23.62 +0/-0.12	168	23.62 +0/-0.12	201	17.80	Yes
12	19.68 +0/-0.12	146	19.68 +0/-0.12	179	-	-	18.82	Yes
14	21.65 +0/-0.12	207	21.65 +0/-0.12	267	-	-	19.49	Yes
16	23.62 +0/-0.12	273	23.62 +0/-0.12	337	-	-	20.48	Yes
20	24.61 +0/-0.12	428	24.61 +0/-0.12	509	-	-	22.45	Yes
24	29.53 +0/-0.12	668	29.53 +0/-0.12	805	-	-	24.49	Yes
28	34.45 +0/-0.12	796	34.45 +0/-0.12	1246	-	-	26.50	Yes
32	39.37 +0/-0.12	1089	39.37 +0/-0.12	1698	-	-	28.51	Yes
36	48.43 +0/-0.24	1179	51.18 +0/-0.24	1841	-	-	30.52	Yes
40	51.18 +0/-0.24	1310	53.94 +0/-0.24	2205	-	-	32.52	Yes
48	53.34 +0/-0.24	1614	-	-	-	-	36.54	Yes

**Notes:**

- Weight for transmitter/electronics 3.3 lb (compact version) or approximately 6.6 lb (remote version including 32.8 ft cable set)
- Means not available
- All weights are **approximate**
- For flange values - see norm EN 1092-1

## Flow Measurement


SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters


### SITRANS FUS380/FUE380 dimensional drawings and circuit diagrams

#### Circuit diagrams

3

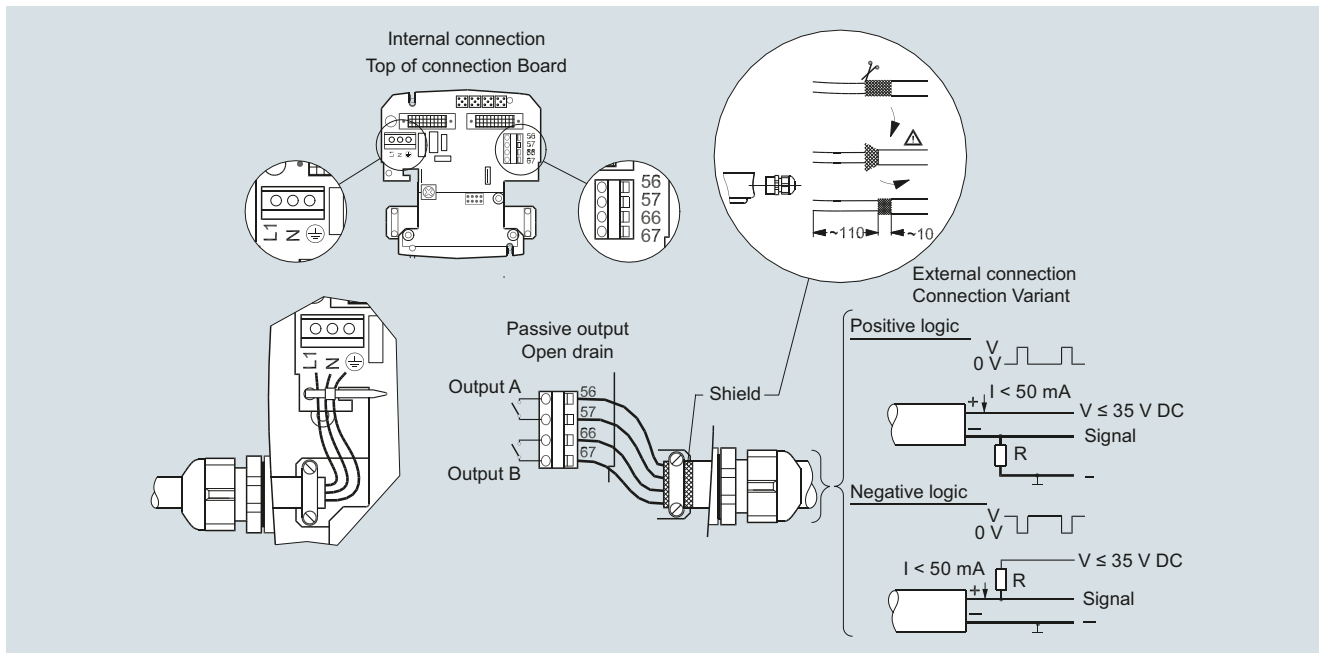

Electrical connection of transmitter SITRANS FUS380 and FUE380

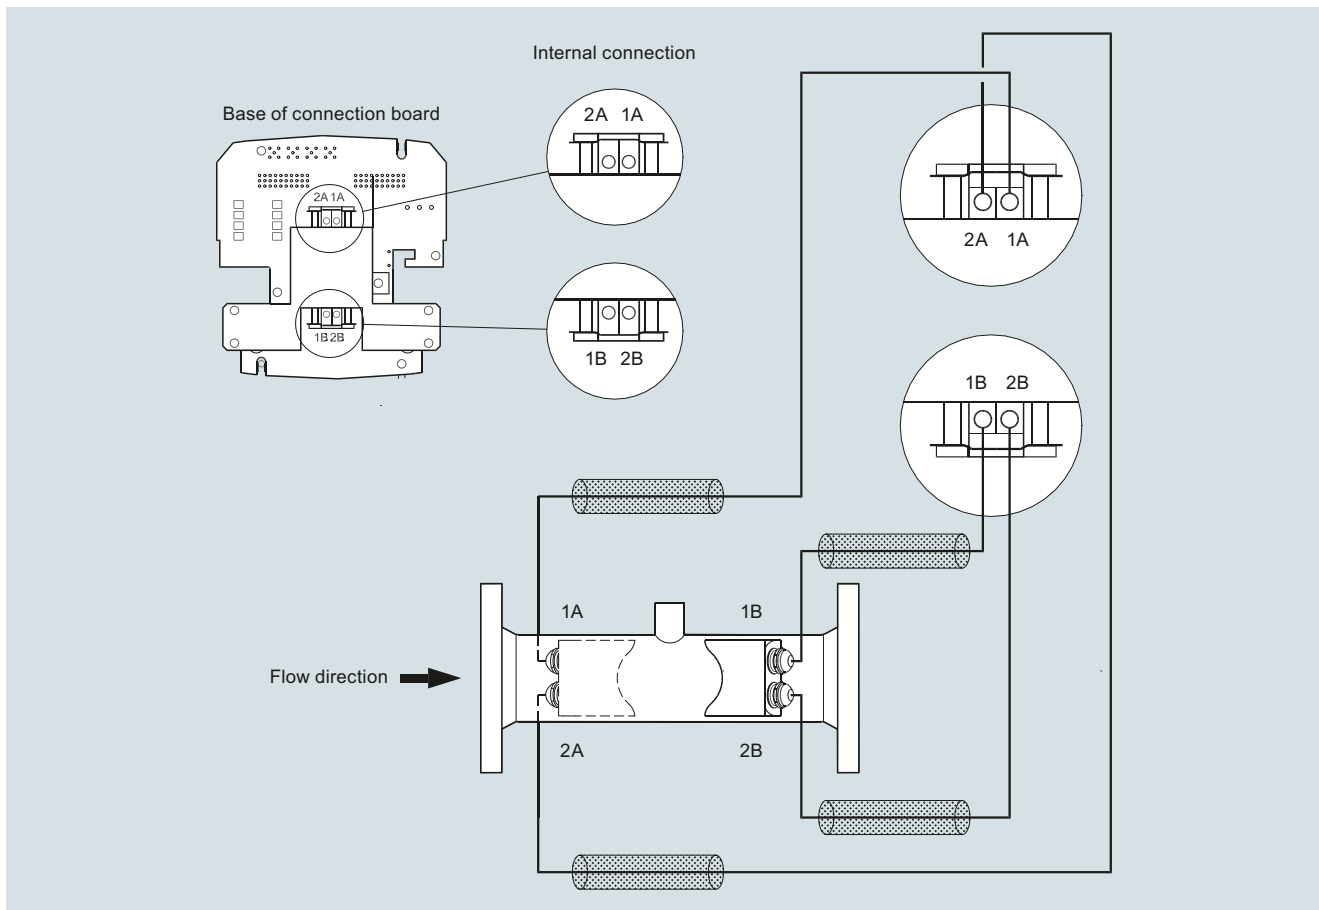

Electrical connection of sensor SITRANS FUS380 and FUE380

## Overview



SITRANS FUE950 is a universal thermal energy calculator, which meets the requirements EN 1434 and has the MID and PTB K7.2 approval for energy metering with the media water.

SITRANS FUE950 has been developed for the SITRANS FUS380/FUE380 and alternatively MAG 5000/6000 or FST020. SITRANS FUE950 is modular in construction and can by order be fitted with optional modules depending on the application. The FUE950 supports none of the SITRANS FX, FC products and only some of the FUS clamp-on products.

## Benefits

### Basic functions

- Prepared for heating, cooling measurement
- Approval for MID for heat metering and PTB K7.2 for cooling
- High-accuracy thermal energy metering, meets EN 1434 requirements
- Measured temperature range  $-20 \dots +190 \text{ }^{\circ}\text{C}$  ( $-4 \dots +374 \text{ }^{\circ}\text{F}$ )
- Instantaneous values for energy/volume flow
- Battery or mains powered
- Battery version with battery lifetime of typically up to 10 years
- Optical data interface
- Real date and time
- Auto-detection of 2-wire or 4-wire temperature sensors

### Additional functions

- Individual tariff functions
- Advanced functions for cooling/heating applications or the combination
- Memory for 24 periods (months, weeks, days)
- Data logger function
- Expandable functionality with 2 optional plug and play add-on modules
- Communication over M-Bus, RS 485 or RS 232

### Add-on modules


- Plug-in module with 2 extra pulse inputs
- Plug-in module with 2 pulse outputs
- Plug-in module with combination of input and output pulses
- Plug-in module for M-Bus communication
- Plug-in module for RS 232 or RS 485 communication
- Plug-in module with 2 passive current outputs ( $4 \dots 20 \text{ mA}$ )

## Application


The SITRANS FUE950 is able to handle 3 kinds of applications, means energy calculation in:

- District heating applications
- Chilled water applications
- Combined cooling/heating applications


### Energy metering in heating, hot water applications (code "A" and "B")

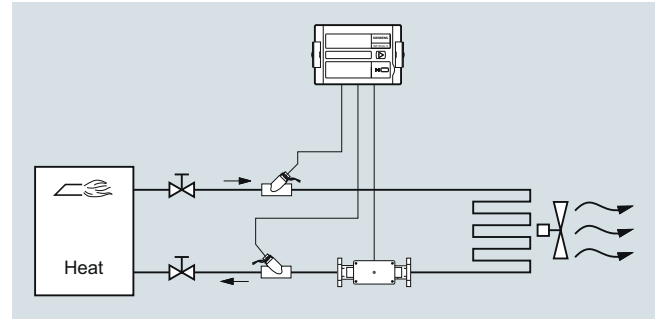

### Energy metering in cooling, chilled water applications (code "C" and "D")

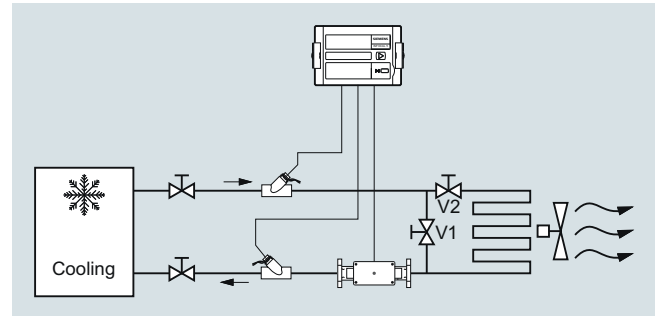

### Energy metering in combined cooling/heating applications (code "E" and "F")

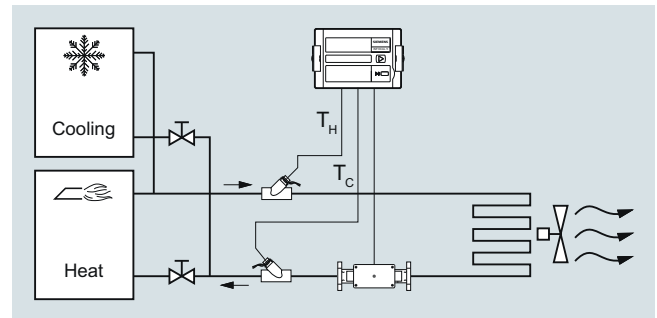

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

## SITRANS FUE950 energy calculator

### Design

SITRANS FUE950 has an easy-read 8-digit LCD display with associated pictograms for the various functions. As the display has been made for several applications, some figures/symbols not used for normal district heating applications will be shown.

SITRANS FUE950 has a push button for simple operation and provides user-friendly control via the various display menu loops. The display will always be configured for the application chosen, and for the selected display settings.

The integrator has an IP54 plastic housing and is designed for wall or panel mounting. The housing comes with prepared rubber gaskets cable entries for fast and easy installation.

#### Operation menu loop structure

The FUE950 display has six menu loops and the menus are numbered in the display from 1 to 6. Some display menus consist of two values (to maximum seven) that are shown alternately at 4-second intervals.

The main menu loop no. 1 with the current data, e.g. for energy, volume, flow rate and temperature, is preprogrammed as default setting.

In the combined heating/cooling configuration the menu loop no. 5 (tariff menu loop) will be activated additionally.

#### Displays and output pulses

Units: MWh, GJ, Gcal, MBtu, m<sup>3</sup>, gal, m<sup>3</sup>/h, GPM, °C, °F and kW; all decimal points are statically (the unit "gal" is shown with factor x 100).

The display unit and the last fractional digit are typical used for the pulse outputs.

### Function

#### Technical principle

Calculation of energy is based on the following formula:

$$\text{Energy} = \text{Volume} \times (T_{\text{Hot}} - T_{\text{Cold}}) \times K_{\text{factor}} (T_i)$$

Volume: Volume [m<sup>3</sup>] of a given amount of volume pulses

$T_{\text{Hot}}$ : Measured temperature in the hot line

$T_{\text{Cold}}$ : Measured temperature in the cold line

$K_{\text{factor}} (T_i)$ : Thermal coefficient of media enthalpy and heat content

The energy calculation is made by a counter and depends on temperature difference, pulse input frequency and legal requirements.

The calculator always carries out at least one energy calculation every 2 seconds. If the connected flowmeter has not sent enough pulses the energy calculation and flow indication is also based on the 8 seconds value.

#### Data memory

The FUE950 has a history memory of 24 periods (months, weeks, days). The following values are stored monthly, weekly or daily in the EEPROM on the programmed day of 1...31 (via software tool).

• Date/Time	• Volume
• Energy	• Error day counter
• Tariff energy 1	• Maximum monthly flow rate
• Tariff energy 2	• Maximum monthly power
• Tariff definition 1	• Date of maximum monthly flow rate
• Tariff definition 2	• Date of maximum monthly power
• Pulse counter input 1	• Pulse counter input 2
• Operation hours	

#### Data logger memory (LOG)

The LOG of the calculator is stored every 24 hours with all cumulative values in the EEPROM. The storage frequency can be selected from various storage intervals (5, 6, 10, 12, 15, 20, 30, 60 minutes or the default setting of 24 hours). The data which are stored in the LOG could be read out using a software tool and can be used for evaluations.

#### Extract of possible LOG settings

Storage interval	Values	Number of data records	Recording period
5 minutes	• Error status	440	36.6 hours
15 minutes	• Overload time temperature	440	110 hours
1 hour	• Overload time flow rate	440	18.3 days
24 hours (default setting)	• Forward temperature	440	440 days
	• Return temperature		
	• Date and time		
	• Energy		
	• Tariff energy 1		
	• Tariff energy 2		
	• Tariff definition 1		
	• Tariff definition 2		
	• Volume		
	• Error day counter		

#### Maximal Values

The integrator creates max. values for power and flow rate based on consumption time, which are stored in the EEPROM. The integration intervals are adjustable to 6, 15, 30 or 60 minutes and 24 h. Default setting is 60 minutes.

#### Tariff/Accounting date function

The calculator includes two independent memories in which the accumulated energy at two programmable tariff dates are stored.

- Last accounting date
- Last but one accounting date

#### Values stored

- Energy
- Volume
- Tariff counter 1
- Tariff counter 2
- Pulse counter 1
- Pulse counter 2
- Date

The integrator offers two optional tariff memories for monitoring plant load states. Here it concerns threshold value tariffs. Extensive tariff conditions make it possible to adapt the calculator individually to the required customer-specific applications.

Both tariffs are separately configurable and independent from each other. Energy or time can be measured alternatively per tariff register dependent on the tariff mode adjusted in each case.

With the "time triggered tariff function" the switch-on time and the switch-off time are adjustable independent from each other for each day of the week in steps of 15 minutes.



### Function (continued)

The following tariff limit types of the tariff are possible: (This example applies to the display at 3 fractional digits after comma)

Type	Description	Limit	Limit resolution
dT	Temperature difference	1 ... 190 °C	1 °C
-dT	Negative temperature difference	1 ... 190 °C	1 °C
TR	Return temperature (low)	1 ... 190 °C	1 °C
TV	Forward temperature (high)	1 ... 190 °C	1 °C
P	Power	10 ... 2500 kW	10 kW
Q	Flow	1 ... 255 m <sup>3</sup> /h	1 m <sup>3</sup> /h
FE	"Theoretically forward energy" with return temperature of 0 °C		
Z	"Time triggered" counting energy		
E	"External" counting energy		

### Error handling and memory

Events such as changes and faults are stored in a non-volatile memory with a capacity of up to 127 entries. The following events are recorded:

- Checksum error
- Temperature measurement error
- Error hours
- Start and end of test mode

If SITRANS FUE950 records an error, this will be automatically indicated by a "alarm symbol" on the display.

To protect the reading data, all the relevant data are saved in a non-volatile memory (EEPROM). This memory saves the measured values, device parameters and types of error at regular intervals.

The following events are recorded:

- Temperature sensor error
- Swapped hot and cold temperature sensors
- Battery low warning
- Power supply failure
- Optical communication warning
- RAM checksum error

### Outputs/Inputs/Communication

#### Communication interfaces:

SITRANS FUE950 is fitted with an optical infra-red send/receive port in accordance with EN 1434/IEC 61107, protocol standard, EN 1434/EN 60870-3 (M-Bus protocol).

A specific optical head with a permanent magnet (IrDA-adapter) in accordance with EN 1434 can be used for readout data or communication with the parameterization software.

#### 2 ports for optionally plug-in modules

The calculator features 2 ports for the plug-in modules.

One slot is for the function modules and the other for the communication modules.

### Communication modules

The following communication modules are available as options: RS 232 module, RS 485 module and M-Bus module. The RS 232 and RS 485 communication modules are serial interfaces and permit data exchange with the calculator. For this purpose a special data cable is necessary.

The M-Bus module is a serial interface for communication with external devices (M-Bus Master/Centre). According to the M-Bus structure a number of calculators can be connected to a control centre.

### Pulse input module

Two pulse inputs are available. The pulse value and the unit is configurable for energy, water, gas or electrical meter by parameterization software. Data are separate cumulated in different registers and are also stored on the two accounting day's (Tariff registers).

### Combined pulse Input/Output module

Two pulse inputs combined with one pulse output are available on one module. The pulse inputs are configurable with value and the unit by parameterization software.

The pulse output is also programmable using the parameterization software.

### Pulse output

The calculator provides levels for two optional external pulse outputs, which can be freely programmed using the parameterization software tool.

Default setting is one pulse which occurs per change in the least significant digit in the display with the unit and resolution selected by the device ordering.

Possible pulse output values

- Energy (default setting)
- Volume (default setting)
- Tariff energy 1
- Tariff energy 2
- Tariff condition 1, limit switch
- Tariff condition 2, limit switch
- Energy error
- Volume error
- Volume with specific resolution (0.1, 1.0, 10 or 100)
- Energy with specific resolution (0.1, 1.0, 10 or 100)

### Combined current output module

Optional module with 2 passive 4 ... 20 mA outputs.

Possible output values:

- Power (default setting for output #1)
- Flow (default setting for output #2)
- Hot, cold or difference temperature

The settings can be configured by parameterization software. The current output module occupies both ports, means no other plug-in module will possible to plug in.

### Module combinations

The calculator has a group of extension modules for communication and another group of extension modules for additional functionality. These modules are available first selected within the calculator, or for retrofitting in the field.

One single function module as well as one single communication module out of following modules is selectable.

Function modules:

- Pulse input module, 2 inputs
- Pulse output module, 2 outputs
- Combined pulse module 2 inputs, 1 output
- Combined current output module, 2 x passive 4 ... 20 mA (occupies both ports)

Communication modules:

- M-Bus (M-Bus protocol according EN 1434-3)
- RS 232 (M-Bus protocol according EN 1434-3)
- RS 485 (M-Bus protocol according EN 1434-3)

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

### SITRANS FUE950 energy calculator

#### Integration


SITRANS FUE950 is a multi-purpose energy calculator for media water which meets the requirements of EN 1434. Further, the energy calculator has been specially developed to process volume pulses from SITRANS FUS380/FUE380 or alternatively MAG 5000/6000 or FST020 transmitter.

#### Technical specifications

Approval	MID approved in accordance with energy meter EN 1434 and PTB K7.2 (German national cooling approval)
Approved temperature range	0 ... 180 °C (32 ... 356 °F)
• Heating	0 ... 105 °C (32 ... 221 °F)
• Cooling	
Absolute temperature range	-20 ... +190 °C (-4 ... -374 °F)
Differential temperature	
• Heating	3 ... 177 K (starting at 0.1 K)
• Cooling	3 ... 102 K
Measuring accuracy	Meets requirements of EN 1434 Typically max. $\pm (0.5 + 3 K/\Delta\theta)$ [%] of measured value
Measuring rates	
• Battery type D-cell	Volume: 1 s, temperature: 4 s
• Mains versions	Volume: 1/8 s, temperature: 2 s
Flow range	Depends on pulse input value (I/P), see "Selection and Ordering data"
Power range value	Depends on pulse input value as follows:
Pulse input value (I/P or gal/P)	Max power [kW]
1	15000
2.5	15000
5	15000
10	150000
25	150000
50	150000
100	1500000
250 *)	1500000
500 *)	1500000
1000 *)	15000000

\*) not available for gal/pulse

#### Typical accuracy of FUE950

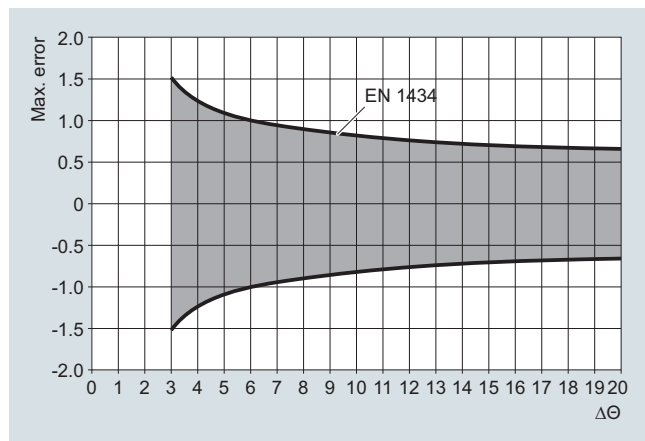

<b>User interface (always included)</b>	
Display	8-digit LCD display with associated pictograms/symbols
Units	MWh, GJ, Gcal, MBtu, m <sup>3</sup> , m <sup>3</sup> /h, GPM, gal, °C, °F, kW, MBtu/h (gal is shown with factor x 100)
Totalizer value range	99 999 999 or 9 999 999.9 (0 and 1 digit after comma). Display digits: Flow in 6 digits; Volume, power and energy in 8 digits
Values	Power, energy, volume, flow rate, temperatures
Push button	Single push button for the menu controlling
Optical interface IrDA interface	ZVEI optical interface with M-Bus protocol as per EN 1434, connection via separate IrDA-adapter baud rate: 300 or 2400

<b>Rated operation conditions</b>	
Enclosure	IP54 in accordance with IEC 529
Material	
• Housing	C Lexan 141R (or similar); colors: light gray (top part) and black (bottom part)
• Pipe/wall fitting	PA 6,6 GF25 (or similar)
• Other plastic parts	ABS Cycolac GPM500 (or similar)
• Gaskets	Neoprene and rubber cable bushings: EPDM 50
• Rubber cable bushings	EPDM 50
Temperature	
• Ambient	5 ... 55 °C (41 ... 131 °F)
• Storage	-25 ... +70 °C (-13 ... +158 °F)
	Relative ambient humidity < 93 %
Environment class	
• Mechanic class	M1/M2
• Electromagnetis class	E1/E2 (MID) or C (DIN EN 1434)

<b>Temperature input (always included)</b>	
Function	The temperature sensors must be connected to terminals 1-5 and 6-2 (T <sub>H</sub> ) and 3-7 and 8-4 (T <sub>C</sub> ) depending on cable type (2-wire or 4-wire).
Temperature range	-20 ... 190 °C (-4 ... 374 °F) for T <sub>H</sub> and T <sub>C</sub>
Absolute measuring range	
Temperature difference	Start 0.1 K, min. 3 K, max. 177 K
Measurement cut-off	0.125 K
Display resolution	T <sub>H</sub> and T <sub>C</sub> : 0.1 K ΔT: 0.1 K 16-bit digital resolution AD converter
Sensor types	Pt100 or Pt500 as 2-wire or 4-wire; Standard is Pt500. Sensor cable length: up to 10 m (according EN 1434 and MID-type approval).
Sensor connection	4-wire or 2-wire; auto detection of connection version

#### Technical specifications (continued)

<b>Flow input (IN0) (always included)</b>		<b>Pulse output 1</b>	
Function	Used as standard for flow input of the external flowmeter. The input is marked as 10 (+ Flow Pulse), 11 (- Gnd) on the terminal strip.  Note: The pulse input value selection must be the same as the pulse output setting of the flowmeter.	<ul style="list-style-type: none"> <li>• Pulse frequency</li> <li>• Pulse width</li> <li>• Pulse duration</li> <li>• Pulse break</li> </ul>	<ul style="list-style-type: none"> <li>≤ 4 Hz</li> <li>125 ms ± 10 %</li> <li>125 ms ± 10 %</li> <li>≥ 125 ms -10 %</li> </ul>
Pulse value	1 ... 1000 l/pulse or 1 ... 100 gal/pulse, selection by corresponding order code. Will be shown at the device label	<ul style="list-style-type: none"> <li>• Pulse output 2</li> <li>• External voltage supply</li> </ul>	<ul style="list-style-type: none"> <li>≤ 100 Hz, depending on the selected pulse length</li> <li>Pulse duration/pulse break ~ 1:1</li> <li>5, 10, 50, 100 ms (default: 5 ms)</li> <li>3 ... 30 V DC</li> </ul>
Pulse frequency	≤ 100 Hz (200 Hz)	<ul style="list-style-type: none"> <li>• Ratio</li> </ul>	<ul style="list-style-type: none"> <li>≤ 20 mA with a residual voltage of ≤ 0.5 V</li> </ul>
Pulse ON-time	≥ 3 ms	Possible pulse output selection	<ul style="list-style-type: none"> <li>• Energy (default setting for 'Out1')</li> <li>• Volume (default setting for 'Out2')</li> <li>• Tariff energy 1</li> <li>• Tariff energy 2</li> <li>• Tariff condition 1 (limit switch)</li> <li>• Tariff condition 2 (limit switch)</li> <li>• Energy error</li> <li>• Volume error</li> <li>• Volume with specific display resolution (or with factor 0,1, 10 or 100 thereof)</li> <li>• Energy with specific display resolution (or factor 0.1 thereof)</li> </ul>
Pulse OFF-time	≥ 2 ms	External voltage supply	
Type	Active pulse input	Current	
Terminal voltage	3.6 V DC (supplied internally by FUE950)		
Flowmeter installation place	The flowmeter installation place can be in the hot line or cold line ("forward or return pipe") selected by corresponding order code. The "installation place" will be shown at the device display and nameplate		
Connected cable	Max. 10 m (shielded cables are highly recommended)		
<b>Ports for option modules</b>		<b>Pulse input</b>	
Type	The calculator features 2 ports for optional plug-in modules.	Function	Add-on module for two additional counters. The pulse input 1 is marked as I1, 'gnd' and the input 2 as I2, 'gnd' on the terminal strip and indicated in the display as separate registers IN1 and IN2 and can also be transferred via the communication modules.
Function modules (Port 1 or 2)	<ul style="list-style-type: none"> <li>• Pulse input module, 2 inputs (In1, In2)</li> <li>• Pulse output module, 2 outputs (Out1, Out2)</li> <li>• Combination module of 2 inputs (In1, In2) and 1 output (Out1)</li> </ul>	Type	Passive "open collector" pulse inputs, outputs not potential isolated to each other, data are separate cumulated in different registers and are also stored on the two accounting day's.
Current output module (Port 1)	2 passive 4 ... 20 mA (#1, #2) (occupies both port 1 and 2)	Pulse value	Pulse value and the unit are configurable for energy, water, gas or electrical meter by a software tool  Default: Pulse input 0,1 m3 or 1 gal (if unit 'gal' is ordered with the Z-option "L05")
Communication modules (Port 1 or 2)	M-Bus, RS 232 or RS 485 (M-Bus protocol, according EN 1434-3)	Pulse frequency	≤ 8 Hz
<b>Pulse output</b>		Pulse length	≥ 10 ms
Function	The module contains connections for 2 pulse outputs, which can be programmed as desired using a software tool. The pulse outputs are marked as standard as O1, 'gnd' and O2, 'gnd' on the terminal strip and Out1 respectively Out2 in the display.	External voltage supply	3 V DC (supplied internally by FUE950)
Type	Passive "open collector" pulse output, outputs potential isolated to each other	Current	based on $R_i = 2.2 \text{ M}\Omega$
Pulse value	Last significant digits of the display (unit/pulse), selection by corresponding order code and setting can be read via display menu, settings changeable via software tool	Cable length	< 10 m connection limit

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### SITRANS FUE950 energy calculator

#### Technical specifications (continued)

##### Current output module

Function	The module contains connections for 2 passive current outputs, which can be programmed individually using the software tool. The outputs are marked „#1“ and „#2“ with corresponding polarity „+“ and „-“ on the terminal strip. The module will be connected on port 1 only, but both ports are occupied by the module.
Terminal voltage	External supply: 10 ... 30 V DC (passive output)
Signal range	4 ... 20 mA; 4 mA = 0 value and 20 mA = default maximum values (for #1: Power in kW and for #2: Flow with the max. values and selected unit). Defaults: For power it is the max. selectable value x 100 000 the last digit of display (e. g. 20 mA = 10 000.0 kW (1 digit res.) or 100 000 kW (0 digit res)). For flow it is the max. selectable value x 10 000 the last digit of display (e. g. 20 mA = 1 000.0 m <sup>3</sup> /h (1 digit res.) or 10 000 m <sup>3</sup> /h (0 digit res.)).
Load	Max. 800 Ω
Upper limit	Up to 20.5 mA (exceed causes the error current value)
Signal on alarm	Errors are indicated with 3.5 mA or 22.6 mA (programmable, default: 3.5 mA)
Output values	Power, flow, temperature (configuring via software tool; default: for #1: Power and for #2: Flow)

##### M-Bus output

Type	The optional M-Bus plug-in module is a serial interface for communication with external devices (M-Bus Repeater)
Protocol	M-Bus according EN 1434-3
Connection	The connection is not polarity-conscious and is electrically isolated, connection of 2 x max. 2.5 mm <sup>2</sup> wires, 300 or 2400 baud (auto baud detection), current drawn: one M-Bus load. M-Bus address: Each port has its own primary M-Bus address (Prim1 = the last two digits of the serial number; Prim2 = 0). The secondary address is unique for each calculator and is factory-set to equal the serial number.

##### RS 232 output

Type	The optional module RS 232 is a serial interface for data transmission with external devices, e.g. PC; baud rate: 300 or 2400. The module contains a 3-pole terminal strip with terminals marked 62 (TX), 63 (RX) and 64 (GND). For this purpose a special data cable is necessary.
Protocol	M-Bus according EN 1434-3
Connection	The module contains a 3-pole terminal strip with terminals marked 62, 63, 64 (max. 2.5 mm <sup>2</sup> ); Connected cable length: max 10 m; For communication with a PC a special adapter cable is required (order no. A5E02611774).

##### RS 485 output

Function	The optional RS 485 module is a serial interface for data transmission with external devices, e.g. PC; baud rate: 2400. The module contains a 4-pole terminal strip with terminals marked D+, D-, Vcc and GND.
Protocol	M-Bus protocol according EN 1434-3
Connection	Terminals D+ and D-; electrically isolated; 2400 baud only. An external supply of 12 V DC ± 5 V (<5 W) is needed for the module (terminals Vcc and GND). The module terminals are max. for 2.5 mm <sup>2</sup> wires. Connected cable length: max. 10 m

##### Power consumption

230 V and 24 V versions	Typical current appr. 0.15 VA
3.6 V D-cell battery	Typical battery lifetime 10 years under normal conditions (no add-on modules, max. 40 °C ambient temperature)
Supply data	Internal voltage 3.6 V by the battery or plug-in power supply module
Battery, 3.6 V type (option)	3.6 V lithium D-cell, battery lifetime typically 16 years with independently powered flowmeter
230 V AC module (option)	Plug-in module for 230 V AC (195 ... 253 V AC), 50/60 Hz (incl. battery backup)
24 V AC module (option)	Plug-in module for 24 V AC (12 ... 30 V AC) (incl. battery backup)
Battery backup (option)	Only with mains supply modules by internal 3.0 V lithium battery (type CR 2032) Displayed values, date and time are still updated, but the measuring functions have stopped, including the flow rate measurement. Communication via optional modules M-Bus, RS 485, RS 232 or optical interface is maintained, affecting the backup battery lifetime.

#### Accessories/Software

The parameterization software based on the M-Bus is a convenient tool for handling the calculator. It runs on Windows and is used for configuration of the calculator functionality, reading out different memories, printing out calculator logs. For further details please contact your local Siemens representative.

A specific optical head with a permanent magnet in (IrDA adapter with bluetooth) accordance with EN 1434 can be used for programming/altering programming of readout data, configuration data, etc. The reader head can also be used to change measuring data.

## Selection and ordering data

## Article No.

## Article No.

Energy calculator SITRANS FUE950, MID or PTB K7.2 custody transfer approved **7ME3480-**

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

## Flow input setting (IN0)

The pulse input value selection must be the same as the pulse output setting of the selected flowmeter. To get optimal function and performance the pulse value must be selected as low as possible according to the maximum flow rate.

The following calculation formula can be used for determining the lowest pulse value at a pulse length of 5 ms:  $L/pulse > Q_{max} (m^3/h)/360$ .

For example  $Q_{max} = 300 m^3/h$ ;  $L/pulse > 300/360$ ;  $L/pulse > 0.83$ ; therefore the pulse value must be 1 l/pulse.

Pulse input in l/pulse or in gal/pulse (with option L05)	Flow limit $Q_{max}$ in $m^3/h$	Flow limit $Q_{max}$ in GPM <sup>1)</sup> (with option L05)	
1	360	6000	<b>2 A</b>
2.5	900	15000	<b>2 B</b>
5	1800	30000	<b>2 C</b>
10	3600	60000	<b>3 A</b>
25	9000	150000	<b>3 B</b>
50	18000	300000	<b>3 C</b>
100	36000	600000	<b>4 A</b>
250	90000	-	<b>4 B</b>
500	180000	-	<b>4 C</b>
1000	360000	-	<b>5 A</b>

<sup>1)</sup> GPM = Gallons per minute

## Calculator application/Flowmeter installation place

For heating, flowmeter in return pipe (cold pipe), typical standard **A**

For heating, flowmeter in forward pipe (hot pipe) **B**

For cooling, media water, flowmeter in forward pipe (cold pipe) **C**

For cooling, media water, flowmeter in return pipe (hot pipe) **D**

For combined cooling/heating, flowmeter in forward pipe (hot pipe as heating) (MID conformity declaration for heating) **E**

For combined cooling/heating, flowmeter in return pipe (cold pipe as heating) (MID conformity declaration for heating) **F**

## Temperature sensor type

Pt500 setup, no sensor pair included (standard) **0**

Pt500 setup and Pt500 sensor pair (6/140 mm), 4-wire with 5 m connection cable, 6 mm sensor diameter and 140 mm sensor length. MID approved DE-06-MI004-PTB011, PTB approved 22.77/09.01, incl. factory test report (mentioned approvals are only valid if temp. sensors are used with the applicable temperature sensor pockets) **3**

Pt500 setup and Pt500 sensor pair (6/230 mm), 4-wire with 5 m connection cable, 6 mm sensor diameter and 230 mm sensor length. MID approved DE-06-MI004-PTB011, PTB approved 22.77/09.01, incl. factory test report (mentioned approvals are only valid if temp. sensors are used with the applicable temperature sensor pockets) **4**

Pt100 setup, no sensor pair included **5**

Pt 500 setup and PT500 sensor pair (6/50 mm), 2-wire type incl. 5 m cable, 6 mm sensor diameter and 50 mm length, with MID approval (only for use with the applicable temperature sensor pockets) **6**

Pt 500 setup and PT500 sensor pair (6/50 mm), 2-wire type incl. 10 m cable, 6 mm sensor diameter and 50 mm length, with MID approval (only for use with the applicable temperature sensor pockets) **7**

Energy calculator SITRANS FUE950, MID or PTB K7.2 custody transfer approved **7ME3480-**

## Temperature sensor pocket sets

for 6 mm sensor diameter

No pockets (standard) **0**

Brass pockets for 6 mm 2-wire sensors, length 82/92 mm, G½ inch, max. PN 16 (2 pcs.) **2**

Stainless steel pocket, 120/135 mm length for 6 mm sensor diameter, max. PN 40 and max. 5 m/s (2 pcs. for 140 mm 4-wire sensors above) **5**

Stainless steel pockets for 6 mm 2-wire sensors, length 117/127 mm, G½ inch, max. PN 25 (2 pcs.) **6**

Stainless steel pocket, 210/225 mm length for 6 mm sensor diameter, max. PN 40 and max 5 m/s (2 pcs. for 230 mm 4-wire sensors above) **7**

Stainless steel pockets for 6 mm 2-wire sensors, length 155/168 mm, G½ inch, max. PN 25 (2 pcs.) **8**

## Voltage supply

Battery 3.6 V DC (Lithium D-cell type) (standard) **1**

Mains power module for 230 V AC supply (incl. back-up battery) **2**

Mains power module for 24 V AC supply (incl. back-up battery) **3**

No power supply module (power supply ordering separate) **4**

## Option modules

No module (standard) **A**

1 module (communication module)

M-Bus module **B**

RS 232 module (M-Bus protocol) **C**

RS 485 module (M-Bus protocol) **D**

1 module (function module)

Pulse output, 2x output (Out1 "Energy" and Out2 "Volume") **E**

Pulse input, 2x input (In1 and In2) **F**

Pulse out-/input combination, 2x input and 1x output **G**

Combination of 2 modules (communication and function module)

M-Bus module and Pulse output, 2x output (Out1 "Energy" and Out2 "Volume") **H**

M-Bus module and Pulse input, 2x input (In1 and In2) **J**

M-Bus module and Pulse out-/input combination, 2x input and 1x output **K**

RS 232 module (M-Bus) and Pulse output, 2x output (Out1 "Energy" and Out2 "Volume") **L**

RS 232 module (M-Bus) and Pulse input, 2x input (In1 and In2) **M**

RS 232 module (M-Bus) and Pulse out-/input combination, 2x input and 1x output **N**

RS 485 module (M-Bus) and Pulse output, 2x output (Out1 "Energy" and Out2 "Volume") **P**

RS 485 module (M-Bus) and Pulse input, 2x input (In1 and In2) **Q**

RS 485 module (M-Bus) and Pulse out-/input combination, 2x input and 1x output **R**

Combination current output module, 2x passive 4 ... 20 mA (Out 1 "Power", Out 2 "Flow") (occupies both module Ports 1 and 2) **S**



## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters


#### SITRANS FUE950 energy calculator

#### Selection and ordering data

#### Article No.

#### Article No.

#### Energy calculator SITRANS FUE950, MID or PTB K7.2 custody transfer approved

7ME3480-  


#### Display units and resolutions

MWh & kW, m<sup>3</sup>, m<sup>3</sup>/h in 2 digit resolution;  
Temperature: no decimal figures

C

MWh & kW, m<sup>3</sup>, m<sup>3</sup>/h in 1 digit resolution;  
Temperature: no decimal figures

D

MWh & kW, m<sup>3</sup>, m<sup>3</sup>/h in 0 digit resolution;  
Temperature: no decimal figures

E

GJ & kW, m<sup>3</sup>, m<sup>3</sup>/h in 2 digit resolution; Temperature:  
no decimal figures

H

GJ & kW, m<sup>3</sup>, m<sup>3</sup>/h in 1 digit resolution;  
Temperature: no decimal figures

J

GJ & kW, m<sup>3</sup>, m<sup>3</sup>/h in 0 digit resolution;  
Temperature: no decimal figures

K

Gcal & kW, m<sup>3</sup>, m<sup>3</sup>/h in 2 digit resolution;  
Temperature: no decimal figures

M

Gcal & kW, m<sup>3</sup>, m<sup>3</sup>/h in 1 digit resolution;  
Temperature: no decimal figures

N

Gcal & kW, m<sup>3</sup>, m<sup>3</sup>/h in 0 digit resolution;  
Temperature: no decimal figures

P

MBTU & MBTU/h, m<sup>3</sup>, m<sup>3</sup>/h in 2 digit resolution;  
Temperature: no decimal figures

Q

MBTU & MBTU/h, m<sup>3</sup>, m<sup>3</sup>/h in 1 digit resolution;  
Temperature: no decimal figures

R

MBTU & MBTU/h, m<sup>3</sup>, m<sup>3</sup>/h in 0 digit resolution;  
Temperature: no decimal figures

S

#### Verification/Approval

Without type approval mark, neutral label (standard)

0

With MID type approval mark (only for heating combinations, selection "A, B, E and F")

1

With MID approval mark and first MID verification (only for heating, selection A, B, E and F")

2

Cooling approval mark, German national cooling approval according PTB-TR-K7.2 (only for cooling and media water, selection "C and D")

7

Cooling approval mark, German national cooling approval according PTB-TR-K7.2 and first verification (only for cooling and media water, selection "C and D")

8

#### Further designs

Order code

Please add "-Z" to Article No. and specify Order code

#### Certificate

Always included

Including factory test report (certificate) of FUE950

#### Cooling, setup for non water

Water/glycol setting for media type "Tyfocor LS (R)" (only with neutral label, no verification and approval)

C02

#### Optional settings/programming

Tariff function settings (specify in clear text, up to max. 20 characters)

D02

Pulse output setting of option module (specify in clear text, up to max. 20 characters)

D06

Pulse input setting of option module (specify in clear text, up to max. 20 characters)

D08

Pulse input setting of 4 ... 20 mA option module (please specify 20 mA related type and value in clear text, up to max. 20 characters)

D10

#### Special display units

Flow in 'GPM' and Volume in 'gal' (x100) (digits/resolution as selected above, only with 0 digit resolution)

L05

Temperature in deg. F (digit resolution as selected above)

L31

#### Flowmeter SITRANS FUE950 operating instructions, accessories and spare parts

#### Operating instructions

- English

A5E003424739

This device is shipped with Safety Notes and a DVD containing further SITRANS F US literature.

All literature is available to download for free, in a range of languages, at <http://www.siemens.com/processinstrumentation/documentation>

#### Accessories

Infrared optical head (Bluetooth type) for data acquisition & programming of FUE950

A5E02611768

Bracket for SITRANS FUE950 wall mounting (20 pcs.)

A5E02611769

Cable for data acquisition via RS 232 PC/D-sub 9F/3 wire

A5E02611774

#### Spare parts

#### Add-on modules for FUE950 (only for 7ME348 versions)

Pulse input module (2 inputs)

A5E03461432

Pulse output module (2 outputs)

A5E03461436

Combined pulse in-/output module (2 inputs and 1 output)

A5E03461437

RS232 module (M-Bus protocol)

A5E03461459

RS485 module (M-Bus protocol)

A5E03461512

M-Bus output module

A5E03461516

Combined current output module, 2 x passive 4 ... 20 mA

A5E03461583

Connection set for option modules (types: Pulse, RS 232/RS 485, M-Bus, mA) (special connection cable with 2 plugs)

A5E03461585

#### Power supply for FUE950 (only for 7ME348 versions)

3.6 V D-cell battery for SITRANS FUE950

A5E03461708

230 V AC supply module (incl. internal fuse T50 mA L 250 V and back-up battery) for SITRANS FUE950

A5E03461717

24 V AC supply module for SITRANS FUE950, incl. back-up battery

A5E03461719

#### Pocket for temperature sensors Pt500 (for related 4-wire Pt500 type only, 1 pc.)

Stainless steel pocket (1 pc.), 135 mm length for 6 mm sensor diameter, max. PN 40 and max. 5 m/s (recommended for 140 mm sensor length).

A5E03462868

Stainless steel pocket (1 pc.), 225 mm length for 6 mm sensor diameter, max. PN 40 and max. 5 m/s (recommended for 230 mm sensor length).

A5E03462870

#### Pt500 4-wire temperature sensor pair (as spare part), with MID MI004 and PTB K7.2 approvals and verification (for related 4-wire sensor pocket types only)

Pt500 sensor pair (6/140 mm), 4-wire with 5 m connection cable, 6 mm sensor diameter and 140 mm sensor length. MID approved DE-06-MI004-PTB011, PTB approved 22.77/09.01 (mentioned approvals are only valid if temp. sensors are used with the applicable temperature sensor pockets).

A5E03462872

PT500 sensor pair (6/230 mm), 4-wire with 5 m connection cable, 6 mm sensor diameter and 230 mm sensor length. MID approved DE-06-MI004-PTB011, PTB approved 22.77/09.01 (mentioned approvals are only valid if temp. sensors are used with the applicable temperature sensor pockets).

A5E03462878

#### FUE950 enclosure (only for 7ME348 versions)

Bottom part of FUE950 enclosure (1 pc.)

A5E03461508

Snap fit for FUE950 enclosure (1 pc.)

A5E03461731


**Dimensional drawings** (continued)

**Pocket for Pt500 temperature sensors (for corresponding 2-wire Pt500 types only; 1 pc.)**

Brass pocket 6 mm, G½B x 40 mm (PN 16), 1 pc.	<b>A5E02611778</b>
Brass pocket 6 mm, G½B x 85 mm (PN 16), 1 pc.	<b>A5E02611779</b>
Brass pocket 6 mm, G½B x 120 mm (PN 16), 1 pc.	<b>A5E02611780</b>
Stainless steel 6 mm, G½B x 85 mm (PN 25), 1 pc.	<b>A5E02611781</b>
Stainless steel 6 mm, G½B x 120 mm (PN 25), 1 pc.	<b>A5E02611783</b>
Stainless steel 6 mm, G½B x 155 mm (PN 25), 1 pc.	<b>A5E02611792</b>
Stainless steel 6 mm, G½B x 210 mm (PN 25), 1 pc.	<b>A5E02611793</b>


**Pt500 temperature sensor pair, 2-wire cable, 6 mm sensor diameter, with MID/EN-approval (for corresponding 2-wire sensor pocket types only)**

Cable length:	
2 m	<b>A5E02611794</b>
3 m	<b>A5E02611795</b>
5 m	<b>A5E02611796</b>
10 m	<b>A5E02611798</b>

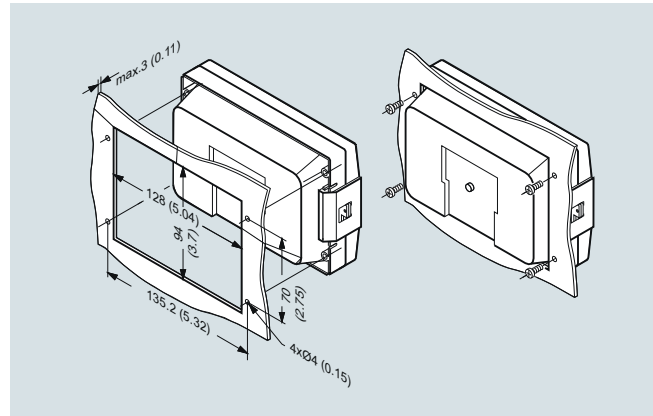


Panel mounting, dimensions in mm (inch)

**Dimensional drawings**

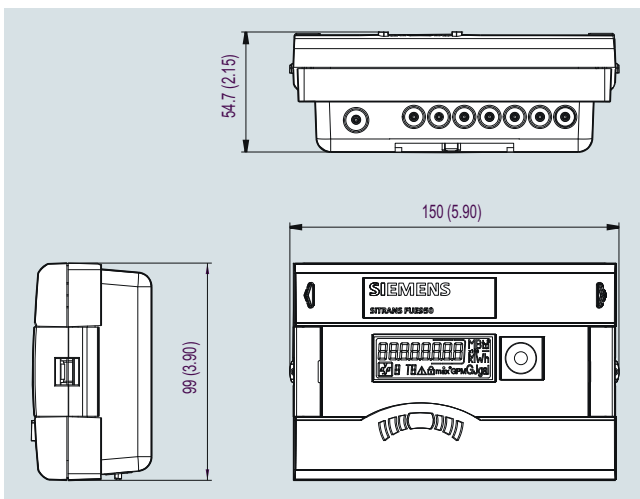


SITRANS FUE950, dimensions in mm (inch)

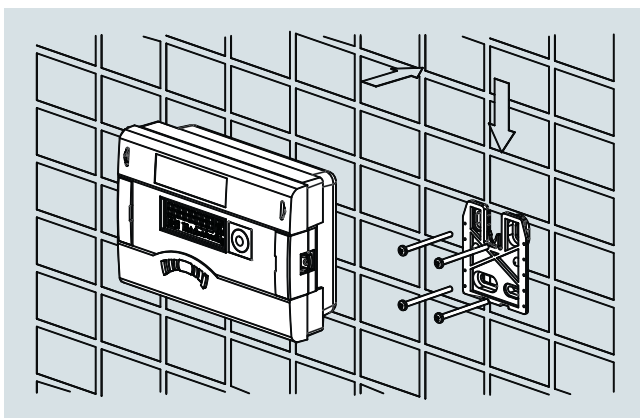

Wall mounting

**Circuit diagrams**

**Electrical connection for SITRANS FUS380/FUE380/FUE950 and MAG 5000/6000/FUE950**

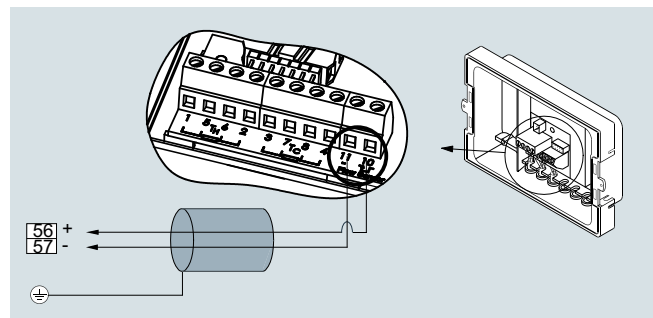

The diagram shows the connection between SITRANS FUE950 (terminals 10 and 11) and FUS380/FUE380 and MAG 5000/6000 (terminals 56 and 57). Temperature sensors must be connected to terminals 5 (1) and 6 (2) ( $T_H$ ) and 7 (3) and 8 (4) ( $T_C$ ).

**Note:**

The right flowmeter pulse output value must be equal to the FUE950 pulse input value and must be checked via the user menu of the transmitter MAG 5000/6000 or nameplate of FUE380 or FUS380.

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Inline ultrasonic flowmeters

#### SITRANS FUE950 energy calculator > Pt500 temperature sensor pairs

### Application

The temperature sensor set is designed for use with the Siemens energy calculator type SITRANS FUE950 for measurement of the energy consumption in a district heating or cooling net.

Temperature sensors are one of the integral components of every thermal energy meter in heating or cooling applications. They are used for determining temperature changes in fluids due to energy taken from or supplied to the loop. The temperature is thus measured by mounting temperature sensors upstream and downstream from the point where the exchange in the thermal energy of the system is.

To ensure an accurate measurement of the temperature difference according to MID (EN 1434) or PTB K7.2 the sensors are delivered as matched pairs.

By selection with the corresponding order code the Pt500 sensor pair sets can be delivered with heating approval or with approvals for combined heating/cooling applications.

### Technical specifications

#### Temperature sensor pairs

##### 2-wire Pt500

Pt500 2-wire temperature sensor pair (EN 1434)	
Measuring insert	Pt500 temperature sensor, EN 60751, tolerance class B, 2-wire
Pairing	Paired to EN 1434 (10 ... 130 °C/14 ... 266 °F)
Media temperature	0 ... 150 °C (32 ... 302 °F)
Response time $T_{0.5}$	See sensor pocket specifications
Medium	Typically heating water
Pressure rating	See sensor pocket specifications
Protection	IP65
Pipe material	AISI 304 Ti/1.4303
Dimension	Ø 6 mm
Sensor tube length	50 m
Cable length	Up to 10 m (32.8 ft), fixed connected silicon cable, 2 connection wire terminals, terminal sleeves to DIN 46228

##### 4-wire Pt500

Pt500 4-wire temperature sensor pair (with MID and PTB K7.2 approval)	
Measuring insert	Pt500 temperature sensor, EN 60751, tolerance class to ISO 751 Class B; 4-wire
Pairing	Matched paired according to EN 1434 at 10, 75 and 140 °C (50, 167 and 284 °F)
Type approval	MID (DE-06-MI004-PTB011) and PTB K7.2 (PTB 22.77/09.01). Only to be mounted with related sensor pockets according to the type approvals.
Media temperature	0...150 °C (32 ... 302 °F)
Permissible temp. pair range for $\Delta T$	
• Heating	3 ... 150 K
• Cooling	3 ... 85 K
Medium	Approved for heating/cooling water
Protection	IP65
Environment	
• Meachnic class	M3
• Electromagnetic class	E1 (MID)
Pressure rating	See sensor pocket specifications
Material	
• Protective tube	Stainless steel AISI 304Ti/1.4571 (or similar), diameter of protective tube: 6 mm
• Connector cable	Silicon cable, 4 connection wire terminals, terminal sleeves to DIN 46228
Sensor tube length	140 or 230 mm (5.51 or 9.06 inch)
Cable length	5 m (16.4 ft), fixed connected

#### Sensor pockets

Stainless steel sensor pocket (for 4-wire Pt500 types only - standard)	
Media temperature	0 ... 150 °C (32 ... 302 °F)
Approval	Approved only together with 4-wire sensors
Medium	Approved for heating/cooling water; up to max. 5 m/s flow velocity
Pressure rating	PN 40
Length	Face-to-face length 120/135 and 210/225 mm (4.72"/5.23" and 8.27"/8.86")
External diameter	Protective tube 8/11 mm (0.32"/0.43")
Internal diameter	Protective tube 6 mm (0.24")
Pipe connection	Thread G 1/2" (with sealing screw for sensor)
Material	Protective tube AISI 316Ti/1.4571 (or similar)
Use	<ul style="list-style-type: none"> <li>• Use with related 4-wire Pt500 sensors only (according type approval)</li> <li>• For flow velocities up to 5 m/s</li> <li>• Recommended to install with welded sleeve (according to EU standard)</li> </ul>

#### Stainless steel sensor pocket (for 2-wire Pt500 types only, some only available as spare parts)

Media temperature	0 ... 180 °C (32 ... 356 °F)										
Medium	Approved for heating water										
Response time $T_{0.5}$	Typically 13 s at 0.4 m/s without pasta Typically 5 s at 0.4 m/s with pasta										
Pressure rating	PN 25										
Length	<table border="1"> <tr> <td>L1 (mm)</td> <td>92</td> <td>127</td> <td>168</td> <td>223</td> </tr> <tr> <td>L (mm)</td> <td>82</td> <td>117</td> <td>155</td> <td>210</td> </tr> </table>	L1 (mm)	92	127	168	223	L (mm)	82	117	155	210
L1 (mm)	92	127	168	223							
L (mm)	82	117	155	210							
Material	Stainless steel: AISI 316Ti/1.4571										
Use	For 2-wire Pt500 types only										


#### Brass sensor pocket (for 2-wire Pt500 types only, some only available as spare part)

Media temperature	0 ... 150 °C (32 ... 302 °F)								
Medium	Approved for heating water								
Response time $T_{0.5}$	Typically 9 s at 0.4 m/s without pasta Typically 5 s at 0.4 m/s with pasta								
Pressure rating	PN 16								
Length	<table border="1"> <tr> <td>L1 (mm)</td> <td>47</td> <td>92</td> <td>127</td> </tr> <tr> <td>L (mm)</td> <td>40</td> <td>82</td> <td>117</td> </tr> </table>	L1 (mm)	47	92	127	L (mm)	40	82	117
L1 (mm)	47	92	127						
L (mm)	40	82	117						
Material	Brass: CuZn <sub>40</sub> Pb <sub>2</sub> (Ms58)								
Use	For 2-wire Pt500 types only								



**Dimensional drawings**

**Pt500 2-wire temperature sensor pair (EN 1434)**

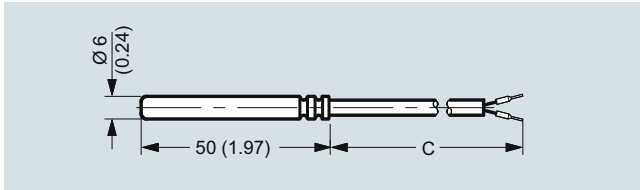


Pt 500 2-wire temperature sensor, dimensions in mm (inch)

**Pt500 temperature sensor pair (EN 1434)**


Cable length 2, 3, 5 or 10 m ('C' at the dimensional drawing)

**Pt500 4-wire temperature sensor pair (with MID and PTB K7.2 approval)**

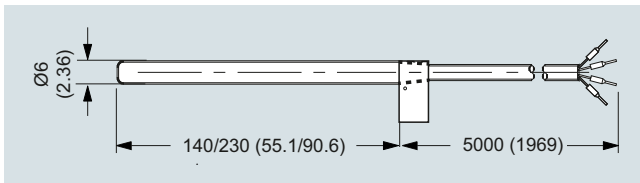

Pt500 4-wire temperature sensor, dimensions in mm (inch)

**Stainless steel sensor pocket (for 2-wire Pt500 types only, some only available as spare parts)**

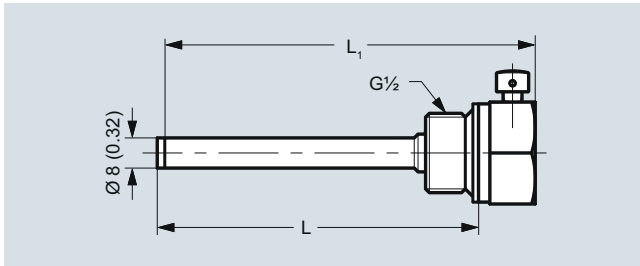


Sensor pocket (for 2-wire Pt500 types only), stainless steel, dimensions in mm (inch)

**Stainless steel sensor pocket (for 2-wire Pt500 types only)**


Length	L1 (mm)	92	127	168	223
	L (mm)	82	117	155	210

**Stainless steel sensor pocket (for 4-wire Pt500 types only - standard)**

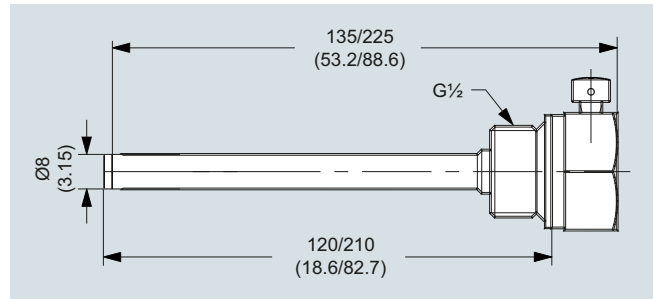

Stainless steel sensor pocket, dimensions in mm (inch)

**Brass sensor pocket (for 2-wire Pt500 types only, some only available as spare part)**

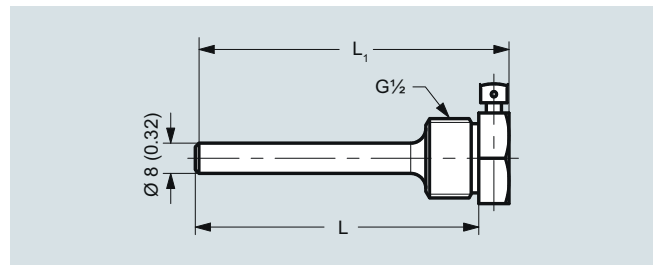

Sensor pocket, brass (for 2-wire Pt500 types only), dimensions in mm (inch)

**Brass sensor pocket for 2-wire Pt500 types only)**

Length	L1 (mm)	47	92	127
	L (mm)	40	82	117

## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

### SITRANS FS230 ultrasonic flowmeter

#### Overview



SITRANS FST030 with FSS200 and external DSL

SITRANS FS clamp-on ultrasonic flowmeters provide highly accurate measurement while minimizing installation time and maintenance expense.

#### Benefits

- Easy installation; no need to cut pipe or stop flow
- Minimal maintenance; external sensors do not require periodic cleaning
- No moving parts to foul or wear
- No pressure drop or energy loss
- Wide turn-down ratio
- Single or dual path with internal DSL, up to four paths with external DSL option

#### System performance

Approvals	<ul style="list-style-type: none"> <li>• ATEX Zone 2 (Sensors: Zone 0, 1, 2)</li> <li>• IIECEx Zone 2 (Sensors: Zone 0, 1, 2)</li> <li>• FM/FMc Class I Div. 2 (Sensors: Class I Div. 1)</li> </ul>
Accuracy	± 0.5 ... 1 % for velocities above 0.3 m/s and >10 diameters straight run
Repeatability	± 0.25 % (based on ISO 11631)
Pipe size range	12.7 ... 10 m (0.5 ... 394")
Wall Thickness Range	0.64 ... 76.2 mm (0.025 ... 3.0")
Pipe material	Any sonically conductive material (steel, plastic, aluminum, glass, cement, ductile iron, copper)
Optional External DSL	Zone 0, 1, 2, Class 1 Div. 1 with transmitter in Zone 2 Class 1 Div 2 area

#### Optional External DSL

The optional external DSL allows for additional flexibility in application configurations. The External DSL benefits include:

- Measurement of 1-4 paths
- 2 x additional analog inputs, RTD or current
- Up to 150 m cable from DSL to transmitter (connection from zone 0,1 area to zone 2 area)

#### Applications

SITRANS FS230 standard functions are suitable for a wide variety of liquid applications, including the following:

- Water industry
  - Raw water
  - Potable water
  - Chemicals
- Wastewater industry
  - Raw sewage
  - Effluent
  - Sludges
  - Mixed liquor
  - Chemicals
- HVAC industry
  - Condensers
  - Hot and cold water systems
- Power industry
  - Nuclear
  - Fossil
  - Hydroelectric
- Processing industry
  - Process control
  - Batching
  - Rate indication
  - Volumetric and mass measurement

SITRANS FS230 hydrocarbon functions are ideal for applications carrying crude oil, refined petroleum or liquefied gas.

#### Standard volume (high end system)

- Standard (net) volume flow measurement
- Suitable for use in leak detection systems
- Mass flow output measurement
- Chemical and petrochemical processing
- Precise identification of interfaces on multi-liquid pipelines
- Product identification
- Standard density indication
- Applications with multiple liquids having a wide viscosity range
- Automatic gross volume compensation due to viscosity

SITRANS FS230 is ideal for most natural and process gas industry applications, including:

- Checkmetering
- Allocation
- Flow survey verification
- Lost and unaccounted for (LAUF) gas analysis
- Production
- Storage

The FS230 can be supplied with an external DSL option that allows for up to four paths with two additional analog inputs. The External DSL enclosure can be installed in a Zone 1 or Div 1 area near the sensors and measurement pipe using short sensor cables, with communication cable to transmitter up to 150 meters away.

**Overview** (continued)**System information and selection guide**

SITRANS FS clamp-on flowmeters	FS230 (Standard)	FS230 (Hydrocarbon)	FS230 (Gas)
<b>Industry/Applications</b>			
Water and aqueous solutions	X		
Utility district heating, cooling	X		
Chemical	X		
Hydrocarbons/petrochemical, multiple products or varying viscosity, liquefied gases, net and gross volume		X	
Hydrocarbons (single product with limited viscosity range) gross volume	X	X	
Very low flow (< 0.1 m/s) in small pipes	X		
High temperature applications < 232 °C (450 °F)	X	X	
Refrigeration liquids	X		
Food products	X		
Natural gas			X
Other gases i.e. propane, oxygen, argon etc.			X
<b>Design</b>			
Field clamp-on (non-intrusive)	X	X	X
Standard volume or mass flow; per API MPMS chapter 11.1		X	X
Interface detection		X	X
Standard density output		X	X
Temperature measurement	X	X	X
Analog input	X	X	X
Large graphical display	X	X	X
Configuration and diagnostic software PDM compatible	X	X	X
<b>Number of acoustic paths and channels</b>			
1-path	X	X	X
2-path	X	X	X
3-path (with external DSL)	X	X	X
4-path (with external DSL)	X	X	X
<b>Size</b>			
12.7 ... 10 000 mm (0.5" ... 394")	X		
38 ... 10 000 mm (1.5" ... 394")		X	
38 ... 1 200 mm (1.5" ... 48")			X
<b>Approvals</b>			
FM/FMc <sup>1)</sup>	X	X	X
ATEX	X	X	X
UL/ULc	X	X	X
IECEX	X	X	X

<sup>1)</sup> Nema 4X associated equipment in DIV 2 connected to DIV 1 sensors and DIV 1 external DSL.

## Flow Measurement

SITRANS FS (ultrasonic)


Clamp-on ultrasonic flowmeters

### SITRANS FSS200 ultrasonic flow sensor

#### Function

##### Operating Principle

The SITRANS FS system is a transit-time ultrasonic meter that provides exceptional performance using a non-intrusive clamp-on approach. Ultrasonic sensors transmit and receive acoustic signals directly through the existing pipe wall, where the fluid refraction angle is governed by Snell's law of refraction.

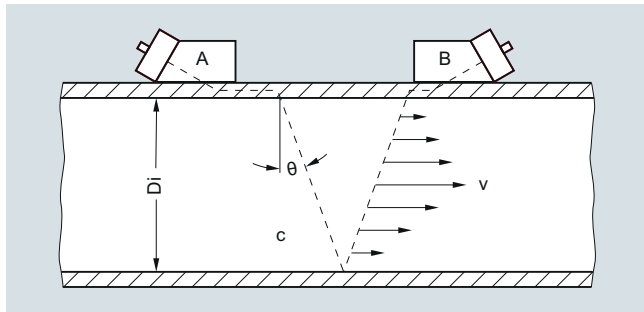

Clamp-on sensor mounted in a reflect configuration

The beam refraction angle is calculated as follows:

$$\sin \theta = c / V_{\phi}$$

$c$  = Velocity of sound in fluid

$V_{\phi}$  = Phase velocity (a constant in the pipe wall)

The flowmeter automatically compensates for any change in fluid sound velocity (or beam angle) in response to variations in the average transit time between sensors A and B. By subtracting the computed fixed times (within the sensors and pipe wall) from the measured average transit time, the meter can then infer the required transit time in the fluid ( $T_{\text{Fluid}}$ ).

The sound waves traveling in the same direction as the flow ( $T_{A,B}$ ) arrive earlier than sound waves traveling against the direction of flow ( $T_{B,A}$ ). This time difference ( $\Delta t$ ) is used to compute the line integrated flow velocity ( $v$ ) as shown in the equation below:

$$v = V_{\phi} / 2 \cdot \Delta t / T_{\text{Fluid}}$$

Once the raw flow velocity is determined, the fluid Reynolds Number ( $Re$ ) must be determined to properly correct for fully developed flow profile. This requires the entry of the fluid's kinematic viscosity ( $\text{visc}$ ) as shown in the equations below, where  $Q$  represents the final flow profile compensated volumetric flow rate.

$$Re = Di \cdot v / \text{visc} \cdot Q = K(Re) \cdot (\pi / 4 \cdot Di^2) \cdot v$$

$v$  = Flow velocity

$\text{visc} = \mu / \rho$  = (dynamic viscosity / density)

$K(Re)$  = Reynolds flow profile compensation

In wetted type ultrasonic flowmeters the meter constants are configured prior to leaving the factory. As this is not possible with clamp-on meters, the settings must be made by the customer at the time of installation. These settings include pipe diameter, wall thickness, liquid viscosity, etc.

SITRANS clamp-on flowmeters that include temperature sensing can be configured to dynamically infer changes in fluid viscosity for the purpose of computing the most accurate flow profile compensation ( $K_{Re}$ ).


##### Ultrasonic sensor types

Two basic types of clamp-on sensors can be selected for use with the SITRANS FS flowmeter. The lower cost "universal" sensor is the most common type in the industry and is suitable for most single liquid applications where the sound velocity does not vary much. This sensor type can be used on any sonically conductive pipe material (including steel) making it well suited for portable survey applications. Universal sensors are selected

based on the pipe diameter range alone, so wall thickness is less important to the selection process.

The second sensor type is the "WideBeam" sensor (called high precision), which utilizes the pipe wall as a kind of waveguide to optimize the signal to noise ratio and provide a wider area of vibration. This makes this kind of sensor less sensitive to any change in the fluid medium.


The WideBeam sensor is designed for steel pipes, but can also be used with aluminum and titanium. It is the preferred sensor for HPI applications. Note that unlike the universal type, this sensor selection is dependent only on the pipe's wall thickness.

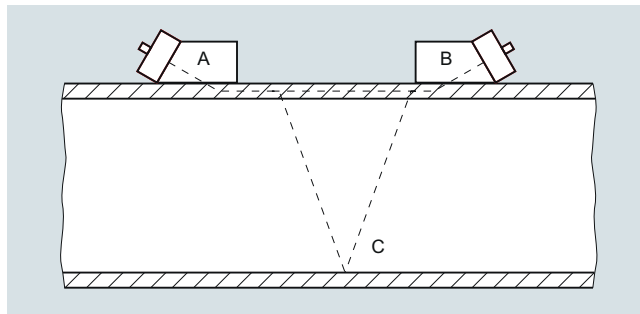

##### Multi-path flowmeters

For improved flow profile averaging, redundancy or better cost per measurement, clamp-on meters can be supplied with 1, 2, 3 or 4 path measurement systems.

In the standard FS230 systems, these can be installed on a single pipe as shown below (four paths on same pipe).

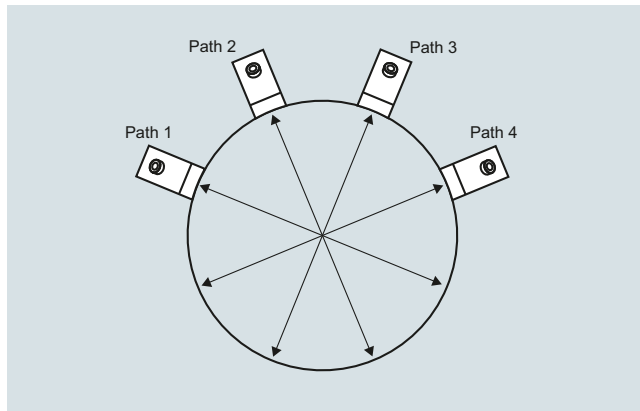

Four path installation example

#### Function (continued)

##### SITRANS meter family description

###### SITRANS FS230 clamp-on flowmeters

The FS230 system is a basic function, permanent (or dedicated) Clamp-on meter that is available with a full range of safety approvals and I/Os. This meter can be used in a wide range of applications.

##### FST030 transmitter standard flow functions

When configured with standard flow functions, the FST030 transmitter is typically programmed with a fixed viscosity and specific gravity entry, which can limit the mass flow and volumetric flow accuracy when highly variable (multi-product) liquid properties flow through the same pipeline.

It will have the ability to accommodate clamp-on RTDs, or analog input from a temperature transmitter.

##### FST030 hydrocarbon flow functions

When configured with hydrocarbon functions, the FST030 can be used for applications that will flow a wide range of viscosity with a standard volume (mass) and interface detection functions available. All functions rely on a variable referred to as "Liquident (TM)", which is used to infer the liquid's viscosity and density. This variable represents the measured liquid sonic velocity compensated by the operating temperature and pressure, so for a given liquid product the measured Liquident (TM) output will remain constant over a wide range of pressure or temperature.

##### Standard volume description:

This Liquident (TM) variable can also be used to identify the liquid flowing through the pipe as well as its physical properties (density, viscosity and compressibility) at base conditions. With this information the meter can be configured to output a temperature and pressure compensated (standard) volume flow rate using the API MPMS chapter 11.2.1 methods as shown below.

##### Correction for temperature:

Compute thermal expansion coefficient ( $\alpha_b$ ):

$$\alpha_b = KO / \rho_b^2 + K1 / \rho_b$$

where: KO and K1 are constants dependent on type of liquid and  $\rho_b$  is the liquid density at base conditions

Compute temperature correction factor ( $K_T$ ):

$$K_T = \rho_b * \text{EXP}(-\alpha_b \Delta T (1 + 0.8 \alpha_b \Delta T))$$

where:  $\Delta T = (T - \text{base temperature})$

##### Correction for pressure:

Compute compressibility factor (F):

$$F = \text{EXP}(A + B T + (C + D T) / \rho_b^2)$$

where: A, B, C and D are constants, and "T" is liquid temperature

Compute pressure correction factor ( $K_p$ ):


$$K_p = 1 / (1 - F (P_{\text{act}} - P_{\text{base}}) * 10^{-4})$$

**Final volume correction:**  $Q_{\text{std}} = Q_{\text{act}} * K_t * K_p$

Available outputs from this meter include: API, standard density, mass flowrate, standard volume flowrate and liquid identification.

##### General installation guidelines for transit time clamp-on sensor

- Minimum measuring range: 0 to  $\pm 0.3$  m/s velocity (see meter accuracy graph below for more detail)
- Maximum measuring range: 0 to  $\pm 12$  m/s ( $\pm 30$  m/s for high precision sensors). Final flow range determination requires application review

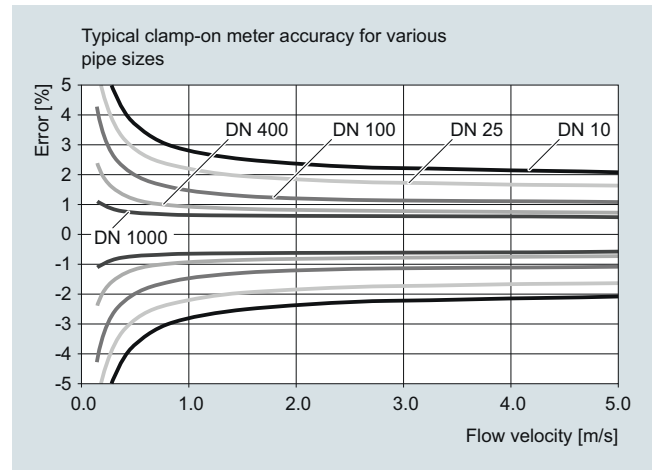

- Pipe must be completely full within the sensor installation volume for accurate flow measurement
- Typical MINIMUM straight pipe requirements are: 10 Diameters upstream/5 Diameters downstream. Additional straight run is required for double out-of-plane elbows and partially open valves.
- Sensors should be installed at least 20° off vertical for horizontal pipes. This reduces the chance of beam interference from gas buildup at the top of the pipe
- Operation inside the Reynolds transition region, between  $1000 < Re < 5000$  should be avoided for best accuracy
- Submersible and direct burial installations can be accommodated. Consult sales representative for details
- Ultrasonic coupling compound is provided with all sensor orders. Insure that a permanent coupling compound is used for long term installations
- Refer to the "Sensor type selection guide" to insure proper application of the equipment

## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

### SITRANS FSS200 ultrasonic flow sensor

Function (continued)

#### Sensor type selection guide



Considerations for sensor selection	Standard sensor supported in MLFB		Notes
	High precision	Universal	
<b>Media</b>			
General survey (clean liquids) on non-steel pipes		X	
General survey (clean liquids) on a limited range of steel pipes	X		
Moderately aerated liquid or slurry, up to 121 °C (250 °F)	X		
Permanent installation on steel pipe (clean liquids and gases)	X		
Installation in offshore or corrosive environment	X <sup>1)</sup>	X <sup>2)</sup>	Sensor size C/D/E come standard as corrosion resistant. Size A and B optional stainless steel
Liquid temperature greater than 120 °C (248 °F)	O	X	FSS200 high temperature metal block sensors (up to 232 °C (450 °F))
Operation on single pipeline flowing multiple products	X	O	
<b>Pipe material</b>			
Steel	X		
Steel pipe with diameter/wall thickness ratio <10	O	X	
Non-steel pipe material (copper, ductile iron, cast iron, etc.)	O	X	High precision sensors can also be used on plastic and aluminum pipes in special cases
Wall thickness > 31.75 mm (1.25")	O	X	

O = not suitable X = preferred choice

<sup>1)</sup> For steel and stainless steel pipes only

<sup>2)</sup> Not preferred for steel pipes

#### Definitions

Sensor chart	Description
FSS200	Formerly 1011 clamp-on sensors of the 1010 systems
Standard	Standard system sensor, selectable as part of a configured product
Special	Sensors available for non-standard applications and pipes. Contact tech support for application use
Corrosion resistant	Stainless steel metal parts on all Size C, D and E and all high temperature sensors
Aluminum	Aluminum metal parts on all HP and Universal size A and B (Corrosion resistant on request for size B)
Spare	Not available as part of a configured product, must be ordered separately
CE	Transmitter and sensors certified for sale in the EU
Trackless mount	Sensors fixed only by straps, no other mounting (spacer bar as an option) - not recommended
Tracks	Permanent installation for universal size A/B, high precision size A/B and all sizes of high temperature. Tracks always come as dual-part for either direct or reflect mounting, and always with straps.
Frames	Three sizes, for permanent installation for universal size C/ D/ E, and for high precision size C/D. For universal and high precision size B available for pipes > 125 OD (Spare)
T1	Usable from -40 ... +120 °C (-40 ... +248 °F), but best for Ø temperature below 80 °C (< 176 °F), standard
T2	Usable from -40 ... +120 °C (-40 ... +248 °F), but best for Ø temperature above 80 °C (> 176 °F)
Submersible	Sensors can be used submerged; adding Denso for supplemental protection is recommended

## Function (continued)

## Sensor availability guide

Sensor models	Availability											
	Standard	Spare only	ATEX/FM/FMc/IECEX	Corrosion resistant	Trackless	Tracks	Frames	High precision mount	T1 best use < 80 °C (176 °F)	T2 best use > 80 °C (176 °F)	Submersible	Catalog
<b>FSS200 Universal Sensor -40 ... 120 °C (-40 ... +248 °F) Polyetherimide - stainless steel housing CE IP68</b>												
A1 Universal for pipe OD – 5.8 ... 50.8 mm (0.23" ... 2")		X	X	X	X <sup>1)</sup>	X					X	
A2 Universal for pipe OD – 12.7 ... 50.8 mm (0.5" ... 2")	X		X	X	X <sup>1)</sup>	X					X	X
B1 Universal for pipe OD – 12.7 ... 76 mm (0.5" ... 3")		X	X	X	X <sup>1)</sup>	X	X				X	
B2 Universal for pipe OD – 12.7 ... 76 mm (0.5" ... 3")		X	X	X	X <sup>1)</sup>	X	X				X	
B3 Universal for pipe OD – 19 ... 127 mm (0.75" ... 5")	X		X	X	X <sup>1)</sup>	X	X				X	X
C1 Universal for pipe OD – 51 ... 254 mm (2" ... 10")		X	X	X	X		X				X	
C2 Universal for pipe OD – 51 ... 254 mm (2" ... 10")		X	X	X	X		X				X	
C3 Universal for pipe OD – 51 ... 305 mm (2" ... 12")	X		X	X	X		X				X	X
D1 Universal for pipe OD – 102 ... 508 mm (4" ... 20")		X	X	X	X		X				X	
D2 Universal for pipe OD – 152 ... 610 mm (6" ... 24")		X	X	X	X		X				X	
D3 Universal for pipe OD – 203 ... 610 mm (8" ... 24")	X		X	X	X		X				X	X
*E1 Universal for pipe OD – 254 ... 3048 mm (10" ... 120")		X	X	X	X		X				X	
*E2 Universal for pipe OD – 254 ... 6096 mm (10" ... 240")	X		X	X	X		X				X	X
*E3 Universal for pipe OD – 304 ... 10007 mm (12" ... 394")		X	X	X	X		X	X			X	
<b>FSS200 High Precision Sensor -40 ... +120 °C (-40 ... +248 °F) Polyetherimide - stainless steel housing T1/T2 CE IP68</b>												
A1H (High Precision) for pipe WT - 0.64 ... 1.0 mm (0.025" ... 0.04")		X	X	X	X <sup>1)</sup>	X			X		X	X
A2H (High Precision) for pipe WT - 1.0 ... 1.5 mm (0.04" ... 0.06")	X		X	X	X <sup>1)</sup>	X			X		X	X
A3H (High Precision) for pipe WT - 1.5 ... 2.0 mm (0.06" ... 0.08")	X		X	X	X <sup>1)</sup>	X			X		X	X
B1H (High Precision) for pipe WT - 2.0 ... 3.0 mm (0.08" ... 0.12")	X		X	X	X <sup>1)</sup>	X	X		X	X	X	X
B2H (High Precision) for pipe WT - 3.0 ... 4.1 mm (0.12" ... 0.16")	X		X	X	X <sup>1)</sup>	X	X		X	X	X	X
B3H (High Precision) for pipe WT - 2.7 ... 3.3 mm (0.106" ... 0.128")		X	X	X	X <sup>1)</sup>	X	X		X	X	X	X
C1H (High Precision) for pipe WT - 4.1 ... 5.8 mm (0.16" ... 0.23")	X		X	X	X		X	X	X	X	X	X
C2H (High Precision) for pipe WT - 5.8 ... 8.1 mm (0.23" ... 0.32")	X		X	X	X		X	X	X	X	X	X
* D1H (High Precision) for pipe WT - 8.1 ... 11.2 mm (0.32" ... 0.44")	X		X	X	X		X	X	X	X	X	X
* D2H (High Precision) for pipe WT - 11.2 ... 15.7 mm (0.44" ... 0.62")	X		X	X	X		X	X	X	X	X	X
* D3H (High Precision) for pipe WT - 7.4 ... 9.0 mm (0.293" ... 0.354")		X	X	X	X		X	X	X	X	X	X
* D4H (High Precision) for pipe WT - 15.7 ... 31.8 mm (0.62" ... 1.25")	X		X	X	X		X	X	X	X	X	X
<b>FSS200 High Temperature Universal Sensor -40 ... +230 °C (-40 ... +446 °F)</b>												
High Temperature size 1 ... 230 °C (Ø 12.7 ... 100 mm)		X	X	X		X						
High Temperature size 2 ... 230 °C (Ø 30 ... 200 mm )	X		X	X		X						X
High Temperature size 3 ... 230 °C (Ø 150 ... 610 mm)	X		X	X		X						X
High Temperature size 4 ... 230 °C (Ø 400 ... 1200 mm)	X		X	X		X						X
High Temperature size 2A ... 230 °C (Ø 30 ... 200 mm)		X	X	X		X						
High Temperature size 3A ... 230 °C (Ø 150 ... 610 mm)		X	X	X		X						
High Temperature size 4A ... 230 °C (Ø 400 ... 1200 mm)		X	X	X		X						

<sup>1)</sup> Usable, but not recommended for selection.

**Flow Measurement**

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

**SITRANS FSS200 ultrasonic flow sensor****Function** (continued)**Sensor mounting availability guide**

	Sensor		
	FSS200 Dedicated Universal	FSS200 Dedicated High precision	FSS200 High temperature Universal
<b>Mounting</b>			
Trackless <sup>1)</sup>	X	X	
Tracks universal dedicated	X		
Tracks HP dedicated		X	
Frames universal dedicated	X		
Frames HP dedicated		X	
Tracks high temperature universal			X
High precision mounting single enclosure		X	
High precision mounting dual enclosure		X	
SpacerBar	X	X	
Straps	X	X	X
Denso	X	X	

<sup>1)</sup> Usable but not recommended



## Overview



FST030 is based on the latest developments within Digital Signal Processing (DSP) technology – engineered for high measuring performance, fast response to step changes in flow, high immunity against process noise, easy to install commission and maintain.

The FST030 transmitter delivers true multi-parameter measurements i.e. volume flow, standard volume flow, density, mass flow, fluid sound velocity and temperature.

The multiple outputs and bus communication mean that all primary process information can be read either instantaneously (10 ms update) or periodically as required by plant operations.

### Process values

- Volume flow
- Mass flow
- Flow velocity
- Sound velocity
- Standard volume flow (hydrocarbon variant only)
- Density
- Kinematic viscosity
- Pressure
- Medium temperature
- Specific gravity (hydrocarbon variant only)
- Totalizer 1
- Totalizer 2
- Totalizer 3
- Standard density (hydrocarbon variant only)
- Standard specific gravity (hydrocarbon variant only)
- Standardizing factor (hydrocarbon variant only)
- Liquident (hydrocarbon variant only)
- API gravity (hydrocarbon variant only)
- Standard API gravity (hydrocarbon variant only)
- Standard kinematic viscosity (hydrocarbon variant only)
- Liquid identifier (hydrocarbon variant only)

## Benefits

### Flow calculation and measurement

- Dedicated volume flow calculation with DSP technology
- 100 Hz update rate for all output on all primary process values
- Maximum data age from sensor to output is 20 ms
- Independent low flow cut-off settings for volume and mass flow, standard volume flow and velocity
- Zero-point adjustment on command from discrete input or host system

### Operation and display

- User-configurable operation display
  - Full graphical display 240 x 160 pixels with up to 6 programmable views
  - Self-explaining alarm handling/log in clear text
  - Help text for all parameters appears automatically in the configuration menu
- SensorFlash technology stores production specific system documentation and provides removable memory of all flowmeter setups and functions
  - Calibration certificates (with ordered calibration)
  - Non-volatile memory backup of operational data
  - Transfer of user configuration to other flowmeters
  - 4GB SD card for storage and data logging
  - Audit trail of all parameter changes
  - Alarm logging

### Alarms and safety

- Advanced diagnosis and service menu enhances troubleshooting and meter validation
- Configurable upper and lower alarm and warning limits for all process values
- Alarm handling can be selected between Siemens and NAMUR standard configurations

### Outputs and control

- Monitoring comprising of 3 individually configurable totalizers
- Multi-parameter outputs, configurable outputs assigned individually to any of the following parameters:
  - Volume flow
  - Standard volume flow
  - Mass flow
  - Flow velocity
  - Sound velocity
  - Density
  - Process viscosity
  - Process pressure
  - Process/medium temperature

Up to six I/O channels are configured as follows.

#### Channel 1

Channel 1 is 4 to 20 mA analog output with HART 7.5. The current signal can be configured for massflow, volume flow and includes the availability of active or passive function selected by wiring on the non-Ex terminals. Alternative Modbus RTU RS 485 is available.

#### Channel 2

Channel 2 is a signal output which can be freely configured for any process variable.

- Analog current (0/4 to 20 mA)
- Frequency or pulse
- Operational and alarm status

#### Channels 3 and 4

Channels 3 and 4 can be ordered with signal (freely configured for any process variable) or relay outputs, or signal input.

## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

### SITRANS FST030 transmitter, wall mount housing

#### Benefits (continued)

##### Signal output

Signal output can be user configured to:

- Analog current (0/4 to 20 mA)
- Frequency or pulse
- Redundant frequency or pulse (linked to channel 2)
- Operational and alarm status

##### Signal input

Signal input can be user-configured for:

- Totalizer reset functions
- Force outputs or freeze process values
- Initiate automatic zero point adjustment

##### Relay

Relay output(s) can be user configured to:

- Alarm status

4-20 mA signal outputs and inputs are ordered as active or passive for Ex versions, active and passive for non-Ex versions - function selected by wiring on the terminals.

During initial commissioning of the flowmeter, all outputs can be forced to a preset value for simulation, verification or calibration purposes.

##### Channels 5 and 6 (with internal DSL)

- RTD temperature inputs for 1000, 500 or 100  $\Omega$  RTD's - 2, 3 or 4 wire RTD's supported
- Channels 5 and 6 (with external DSL option)
- RTD Temperature inputs or 4-20 ma inputs. Selectable in menu.

##### Approvals and certificates

The SITRANS FST030 transmitter was designed to comply with or exceed the requirements of international standards and regulations.

#### Design

The SITRANS FST030 is designed in an IP67/Nema 4X aluminum enclosure with corrosion resistant coating. It can be wall or pipe mounted and the enclosure can be locked with a padlock or wired with lead security seals. Includes all flow and DSL functions integrated into one unit.

The FST030 is available as standard with one current, HART 7.5 output and can be ordered with additional input/output functions.

The transmitter has a modular design with discrete, replaceable electronic modules and connection boards to maintain separation between functions and facilitate field service. All modules are fully traceable and their provenance is included in the transmitter setup.

##### SensorFlash

SensorFlash is a standard, 4 GB micro SD card with the ability to be updated by PC. It is supplied with each transmitter and comes with a complete set of certification documents including report if ordered. Factory conformance certificates are optional at ordering.

The Siemens SensorFlash memory unit offers the following features and benefits:

- Copy site setups to SD card for easy transfer to other similar transmitters
- Permanent database of operational and functional information from the moment that the flowmeter is switched on
- New firmware updates can be downloaded from the Siemens internet portal for Product Support and placed onto SensorFlash (unmounted from the transmitter and inserted into a PC's SD card slot). The firmware is then inserted into the existing flowmeter for system/firmware upgrade.

#### Function

The following functions are available:

- Up to four configurable outputs and 2 RTD input channels selected at ordering
- Outputs can be individually configured for mass flow, volume flow etc.
- Three built-in totalizers which can count positive, negative or net flows
- Independent low flow cut-offs, adjustable
- Uni/bidirectional flow measurement
- Flow direction adjustable
- Alarm system consisting of alarm-log, alarm pending menu
- Change log, logs all changes made to menu parameters or via communications
- Internal data logger
- Display of operating time with real-time clock
- Flowrate outputs are freely configurable between maximum negative and maximum positive flows according to the sensor capacity
- Limit switches programmable for flow, density and temperature. Limit points can be graded as warning and alarm for values both above and below nominal process conditions
- Zero adjustment menu, with zero point evaluation display
- Full service menu for effective and straight forward application and meter troubleshooting
- Precise temperature measurement ensures optimal accuracy on massflow and density
- Fully compatible with Siemens PDM version 8.2 service pack 1 or higher

# Flow Measurement

## SITRANS FS (ultrasonic)

### Clamp-on ultrasonic flowmeters

#### SITRANS FST030 transmitter, wall mount housing

#### Technical specifications

<b>Process media</b>	<ul style="list-style-type: none"> <li>• Suitable for virtually any sonically conductive fluid, including hazardous liquids</li> <li>• Aggregate state: Light slurry and liquid</li> </ul>
<b>Process variables</b>	<ul style="list-style-type: none"> <li>• Volume flow</li> <li>• Mass flow</li> <li>• Flow velocity</li> <li>• Sound velocity</li> <li>• Standard volume flow (hydrocarbon variant only)</li> <li>• Density</li> <li>• Kinematic viscosity</li> <li>• Pressure</li> <li>• Medium temperature</li> <li>• Specific gravity (hydrocarbon variant only)</li> <li>• Totalizer 1</li> <li>• Totalizer 2</li> <li>• Totalizer 3</li> <li>• Standard density (hydrocarbon variant only)</li> <li>• Standard specific gravity (hydrocarbon variant only)</li> <li>• Standardizing factor (hydrocarbon variant only)</li> <li>• Liquident (hydrocarbon variant only)</li> <li>• API gravity (hydrocarbon variant only)</li> <li>• Standard API gravity (hydrocarbon variant only)</li> <li>• Standard kinematic viscosity (hydrocarbon variant only)</li> <li>• Liquid identifier (hydrocarbon variant only)</li> </ul>
<b>Current output</b>	
Current	0 ... 20 mA or 4 ... 20 mA (channel 1 only 4 ... 20 mA)
Load	< 500 Ω per channel
Time constant	0 ... 100 s adjustable
<b>Digital output</b>	
Pulse	41.6 μs ... 5 s pulse duration
Frequency	0 ... 10 kHz, 50 % duty cycle, 120 % overscale provision
Time constant	0 ... 100 s adjustable
Active	0 ... 22 V DC, 30 mA, short-circuit-protected
Passive	3 ... 30 V DC, max. 110 mA
<b>Relay</b>	
Type	SPDT dry contact relay
Load	30 V AC/100 mA
Functions	Alarm level, alarm number, limit, flow direction
<b>Digital input</b>	
Voltage	15 ... 30 V DC (2 ... 15 mA)
Current	4 ... 20 mA
Functionality	Reset totalizer 1, 2 and 3, force output, freeze process values, zero point adjustment

<b>Galvanic isolation</b>	All inputs and outputs are galvanically isolated, isolation voltage 500 V
<b>Alarm and warning limit</b>	Available for all process values
<b>Totalizer</b>	Three counters for forward, net and reverse flow
<b>Display</b>	<ul style="list-style-type: none"> <li>• Background illumination with alpha-numerical text to indicate flow rate, totaled values, settings and faults</li> <li>• Adjustable damping constant of 0 ... 100 s</li> <li>• Reverse flow indicated by negative sign</li> </ul>
<b>SD card functions</b>	<ul style="list-style-type: none"> <li>• Parameter change log</li> <li>• Configurable data logger</li> <li>• FW update log</li> <li>• Diagnostic log</li> <li>• Error and alarm log</li> <li>• Parameter backup</li> </ul>
<b>Ambient temperature</b>	
Operation	
• Transmitter	-40 ... +60 °C (-40 ... +140 °F), (humidity max. 95 %)
• Display	-20 ... +60 °C (-4 ... +140 °F)
Storage	
• Transmitter	-40 ... +70 °C (-40 ... +158 °F) (humidity max. 95 %)
<b>Communication</b>	HART 7.5 Modbus RTU RS 485
<b>Enclosure</b>	
Material	Aluminum
Rating	IP66/67, Nema 4X to IEC 529 and DIN 40050 (1 mH <sub>2</sub> O for 30 min.)
Mechanical load	18 ... 400 Hz random, 3.17 g RMS, in all directions
<b>Power supply</b>	
Universal	20 ... 27 V DC 100 ... 240 V AC, 47 ... 63 Hz
Fluctuation	No limit
Power consumption	20 W/22 VA
<b>Minimum pressure for Gas</b>	7 ... 10 bar (100 ... 145 psi), typical (gas composition and application dependent; plastic pipes support operation at atmospheric pressure)
<b>Environment</b>	
Environmental conditions acc. to IEC/EN/UL 61010-1	<ul style="list-style-type: none"> <li>• Altitude up to 2000 m</li> <li>• Pollution degree 2</li> <li>• Overvoltage category II</li> </ul>
<b>Maintenance</b>	The flowmeter has a built-in error log/pending menu which should be inspected on a regular basis
<b>Cable glands</b>	Cable glands are available in nylon, nickel plated brass or stainless steel (316L/W1.4404)

## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

### SITRANS FST030 transmitter, wall mount housing

#### Technical specifications (continued)

##### Approvals

For non-hazardous area	No approval required
For hazardous area	
<ul style="list-style-type: none"> <li>• ATEX           <ul style="list-style-type: none"> <li>- Sensor</li> <li>- Transmitter with integrated DSL</li> <li>- External DSL</li> </ul> </li> <li>• FM           <ul style="list-style-type: none"> <li>- Sensor</li> <li>- Transmitter</li> <li>- External DSL</li> </ul> </li> <li>• FM Canada           <ul style="list-style-type: none"> <li>- Sensor</li> <li>- Transmitter with integrated DSL</li> <li>- External DSL</li> </ul> </li> <li>• Combination Approval: ATEX, IECEx, FM, FM Canada           <ul style="list-style-type: none"> <li>- Sensor</li> <li>- Transmitter with integrated DSL</li> <li>- External DSL</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Zone 0, 1, 2</li> <li>Zone 2</li> <li>Zone 0, 1, 2</li> <li>Class 1, Div 1, 2</li> <li>Class 1, Div 2</li> <li>Class 1, Div 1</li> <li>Class 1, Div 1, 2 (Zone 0, 1, 2)</li> <li>Class 1, Div 2 (Zone 2)</li> <li>Class 1, Div 1, 2 (Zone 0, 1, 2)</li> <li>Zone 0, 1, 2 (Div 1, 2)</li> <li>Zone 2 (Div 2)</li> <li>Zone 0, 1, 2 (Div 1)</li> </ul>


##### Certificates

CE conformity marking	<ul style="list-style-type: none"> <li>• Low voltage directive</li> <li>• WEEE</li> <li>• RoHS</li> </ul>
-----------------------	---


##### EMC performance

Emission	CISPR 11:2009/A1:2010 and EN 55011:2009/A1:2010
Immunity	IEC/EN 61326-1:2013

#### Dimensional drawing

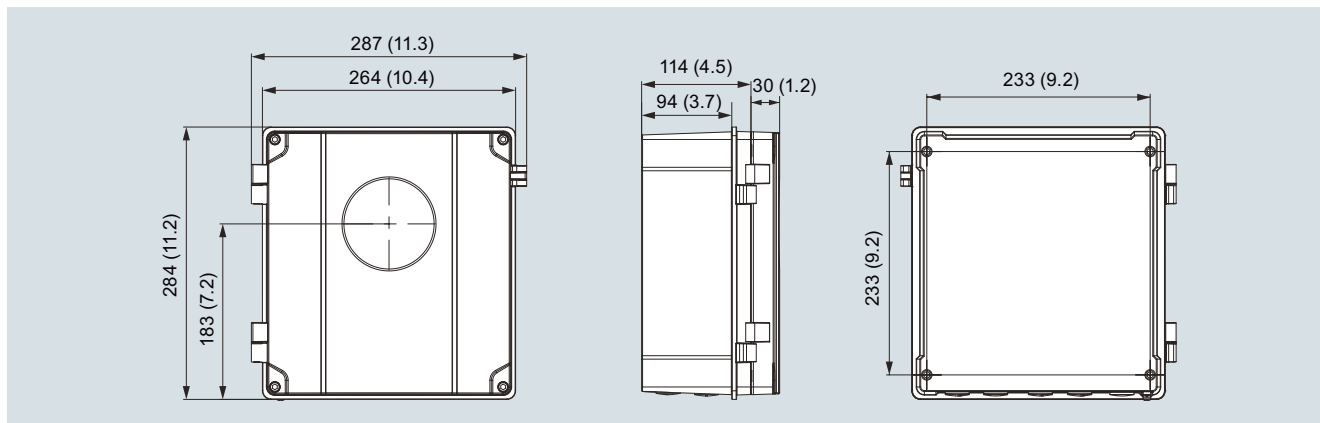

SITRANS FST030, wall mount version, dimensions in mm (inch)

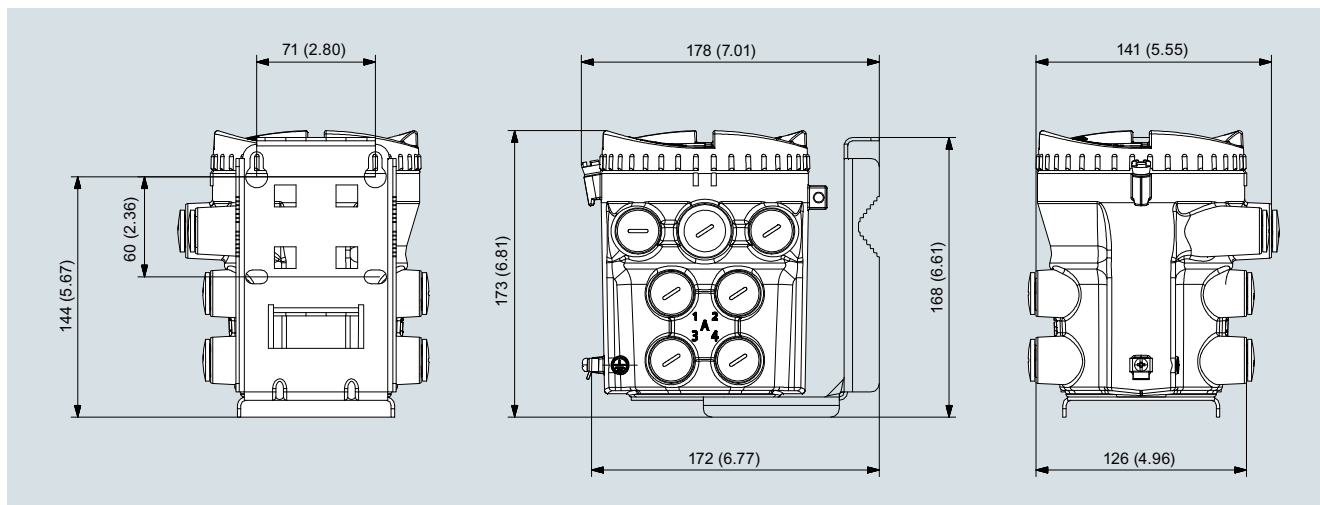

External DSL, dimensions in mm (inch)

# Flow Measurement

## SITRANS FS (ultrasonic)

### Clamp-on ultrasonic flowmeters

#### Selection and ordering data for SITRANS FS230

Selection and ordering data	Article No.	Article No.
<b>SITRANS FS230 clamp-on flowmeter</b>	<b>7ME37</b>	<b>SITRANS FS230 clamp-on flowmeter</b> <b>7ME37</b>
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
<b>Transmitter model</b>		
Transmitter FST030	3	
<b>Pipe material/temperature</b>		
Transmitter only - no sensor	0	
Steel (stainless steel, carbon steel), temperature range: best use < 80 °C (176 °F)	1	
Steel (stainless steel, carbon steel), temperature range: best use > 80 °C (176 °F)	2	
Plastic (PVC) (for gas applications), temperature: -40 ... 65.5 °C (-40 ... 150 °F)	4	
Plastic (PVC) (for liquid applications), temperature: -40 ... +121 °C (-40 ... 250 °F)	6	
Any material, temperature: -40 ... +121 °C (-40 ... 250 °F)	7	
Any material, very high temperature: -40 ... +230 °C (-40 ... 446 °F)	8	
<b>Pipe outer diameter range</b>		
Transmitter only - no sensor	A	
13 ... 19 mm (0.5 ... 0.75")	B	
19.3 ... 30.5 mm (0.76 ... 1.20")	C	
30.7 ... 50.8 mm (1.21 ... 2.00")	D	
51 ... 76 mm (2.01 ... 3.00")	E	
78 ... 127 mm (3.1 ... 5.0")	F	
129 ... 203 mm (5.1 ... 8.0")	G	
206 ... 305 mm (8.1 ... 12.0")	H	
307 ... 508 mm (12.1 ... 20.0")	J	
510 ... 813 mm (20.1 ... 32.0")	K	
815 ... 9144 mm (32.1 ... 360")	L	
<b>Pipe wall thickness range</b>		
Transmitter only - no sensor	A	
0.635 ... 1.016 mm (0.025 ... 0.04")	B	
1.016 ... 1.524 mm (0.04 ... 0.06")	C	
1.524 ... 2.032 mm (0.06 ... 0.08")	D	
2.032 ... 3.048 mm (0.08 ... 0.12")	E	
3.048 ... 4.064 mm (0.12 ... 0.16")	F	
4.064 ... 5.842 mm (0.16 ... 0.23")	G	
5.842 ... 8.128 mm (0.23 ... 0.32")	H	
8.128 ... 11.176 mm (0.32 ... 0.44")	J	
11.176 ... 15.748 mm (0.44 ... 0.62")	K	
15.748 ... 31.75 mm (0.62 ... 1.25")	L	
31.75 ... 50.8 mm (1.25 ... 2.00")	M	
<b>Sensor mounting</b>		
Transmitter only - no sensor	0	
Mounting straps only	1	
Standard frames and tracks	2	
Magnetic - no straps	4	
Magnetic - with straps	6	
High precision mount (single enclosure)	7	
High precision mount (dual enclosure)	8	
<b>Number of paths (sensor pairs)</b>		
Transmitter only - no sensor	0	
One path	1	
Two path	2	
Three path	3	
Four path	4	
<b>Environment</b>		
Standard		1
<b>Transmitter/DSL material and mounting style</b>		
Replacement DSL for option V transmitter, no transmitter DSL: aluminium cast, Nema 4X, M12 socket for DSL to transmitter interconnect cable		N
Replacement DSL for option W transmitter, no transmitter DSL: aluminium cast, Nema 4X, terminal block for DSL to transmitter interconnect cable		Q
Wallmount transmitter, internal DSL Transmitter: aluminum wallbox, Nema 4X DSL: none, direct connected sensor cables (max 2-path, max. 20 meter sensor cable)		U
Wall box housing, external DSL, remote to sensor Transmitter: aluminum wallbox, Nema 4X DSL: aluminum cast, Nema 4X, M12 socket for DSL to transmitter interconnect cable (max 4-path, max. 20 meter sensor cable, max. 150 meter interconnect cable)		V
Wall box housing, external DSL, remote to sensor Transmitter: aluminum wall box, Nema 4X DSL: aluminum cast, Nema 4X, terminal block for DSL to transmitter interconnect cable (max. 4-path, max. 20 meter sensor cable, max. 150 meter interconnect cable)		W
<b>Ex approvals</b>		
Non-Ex		A
ATEX, wallbox enclosure		B
IECEX, wallbox		E
FM, FMc, wallbox enclosure		G
ATEX, IECEX, FM, FMc, wallbox		P
<b>Local User Interface</b>		
Blind version transmitter		1
Graphical local user interface, 240 x 160 pixels		3

## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

### Selection and ordering data for SITRANS FS230

#### Selection and ordering data

#### Order code

##### Further designs

Please add “-Z” to Article No. and specify Order code(s) and plain text.

##### Cable glands - transmitter, DSL (not for sensor cables)

No glands, metric threads on transmitter

A01

No glands, metric thread with NPT thread adapters, nickel plated brass: quantity based on selection "N" in data place 14

A40

No glands, metric thread with NPT thread adapters, stainless steel: quantity based on selection "N" in data place 14

A41

Nickel plated brass glands: quantity based on selection "N" in data place 14

A42

Plastic glands: quantity based on selection "N" in data place 14

A44

Stainless steel glands: quantity based on selection "N" in data place 14

A46

No glands, metric thread with NPT thread adapters, nickel plated brass: quantity based on selection "Q" in data place 14

A50

No glands, metric thread with NPT thread adapters, stainless steel: quantity based on selection "Q" in data place 14

A51

Nickel plated brass glands: quantity based on selection "Q" in data place 14

A52

Plastic glands: quantity based on selection "Q" in data place 14

A54

Stainless steel glands: quantity based on selection "Q" in data place 14

A56

No glands, metric thread with NPT thread adapters, stainless steel: quantity based on selection "U" in data place 14

A60

No glands, metric thread with NPT thread adapters, nickel plated brass: quantity based on selection "U" in data place 14

A61

Nickel plated brass glands: quantity based on selection "U" in data place 14

A62

Plastic glands: quantity based on selection "U" in data place 14

A64

Stainless steel glands: quantity based on selection "U" in data place 14

A66

No glands, metric thread with NPT thread adapters, nickel plated brass: quantity based on selection "V" in data place 14

A70

No glands, metric thread with NPT thread adapters, stainless steel: quantity based on selection "V" in data place 14

A71

Nickel plated brass glands: quantity based on selection "V" in data place 14

A72

Plastic glands: quantity based on selection "V" in data place 14

A74

Stainless steel glands: quantity based on selection "V" in data place 14

A76

No glands, metric thread with NPT thread adapters, nickel plated brass: quantity based on selection "W" in data place 14

A80

No glands, metric thread with NPT thread adapters, stainless steel: Quantity based on selection "W" in data place 14

A81

Nickel plated brass glands: quantity based on selection "W" in data place 14

A82

Plastic glands: quantity based on selection "W" in data place 14

A84

Stainless steel glands: quantity based on selection "W" in data place 14

A86

##### Software functions and CT approvals

Software: for standard industry applications

B11

Software including hydrocarbon process values

B39

Software including gas process values

B50

##### I/O configuration Ch1

Non-Ex, 4 ... 20 mA HART, menu selected passive/active

E02

Ex, 4 ... 20 mA HART, active

E06

Ex, 4 ... 20 mA HART, passive

E07

Modbus RTU 485

E14

##### I/O configuration Ch2, Ch3 and Ch4

None

F00

Non-Ex

• Ch2: current/freq./pulse, Ch3: none Ch4: none. Active/passive menu selected

F01

• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: none. Active/passive menu selected

F02

• Ch2:current/freq./pulse, Ch3: current/freq./pulse Ch4:current/freq./pulse. Active/passive menu selected

F03

• Ch2:current/freq./pulse, Ch3: current/freq./pulse Ch4: relay. Active/passive menu selected

F04

• Ch2: current/freq./pulse, Ch3: relay Ch4: relay. Active/passive menu selected

F05

• Ch2: current/freq./pulse, Ch3: relay Ch4: none. Active/passive menu selected

F06

Ex Active

• Ch2: current/freq./pulse, Ch3: none Ch4: none

F11

• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: none

F12

• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: current/freq./pulse

F13

• Ch2: current/freq./pulse, Ch3: current/freq./pulse, Ch4: relay

F14

• Ch2: current/freq./pulse, Ch3: relay, Ch4: relay

F15

• Ch2: current/freq./pulse, Ch3: relay, Ch4: none

F16

Ex Passive

• Ch2: current/freq./pulse, Ch3: none, Ch4: none

F21

• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: None

F22

• Ch2:current/freq./pulse, Ch3: current/freq./pulse Ch4:current/freq./pulse

F23

• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: relay

F24

• Ch2: current/freq./pulse, Ch3: relay, Ch4: relay

F25

• Ch2: current/freq./pulse, Ch3: relay, Ch4: none

F26

##### DSL strap kit (to strap DSL to pipe)

• 60.3 mm (2 inch) pipe mount with U-bolts

G01

• Stainless steel strap to mount DSL to pipe DN 60 ... 150 pipe size (2 ... 6 inch)

G03

• Stainless steel strap to mount DSL to pipe DN 150 ... 300 (6 ... 12 inch)

G05

• Stainless steel strap to mount DSL to pipe DN 300 ... 400 (12 ... 16 inch)

G07

• Stainless steel strap to mount DSL to pipe DN 400 ... 600 (16 ... 24 inch)

G08

##### Temperature sensors and pockets

1000 Ω platinum standard clamp-on RTD

J61

1000 Ω platinum submersible clamp-on RTD

J62



Selection and ordering data	Order code	Order code	
<b>Sensor cables to transmitter/DSL for 1-path</b>		<b>Sensor cables to transmitter/DSL for 2-path</b>	
1 m (3.2 ft) standard/submersible coax sensor cable pair with nylon glands	<b>K21</b>	1 m (3.2 ft) standard/submersible coax sensor cable pair with nylon glands	<b>T21</b>
3 m (9.8 ft) standard/submersible coax sensor cable pair with nylon glands	<b>K22</b>	3 m (9.8 ft) standard/submersible coax sensor cable pair with nylon glands	<b>T22</b>
5 m (16.4 ft) standard/submersible coax sensor cable pair with nylon glands	<b>K23</b>	5 m (16.4 ft) standard/submersible coax sensor cable pair with nylon glands	<b>T23</b>
10 m (32.8 ft) standard/submersible coax sensor cable pair with nylon glands	<b>K24</b>	10 m (32.8 ft) standard/submersible coax sensor cable pair with nylon glands	<b>T24</b>
20 m (65.6 ft) standard/submersible coax sensor cable pair with nylon glands	<b>K25</b>	20 m (65.6 ft) standard/submersible coax sensor cable pair with nylon glands	<b>T25</b>
1 m (3.2 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>K26</b>	1 m (3.2 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>T26</b>
3 m (9.8 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>K27</b>	3 m (9.8 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>T27</b>
5 m (16.4 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>K28</b>	5 m (16.4 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>T28</b>
10 m (32.8 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>K29</b>	10 m (32.8 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>T29</b>
20 m (65.6 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>K30</b>	20 m (65.6 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>T30</b>
1 m (3.2 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>K31</b>	1 m (3.2 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>T31</b>
3 m (9.8 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>K32</b>	3 m (9.8 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>T32</b>
5 m (16.4 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>K33</b>	5 m (16.4 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>T33</b>
10 m (32.8 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>K34</b>	10 m (32.8 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>T34</b>
20 m (65.6 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>K35</b>	20 m (65.6 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>T35</b>
5 m (16.4 ft) plenum rated coax sensor cable pair with nylon glands	<b>K36</b>	5 m (16.4 ft) plenum rated coax sensor cable pair with nylon glands	<b>T36</b>
20 m (65.6 ft) plenum rated coax sensor cable pair with nylon glands	<b>K37</b>	20 m (65.6 ft) plenum rated coax sensor cable pair with nylon glands	<b>T37</b>
5 m (16.4 ft) plenum rated coax sensor cable pair with nickel plated brass glands	<b>K38</b>	5 m (16.4 ft) plenum rated coax sensor cable pair with nickel plated brass glands	<b>T38</b>
20 m (65.6 ft) plenum rated coax sensor cable pair with nickel plated brass glands	<b>K39</b>	20 m (65.6 ft) plenum rated coax sensor cable pair with nickel plated brass glands	<b>T39</b>
5 m (16.4 ft) plenum rated coax sensor cable pair with stainless steel glands	<b>K40</b>	5 m (16.4 ft) plenum rated coax sensor cable pair with stainless steel glands	<b>T40</b>
20 m (65.6 ft) plenum rated coax sensor cable pair with stainless steel glands	<b>K41</b>	20 m (65.6 ft) plenum rated coax sensor cable pair with stainless steel glands	<b>T41</b>
1 m (3.2 ft) armored sensor cable pair with nickel plated brass glands. Temperature: -25 ... +80 C	<b>K50</b>	1 m (3.2 ft) armored sensor cable pair with nickel plated brass glands. Temperature: -25 ... +80 C	<b>T50</b>
3 m (9.8 ft) armored sensor cable pair with nickel plated brass glands. Temperature: -25 ... +80 C	<b>K51</b>	3 m (9.8 ft) armored sensor cable pair with nickel plated brass glands. Temperature: -25 ... +80 C	<b>T51</b>
5 m (16.4 ft) armored sensor cable pair with nickel plated brass glands. Temperature: -25 ... +80 C	<b>K52</b>	5 m (16.4 ft) armored sensor cable pair with nickel plated brass glands. Temperature: -25 ... +80 C	<b>T52</b>
10 m (32.8 ft) armored sensor cable pair with nickel plated brass glands	<b>K53</b>	10 m (32.8 ft) armored sensor cable pair with nickel plated brass glands	<b>T53</b>
20 m (65.6 ft) armored sensor cable pair with nickel plated brass glands	<b>K54</b>	20 m (65.6 ft) armored sensor cable pair with nickel plated brass glands	<b>T54</b>
10 m (32.8 ft) standard/submersible coax sensor cable pair with no transmitter glands	<b>K76</b>	10 m (32.8 ft) standard/submersible coax sensor cable pair with no transmitter glands	<b>T76</b>
20 m (65.6 ft) standard/submersible coax sensor cable pair with no transmitter glands	<b>K77</b>	20 m (65.6 ft) standard/submersible coax sensor cable pair with no transmitter glands	<b>T77</b>
20 m (65.6 ft) plenum rated coax sensor cable pair with no glands	<b>K78</b>	20 m (65.6 ft) plenum rated coax sensor cable pair with no glands	<b>T78</b>

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Clamp-on ultrasonic flowmeters

#### Selection and ordering data for SITRANS FS230

##### Selection and ordering data

##### Order code

##### Order code

##### Sensor cables to transmitter/DSL for 3-path

1 m (3.2 ft) standard/submersible coax sensor cable pair with nylon glands	<b>U21</b>
3 m (9.8 ft) standard/submersible coax sensor cable pair with nylon glands	<b>U22</b>
5 m (16.4 ft) standard/submersible coax sensor cable pair with nylon glands	<b>U23</b>
10 m (32.8 ft) standard/submersible coax sensor cable pair with nylon glands	<b>U24</b>
20 m (65.6 ft) standard/submersible coax sensor cable pair with nylon glands	<b>U25</b>
1 m (3.2 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>U26</b>
3 m (9.8 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>U27</b>
5 m (16.4 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>U28</b>
10 m (32.8 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>U29</b>
20 m (65.6 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>U30</b>
1 m (3.2 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>U31</b>
3 m (9.8 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>U32</b>
5 m (16.4 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>U33</b>
10 m (32.8 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>U34</b>
20 m (65.6 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>U35</b>
5 m (16.4 ft) plenum rated coax sensor cable pair with nylon glands	<b>U36</b>
20 m (65.6 ft) plenum rated coax sensor cable pair with nylon glands	<b>U37</b>
5 m (16.4 ft) plenum rated coax sensor cable pair with nickel plated brass glands	<b>U38</b>
20 m (65.6 ft) plenum rated coax sensor cable pair with nickel plated brass glands	<b>U39</b>
5 m (16.4 ft) plenum rated coax sensor cable pair with stainless steel glands	<b>U40</b>
20 m (65.6 ft) plenum rated coax sensor cable pair with stainless steel glands	<b>U41</b>
1 m (3.2 ft) armored sensor cable pair with nickel plated brass glands. Temperature: -25 ... +80 C	<b>U50</b>
3 m (9.8 ft) armored sensor cable pair with nickel plated brass glands. Temperature: -25 ... +80 C	<b>U51</b>
5 m (16.4 ft) armored sensor cable pair with nickel plated brass glands. Temperature: -25 ... +80 C	<b>U52</b>
10 m (32.8 ft) armored sensor cable pair with nickel plated brass glands	<b>U53</b>
20 m (65.6 ft) armored sensor cable pair with nickel plated brass glands	<b>U54</b>
10 m (32.8 ft) standard/submersible coax sensor cable pair with no transmitter glands	<b>U76</b>
20 m (65.6 ft) standard/submersible coax sensor cable pair with no transmitter glands	<b>U77</b>
20 m (65.6 ft) plenum rated coax sensor cable pair with no glands	<b>U78</b>

##### Sensor cables to transmitter/DSL for 4-path

1 m (3.2 ft) standard/submersible coax sensor cable pair with nylon glands	<b>V21</b>
3 m (9.8 ft) standard/submersible coax sensor cable pair with nylon glands	<b>V22</b>
5 m (16.4 ft) standard/submersible coax sensor cable pair with nylon glands	<b>V23</b>
10 m (32.8 ft) standard/submersible coax sensor cable pair with nylon glands	<b>V24</b>
20 m (65.6 ft) standard/submersible coax sensor cable pair with nylon glands	<b>V25</b>
1 m (3.2 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>V26</b>
3 m (9.8 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>V27</b>
5 m (16.4 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>V28</b>
10 m (32.8 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>V29</b>
20 m (65.6 ft) standard/submersible coax sensor cable pair with nickel plated brass glands	<b>V30</b>
1 m (3.2 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>V31</b>
3 m (9.8 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>V32</b>
5 m (16.4 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>V33</b>
10 m (32.8 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>V34</b>
20 m (65.6 ft) standard/submersible coax sensor cable pair with stainless steel glands	<b>V35</b>
5 m (16.4 ft) plenum rated coax sensor cable pair with nylon glands	<b>V36</b>
20 m (65.6 ft) plenum rated coax sensor cable pair with nylon glands	<b>V37</b>
5 m (16.4 ft) plenum rated coax sensor cable pair with nickel plated brass glands	<b>V38</b>
20 m (65.6 ft) plenum rated coax sensor cable pair with nickel plated brass glands	<b>V39</b>
5 m (16.4 ft) plenum rated coax sensor cable pair with stainless steel glands	<b>V40</b>
20 m (65.6 ft) plenum rated coax sensor cable pair with stainless steel glands	<b>V41</b>
1 m (3.2 ft) armored sensor cable pair with nickel plated brass glands. Temperature: -25 ... +80 C	<b>V50</b>
3 m (9.8 ft) armored sensor cable pair with nickel plated brass glands. Temperature: -25 ... +80 C	<b>V51</b>
5 m (16.4 ft) armored sensor cable pair with nickel plated brass glands. Temperature: -25 ... +80 C	<b>V52</b>
10 m (32.8 ft) armored sensor cable pair with nickel plated brass glands	<b>V53</b>
20 m (65.6 ft) armored sensor cable pair with nickel plated brass glands	<b>V54</b>
10 m (32.8 ft) standard/submersible coax sensor cable pair with no transmitter glands	<b>V76</b>
20 m (65.6 ft) standard/submersible coax sensor cable pair with no transmitter glands	<b>V77</b>
20 m (65.6 ft) plenum rated coax sensor cable pair with no glands	<b>V78</b>



Selection and ordering data	Order code		Order code
<b>Cable, DSL to wallbox transmitter</b>		<b>RTD cable (insert temperature sensor to transmitter)</b>	
5 m (16.4 ft) standard DSL cable (2 mounted M12 plugs)	<b>L51</b>	15 m (50 ft) RTD cable with nickel plated gland	<b>R74</b>
5 m (16.4 ft) standard DSL cable (no plugs mounted)	<b>L52</b>	15 m (50 ft) RTD cable with stainless steel gland	<b>R75</b>
10 m (32.8 ft) standard DSL cable (2 mounted M12 plugs)	<b>L55</b>	30 m (100 ft) RTD cable with nickel plated gland	<b>R76</b>
10 m (32.8 ft) standard DSL cable (no plugs mounted)	<b>L56</b>	30 m (100 ft) RTD cable with stainless steel gland	<b>R77</b>
25 m (82 ft) standard DSL cable (2 mounted plugs)	<b>L59</b>	91 m (300 ft) RTD cable with nickel plated gland	<b>R78</b>
25 m (82 ft) standard DSL cable (no plugs mounted)	<b>L60</b>	91 m (300 ft) RTD cable with stainless steel gland	<b>R79</b>
50 m (164 ft) standard DSL cable (2 mounted plugs)	<b>L63</b>	15 m (50 ft) insert RTD cable with nickel plated gland	<b>R80</b>
50 m (164 ft) standard DSL cable (no plugs mounted)	<b>L64</b>	15 m (50 ft) insert RTD cable with stainless steel gland	<b>R81</b>
75 m (246.1 ft) standard DSL cable (2 mounted plugs)	<b>L67</b>	30 m (100 ft) insert RTD cable with nickel plated gland	<b>R82</b>
75 m (246.1 ft) standard DSL cable (no plugs mounted)	<b>L68</b>	30 m (100 ft) insert RTD cable with stainless steel gland	<b>R83</b>
150 m (492.1 ft) standard DSL cable (2 mounted plugs)	<b>L71</b>	91 m (300 ft) insert RTD cable with nickel plated gland	<b>R84</b>
150 m (492.1 ft) standard DSL cable (no plugs mounted)	<b>L72</b>	91 m (300 ft) insert RTD cable with stainless steel gland	<b>R85</b>
<b>RTD cable (clamp temperature sensor to transmitter)</b>		<b>Mass storage</b>	
6 m (20 ft) standard RTD cable	<b>R50</b>	Enable mass storage function for SD card (not available for USA)	<b>S30</b>
15 m (50 ft) standard RTD cable	<b>R51</b>	<b>Tag plate</b>	
30 m (100 ft) standard RTD cable	<b>R52</b>	Tag plate for external DSL, stainless steel	<b>Y14</b>
46 m (150 ft) standard RTD cable	<b>R53</b>	Tag plate for transmitter, stainless steel	<b>Y15</b>
61 m (200 ft) standard RTD cable	<b>R54</b>	Tag name plate, stainless steel	<b>Y17</b>
91 m (300 ft) standard RTD cable	<b>R55</b>		
6 m (20 ft) submersible RTD cable	<b>R56</b>		
15 m (50 ft) submersible RTD cable	<b>R57</b>		
30 m (100 ft) submersible RTD cable	<b>R58</b>		
46 m (150 ft) submersible RTD cable	<b>R59</b>		
61 m (200 ft) submersible RTD cable	<b>R60</b>		
91 m (300 ft) submersible RTD cable	<b>R61</b>		

## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

### Selection and ordering data for SITRANS FS230

Selection and ordering data	Article No.	Article No.
<b>System spare parts</b>		
<b>Tool kits and loose parts</b>		
"F" connector tool kit, 2 per	A5E38145699	A5E38012039
Bag of loose spare parts; for wallmount, including cable strain relief components, mounting tool, seals and gasket, assorted screws and washers, hex cap nut, blind plugs, and O-rings	A5E38288072	A5E38012056
<b>Electronics assemblies and modules</b>		
Wall mount transmitter		
• Display and keypad assembly	A5E37697615	A5E38012121
• Digital Sensor Link (DSL), internal, module only, for wall box, standard process values	A5E38014726	A5E38019235
• Digital Sensor Link (DSL), internal, module only, for wall box, hydrocarbon process values	A5E42138542	A5E38019263
• Digital Sensor Link (DSL), internal, module only, for wall box, gas process values	A5E47202379	A5E38019378
• SensorFlash (4 GB micro SD card) -40 °C ... +85 °C	A5E38288507	
• Power supply, for wall box, (240 V AC, 47 ... 63 Hz), (24 ... 90 V DC)	A5E38263021	
• Foam insert for wall box with connectors	A5E38287828	
External DSL		
• Digital Sensor Link (DSL), external, module only, standard process values	A5E38014662	A5E38011478
• Digital Sensor Link (DSL), external, module only, hydrocarbon process values	A5E37843869	A5E38011509
• Digital Sensor Link (DSL), external, module only, gas process values	A5E47202369	A5E38011541
• F connector board set: board A, board B and screws for mounting	A5E45882316	A5E38011600
• Front end module cover plate with screws for mounting	A5E45882046	A5E38011618
<b>Cassettes, I/O configuration and communication</b>		
<b>Ex</b>		
• Ch1: I/O and comm (active) 4 ... 20 mA output and HART 7.2	A5E38012278	A5E38011908
• Ch1: I/O and comm (passive) 4 ... 20 mA output and HART 7.2	A5E38013025	
• Ch1: communication Modbus RTU 485	A5E38013054	
<b>Non Ex</b>		
• Ch1: I/O and comm (active/passive) 4 ... 20 mA output and HART 7.2	A5E38013040	
• Ch1: communication Modbus RTU 485	A5E38013069	
• Ch2: current/freq./pulse, Ch3: None Ch4: none. Menu select active/passive	A5E38006256	
• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: none. Menu select active/passive	A5E38006558	
• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: current/Freq./Pulse. Menu select active/passive	A5E38006598	
• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: relay. Menu select active/passive	A5E38006896	
• Ch2: current/freq./pulse, Ch3: relay Ch4: relay. Menu select active/passive	A5E38006900	
• Ch2: current/freq./pulse, Ch3: relay Ch4: none. Menu select active/passive	A5E38011432	
<b>Ex Active</b>		
• Ch2: current/freq./pulse, Ch3: None Ch4: none		A5E38012039
• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: none		A5E38012056
• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: current/freq./pulse		A5E38012121
• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: relay		A5E38019235
• Ch2: current/freq./pulse, Ch3: relay Ch4: relay		A5E38019263
• Ch2: current/freq./pulse, Ch3: relay Ch4: none		A5E38019378
<b>Ex Passive</b>		
• Ch2: current/freq./pulse, Ch3: none Ch4: none		A5E38011478
• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: none		A5E38011509
• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: current/freq./pulse		A5E38011541
• Ch2: current/freq./pulse, Ch3: current/freq./pulse Ch4: relay		A5E38011600
• Ch2: current/freq./pulse, Ch3: relay Ch4: relay		A5E38011618
• Ch2: current/freq./pulse, Ch3: relay Ch4: none		A5E38011908
<b>Miscellaneous parts</b>		
<b>General</b>		
• Blind plug brass-nickel 10 pcs (Ex version)		A5E38145685
• Blind plug stainless steel 10 pcs (Ex version)		A5E38145689
• F connectors, 4 pcs		A5E38268608
• M12 adapter for DSL or wall mounted transmitter		A5E03906095
<b>Wall mount transmitter</b>		
• Wall bracket "pipe mounting"		A5E38288020
• Wall bracket "panel mounting"		A5E38288032
• Metal kit: PSU cover, back plane		A5E38415145
• Power input cover plate		A5E38415205
<b>External DSL</b>		
• Wall mount bracket and screws for mounting DSL on bracket		A5E45882610
• Lid with O-ring		A5E45818351
• Bag with parts: cable strain reliefs, screws and washers, lid lock screw, grounding parts		A5E38111577
• Accessory pipe mount kit for 60.3 mm (2.375 inch) pipe		A5E36617118006
• Accessory pipe strap kit for DN 50 ... 150 (2 ... 6 inch) pipe		A5E36617118007
• Accessory pipe strap kit for DN 150 ... 300 (6 ... 12 inch) pipe		A5E36617118008
• Accessory pipe strap kit for DN 300 ... 400(12 ... 16 inch) pipe		A5E36617118009
• Accessory pipe strap kit for DN 400 ... 600(16 ... 24 inch) pipe		A5E36617118010

## Selection and ordering data (continued)

## Article No./Sensor Crossreference

Steel (T1)			Steel (T2)			Plastic (liquid)		
Data place 8,9,10 of 7ME372-... combination	Sensor part number	Sensor Size Code	Data place 8,9,10 of 7ME372-... combination	Sensor part number	Sensor Size Code	Data place 8,9,10 of 7ME372-... combination	Sensor part number	Sensor Size Code
1BB	7ME3950-5LG01	A1HT1	2BB	7ME3950-5LB11	A1	6BB	7ME3950-5LB01	A2
1BC	7ME3950-5LH01	A2HT1	2BC	7ME3950-5LB01	A2	6BC	7ME3950-5LB01	A2
1BD	7ME3950-5LB11	A1	2BD	7ME3950-5LB11	A1	6BD	7ME3950-5LB01	A2
1BE	7ME3950-5LB01	A2	2BE	7ME3950-5LB01	A2	6BE	7ME3950-5LB01	A2
1BF	7ME3950-5LB11	A1	2BF	7ME3950-5LB11	A1	6BF	7ME3950-5LB01	A2
1CB	7ME3950-5LG01	A1HT1	2CB	7ME3950-5LB11	A1	6CB	7ME3950-5LB01	A2
1CC	7ME3950-5LH01	A2HT1	2CC	7ME3950-5LB01	A2	6CC	7ME3950-5LB01	A2
1CD	7ME3950-5LJ01	A3HT1	2CD	7ME3950-5LB11	A1	6CD	7ME3950-5LB01	A2
1CE	7ME3950-5GK01	B1HT1	2CE	7ME3950-5GK21	B1HT2	6CE	7ME3950-5LB01	A2
1CF	7ME3950-5LB11	A1	2CF	7ME3950-5LB11	A1	6CF	7ME3950-5LB01	A2
1CG	7ME3950-5LB11	A1	2CG	7ME3950-5LB11	A1	6CG	7ME3950-5LB01	A2
1DB	7ME3950-5LG01	A1HT1	2DB	7ME3950-5LC11	B1	6DC	7ME3950-5LC01	B3
1DC	7ME3950-5LH01	A2HT1	2DC	7ME3950-5LC21	B2	6DD	7ME3950-5LC01	B3
1DD	7ME3950-5LJ01	A3HT1	2DD	7ME3950-5LC11	B1	6DE	7ME3950-5LC01	B3
1DE	7ME3950-5GK01	B1HT1	2DE	7ME3950-5GK21	B1HT2	6DF	7ME3950-5LC01	B3
1DF	7ME3950-5GL01	B2HT1	2DF	7ME3950-5GL21	B2HT2	6DG	7ME3950-5LC01	B3
1DG	7ME3950-5LC01	B3	2DG	7ME3950-5LC01	B3	6DH	7ME3950-5LC01	B3
1DH	7ME3950-5LC21	B2	2DH	7ME3950-5LC21	B2	6EC	7ME3950-5LC01	B3
1EB	7ME3950-5LG01	A1HT1	2EB	7ME3950-5LC11	B1	6ED	7ME3950-5LC01	B3
1EC	7ME3950-5LH01	A2HT1	2EC	7ME3950-5LC21	B2	6EE	7ME3950-5LC01	B3
1ED	7ME3950-5LJ01	A3HT1	2ED	7ME3950-5LC11	B1	6EF	7ME3950-5LC01	B3
1EE	7ME3950-5GK01	B1HT1	2EE	7ME3950-5GK21	B1HT2	6EG	7ME3950-5LC01	B3
1EF	7ME3950-5GL01	B2HT1	2EF	7ME3950-5GL21	B2HT2	6EH	7ME3950-5LC01	B3
1EG	7ME3950-5GM00	C1HT1	2EG	7ME3950-5GM20	C1HT2	6EJ	7ME3950-5LC01	B3
1EH	7ME3950-5GN00	C2HT1	2EH	7ME3950-5GN20	C2HT2	6EK	7ME3950-5LC01	B3
1EJ	7ME3950-5LC01	B3	2EJ	7ME3950-5LC01	B3	6FE	7ME3950-5LD00	C3
1EK	7ME3950-5LC01	B3	2EK	7ME3950-5LC01	B3	6FF	7ME3950-5LD00	C3
1FC	7ME3950-5LH01	A2HT1	2FC	7ME3950-5LD10	C1	6FG	7ME3950-5LD00	C3
1FD	7ME3950-5LJ01	A3HT1	2FD	7ME3950-5LD10	C1	6FH	7ME3950-5LD00	C3
1FE	7ME3950-5GK01	B1HT1	2FE	7ME3950-5GK21	B1HT2	6FJ	7ME3950-5LD00	C3
1FF	7ME3950-5GL01	B2HT1	2FF	7ME3950-5GL21	B2HT2	6FK	7ME3950-5LD00	C3
1FG	7ME3950-5GM00	C1HT1	2FG	7ME3950-5GM20	C1HT2	6GF	7ME3950-5LD00	C3
1FH	7ME3950-5GN00	C2HT1	2FH	7ME3950-5GN20	C2HT2	6GG	7ME3950-5LD00	C3
1FJ	7ME3950-5GP00	D1HT1	2FJ	7ME3950-5GP20	D1HT2	6GH	7ME3950-5LD00	C3
1FK	7ME3950-5LD10	C1	2FK	7ME3950-5LD10	C1	6GJ	7ME3950-5LD00	C3
1GD	7ME3950-5LJ01	A3HT1	2GD	7ME3950-5LD10	C1	6GK	7ME3950-5LD00	C3
1GE	7ME3950-5GK01	B1HT1	2GE	7ME3950-5GK21	B1HT2	6GL	7ME3950-5LD00	C3
1GF	7ME3950-5GL01	B2HT1	2GF	7ME3950-5GL21	B2HT2	6HG	7ME3950-5LE00	D3
1GG	7ME3950-5GM00	C1HT1	2GG	7ME3950-5GM20	C1HT2	6HH	7ME3950-5LE00	D3
1GH	7ME3950-5GN00	C2HT1	2GH	7ME3950-5GN20	C2HT2	6HJ	7ME3950-5LE00	D3
1GJ	7ME3950-5GP00	D1HT1	2GJ	7ME3950-5GP20	D1HT2	6HK	7ME3950-5LE00	D3
1GK	7ME3950-5GQ00	D2HT1	2GK	7ME3950-5GQ20	D2HT2	6HL	7ME3950-5LE00	D3
1GL	7ME3950-5LD00	C3	2GL	7ME3950-5LD00	C3	6HM	7ME3950-5LE00	D3
1HE	7ME3950-5GK01	B1HT1	2HE	7ME3950-5GK21	B1HT2	6JJ	7ME3950-5LE00	D3
1HF	7ME3950-5GL01	B2HT1	2HF	7ME3950-5GL21	B2HT2	6JK	7ME3950-5LE00	D3
1HG	7ME3950-5GM00	C1HT1	2HG	7ME3950-5GM20	C1HT2	6JL	7ME3950-5LE00	D3
1HH	7ME3950-5GN00	C2HT1	2HH	7ME3950-5GN20	C2HT2	6JM	7ME3950-5LE00	D3
1HJ	7ME3950-5GP00	D1HT1	2HJ	7ME3950-5GP20	D1HT2	6KK	7ME3950-5LF00	E2
1HK	7ME3950-5GQ00	D2HT1	2HK	7ME3950-5GQ20	D2HT2	6KL	7ME3950-5LF00	E2
1HL	7ME3950-5GR00	D4HT1	2HL	7ME3950-5GR20	D4HT2	6KM	7ME3950-5LF00	E2
1JG	7ME3950-5GM00	C1HT1	2JG	7ME3950-5GM20	C1HT2	6LM	7ME3950-5LF00	E2
1JH	7ME3950-5GN00	C2HT1	2JH	7ME3950-5GN20	C2HT2			
1JJ	7ME3950-5GP00	D1HT1	2JJ	7ME3950-5GP20	D1HT2			
1JK	7ME3950-5GQ00	D2HT1	2JK	7ME3950-5GQ20	D2HT2			
1JL	7ME3950-5GR00	D4HT1	2JL	7ME3950-5GR20	D4HT2			
1KH	7ME3950-5GN00	C2HT1	2KH	7ME3950-5GN20	C2HT2			
1KJ	7ME3950-5GP00	D1HT1	2KJ	7ME3950-5GP20	D1HT2			
1KK	7ME3950-5GQ00	D2HT1	2KK	7ME3950-5GQ20	D2HT2			
1KL	7ME3950-5GR00	D4HT1	2KL	7ME3950-5GR20	D4HT2			
1LJ	7ME3950-5GP00	D1HT1	2LJ	7ME3950-5GP20	D1HT2			
1LK	7ME3950-5GQ00	D2HT1	2LK	7ME3950-5GQ20	D2HT2			
1LL	7ME3950-5GR00	D4HT1	2LL	7ME3950-5GR20	D4HT2			

## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

### Selection and ordering data for SITRANS FS230

#### Selection and ordering data (continued)

Other (Univ)			Other (VH)		
Data place 8,9,10 of 7ME372-... combination	Sensor part number	Sensor Size Code	Data place 8,9,10 of 7ME372-... combination	Sensor part number	Sensor Size Code
7BB	7ME3950-5LB01	A2	8BB	7ME3950-5LA13	1
7BC	7ME3950-5LB01	A2	8BC	7ME3950-5LA13	1
7BD	7ME3950-5LB01	A2	8BD	7ME3950-5LA13	1
7BE	7ME3950-5LB01	A2	8BE	7ME3950-5LA13	1
7BF	7ME3950-5LB01	A2	8BF	7ME3950-5LA13	1
7CB	7ME3950-5LB01	A2	8CB	7ME3950-5LA13	1
7CC	7ME3950-5LB01	A2	8CC	7ME3950-5LA13	1
7CD	7ME3950-5LB01	A2	8CD	7ME3950-5LA13	1
7CE	7ME3950-5LB01	A2	8CE	7ME3950-5LA13	1
7CF	7ME3950-5LB01	A2	8CF	7ME3950-5LA13	1
7CG	7ME3950-5LB01	A2	8CG	7ME3950-5LA13	1
7DB	7ME3950-5LC01	B3	8DB	7ME3950-5LA13	1
7DC	7ME3950-5LC01	B3	8DC	7ME3950-5LA13	1
7DD	7ME3950-5LC01	B3	8DD	7ME3950-5LA13	1
7DE	7ME3950-5LC01	B3	8DE	7ME3950-5LA13	1
7DF	7ME3950-5LC01	B3	8DF	7ME3950-5LA13	1
7DG	7ME3950-5LC01	B3	8DG	7ME3950-5LA13	1
7DH	7ME3950-5LC01	B3	8DH	7ME3950-5LA13	1
7EB	7ME3950-5LC01	B3	8EB	7ME3950-5LA13	1
7EC	7ME3950-5LC01	B3	8EC	7ME3950-5LA13	1
7ED	7ME3950-5LC01	B3	8ED	7ME3950-5LA13	1
7EE	7ME3950-5LC01	B3	8EE	7ME3950-5LA13	1
7EF	7ME3950-5LC01	B3	8EF	7ME3950-5LA13	1
7EG	7ME3950-5LC01	B3	8EG	7ME3950-5LA13	1
7EH	7ME3950-5LC01	B3	8EH	7ME3950-5LA13	1
7EJ	7ME3950-5LC01	B3	8EJ	7ME3950-5LA13	1
7EK	7ME3950-5LC01	B3	8EK	7ME3950-5LA13	1
7FC	7ME3950-5LD00	C3	8FC	7ME3950-5LA23	2
7FD	7ME3950-5LD00	C3	8FD	7ME3950-5LA23	2
7FE	7ME3950-5LD00	C3	8FE	7ME3950-5LA23	2
7FF	7ME3950-5LD00	C3	8FF	7ME3950-5LA23	2
7FG	7ME3950-5LD00	C3	8FG	7ME3950-5LA23	2
7FH	7ME3950-5LD00	C3	8FH	7ME3950-5LA23	2
7FJ	7ME3950-5LD00	C3	8FJ	7ME3950-5LA23	2
7FK	7ME3950-5LD00	C3	8FK	7ME3950-5LA23	2
7GD	7ME3950-5LD00	C3	8GD	7ME3950-5LA23	2
7GE	7ME3950-5LD00	C3	8GE	7ME3950-5LA23	2
7GF	7ME3950-5LD00	C3	8GF	7ME3950-5LA23	2
7GG	7ME3950-5LD00	C3	8GG	7ME3950-5LA23	2
7GH	7ME3950-5LD00	C3	8GH	7ME3950-5LA23	2
7GJ	7ME3950-5LD00	C3	8GJ	7ME3950-5LA23	2
7GK	7ME3950-5LD00	C3	8GK	7ME3950-5LA23	2
7GL	7ME3950-5LD00	C3	8GL	7ME3950-5LA23	2
7HE	7ME3950-5LE00	D3	8HE	7ME3950-5LA43	3
7HF	7ME3950-5LE00	D3	8HF	7ME3950-5LA43	3
7HG	7ME3950-5LE00	D3	8HG	7ME3950-5LA43	3
7HH	7ME3950-5LE00	D3	8HH	7ME3950-5LA43	3
7HJ	7ME3950-5LE00	D3	8HJ	7ME3950-5LA43	3
7HK	7ME3950-5LE00	D3	8HK	7ME3950-5LA43	3
7HL	7ME3950-5LE00	D3	8HL	7ME3950-5LA43	3
7HM	7ME3950-5LE00	D3	8HM	7ME3950-5LA43	3
7JG	7ME3950-5LE00	D3	8JG	7ME3950-5LA43	3
7JH	7ME3950-5LE00	D3	8JH	7ME3950-5LA43	3
7JJ	7ME3950-5LE00	D3	8JJ	7ME3950-5LA43	3
7JK	7ME3950-5LE00	D3	8JK	7ME3950-5LA43	3
7JL	7ME3950-5LE00	D3	8JL	7ME3950-5LA43	3
7JM	7ME3950-5LE00	D3	8JM	7ME3950-5LA43	3
7KH	7ME3950-5LF00	E2	8KH	7ME3950-5LA73	4
7KJ	7ME3950-5LF00	E2	8KJ	7ME3950-5LA73	4
7KK	7ME3950-5LF00	E2	8KK	7ME3950-5LA73	4
7KL	7ME3950-5LF00	E2	8KL	7ME3950-5LA73	4
7KM	7ME3950-5LF00	E2	8KM	7ME3950-5LA73	4
7LJ	7ME3950-5LF00	E2	8LJ	7ME3950-5LA73	4
7LK	7ME3950-5LF00	E2	8LK	7ME3950-5LA73	4
7LL	7ME3950-5LF00	E2	8LL	7ME3950-5LA73	4
7LM	7ME3950-5LF00	E2	8LM	7ME3950-5LA73	4

# Flow Measurement

## SITRANS FS (ultrasonic)

### Clamp-on ultrasonic flowmeters

#### Selection and ordering data for SITRANS FS230

Selection and ordering data	Article No.	Article No.
<b>Spare parts (system)</b>		
<b>SITRANS FS230</b> IP65/IP66 (Nema 4X)	7ME3950-	<b>SITRANS FS230</b> IP65/IP66 (Nema 4X)
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
<b>Approvals</b>		
All, FM/FMc, ATEX, IECEX - Flow sensors	5	
All, FM/FMc, ATEX, IECEX - Temperature sensors	1	
<b>Spare sensor code</b>		
For liquid flow sensors pipe ranges please refer to catalog sensor selection chart in the FSS200 section		
<b>Flow sensors for use with mounting frames or tracks</b>		
Suitable for pipes other than steel or stainless steel.		
Temperature -40 ... +121 °C (-40 ... +250 °F)		
• A1 Universal	5 L B 1 1	
• A2 Universal	5 L B 0 1	
• B1 Universal	5 L C 1 1	
• B2 Universal	5 L C 2 1	
• B3 Universal	5 L C 0 1	
• C1 Universal	5 L D 1 0	
• C2 Universal	5 L D 2 0	
• C3 Universal	5 L D 0 0	
• D1 Universal	5 L E 1 0	
• D2 Universal	5 L E 2 0	
• D3 Universal	5 L E 0 0	
• E1 Universal	5 L F 1 0	
• E2 Universal	5 L F 0 0	
• E3 Universal	5 L F 2 0	
<b>Gas and liquid sensors for use with mounting frames or tracks</b>		
Suitable for steel or stainless steel pipes		
Temperature T1		
• A1H high precision	5 L G 0 1	
• A2H high precision	5 L H 0 1	
• A3H high precision	5 L J 0 1	
• B1H high precision	5 G K 0 1	
• B2H high precision	5 G L 0 1	
• B3H high precision	5 G t 0 1	
• C1H high precision	5 G M 0 0	
• C2H high precision	5 G N 0 0	
• D1H high precision	5 G P 0 0	
• D2H high precision	5 G Q 0 0	
• D3H high precision	5 G U 0 0	
• D4H high precision	5 G R 0 0	
<b>Spare parts (system)</b>		
<b>SITRANS FS230</b> IP65/IP66 (Nema 4X)	7ME3950-	
Temperature T2		
• A1H high precision		5 L G 2 1
• A2H high precision		5 L H 2 1
• A3H high precision		5 L J 2 1
• B1H high precision		5 G K 2 1
• B2H high precision		5 G L 2 1
• B3H high precision		5 G t 2 1
• C1H high precision		5 G M 2 0
• C2H high precision		5 G N 2 0
• D1H high precision		5 G P 2 0
• D2H high precision		5 G Q 2 0
• D3H high precision		5 G U 2 0
• D4H high precision		5 G R 2 0
<b>High temperature universal liquid sensors</b>		
Very high temperature up to 230 °C (446 °F)		
• Size 1 (Ø 12.7 ... 100 mm (0.47 ... 3.94"))		5 L A 1 3
• Size 2 (Ø 30 ... 200 mm (1.18 ... 7.87"))		5 L A 2 3
• Size 2A (Ø 30 ... 200 mm (1.18 ... 7.87"))		5 L A 3 3
• Size 3 (Ø 150 ... 610 mm (5.9 ... 24.0"))		5 L A 4 3
• Size 3A (Ø 150 ... 610 mm (5.9 ... 24.0"))		5 L A 6 3
• Size 4 (Ø 400 ... 1200 mm (16.75 ... 47.24"))		5 L A 7 3
• Size 4A (Ø 400 ... 1200 mm (16.75 ... 47.24"))		5 L A 8 3
<b>Standard RTD temperature sensors</b>		
Standard clamp-on RTD		1 T A 0 0
Submersible clamp-on RTD		1 T B 0 0
Insertion style RTD (size 1), 140 mm (5.5")		1 T J 0 0
Insertion style RTD (size 2), 216 mm (8.5")		1 T J 0 1
Insertion style RTD (size 3), 292 mm (11.5")		1 T J 0 2
Insertion style RTD (size 4), 368 mm (14.5")		1 T J 0 3

## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

### Selection and ordering data for SITRANS FS230

Selection and ordering data	Article No.	Article No.
<i>Spare parts (Miscellaneous)</i>		<i>Spare parts (Miscellaneous)</i>
<b>SITRANS F S Clamp-on</b> ↗	7ME3960-■ ■ ■ ■	<b>SITRANS F S Clamp-on</b>
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		7ME3960-■ ■ ■ ■
<b>FS230 dedicated sensor mounting hardware</b>		<b>Sensor mounting tracks (aluminum with mounting straps) for pipes &lt; 125 mm (5 inch)</b>
Sensor mounting frames for		Universal sensor size A or B
• Universal sensor size B (for pipes > 125 mm (5 inch))	<b>CQO:1012FN-PB</b>	High precision sensor size A or B
• Universal sensor size C	0 M C 0 0	
• Universal sensor size D	0 M C 0 1	
• Universal sensor size E	0 M C 0 1	
• High precision sensor size B (For pipes > 125 mm (5 inch))	<b>CQO:1012FNH-PB</b>	
• High precision sensor size C	0 M D 0 0	
• High precision sensor size D	0 M D 0 1	
• Magnetic mounting frames for size C, D, E, universal and high precision sensors	0 M D 0 2	
<b>Spacer bars (for indexing sensors on pipe)</b>		<b>Stainless mounting tracks for high temperature 991 sensors</b>
Spacer bar for pipes to 200 mm/8 inch (liquid), 600 mm/24 inch (gas)	0 M S 1 0	Size 1 high temperature sensor pair
Spacer bar for pipes to 500 mm/20 inch (liquid), DN 1200/48 inch (gas)	0 M S 2 0	Size 2 high temperature sensor pair
Spacer bar for pipes to 800 mm/32 inch (liquid)	0 M S 3 0	Size 3 high temperature sensor pair
Spacer bar for pipes to 1200 mm/48 inch (liquid). Must be used with 7ME39600SM30	0 M S 4 0	Size 4 high temperature sensor pair
<b>Mounting straps (slotted stainless steel)</b>		<b>Clamp-on RTD mounting hardware for dedicated systems</b>
For pipes		RTD mounting hardware for dedicated system
DN 50 ... DN 150	0 S M 0 0	• 1152 ... 610 mm (6 ... 24")
DN 50 ... DN 300	0 S M 1 0	• 12.7 ... 50.8 mm (0.5 ... 2")
DN 300 ... DN 600	0 S M 2 0	• 31.8 ... 203.2 mm (1.25 ... 8")
DN 600 ... DN 1200	0 S M 3 0	• 508 ... 1219 mm (20 ... 48")
DN 1200 ... DN 1500	0 S M 4 0	Junction box for clamp on RTD's
DN 1500 ... DN 2100	0 S M 5 0	<b>Insert RTD thermowells</b>
DN 2100 ... DN 3000	0 S M 6 0	Thermowell standard duty
<b>High precision mounting enclosures for sensors</b>		• Uninsulated pipe 140 mm (5.5")
Stainless steel mounts for high precision size "C" sensors, single enclosure	0 W S 5 0	• Uninsulated pipe 216 mm (8.5")
Stainless steel mounts for high precision size "D/E" sensors, single enclosure	0 W S 6 0	• Uninsulated pipe: 292 mm (11.5")
Stainless steel mounts for high precision size "C" sensors, dual enclosure	0 W D 5 0	• With lagging 140 mm (5.5")
Stainless steel mounts for high precision size "D/E" sensors, dual enclosure	0 W D 6 0	• With lagging 216 mm (8.5")
<b>Stainless steel bands for high precision mounting enclosures</b>		• With lagging 292 mm (11.5")
Mounting strap for pipe diameter to		<b>Sensor cables</b>
• 300 mm (13")	0 S M 0 1	Coax (CE mark)
• 600 mm (24")	0 S M 1 1	• 10 m (32.8 ft) armored sensor cable pair with nickel plated brass glands
• 1200 mm (48")	0 S M 2 1	• 20 m (65.6 ft) armored sensor cable pair with nickel plated brass glands
• 1500 mm (60")	0 S M 3 1	• 10 m (32.8 ft) standard/submersible Coax sensor cable pair with Nylon glands
• 2130 mm (84")	0 S M 4 1	• 20 m (65.6 ft) standard/submersible Coax sensor cable pair with Nylon glands
• 3050 mm (120")	0 S M 5 1	• 10 m (32.8 ft) standard/submersible Coax sensor cable pair with nickel plated brass glands
• 5486 mm (216")	0 S M 6 1	• 20 m (65.6 ft) standard/submersible Coax sensor cable pair with nickel plated brass glands
ADAPTER, MTG STRAP, TEMP COMP	<b>CQO-1012WSM-A2</b>	• 10 m (32.8 ft) standard/submersible Coax sensor cable pair with stainless steel glands
		• 20 m (65.6 ft) standard/submersible Coax sensor cable pair with stainless steel glands
		• 20 m (65.6 ft) plenum rated Coax sensor cable pair with Nylon glands
		• 20 m (65.6 ft) plenum rated Coax sensor cable pair with nickel plated brass glands
		• 20 m (65.6 ft) plenum rated Coax sensor cable pair with stainless steel glands



Selection and ordering data	Article No.	Article No.
<i>Spare parts (Miscellaneous)</i>		<i>Spare parts (Miscellaneous)</i>
<b>SITRANS F S Clamp-on</b>	<b>7ME3960-</b>	<b>SITRANS F S Clamp-on</b>
<b>Cable glands and adapters</b>		<b>7ME3960-</b>
Cable gland set M20, nylon	<b>A5E38145321</b>	<b>Pipe damping films</b>
Cable gland set M20, nickel/brass	<b>A5E38145323</b>	B1, B2, B3, C1 and C2 sensors
Cable gland set M20, stainless steel	<b>A5E38145327</b>	D1 and D3 sensors
Iris glands, set of 2, nickel plated brass	<b>A5E38635890</b>	D2 sensor
Iris glands, set of 2, stainless steel	<b>A5E38635986</b>	D4 sensor
M20xNPT adapters, set of 8, brass/nickel	<b>A5E38145635</b>	<b>Universal sensor test blocks</b>
M20xNPT adapters, set of 8, brass/nickel, Ex	<b>A5E38309159</b>	Test block for size A and B universal sensors
M20xNPT adapters, set of 8, stainless steel	<b>A5E38145643</b>	Test block for size C and D universal sensors
<b>RTD temperature sensor cables</b>		<b>Thickness gauge</b>
6 m (20 ft) standard RTD cable	<b>0 C R 5 0</b>	Stand alone thickness gauge
15 m (50 ft) standard RTD cable	<b>0 C R 5 1</b>	<b>7ME39510TG20</b>
30 m (100 ft) standard RTD cable	<b>0 C R 5 2</b>	<b>Cable, DSL to wallbox transmitter</b>
46 m (150 ft) standard RTD cable	<b>0 C R 5 3</b>	5 m (16.4 ft) standard DSL cable (2 mounted M12 plugs)
61 m (200 ft) standard RTD cable	<b>0 C R 5 4</b>	5 m (16.4 ft) standard DSL cable (no plugs mounted)
91 m (300 ft) standard RTD cable	<b>0 C R 5 5</b>	10 m (32.8 ft) standard DSL cable (2 mounted M12 plugs)
6 m (20 ft) submersible RTD cable	<b>0 C R 5 6</b>	10 m (32.8 ft) standard DSL cable (no plugs mounted)
15 m (50 ft) submersible RTD cable	<b>0 C R 5 7</b>	25 m (82 ft) standard DSL cable (2 mounted plugs)
30 m (100 ft) submersible RTD cable	<b>0 C R 5 8</b>	25 m (82 ft) standard DSL cable (no plugs mounted)
46 m (150 ft) submersible RTD cable	<b>0 C R 5 9</b>	50 m (164 ft) standard DSL cable (2 mounted plugs)
61 m (200 ft) submersible RTD cable	<b>0 C R 6 0</b>	50 m (164 ft) standard DSL cable (no plugs mounted)
91 m (300 ft) submersible RTD cable	<b>0 C R 6 1</b>	75 m (246.1 ft) standard DSL cable (2 mounted plugs)
<b>Dedicated cable termination kits for:</b>		75 m (246.1 ft) standard DSL cable (no plugs mounted)
Standard, plenum sensor cable (Nema 4X and Nema 7 wall)	<b>0 C t 0 1</b>	150 m (492.1 ft) standard DSL cable (2 mounted plugs)
Submersible sensor cable (Nema 4X and Nema 7 wall)	<b>0 C t 1 1</b>	150 m (492.1 ft) standard DSL cable (no plugs mounted)
Clamp-on RTD cable termination kit for standard RTD	<b>0 C t 2 1</b>	
Clamp-on RTD cable termination kit for submersible RTD	<b>0 C t 3 1</b>	
Insert RTD cable termination kit	<b>0 C t 4 1</b>	
Termination kit for armored cable	<b>CQO:1012CNFX-TK</b>	
<b>Ultrasonic couplants</b>		
Temporary water based for portable systems: 350 ml (12 oz): -34 ... +38 °C (-30 ... +100 °F)	<b>0 U C 1 0</b>	
Permanent synthetic polymer based: 90 ml (3 oz) -40 ... +190 °C (-40 ... +375 °F)	<b>0 U C 2 0</b>	
Permanent high temperature fluoroether: 163 ml (5.5 oz): -40 ... +230 °C (-40 ... +450 °F)	<b>0 U C 3 2</b>	
Dry coupling pad kit (10 pieces)	<b>0 U C 4 0</b>	
Permanent vulcanizing silicone rubber couplant: 90 ml (3 oz): -40...+120C (-40...+250 °F)	<b>CQO:CC112</b>	
Permanent high temperature silicone grease: 12 ml (0.4 oz): -40 ... +230 °C (-40 ... +450 °F)	<b>CQO:CC117B</b>	
Permanent high temperature silicone grease: 150 ml (5 oz): -40 ... +230 °C (-40 ... +450 °F)	<b>CQO:CC117A</b>	
Couplant for submersible sensor applications	<b>CQO:CC120</b>	

## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

### SITRANS FS220 ultrasonic flowmeter

#### Overview



The SITRANS FS220 is a clamp-on ultrasonic flow system consisting of an FST020 transmitter and FSS200 clamp-on sensors.

The transmitter classification FST020 describes a basic clamp-on ultrasonic flowmeter for basic application requirements. Based on the same digitalized platform as the FST030 this system provides the same accuracy and similar functions on a lower cost level. This system is ideal for water measurement and any application not requiring temperature or viscosity compensation.

#### Benefits

- Easy installation at any time; no production stop, no need to cut pipe or stop flow
- Minimal maintenance; external sensors do not require periodic cleaning
- No moving parts to foul or wear. No contact with media
- No pressure drop or energy loss
- Wide turn-down ratio, bidirectional and high stability at zero flow conditions
- Anomaly compensation tool for correction of non-ideal straight pipe runs. Automatic compensation during backflow
- Optional WideBeam technology ensures highest performance and accuracy
- Compatible with all previously installed transit time sensors

#### Application

The SITRANS FS220 can be used for the following application conditions:

- Pipe sizes from 10 mm to 10 m
- Pipe materials: ideal for all metals, glass, FRP and most PVC variants; NOT for concrete pipes and special compound pipes
- Pipe wall thickness from 1 to 35 mm; specials on request up to 65 mm
- Media temperatures from -40 to 121 °C; universal high temperature sensors for up to 230 °C max.
- Underground/submerged locations, non-ideal environments, strong pipe vibrations

SITRANS FS220 flowmeters are suitable for most clean liquid applications, including the following:

- Water and wastewater industry
  - Potable water
  - Water and aqueous solutions
  - Wastewater, influent & effluent
  - Processed sewage, sludge
- Chemical feed industry
  - Sodium hypochlorite
  - Sodium hydroxide
- HVAC and power industries
  - Coolant flow
  - Fuel flow
  - Utility district heating, cooling
  - Refrigeration liquids
- Process control
  - Chemicals
  - Pharmaceuticals
  - Food products
  - Very low flow sensitivity (< 0.1 m/s)
  - High temperature liquids > 120 °C (248 °F)



## Application (continued)

### Sensor type selection guide



Application condition Note all that apply before making selection	Standard sensor supported in MLFB		Notes
	High precision	Universal	
<b>Media</b>			
General survey (clean liquids) on non-steel pipes		X	
General survey (clean liquids) on a limited range of steel pipes	X		
Moderately aerated liquid or slurry, up to 121 °C (250 °F)	X		
Permanent installation on steel pipe (clean liquids)	X		
Installation in offshore or corrosive environment	X		With optional stainless steel mounting
Liquid temperature greater than 120 °C (248 °F)	O	X	High temperature metal block sensors (up to 230 °C (446 °F))
Operation on single pipeline flowing multiple products	X	O	
<b>Pipe material</b>			
Steel	X		
Steel pipe with diameter/wall thickness ratio < 10	O	X	
Non-steel pipe material (copper, ductile iron, cast iron, etc.)	O	X	High precision sensors can also be used on plastic and aluminum pipes in special cases

O = not suitable X = preferred choice

### Definitions

Sensor chart	Description
FSS200	Formerly 1011 clamp-on sensors of the 1010 systems
Standard	Standard system sensor, selectable as part of a configured product
Special	Sensors available for non-standard applications and pipes. Contact tech support for application use
Corrosions resistant	Stainless steel metal parts on all Size C, D and E and all high temperature sensors
Aluminum	Aluminum metal parts on all HP and Universal size A and B (Corrosion resistant on request for size B)
Spare	Not available as part of a configured product, must be ordered separately
CE	Transmitter and sensors certified for sale in the EU
Trackless mount	Sensors fixed only by straps, no other mounting (spacer bar as an option) - not recommended
Tracks	Permanent installation for universal size A/B, high precision size A/B and all sizes of high temperature. Tracks always come as dual-part for either direct or reflect mounting, and always with straps.
Frames	Three sizes, for permanent installation for universal size C/ D/ E, and for high precision size C/D. For universal and high precision size B available for pipes > 125 OD (Spare)
T1	Usable from -40 ... +120 °C (-40 ... +248 °F), but best for Ø temperature below 80 °C (< 176 °F); standard
T2	Usable from -40 ... +120 °C (-40 ... +248 °F), but best for Ø temperature above 80 °C (< 176 °F)
Submersible	Sensors can be used submerged; adding Denso for supplemental protection is recommended

## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

### SITRANS FS220 ultrasonic flowmeter

Application (continued)

#### Sensor Availability Guide

Sensor models	Availability									
	Standard	Spare only	Corrosion resistant	Trackless	Tracks	Frames	T1 best use below 80 °C (176 °F)	T2 best use 80 ... 120 °C (176 ... 248 °F)	Submersible	Catalog
<b>Universal Sensor -40 ... 120 °C housing CE IP68</b>										
A1 Universal for pipe OD – 5.8 ... 50.8 mm (0.23" ... 2")		X			X				X	
A2 Universal for pipe OD – 12.7 ... 50.8 mm (0.5" ... 2")	X				X				X	X
B1 Universal for pipe OD – 12.7 ... 76 mm (0.5" ... 3")		X			X	X			X	
B2 Universal for pipe OD – 12.7 ... 76 mm (0.5" ... 3")		X			X	X			X	
B3 Universal for pipe OD – 19 ... 127 mm (0.75" ... 5")	X				X	X			X	X
C1 Universal for pipe OD – 51 ... 254 mm (2" ... 10")		X	X	X		X			X	
C2 Universal for pipe OD – 51 ... 254 mm (2" ... 10")		X	X	X		X			X	
C3 Universal for pipe OD – 51 ... 305 mm (2" ... 12")	X		X	X		X			X	X
D1 Universal for pipe OD – 102 ... 508 mm (4" ... 20")		X	X	X		X			X	
D2 Universal for pipe OD – 152 ... 610 mm (6" ... 24")		X	X	X		X			X	
D3 Universal for pipe OD – 203 ... 610 mm (8" ... 24")	X		X	X		X			X	X
*E1 Universal for pipe OD – 254 ... 3048 mm (10" ... 120")		X	X	X		X			X	
*E2 Universal for pipe OD – 254 ... 6096 mm (10" ... 240")	X		X	X		X			X	X
*E3 Universal for pipe OD – 304 ... 10007 mm (12" ... 394")		X	X	X		X			X	
<b>High Precision Sensor -40 ... 120 °C (-40 ... +248 °F) T1 (T2) CE IP68</b>										
A1H (High Precision) for pipe WT - 0.64 ... 1.0 mm (0.025" ... 0.04")		X			X		X		X	X
A2H (High Precision) for pipe WT - 1.0 ... 1.5 mm (0.04" ... 0.06")	X				X		X		X	X
A3H (High Precision) for pipe WT - 1.5 ... 2.0 mm (0.06" ... 0.08")	X				X		X		X	X
B1H (High Precision) for pipe WT - 2.0 ... 3.0 mm (0.08" ... 0.12")	X				X	X	X	X	X	X
B2H (High Precision) for pipe WT - 3.0 ... 4.1 mm (0.12" ... 0.16")	X				X	X	X	X	X	X
B3H (High Precision) for pipe WT - 2.7 ... 3.3 mm (0.106" ... 0.128")		X			X	X	X	X	X	X
C1H (High Precision) for pipe WT - 4.1 ... 5.8 mm (0.16" ... 0.23")	X		X	X		X	X	X	X	X
C2H (High Precision) for pipe WT - 5.8 ... 8.1 mm (0.23" ... 0.32")	X		X	X		X	X	X	X	X
* D1H (High Precision) for pipe WT - 8.1 ... 11.2 mm (0.32" ... 0.44")	X		X	X		X	X	X	X	X
* D2H (High Precision) for pipe WT - 11.2 ... 15.7 mm (0.44" ... 0.62")	X		X	X		X	X	X	X	X
* D3H (High Precision) for pipe WT - 7.4 ... 9.0 mm (0.293" ... 0.354")		X	X	X		X	X	X	X	X
* D4H (High Precision) for pipe WT - 15.7 ... 31.8 mm (0.62" ... 1.25")	X		X	X		X	X	X	X	X
<b>High Temperature Universal Sensor -40 ... +230 °C (-40 ... +446 °F)</b>										
High Temperature size 1 ... 230 °C (Ø 12.7 ... 100 mm)		X	X		X				X <sup>1)</sup>	
High Temperature size 2 ... 230 °C (Ø 30 ... 200 mm)	X		X		X				X	X
High Temperature size 3 ... 230 °C (Ø 150 ... 610 mm)	X		X		X				X	X
High Temperature size 4 ... 230 °C (Ø 400 ... 1200 mm)	X		X		X				X	X
High Temperature size 2A ... 230 °C (Ø 30 ... 200 mm)		X	X		X				X <sup>1)</sup>	
High Temperature size 3A ... 230 °C (Ø 150 ... 610 mm)		X	X		X				X <sup>1)</sup>	
High Temperature size 4A ... 230 °C (Ø 400 ... 1200 mm)		X	X		X				X <sup>1)</sup>	

#### Application (continued)


#### Sensor mounting availability guide

Mounting	Sensor (Dedicated)		
	Universal	High precision	High temperature universal
Trackless (straps only)	X	X	
Tracks universal dedicated	X		
Tracks HP dedicated		X	
Frames universal dedicated	X		
Frames HP dedicated		X	
Tracks high temperature universal			X
High precision mounting single enclosure for one pair sensors		X	
High precision mounting dual enclosure for one pair sensors		X	
SpacerBar	X	X	
Straps	X	X	X
Denso	X	X	

#### Function

#### Operating principle

The SITRANS F S system is a transit-time ultrasonic meter that provides exceptional performance using a non-intrusive clamp-on approach. Ultrasonic sensors transmit and receive acoustic signals directly through the existing pipe wall, where the fluid refraction angle is governed by Snell's law of refraction.

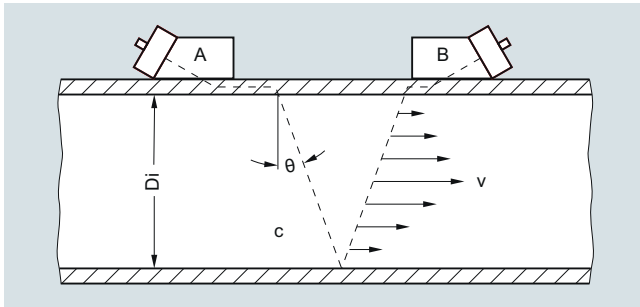

Clamp-on sensor mounted in a reflect configuration

The beam refraction angle is calculated as follows:

$$\sin \theta = c / V_{\phi}$$

$c$  = Velocity of sound in fluid

$V_{\phi}$  = Phase velocity (a constant in the pipe wall)

The flowmeter automatically compensates for any change in fluid sound velocity (or beam angle) in response to variations in the average transit time between sensors A and B. By subtracting the computed fixed times (within the sensor and pipe wall) from the measured average transit time, the meter can then infer the required transit time in the fluid ( $T_{\text{Fluid}}$ ).

The sound waves traveling in the same direction as the flow ( $T_{A,B}$ ) arrive earlier than sound waves traveling against the direction of flow ( $T_{B,A}$ ). This time difference ( $\Delta t$ ) is used to compute the line integrated flow velocity ( $v$ ) as shown in the equation below:

$$v = V_{\phi} / 2 \cdot \Delta t / T_{\text{Fluid}}$$

Once the raw flow velocity is determined, the fluid Reynolds Number ( $Re$ ) must be determined to properly correct for fully developed flow profile. This requires the entry of the fluid's kinematic viscosity ( $\text{visc}$ ) as shown in the equations below, where  $Q$  represents the final flow profile compensated volumetric flow rate.

$$Re = Di \cdot v / \text{visc} \quad Q = K(Re) \cdot (\pi / 4 \cdot Di^2) \cdot v$$

$v$  = Flow velocity

$\text{visc} = \mu / \rho$  = (dynamic viscosity / density)

$K(Re)$  = Reynolds flow profile compensation

In wetted type ultrasonic flowmeters the meter constants are configured prior to leaving the factory. As this is not possible with clamp-on meters, the settings must be made by the customer at the time of installation. These settings include pipe diameter, wall thickness, liquid viscosity, etc.

SITRANS clamp-on flowmeters that include temperature sensing can be configured to dynamically infer changes in fluid viscosity for the purpose of computing the most accurate flow profile compensation ( $K_{Re}$ ).

#### Ultrasonic sensor types

Two basic types of clamp-on sensors can be selected for use with the SITRANS F S flowmeter. The lower cost "universal" sensor is the most common type in the industry and is suitable for most single liquid applications where the sound velocity does not vary much. This sensor type can be used on any sonically conductive pipe material (including steel) making it well suited for temporary survey applications. Universal sensors are selected based on the pipe diameter range alone, so wall thickness is less important to the selection process.

The second sensor type is the patented "WideBeam" sensor (called high precision), which utilizes the pipe wall as a kind of waveguide to optimize the signal to noise ratio and provide a wider area of vibration. This makes this kind of sensor less sensitive to any change in the fluid medium.

The WideBeam sensor is designed for steel pipes, but can also be used with aluminum and titanium. It is the preferred sensor for HPI applications. Note that unlike the universal type, this sensor selection is dependent only on the pipe's wall thickness.


## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters


### SITRANS FS220 ultrasonic flowmeter

#### Function (continued)

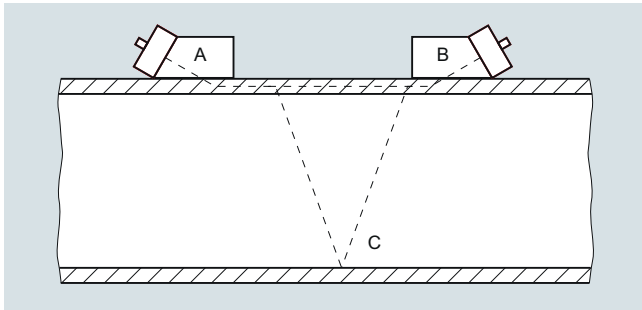

#### General installation guidelines for SITRANS FSS200 clamp-on sensor

- Minimum measuring range: 0 to  $\pm 0.3$  m/s velocity (see meter accuracy graph on next page for more detail)
- Maximum measuring range: 0 to  $\pm 12$  m/s ( $\pm 30$  m/s for high precision sensors). Final flow range determination requires application review

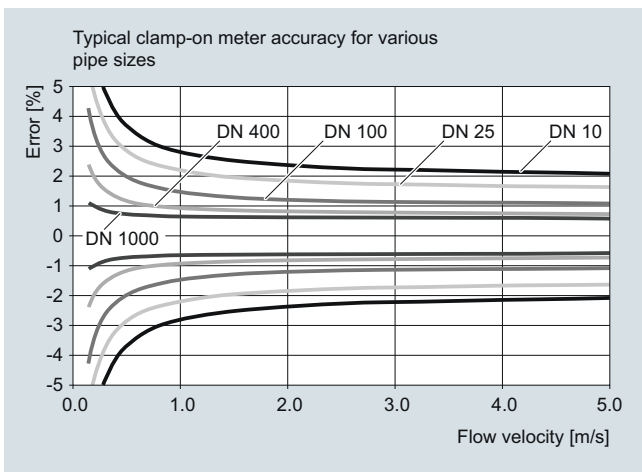

- Pipe must be completely full within the sensor installation volume for accurate flow measurement
- Typical MINIMUM straight pipe requirements are: 10 Diameters upstream/5 Diameters downstream. Additional straight run is required for double out-of-plane elbows and partially open valves.
- Sensors should be installed at least 20° off vertical for horizontal pipes. This reduces the chance of beam interference from gas buildup at the top of the pipe
- Operation inside the Reynolds transition region, between  $1000 < Re < 5000$  should be avoided for best accuracy
- Submersible and direct burial installations can be accommodated. Consult sales representative for details
- Ultrasonic coupling compound is provided with all sensor orders. Insure that a permanent coupling compound is used for long term installations
- Refer to the "Sensor type selection guide" to insure proper application of the equipment

#### Technical specifications

<b>Rangeability</b>	
Flow range	$\pm 12$ m/s ( $\pm 40$ ft/s), depending on pipe size higher or lower
Flow direction	bi-directional
Flow sensitivity	0.001 m/s (0.003 ft/s) flow rate independent
<b>Digital inputs</b>	
Totalizer Hold	Optically isolated diode Activated On: Input voltage: 2 ... 10 V DC
Totalizer Reset	Optically isolated diode Activated On: Input voltage: 2 ... 10 V DC
<b>Output Channel 1</b>	
Current	4 ... 20 mA (isolated) Externally powered 10 ... 30 V DC
Relay	30 V DC, 3 V AC max. Pulse: 41.6 ms ... 5 s pulse duration Frequency: 0 ... 12.5 kHz (50 % duty cycle)
Pulse rate	Optically isolated transistor 10 mA, 30 V DC max.
<b>Accuracy</b>	
Repeatability	For velocities above 0.3 m/s (1 ft/s), $\pm 1.0$ % of flow
Zero Drift	$\pm 0.25$ % (according to ISO 11631) 0.1 % of rate; $< \pm 0.001$ m/s ( $\pm 0.003$ ft/s)
Data refresh rate	100 Hz
<b>Transmitter conditions</b>	
Operating temperature	-10 ... +50 °C (14 ... 122 °F)
Storage temperature	-20 ... +60 °C (-4 ... +140 °F)
Degree of protection	IP65, NEMA 4X
<b>Design</b>	
Weight	1.4 kg (3.0 lb)
Dimensions (W x H x D)	176 x 240 x 87 mm (6.9 x 9.5 x 3.4 inch)
Enclosure material	Polycarbonate
<b>Power supply</b>	
	100 ... 240 V AC @ 20 VA or 11.5 ... 28.5 V DC @ 10 W
<b>Certificates and approvals</b>	
Unclassified locations	
• General Safety	UL, cUL, CE

Selection and ordering data	Article No.	Article No.
<i>Spare parts (FSS200 sensors)</i>		
<b>SITRANS F US clamp-on</b>	<b>7ME3950-5</b>	<b>7ME3960-</b>
<b>Temperature range for all sensors is unless otherwise noted</b>		
<b>-40 °C ... +120 °C (-40 °F ... +248 °F)</b>		
Ideal operating temperatures as follows:		
T1: -40 ... +80 °C (-40 ... +176 °F)	0	
T2: +80 ... 121 °C (+176 ... 250 °F)	2	
<b>Spare sensor code</b>		
(Stainless steel construction)		
<u>Liquid flow sensors for use with mounting frames or tracks (including portable)</u>		
FSS200 A2 universal	L B 0 1	
FSS200 B3 universal	L C 0 1	
FSS200 C3 universal	L D 0 0	
FSS200 D3 universal	L E 0 0	
FSS200 E2 universal	L F 0 0	
FSS200 A1H (high precision)	L G 0 1	
FSS200 A2H (high precision)	L H 0 1	
FSS200 A3H (high precision)	L J 0 1	
FSS200 B1H (high precision)	G K 1	
FSS200 B2H (high precision)	G L 1	
FSS200 B3H (high precision)	G T 1	
FSS200 C1H (high precision)	G M 0	
FSS200 C2H (high precision)	G N 0	
FSS200 D1H (high precision)	G P 0	
FSS200 D2H (high precision)	G Q 0	
FSS200 D3H (high precision)	G U 0	
FSS200 D4H (high precision)	G R 0	
<u>High temperature universal liquid sensors up to 230 °C (446 °F)</u>		
FSS200 High temp. sensor size 1 for 12.7 to 100 mm diam.	L A 1 3	
FSS200 High temp. sensor size 2 for 30 to 200 mm diam.	L A 2 3	
FSS200 High temp. sensor size 3 for 150 to 600 mm diam.	L A 4 3	
FSS200 High temp. sensor size 4 for 400 to 1200 mm diam.	L A 7 3	
<i>Spare parts (Miscellaneous)</i>		
<b>SITRANS F US clamp-on</b>		
<b>Dedicated sensor mounting hardware</b>		
Sensor mounting tracks (dual part aluminium with mounting straps) for pipes < 125 mm (5 inch)		0 M A 0 0
• Tracks for Universal sensor pair size A or B		0 M B 0 0
• Tracks for High precision sensor pair size A or B		
Sensor mounting frames pair with mounting straps		
• Frames for universal sensor size B (for pipes >125 mm (5 inch))		
• Frames for universal sensor size C		0 M C 0 0
• Frames for universal sensor size D		0 M C 0 1
• Frames for universal sensor size E		0 M C 0 2
• Frames for High precision sensor size B (for pipes >125 mm (5 inch))		
• Frames for High precision sensor size C		
• Frames for High precision sensor size D		
Mounting straps for mounting frames (slotted stainless steel)		
• Straps for pipes from DN 50 to DN 150		0 S M 0 0
• Straps fFor pipes from DN 50 to DN 300		0 S M 1 0
• Straps fFor pipes from DN 300 to DN 600		0 S M 2 0
• Straps for pipes from DN 600 to DN 1200		0 S M 3 0
• Straps for pipes from DN 1200 to DN 1500		0 S M 4 0
• Straps fFor pipes from DN 1500 to DN 2100		0 S M 5 0
• Straps for pipes from DN 2100 to DN 3000		0 S M 6 0
Spacer bars (for indexing sensors on pipe)		
• Spacer bar for pipes to 200 mm/8 inch (liquid), 600 mm/24 inch (gas)		0 M S 1 0
• Spacer bar for pipes to 500 mm/20 inch (liquid), DN 1200/48 inch (gas)		0 M S 2 0
• Spacer bar for pipes to 800 mm/32 inch (liquid)		0 M S 3 0
• Spacer bar-extension for pipes to 1200 mm/48 inch (liquid) Only use in conjunction with 7ME3960-0MS30		0 M S 4 0
High precision mounting enclosures. Spacer bar is included; straps should be ordered separately		
• Stainless steel mounts for high precision size "C" sensor pair, single enclosure (each)		0 W S 5 0
• Stainless steel mounts for high precision size "D/E" sensor pair, single enclosure (each)		0 W S 6 0
• Stainless steel mounts for high precision size "C" sensors, dual enclosure (pair)		0 W D 5 0
• Stainless steel mounts for high precision size "D/E" sensors, dual enclosure (pair)		0 W D 6 0
<b>Stainless steel straps for weld seal enclosure mounting (2 x required for dual enclosures)</b>		
Mounting strap for pipe diameter to 300 mm (13 inch)		0 S M 0 1
Mounting strap for pipe diameter to 600 mm (24 inch)		0 S M 1 1
Mounting strap for pipe diameter to 1200 mm (48 inch)		0 S M 2 1
Mounting strap for pipe diameter to 1500 mm (60 inch)		0 S M 3 1
Mounting strap for pipe diameter to 2130 mm (84 inch)		0 S M 4 1
Mounting strap for pipe diameter to 3050 mm (120 inch)		0 S M 5 1

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Clamp-on ultrasonic flowmeters

#### SITRANS FS220 ultrasonic flowmeter

#### Selection and ordering data

#### Article No.


##### Spare parts (Miscellaneous)

##### SITRANS F US clamp-on

7ME3960- 

##### Stainless mounting tracks for high temp 991 sensors, with straps, dual part for direct and reflect out, inc. straps

Size 1 high temp sensor pair

CQO:992MTNHMSH-1 

Size 2 high temp sensor pair

CQO:992MTNHMSH-2 

Size 3 high temp sensor pair

CQO:992MTNHMSH-3 

Size 4 high temp sensor pair

CQO:992MTNHMSH-4 

##### Sensor cables FSS220 (IP65 NEMA 4X) wall mount

Sensor cable pair, terminated, 5 m

A5E39669934031 

Sensor cable pair, terminated, 10 m

A5E39669934032 

Sensor cable pair, terminated, 20 m

A5E39669934033 


##### Dedicated cable termination kits

For externally supplied sensor cables, standard and plenum



0 C T 0 1 

##### Cable gland kit (normally supplied with transmitter)


for IP65 NEMA 4X enclosures

A5E41693895 

##### Ultrasonic couplant

Temporary water based for portable systems:  
350 ml (12 oz): -34 ... +38 °C (-30 ... +100 °F)0 U C 1 0 Permanent synthetic polymer based:  
90 ml (3 oz) -40 ... +190 °C (-40 ... +375 °F)0 U C 2 0 Permanent high temp fluoroether:  
-40 ... +230 °C (-40 ... +450 °F)0 U C 3 0 Permanent vulcanizing silicone rubber couplant:  
90 ml (3 oz): -40 ... +120 °C (-40 ... +250 °F)CQO:CC112 Permanent high temp silicone grease:  
12 ml (0.4 oz): -40 ... +230 °C (-40 ... +450 °F)CQO:CC117 Permanent high temp silicone grease:  
150 ml (5 oz): -40 ... +230 °C (-40 ... +450 °F)CQO:CC117A 

Couplant for submersible sensor applications

CQO:CC120 Dry coupling pads (qty of 10):  
-34 to +200 °C (-30 to +392 °F)0 U C 4 0 

##### Universal Sensor Test Blocks

Test block for size A and B universal sensors

0 T B 1 0 

Test block for size C and D universal sensors

0 T B 2 0 

#### Accessories

##### Description

##### Article No.

##### FSS200 Universal Sensors

7ME3950-...

Selected for general purpose measurement.

Since they are selected based on diameter only, a wide range of pipe sizes and materials can be covered with a minimum number of sensors. These can also be selected for cost savings on applications where standard accuracy is sufficient.

##### FSS200 High Precision Sensors

7ME3950-...

Selected for increased performance on steel pipes. They provide the highest accuracy achievable by the meters and therefore should be selected whenever higher accuracy / repeatability is required primarily based on pipe wall thickness.



##### FSS200 High Temperature Sensors

7ME3950-...

Selected whenever pipe temperature will exceed 250 °F (120 °C) up to a maximum of 450 °F (232 °C). They are universal type and can therefore be used on any pipe material and are selected by pipe diameter. Constructed in stainless steel. Connection junction box included.



##### Mounting tracks

7ME3960-...

Typically used on smaller pipes for easier and more stable mounting of dedicated universal style sensor size A or B; also available for dedicated high precision sensor size A or B.



##### Mounting Frames

7ME3960-...

These items are useful in simplifying sensor installation. They are strapped to the pipe first and then the sensors are installed, making the installation less cumbersome and more precise. They also enable easy repeated mounting of the sensors assuring alignment to the original sensor positioning. They may be left in place at each measurement location where periodic flow surveys are conducted to simplify subsequent installations and ensure repeatable results.



##### Magnetic mounting frames










7ME3960-0MD02

Magnetic mounting frames are designed to simplify clamp-on sensor installation on pipelines 8 inches (DN 200) and larger by eliminating the need for straps to secure them. They feature powerful magnets to ensure quick and accurate setup. Compatible with all C, D and E universal and high-precision sensors belonging to the SITRANS FSS200 clamp-on family. Magnetic mounting frames are constructed in aluminum for a high level of durability. Ideal use on temporary installations.





#### Selection and ordering data (continued)

Description	Article No.		Description	Article No.	
<b>Test Block</b> Used for checking operation of a meter and sensors prior to a field installation, or as a troubleshooting tool. Selected by sensor size, each block accommodates 2 sensor sizes. Available only for universal sensors.	7ME3960...		<b>FST020 Transmitter module</b> Main transmitter module for FST020 including SD-card and firmware load	A5E41693884	
<b>Straps</b> Used to fasten sensors or mounting frames to pipe for dedicated meter installations. Stainless steel construction for corrosion resistance.	7ME3960-...		<b>FST020 Transmitter module cover AC</b> Cover for FST020 Main transmitter module for AC powered units; includes label and screws	A5E41693888	
<b>Cable Gland</b> Cable gland kit for use with SITRANS FST020 transmitters housed in IP65 NEMA 4X wall mount enclosures. Kit contains two single port glands for power and one dual port gland for sensor cables.	A5E41693895		<b>FST020 Transmitter module cover DC</b> Cover for FST020 Main transmitter module for DC powered units; includes label and screws	A5E41693889	
<b>Ultrasonic Couplant</b> Fills any voids between sensor emitting surface and pipe wall to allow maximum energy transfer between sensor and pipe. Several different types of couplants are employed as determined by the application conditions and type of installation (Temporary or permanent).	7ME3960-...		<b>FST020 Enclosure cover</b> Enclosure lid for FST020; includes display module, connection label and screws	A5E38846901	
<b>Dry Couplant</b> The dry coupling pad is intended for use in any liquid, clamp-on transit time or Doppler applications that require a more durable coupling material. Installation is easy by simply placing one strip of material between sensor and pipe. Not intended for clamp-on gas where damping material is used. The temperature range is -34 to +200 °C (-30 to +392 °F).	7ME3960-...		<b>FST020 Power Supply AC</b> Power supply module for FST020, AC power	7ML1830-1MD	
<b>Termination Kit (Flow Sensors)</b> Termination kit for one pair of sensor cables. These can be provided in cases where users will be purchasing bulk cable directly and cutting to length at site, or when existing cable length is to be altered. Selected by cable type.	7ME3960-...		<b>FST020 Power Supply DC</b> Power supply module for FST020, DC power	7ML1830-1ME	
			<b>SensorFlash SD-card</b> 4 GB micro SD card -40 °C ... +85 °C for FST020 or FST030 for data storage, firmware and back-up	A5E38288507	
			<b>Hardware kit</b> Various nuts, screws, and grounding strap for FST020 transmitter	A5E41944763	
			<b>Sensor cable pair, 5 m</b> Sensor cable for connection between FSS200 sensors and FST020 transmitter, 5 meters in length	A5E39669934031	
			<b>Sensor cable pair, 10 m</b> Sensor cable for connection between FSS200 sensors and FST020 transmitter, 10 meters in length	A5E39669934032	
			<b>Sensor cable pair, 20 m</b> Sensor cable for connection between FSS200 sensors and FST020 transmitter, 20 meters in length	A5E39669934033	
			<b>Enclosure mounting kit</b> Mounting kit to fix enclosure on a 2" stanchion pipe	QCB:1012NMB1	


### Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

#### SITRANS FS220 ultrasonic flowmeter

#### Dimensional drawings

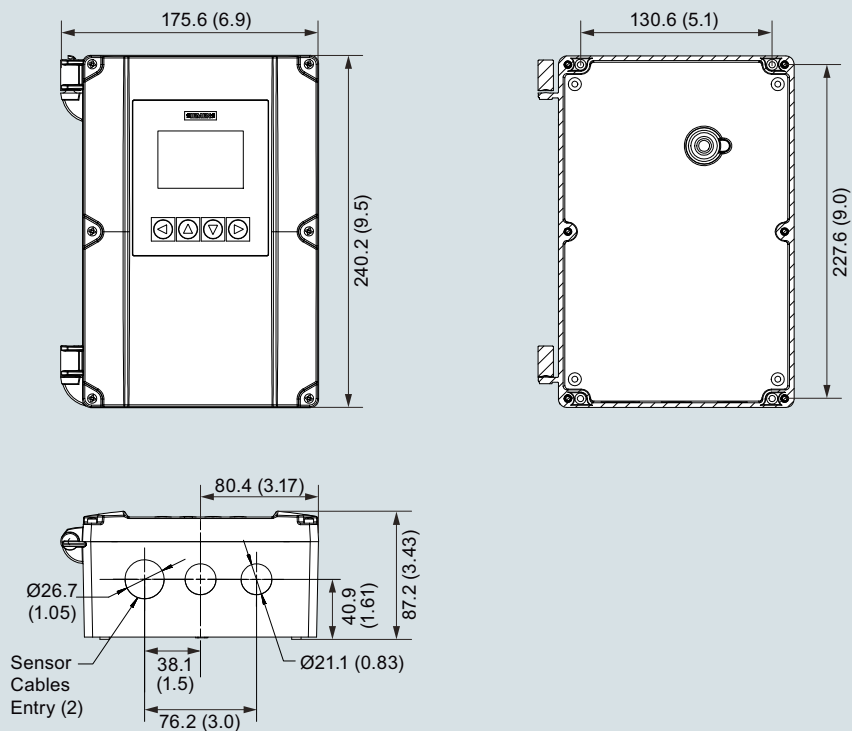

SITRANS FST020 IP65 (NEMA 4X), wall mount enclosure, dimensions in mm (inch)



#### SITRANS FST020 ultrasonic flow transmitter, wall mount housing

### Overview



The SITRANS FST020 is the basic device for simple and cost-effective clamp-on applications. As a single-path device, it is suitable for flow measurement on liquids that do not require temperature or viscosity consideration and where highest accuracies are not required.

Historically, the FST020 comes from the clamp-on family of analog FUS1010 transmitters. Since the revision in 2017, the updated transmitter is now part of a digital platform based on the latest developments within Digital Signal Processing (DSP) technology - engineered for high measuring performance, fast response to step changes in flow, high immunity against process noise and simplicity in installation, commissioning and maintenance.

The FST020 transmitter delivers standard parameter measurements i.e. volume flow, flow speed or sound velocity by analog outputs and Modbus communication.

Process values

- Volume flow
- Flow velocity
- Sound velocity
- Totalizer 1

### Benefits

#### Flow calculation and measurement

- Dedicated volume flow calculation with DSP technology
- 100 Hz update rate for all primary process values
- Maximum data age from sensor to output is 20 ms
- Independent low flow cut-off settings for volume flow and velocity
- Zero-point adjustment on command from discrete input or host system

#### Operation and display

- User-configurable operation display
  - Fully graphical display 240 x 160 pixel display with up to 6 programmable views
  - Self-explaining alarm handling/log in clear text
  - Help text for all parameters appears automatically in the configuration menu

- SensorFlash technology stores production specific system documentation and provides removable memory of all flow-meter setups and functions
  - Calibration certificates (with ordered calibration)
  - Non-volatile memory backup of operational data
  - Transfer of user configuration to other flowmeters
  - 4GB SD card for storage and data logging
  - Audit trail of all parameter changes
  - Alarm logging

#### Alarms and safety

- Advanced diagnosis and service menu enhances troubleshooting and meter validation
- Configurable upper and lower alarm and warning limits for all process values

#### Outputs and control

- Monitoring comprised of 1 individually configurable totalizer
- Single parameter outputs that can be assigned individually to any of the following parameters:
  - Volume flow
  - Flow velocity
  - Sound velocity
  - Flow direction

Channel 1 is 4 to 20 mA analog output. The current signal can be configured for passive volume flow.

Relay output(s) can be user configured to Alarm status or warning.

Modbus RTU RS 485 comes as standard.

#### Signal input

The signal input can be user-configured for:

- Totalizer reset functions
- Forcing outputs or freezing process values
- Initiating automatic zero point adjustment

#### Approvals and certificates

The SITRANS FST020 transmitter was designed to comply with or exceed the requirements of international standards and regulations.

### Design

- Field clamp-on (non-intrusive)
- Single path, for only one pair of sensors on one pipe
- IP65 (NEMA 4X) wall mount housing, constructed of polycarbonate
- Available AC or DC power, 100 to 240 V AC, 11.5 to 28.5 V DC

### Function

- 240 x 160 pixel graphical display with 4 key navigation and backlight
- 6 user programmable views for individual process and diagnostic information
- Modbus RTU communication
- 100 Hz update rate for all primary process value
- Independent low flow cut-off settings for volume and flow velocity
- Fully compatible with Siemens PDM version 8.2 service pack 1 or higher
- Bidirectional flow operation
- Menus available in English and German

## Flow Measurement

### SITRANS FS (ultrasonic)

#### Clamp-on ultrasonic flowmeters

#### SITRANS FST020 ultrasonic flow transmitter, wall mount housing

#### Technical specifications

<b>Input</b>	
Flow range	± 12 m/s (± 40 ft/s), depending on pipe size higher or lower
Flow direction	bi-directional
Flow sensitivity	0.0003 m/s (0.001 ft/s) flow rate independent
<b>Digital inputs</b>	
Totalizer Hold	Optically isolated diode Activated ON: Input voltage: 2 ... 10 V DC
Totalizer Reset	Optically isolated diode Activated ON: Input voltage: 2 ... 10 V DC
<b>Output Channel 1</b>	
Current	4 ... 20 mA (isolated) Externally powered 10 ... 30 V DC
Relay	30 V DC, 3 VA AC max.
Pulse rate	Optically isolated transistor 10 mA, 30 V DC max Pulse: 41.6 ms ... 5 s pulse duration Frequency: 0 ... 12.5 kHz (50 % duty cycle)
<b>Accuracy</b>	
Accuracy	For velocities above 0.3 m/s (1 ft/s), ±1.0 % of flow
Repeatability	± 0.25 % (according to ISO 11631)
Zero Drift	0.1 % of rate; < ±0.001 m/s (±0.003 ft/s)
Data refresh rate	100 Hz
<b>Rated operation conditions</b>	
Operating temperature	-10 ... +50 °C (14 ... +122 °F)
Storage temperature	-20 ... +60 °C (-4 ... +140 °F)
Degree of protection	IP65/NEMA 4X
<b>Design</b>	
Weight	1.4 kg (3.0 lbs)
Dimensions (W x H x D)	176 x 240 x 87 mm (6.9 x 9.5 x 3.4 inch)
Enclosure material	Polycarbonate
<b>Power supply</b>	
	100 ... 240 V AC @ 20 VA or 11.5 ... 28.5 V DC @ 10 W
<b>Certificates and approvals</b>	
Unclassified locations	
• General safety	UL, cUL, CE

# Flow Measurement

## SITRANS FS (ultrasonic)

### Clamp-on ultrasonic flowmeters

#### SITRANS FST020 ultrasonic flow transmitter, wall mount housing

#### Selection and ordering data

#### Article No.

Transmitter SITRANS FST020 (Basic), IP65 (NEMA 4X)



7ME3570-

Ord.  
Code

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Number of ultrasonic paths

Single path

1

#### Flowmeter functions and I/O configurations

With display, keypad, 1x 4 ... 20 mA, 1x relay, 1x pulse/frequency, 2x digital input, Modbus RTU

J

#### Meter power options

100 ... 240 V AC

11.5 ... 28.5 V DC

A

B

#### Sensor FSS200<sup>1)</sup>

When ordering a flow system, sensors always come automatically with suitable mounting equipment. Smaller sensor sizes A & B come with mounting tracks, while sensor sizes C, D & E are supplied with frames and spacer bars. Straps provided are for the indicated maximum OD listed below. Strap kits are available to accommodate larger pipes (refer to spare part list). Refer to "Sensor Selection Charts" to find the most suitable sensors for specific pipe sizes and wall thicknesses.

No sensor

A

For the following Universal sensors, temperature range is -40 ... +121 °C (-40 ... +250 °F), FSS200 Universal: select according to outer pipe diameter

FSS200 Universal	A2	12.7 ... 50 mm (0.5 ... 2")	Track mount and straps provided up to 75 mm (3")	B
FSS200 Universal	B3	19 ... 127 mm (0.75 ... 5")	Track mount and straps provided up to 125 mm (5")	C
FSS200 Universal	C3	51 ... 305 mm (2 ... 12")	Mounting frame, straps and spacer bar provided up to 330 mm (13")	D
FSS200 Universal	D3	203 ... 610 mm (8 ... 24")	Mounting frame and straps and spacer bar provided up to 600 mm (24")	E
FSS200 Universal	E2	304 ... 9144 mm (12 ... 360")	Mounting frame and straps and spacer bar provided up to 1200 mm (48")	F

For the following High Precision sensors T1, temperature range is -40 ... +120 °C (-40 ... +248 °F), FSS200 High Precision: select according to pipe wall thickness

FSS200 HP	A1H	0.6 ... 1.0 mm (0.025 ... 0.4")	Track mount and straps provided up to 75 mm (3")	G
FSS200 HP	A2H	1.0 ... 1.5 mm (0.04 ... 0.06")	Track mount and straps provided up to 75 mm (3")	H
FSS200 HP	A3H	1.5 ... 2.0 mm (0.06 ... 0.08")	Track mount and straps provided up to 75 mm (3")	J
FSS200 HP	B1H	2.0 ... 3.0 mm (0.08 ... 0.12")	Track mount and straps provided up to 125 mm (5")	K
FSS200 HP	B2H	3.0 ... 4.1 mm (0.12 ... 0.16")	Track mount and straps provided up to 125 mm (5")	L
FSS200 HP	C1H	4.1 ... 5.8 mm (0.16 ... 0.23")	Mounting frame, straps and spacer bar up to 600 min (24")	M
FSS200 HP	C2H	5.8 ... 8.1 mm (0.23 ... 0.32")	Mounting frame, straps and spacer bar up to 600 min (24")	N
FSS200 HP	D1H	8.1 ... 11.2 mm (0.32 ... 0.44")	Mounting frame and straps provided up to 1200 mm (48") <sup>1)</sup>	P
FSS200 HP	D2H	11.2 ... 15.7 mm (0.44 ... 0.62")	Mounting frame and straps provided up to 1200 mm (48") <sup>1)</sup>	Q
FSS200 HP	D4H	15.7 ... 31.8 mm (0.62 ... 1.25")	Mounting frame and straps provided up to 1200 mm (48") <sup>1)</sup>	R

For the following High Temperature sensors, temperature range is -40 ... +230 °C (-40 ... +446 °F), FSS200 High Temperature: select according to outer diameter

FSS200 HT	Size 2	30 ... 200 mm (1 ... 8")	Mounting track and straps provided up to 250 mm (10")	Z	P 1 A
FSS200 HT	Size 3	150 ... 610 mm (6 ... 24")	Mounting track and straps provided up to 650 mm (26")	Z	P 2 A
FSS200 HT	Size 4	400 ... 1200 mm (16 ... 48")	Mounting track and straps provided up to 1250 mm (50")	Z	P 3 A

#### Sensor cable (pair - terminated)

No sensor cable

A

Sensor cable, HDPE jacket, submersible, length

- 5 m (16.4 ft)
- 10 m (32.8 ft)
- 20 m (65.6 ft)

P

Q

R

#### Approvals

UL, ULc, CE

1

<sup>1)</sup> Supplied spacer bar supports pipes up to 1050 mm (42"). For pipes larger than 1050 mm (42") purchase also, spare part 7ME3960-OMS40 (1012BN-4).

<sup>2)</sup> Made of stainless steel construction.

## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

### SITRANS FST020 ultrasonic flow transmitter, wall mount housing

#### Selection and ordering data

#### Order code

##### Further designs

Please add "-Z" to Article No. and specify Order code(s).

##### Cable termination kit for customer supplied sensor cable pair

Sensor cable termination for standard and plenum cable

**T01**

##### Mass storage

Enable mass storage function or SD-card (not available for USA)


**S30**

##### Tag and name plates

Tag plate, transmitter and sensor

**Y19**

#### Dimensional drawings

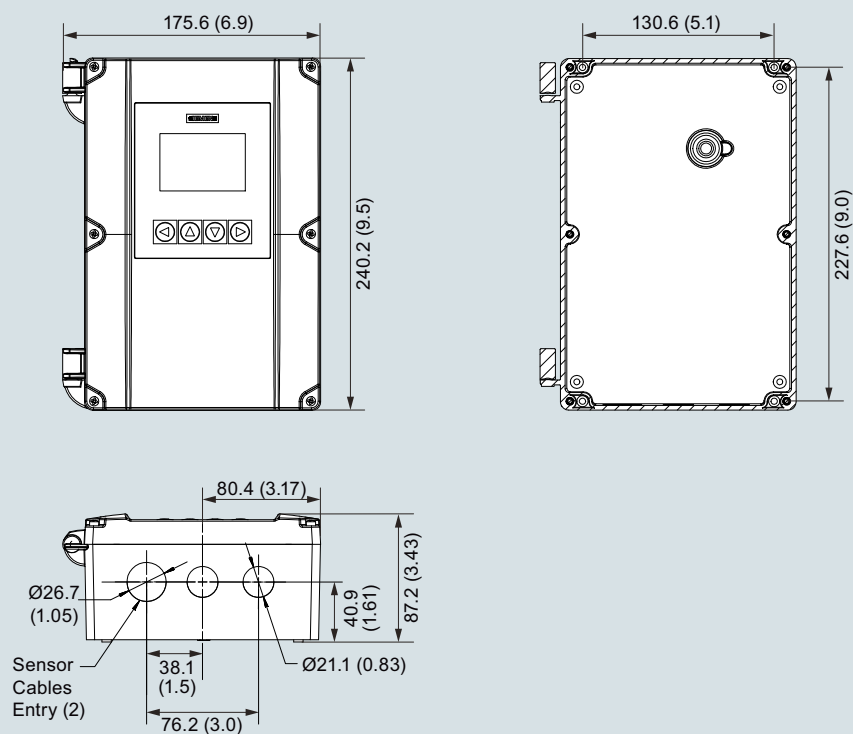

SITRANS FST020 IP65 (NEMA 4X), wall mount enclosure, dimensions in mm (inch)

### Overview



The thickness gauge is used to measure the wall thickness of the pipe that a clamp-on ultrasonic flowmeter is installed on. The wall thickness value is a vital factor in the flow computation model and a prerequisite for precise clamp-on ultrasonic flow measurement. When measuring any pipe wall thickness the thickness gauge can also be used as a stand-alone tool used to measure the wall thickness of any metallic or non-metallic pipe materials capable of acting as an ultrasonic wave conductor.

### Benefits

The thickness gauge is an indispensable tool in accurate clamp-on ultrasonic flow measurement. For a flowmeter to measure correctly it needs to know the exact wall thickness of the pipe it is measuring on. Since even the smallest miscalculation can have a major effect on the flow reading, the pipe thickness gauge has to be extremely precise. This is why the standard probe operates at a 5 MHz frequency making it capable of measuring pipe thickness ranging from 0.1 to 200 mm (0.03" to 7.9") with a very high resolution of up to 0.1 mm (0.004").

### Application

The thickness gauge can be used in any field application where there is a need for flow measurement.

### Design

The hand-held micro-processor controlled gauge is designed to measure the thickness of various metallic or non-metallic pipe. Such materials include steel, aluminum, titanium, plastics and ceramics. Measurement results are shown in either inches or millimeter; only a simple pre-calibration to a known thickness or sound velocity is required. The simple-to-read 4-digit LCD display featuring a basic user friendly menu is easily navigable with only three conveniently located push buttons. The lightweight computing unit weighs a mere 150 g (5.3 oz) making it ideal for quick and easy on-site pipe wall thickness measurement and with two AAA alkaline batteries trouble-free operation is ensured for 250 hours.

### Function

The thickness gauge measurement is based on the transit time ultrasonic wave propagation principle: a high frequency ultrasonic beam is transmitted into the pipe being measured through a probe acting as a sender and receiver. When the probe subsequently retrieves that same signal, an internal counter calculates the time taken for the signals to be sent and received through the pipe. This value is used to evaluate the speed of sound through the pipe and consequently, the thickness of the pipe wall.

### Technical specifications

#### Thickness gauge

Display type	4-digit LCD
Display resolution	0.1 mm (0.004")
Measurement units	Metric and imperial
Sound velocity range	1 000 ... 9 999 m/s (3 280 ... 32 805 ft/s)
Operating temperature	-10 ... +50 °C (14 ... 122 °F)
Probe/pipe temperature	70 °C (158 °F)
Update range	4 Hz
Frequency	5 MHz
Power source	2 x 1.5 V AAA dry cells
Power consumption	Working current is less than 3 mA
Battery life	Approx. 250 h on a set of batteries
Dimensions (W x H x D)	61 x 108 x 28 mm (2.4 x 4.3 x 1.1")
Weight	150 g (5.3 oz)

### Selection and ordering data Article No.

Thickness gauge	<b>7ME3951-0TG20</b>
-----------------	----------------------

## Flow Measurement











### SITRANS FS (ultrasonic)

#### Clamp-on ultrasonic flowmeters










#### Accessories and spare parts




#### Selection and ordering data

#### Accessories / Spare parts for Clamp-on ultrasonic flowmeters

Description	Article No.		Description	Article No.	
<p><b>Universal Portable Sensors</b></p> <p>Selected generally for portable systems where a wide variety of pipes are to be measured. Since they are selected based on diameter only, a wide range of pipe sizes and materials can be covered with a minimum number of sensors. These can also be selected as a cost savings on applications where standard accuracy is sufficient.</p>	7ME3951-...		<p><b>Magnetic mounting frames</b></p> <p>Magnetic mounting frames are designed to simplify clamp-on sensor installation on pipelines 8 inches (DN200) and larger by eliminating the need for straps to secure them. They feature powerful magnets to ensure quick and accurate setup. Compatible with all C, D and E universal and high-precision sensors belonging to the SITRANS F US clamp-on family, magnetic mounting frames can be installed on any carbon steel pipe and are constructed in aluminum for a high level of durability.</p>	7ME3960-0MD02	
<p><b>High Precision Sensors</b></p> <p>Selected generally for dedicated meters since the need to cover a range of pipes is not a requirement. They provide the highest accuracy achievable by the meters and therefore should be selected whenever higher accuracy/repeatability is required. They are only applicable to steel pipes but no other metals, and are selected solely by wall thickness.</p>	7ME3950-...		<p><b>Mounting Frames</b></p> <p>These items are useful in simplifying sensor installation. They are strapped to the pipe first then the sensors are installed, making the installation less cumbersome and more precise. They also enable easy repeated mounting of the sensors assuring conformation to the original sensor positioning. They may be left in place at each measurement location where periodic flow surveys are conducted to simplify subsequent installations and ensure repeatable results.</p>	7ME3960-...	
<p><b>High Temperature Sensors</b></p> <p>Are selected whenever pipe temperature will exceed 250 °F (120 °C) up to a maximum of 450 °F (232 °C). They are universal type and can therefore be used on any pipe material and are selected by pipe diameter.</p>	7ME3950-...		<p><b>Spacer Bars</b></p> <p>Sensors are required to be mounted at a set distance from each other as determined by pipe size and medium being measured. The spacer bar simplifies this requirement by eliminating the need to undertake a precise dimensional measurement. The flowmeter will specify a specific spacing index which is easily accommodated with the marked indices on the bar.</p>	7ME3960-...	
<p><b>High Precision Mount</b></p> <p>These provide the most secure and strongest mounting of the flow sensors. They are generally selected for "High End" meter types where maximum performance criteria applies. They accommodate high precision sensors designed to mount inside these enclosures. May be welded to the pipe if so desired by the customer. They come in 2-piece or 1-piece configurations depending upon the application pipe size and type (Liquid/Gas).</p>	7ME3960-...		<p><b>Clamp-On RTD's</b></p> <p>1000 W platinum RTD's for use where temperature is required. Used with Energy Meters to record supply/return temperature. For this purpose precision matched pairs (to 0.02 °C) are supplied. Single RTD's are also used with FUH and FUG meters to enable live calculations of "Liquident" and Standard Volume Correction.</p>	7ME3950-...	
<p><b>Mounting tracks</b></p> <p>Typically used on smaller pipes for easier and more stable mounting for dedicated universal style sensor size A or B, also available for dedicated high precision sensor size A or B.</p>	7ME3960-...		<p><b>Insert RTD's</b></p> <p>Are identical to clamp-on RTD's as described above except that they are inserted into the pipe (In a Thermowell). They provide more precise and quicker responding temperature measurement. They are selected when precise temperature measurement of the actual liquid or gas is required as opposed to pipe "skin temperature". Since they project into the pipe they cannot be used in pipeline that undergo periodic "pigging".</p>	7ME3950-...	

## Selection and ordering data (continued)

Description	Article No.	
<b>Standard Cable (Flow Sensor or RTD)</b> Selected for general purpose installations where no special application requirements exist.	7ME3960-...	
<b>Submersible Cable (Flow Sensor)</b> Polyethylene jacketed, for locations that experience periodical or continual submersion of the flow sensors.	7ME3960-...	
<b>Plenum Cable (Flow Sensor or RTD)</b> For temperatures above 180 °F. Teflon jacketed to withstand high temperatures, is used when high temp sensors are specified.	7ME3960-...	
<b>Armored Cable (Flow Sensor)</b> Double shielded cable, selected when cable will not be installed in conduit between meter and sensors.	7ME3960-...	
<b>Temperature sensor cable</b> Cable to connect field installed RTD to flow meter, available in Teflon wrapped, plenum or submersible grade. Typically used for FUE, FUH and FUG series meters where a temperature sensor is employed.	7ME3960-...	
<b>Straps</b> Used to fasten sensors or mounting frames to pipe for dedicated meter installations. Stainless steel construction for corrosion resistance.	7ME3960-...	
<b>Chains (EZ clamps)</b> Used to fasten portable sensors or mounting frames to pipe. Thumbscrews eliminate need for hand tools when mounting sensors, and allow for easy on/off operations.	7ME3960-...	
<b>Ultrasonic Couplant</b> Fills any voids between sensor emitting surface and pipe wall to allow maximum energy transfer between sensor and pipe. Several different types of couplants are employed as determined by the application conditions and type of installation (Temporary or permanent).	7ME3960-...	
<b>Dry Couplant</b> The dry coupling pad is intended for use in any liquid, clamp-on transit time or Doppler applications that require a more durable coupling material. Installation is easy by simply placing one strip of material between sensor and pipe. Not intended for clamp-on gas where damping material is used. The temperature range is -34 to +200 °C (-30 to +392 °F).	7ME3960-...	

Description	Article No.	
<b>Damping Material</b> Used with gas meters, and required as part of their sensor installation. This material absorbs excess ultrasonic energy from the pipe wall to enable the meter to detect and operate with low amplitude sensor signals normally associated with Clamp-on Gas applications.	7ME3960-...	
<b>Test Block</b> Used for checking operation of a meter and sensors prior to a field installation, or as a troubleshooting tool. Selected by sensor size, each block accommodates 2 sensor sizes. Available only for universal sensors.	7ME3960-...	
<b>Termination Kit (Flow Sensor or RTD)</b> Provides the connectors, labels and shrink tubing or other associated hardware to complete the termination of a specific cable type. These can be provided in cases where users will be purchasing bulk cable directly and cutting to length at their site, or when existing cable length is to be altered. Selected by cable type.	7ME3960-...	
<b>Cable Gland Kit</b> Cable gland kit for use with SITRANS FUS1010, FUH1010 and FUG1010 Ultrasonic Flowmeters housed in IP65 NEMA 4X wall mount enclosures. Kit contains a total of 5 glands to manage and seal the exit and entry of wires and cables to ancillary devices.	A5E32834162	

## Flow Measurement

SITRANS FS (ultrasonic)

Clamp-on ultrasonic flowmeters

### Accessories and spare parts

#### Selection and ordering data (continued)

##### RTD cable selection chart (Dedicated, each)

###### RTD cable codes for length and type

Cable length m (ft)	Standard -40 ... +200 °C (-40 ... +392 °F)	Submersible -40 ... +200 °C (-40 ... +392 °F)	for insert RTD -40 ... +200 °C (-40 ... 392 °F)	for submersible insert RTD -40 ... +200 °C (-40 ... 392 °F)
	<b>Order code</b>			
6 (20)	<b>R01</b>	<b>R11</b>	<b>R21</b>	<b>R31</b>
15 (50)	<b>R02</b>	<b>R12</b>	<b>R22</b>	<b>R32</b>
30 (100)	<b>R03</b>	<b>R13</b>	<b>R23</b>	<b>R33</b>
46 (150)	<b>R04</b>	<b>R14</b>	<b>R24</b>	<b>R34</b>
61 (200)	<b>R05</b>	<b>R15</b>	<b>R25</b>	<b>R35</b>
91 (300)	<b>R06</b>	<b>R16</b>	<b>R26</b>	<b>R36</b>



### Overview



SITRANS FX vortex flowmeters provide accurate volumetric and mass flow measurement of steam, gases and liquids as an all-in-one solution with integrated temperature and pressure compensation.

### Benefits

- 2-wire technology with HART communication
- Integrated temperature compensation for saturated steam as standard feature
- Integrated temperature and pressure compensation enabling direct measurement of mass, standard volume flow rate and energy
- One instrument for measuring pressure, temperature and flow. No additional installation of pressure and temperature sensors
- Maximum process reliability thanks to Intelligent Signal Processing (ISP) - stable readings, free of external disturbances
- Fully welded stainless steel construction with high corrosion, pressure and temperature resistance
- Maintenance-free design
- Ready to use due to plug & play feature
- Minimal pressure drop
- Compact or remote design
- Free Air Delivery (FAD) measurement of a compressor







### Application

The SITRANS FX300 is a flowmeter in a single or dual transmitter version, suitable for measuring industrial steam, gases, as well as conductive and non-conductive liquids, e.g. steam (saturated steam, superheated steam), industrial gases (compressed air, nitrogen, liquefied gases, flue gases), and conductive and non-conductive liquids (demineralized water, boiler feed water, solvents, heat transfer oil).

The main applications of SITRANS FX300 can be found in the following sectors:

- Chemical
- Petrochemical
- Oil & Gas
- Power plants
  - Air
  - Heating
  - Cooling
  - Chilling
- Food & beverage
  - Pharmaceutical
  - Sugar refineries
  - Dairies
  - Breweries
  - Production of soft drinks
- Pulp & paper
- Water & waste water

### System overview

Version	Flange	Sandwich	Dual transmitter
Compact			
Remote			

## Flow Measurement

### SITRANS FX (Vortex)

#### SITRANS FX300

##### Design

SITRANS FX300 vortex flowmeters are available in the following variants:

##### SITRANS FX300 Single transmitter

The single transmitter variant exists in flange or sandwich design. In flange design the SITRANS FX300 offers a sensor with integrated nominal diameter reduction up to two nominal diameter sizes. That ensures best results in accuracy and optimal measuring ranges even in pipelines with large diameters, designed for low pressure loss. By forgoing complex pipeline reduction installations, space and cost saving installations can be realized. At the same time the number of potential leakages is reduced to a minimum.

The flowmeters in sandwich design will be supplied with additional optimised centring rings. With installation of the centring rings the SITRANS FX300 can be aligned centrally and eliminates any offset between the sensor and the pipeline.

The SITRANS FX300 is also available as a remote version. This feature allows separating the transmitter from the sensor up to a distance of 15m (49 ft). The remote mounted transmitter allows easy operation and optimal readability.

The following configurations can be selected for the single transmitter variant:

- **Basic version**  
Suitable for liquids and gases, integrated temperature compensation included as standard for saturated steam
- **With integrated pressure compensation**  
Version with integrated temperature and pressure compensation for gases, wet gases, gas mixtures or steam (energy measurement optional)
- **With integrated pressure compensation and isolation valve**  
Allowing the pressure sensor to be shut off for the purpose of pressure and leak testing of the pipeline or for being exchanged without interrupting the process.
- **Remote version**  
With this version transmitter and sensor are locally separated. In addition, it offers the same features as the compact version (integrated temperature and pressure compensation, isolation valve).

##### SITRANS FX300 Dual transmitter

This is a genuine redundant system with two independent sensors and transmitters providing twofold functional reliability and availability of the measurement. This variant is optimally suited for measurements in multi-product pipelines.

The dual transmitter version is available as:


- **Basic version**  
Suitable for liquids and gases, temperature compensation integrated as standard for saturated steam

##### Function

##### **Operating Principle**

SITRANS F X vortex flowmeters measure flow rate by detecting the frequency at which alternating vortices are shed from a bluff body inserted into the flow stream. This principle of measurement is derived from the Karman phenomenon of vortex shedding. The frequency of the alternating vortices is proportional to the flow rate.

The passage of a vortex causes a slight stress on a pick-up sensor placed downstream of the bluff body. The stress is detected by piezo-electric crystals placed inside the pick-up sensor.

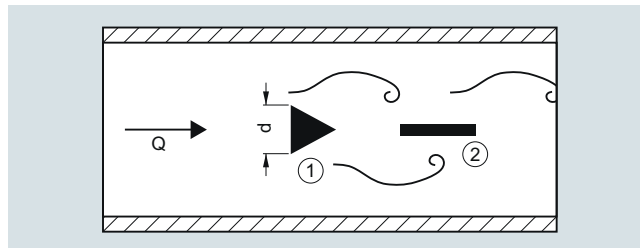

① = Bluff Body, ② = Pick-up

The flowmeter calculates the flow velocity using the following equation:

$$Q = A \cdot V = A \cdot d / St \cdot f = 101.93 \cdot f / K \text{ [m}^3\text{/h]}$$

Where:

Q = flow rate [m<sup>3</sup>/h]

f = vortex shedding frequency [Hz]

K = calibration constant [pulses/m<sup>3</sup>]

d = width of the bluff body [m]

St = Strouhal Number

A = cross-section area [m<sup>2</sup>]

V = flow velocity [m/s]

##### **Requirements**

In order to generate the vortex streets, the medium must have a minimum velocity:

- For steam and gases, the flow velocity must be 2 to 80 m/s (6.6 to 262 ft/s)
- For liquids the flow velocity must be 0.4 to 10 m/s (1.3 to 32.8 ft/s)

## Configuration

Valid combinations of sensor/connections size with flange norm/nominal pressure are shown in the following table

SITRANS FX Flanged - Single transmitter (7ME2600-...)										
Sensor size	Connection size	EN 1092-1, Form B1/B2, PN 10	EN 1092-1, Form B1/B2, PN 16	EN 1092-1, Form B1/B2, PN 25	EN 1092-1, Form B1/B2, PN 40	EN 1092-1, Form B1/B2, PN 63	EN 1092-1, Form B1/B2, PN 100	ANSI B16.5, class 150	ANSI B16.5, class 300	ANSI B16.5, class 600
DN15	DN 15	-	-	-	•	-	•	•	•	•
	DN 25	-	-	-	•	-	•	•	•	•
	DN 40	-	-	-	•	-	•	•	•	•
DN 25	DN 25	-	-	-	•	-	•	•	•	•
	DN 40	-	-	-	•	-	•	•	•	•
	DN 50	-	•	-	•	•	•	•	•	•
DN 40	DN 40	-	-	-	•	-	•	•	•	•
	DN 50	-	•	-	•	•	•	•	•	•
	DN 80	-	•	-	•	•	•	•	•	•
DN 50	DN 50	-	•	-	•	•	•	•	•	•
	DN 80	-	•	-	•	•	•	•	•	•
	DN 100	-	•	-	•	•	•	•	•	•
DN 80	DN 80	-	•	-	•	•	•	•	•	•
	DN 100	-	•	-	•	•	•	•	•	•
	DN 150	-	•	-	•	•	•	•	•	•
DN 100	DN 100	-	•	-	•	•	•	•	•	•
	DN 150	-	•	-	•	•	•	•	•	•
	DN 200	•	•	•	•	-	-	•	•	-
DN 150	DN 150	-	•	-	•	•	•	•	•	•
	DN 200	•	•	•	•	-	-	•	•	-
	DN 250	•	•	•	•	-	-	•	•	-
DN 200	DN 200	•	•	•	•	-	-	•	•	-
	DN 250	•	•	•	•	-	-	•	•	-
	DN 300	•	•	•	•	-	-	•	•	-
DN 250	DN 250	•	•	•	•	-	-	•	•	-
	DN 300	•	•	•	•	-	-	•	•	-
DN 300	DN 300	•	•	•	•	-	-	•	•	-

- available
- not available

# Flow Measurement

## SITRANS FX (Vortex)

### SITRANS FX300

#### Technical specifications

<b>Input</b>		<b>Software</b>	
Measuring range limits	See "Dimensional Drawings"	Uncompensated for liquids and gases, density-compensated by temperature for saturated steam	Order option 1
Media pressure	1 ... 100 bar (14.5 ... 1450 psi) (Higher pressures on request)	Density-compensated by temperature and pressure for superheated steam	Order option 4
<b>Output</b>		Gross heat meter	
Current output		When the thermal energy of steam is to be measured	Order option 5
• Measuring range	4 ... 20 mA	Following information is required at option Y51 to Y56	<ul style="list-style-type: none"> <li>• Y51 Variable current output: Flow rate, power</li> <li>• Y52 Power unit</li> </ul> Select one of the following units: kJ/h, MJ/h, GJ/h, Btu/h, kcal/h, kW, MW or special (custom)
• Over range	20.8 mA ± 1 % (105 % ± 1 %)		<ul style="list-style-type: none"> <li>• Y53 Fullscale value power</li> <li>• Y54 Variable pulse output: Totalized flow, energy</li> <li>• Y55 Totalizer on/off</li> <li>• Y56 Energy unit</li> </ul> Select one of the following units: kJ, MJ, GJ, Btu th, kcal, kWh, MWh or special (custom).
• Load			
- min.	100 Ω		
- max.	$R_{max} = (U_{Power\ Supply} - 14\ V)/22\ mA$		
• Error signal	NAMUR NE 43		
• Maximum output	22 mA (112.5 %)		
• Multidrop mode	4 mA		
Digital output			
• Communication	HART		
• Physical layer	FSK		
• Device category	Transmitter		
<b>Pulse output</b>		Density compensated by temperature and pressure for gases, wet gases	Order option 7
Passive pulse output, setting pulse value (meter factor) for totalized flow or heat quantity (energy) with option Y47 (e.g.: 1 pulse/kg or 1 pulse/kWh)		Wet gases	Select Y49 and enter relative humidity of process medium in %
• Pulse frequency	Max. 0.5 Hz		
• Power supply	Min. 24 V DC as NAMUR or open < 1 mA, max. 36 V, closed 100 mA, $U < 2\ V$	FAD - Free Air Delivery	
• Non-Ex version	open < 1 mA, max. 30 V, closed 100 mA, $U < 2\ V$	When the delivered air of a compressor is to be measured	Order option 8
• Ex version		In Y81 to Y87 add information regarding:	<ul style="list-style-type: none"> <li>• Y81 Inlet suction temperature</li> <li>• Y82 Atmospheric pressure</li> <li>• Y83 Pressure drop at inlet suction filter</li> <li>• Y84 Inlet relative humidity</li> <li>• Y85 Actual compressor rotation (rpm)</li> <li>• Y86 Rated compressor rotation (rpm) Rated compressor rotation (rpm)</li> <li>• Y87 Relative humidity at compressor output</li> </ul>
<b>Accuracy</b>		Mixed gases	When fluid is a gas mixture, specify the single gas components and their amount/concentration in %.
Standard version			
• For liquids	± 0.75 %		
- Re ≥ 20 000			
• For steam and gases	± 1 %		
- Re ≥ 20 000			
• For steam, gases and liquids	± 2 %		
- 10 000 < Re < 20 000			
Pressure and temperature compensated version			
• For liquids			
- 10 000 < Re < 20 000	± 2 %		
- Re ≥ 20 000	± 0.75 %		
• For gases and steam			
- 10 000 < Re < 20 000	± 2.5 %		
- Re ≥ 20 000	± 1.5 %		
Repeatability	± 0.1 %		
<b>Installation conditions</b>		<b>Rated operation conditions</b>	
(At different conditions, e.g. installation after control valve, bends or reductions, please refer to the operating instructions.)		Ambient temperature	
• Inlet run	≥ 20 x DN	• Non-Ex version	-40 ... +85 °C (-40 ... +185 °F)
• Outlet run	≥ 5 x DN	• Ex version	-40 ... +65 °C (-40 ... +149 °F)
		Storage temperature	-50 ... +85 °C (-58 ... +185 °F)
		Media temperature	-40 ... +240 °C (-40 ... +464 °F)
		Density	Taken into consideration when dimensioning
		Viscosity	< 10 cP
		Reynold's number	10 000 ... 2 300 000
		Media pressure limit	Max. 100 bar (1450 psi) Higher pressure on request (contact your local Siemens representative)

**Technical specifications** (continued)


<b>Design</b>	
Material	
• Sensor/Pick-up	AISI 316L (1.4404)/AISI 316L (1.4435)  Hastelloy C22/2.4602 available on request (contact your local Siemens representative)
• Transmitter housing	Aluminum
• Sensor gaskets (Pick-up/Pressure sensor)	AISI 316L(1.4435) /FPM or FFKM  FPM (Viton) for steam and non-aggressive gases  FFKM (Kalrez) for chlorine and other aggressive gases.  (The meter is fitted with FPM/FFKM gasket only when configured with pressure sensor.)
Process connections	Flange norm DIN EN 1092-1 form B1/B2 or ANSI B16.5 RF.  Other flanges on request (contact your local Siemens representative)
• Flange version	DN 15 ... 300 (½ ... 12")
• Sandwich version	DN 15 ... 100 (½ ... 4")
Degree of protection	IP66/IP67
Dimensions and weights	See "Dimensional Drawings"
<b>Display and operating interface</b>	
Local display	2 lines, 10 characters per line
Languages	German, English, French
<b>Power supply</b>	
• Standard version	14 ... 36 V DC
• Ex version	14 ... 30 V DC
<b>Certificates and approvals</b>	
Explosion protection	
• ATEX	II 2G EEx d ia [ia] IIC T6
• FM US/C	Class I, II, III, Div 1 & 2
<b>Calibration</b>	All flowmeters will be delivered with a 3 point calibration certificate
<b>Material Certificate</b>	Certificate of compliance, pressure test, material certificate, material in acc. of NACE and PMI of pressure bearing metal parts.
<b>Cleaning</b>	Choose Cleaning Class1 when fluid is oxygen or contains chloride.
<b>Certificates</b>	X-ray and dye penetration test on pressure bearing weldings


# Flow Measurement

## SITRANS FX (Vortex)

### SITRANS FX300

#### Selection and ordering data

**SITRANS FX300 Flanged Single transmitter and  $T_{max} = 240\text{ °C}$  (464 °F)**  **7ME2600-** Ord. Code

 Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Sensor size	Connection size	Article No.	Ord. Code
DN 15 (1/2")	DN 15 (1/2")	<b>1 A</b>	
	DN 25 (1")	<b>1 B</b>	
	DN 40 (1 1/2")	<b>1 C</b>	
DN 25 (1")	DN 25 (1")	<b>2 B</b>	
	DN 40 (1 1/2")	<b>2 C</b>	
	DN 50 (2")	<b>2 D</b>	
DN 40 (1 1/2")	DN 40 (1 1/2")	<b>2 K</b>	
	DN 50 (2")	<b>2 L</b>	
	DN 80 (3")	<b>2 M</b>	
DN 50 (2")	DN 50 (2")	<b>2 R</b>	
	DN 80 (3")	<b>2 S</b>	
	DN 100 (4")	<b>2 T</b>	
DN 80 (3")	DN 80 (3")	<b>3 L</b>	
	DN 100 (4")	<b>3 M</b>	
	DN 150 (6")	<b>3 R</b>	
DN 100 (4")	DN 100 (4")	<b>3 S</b>	
	DN 150 (6")	<b>3 T</b>	
	DN 200 (8")	<b>3 Q</b>	
DN 150 (6")	DN 150 (6")	<b>4 M</b>	
	DN 200 (8")	<b>4 P</b>	
	DN 250 (10")	<b>4 Q</b>	
DN 200 (8")	DN 200 (8")	<b>4 T</b>	
	DN 250 (10")	<b>4 U</b>	
	DN 300 (12")	<b>4 V</b>	
DN 250 (10")	DN 250 (10")	<b>4 W</b>	
	DN 300 (12")	<b>4 Y</b>	
	DN 300 (12")	<b>5 E</b>	
<b>Flange norm and nominal pressure</b>			
<b>Form B1/B2</b>	<b>EN 1092-1</b>		
PN 10	DN 200 ... 300	<b>A</b>	
PN 16	DN 50 ... 300	<b>B</b>	
PN 25	DN 200 ... 300	<b>C</b>	
PN 40	DN 15 ... 300	<b>D</b>	
PN 63	DN 50 ... 150	<b>E</b>	
PN 100	DN 15 ... 150	<b>F</b>	
<b>RF</b>	<b>ANSI B16.5</b>		
class 150	1 1/2 ... 12"	<b>J</b>	
class 300	1 1/2 ... 12"	<b>K</b>	
class 600	1 1/2 ... 6"	<b>L</b>	
<b>Sensor material/Gasket</b>			
Stainless steel AISI 316L (1.4404)/AISI 316L (1.4435)/FPM		<b>1</b>	
Stainless steel AISI 316L (1.4404)/AISI 316L (1.4435)/FFKM		<b>5</b>	
<b>Transmitter design</b>			
Compact version - no cable		<b>1</b>	
Remote version			
5 m (16.4 ft)		<b>2</b>	
10 m (32.8 ft)		<b>3</b>	
15 m (49.2 ft)		<b>4</b>	

#### Article No.

**SITRANS FX300 Flanged Single transmitter and  $T_{max} = 240\text{ °C}$  (464 °F)** **7ME2600-** Ord. Code

#### Approval and cable gland

Non-Ex, M20 x 1.5 **1**  
 Non-Ex, 1/2" NPT **2**  
 FM approval Class 1 Div. 2, M20 x 1.5 **3**  
 ATEX, M20 x 1.5 **4**  
 ATEX, 1/2" NPT **5**  
 FM approval Class 1 Div. 1, M20 x 1.5 **6**  
 FM approval Class 1 Div. 1, 1/2" NPT **7**  
 FM approval Class 1 Div. 2, 1/2" NPT **8**

#### Further approvals and cable glands

IEC Ex with M20 x 1.5 **9** **N O A**  
 IEC Ex with 1/2" NPT **9** **N O B**

#### Transmitter, display and communication

With display, HART **A**

#### Pressure sensor and isolation valve

Without pressure sensor **A**

With pressure sensor, range:

- 4 bar (58 psi) **B**
- 6 bar (87 psi) **D**
- 10 bar (145 psi) **E**
- 16 bar (232 psi) **G**
- 25 bar (363 psi) **H**
- 40 bar (580 psi) **K**
- 60 bar (870 psi) **L**
- 100 bar (1450 psi) **N**

With isolation valve and pressure sensor, range:

- 4 bar (58 psi) **P**
- 6 bar (87 psi) **Q**
- 10 bar (145 psi) **R**
- 16 bar (232 psi) **S**
- 25 bar (363 psi) **U**
- 40 bar (580 psi) **V**
- 60 bar (870 psi) **W**
- 100 bar (1450 psi) **Y**

#### Software

Uncompensated for liquids and gases, density compensated by temperature for saturated steam **1**

Density compensation for superheated steam **4**

Density compensated by temperature and pressure for superheated steam, gross heat meter - setting of energy metering at option Y51 ... Y56 **5**

Density compensation for gases, wet gases and mixed gases - setting of relative humidity at option Y49 **7**

Density compensation for gases, wet gases and mixed gases, Free air delivery (FAD) - setting of FAD at option Y81 ... Y87 and relative humidity at option Y49 **8**

## Selection and ordering data

## Order code

**Additional information**

Please add "-Z" to Article No. and specify as minimum Order code Y40, Y41, Y42 and Y45 and plain text.

**Input process data**

Specify medium (liquid, gas, steam or customer-specific) **Y40**

Temperature: Specify operating temperature with unit **Y41**

Pressure: Specify operating pressure with unit **Y42**

Density (only for customer-specified medium): Specify density with unit **Y43**

Viscosity (only for customer-specified medium): Specify viscosity with unit **Y44**

Flow rate: Specify max. flow rate with units **Y45**

Setting of pulse output: Specify pulse value (meter factor) for totalized flow (1 pulse/unit) **Y47**

Relative humidity of process medium in % **Y49**

**Settings of gross heat**

Variable current output: Flow rate, power **Y51**

Power unit (specify: kJ/h, MJ/h, GJ/h, Btu/h, kcal/h, kW, MW or special (custom)) **Y52**

Fullscale value power **Y53**

Variable pulse output: Totalized flow, energy **Y54**

Totalizer on/off **Y55**

Energy unit (specify: kJ, MJ, GJ, Btu th, kcal, kWh, MWh or special (custom)) **Y56**

**Settings of FAD**

Inlet suction temperature<sup>1)</sup> **Y81**

Atmospheric pressure<sup>1)</sup> **Y82**

Pressure drop at inlet suction filter<sup>2)</sup> **Y83**

Inlet relative humidity<sup>1)</sup> **Y84**

Actual compressor rotation (rpm)<sup>2)</sup> **Y85**

Rated compressor rotation (rpm)<sup>2)</sup> **Y86**

Relative humidity at compressor outlet<sup>2)</sup> **Y87**

<sup>1)</sup> Required information from customer.

<sup>2)</sup> Required information from compressor manufacturer (data sheet).

**Further designs**

Please add "-Z" to Article No. and specify Order code.

**Converter housing material**

Aluminum for increased requirement, color: petrol green **A10**

**Material certificate**

Certificate of compliance EN 10204-2.1 **C10**

Pressure test + 3.1 accordance EN 10204 **C11**

Material certificate of pressure bearing parts + certificate 3.1 **C12**

Material in accordance with NACE MR 0175-01 **C13**

PMI of pressure bearing metal parts + certificate 3.1 **C14**

Material certificate of pressure bearing parts + PMI + certificate 3.1 **C15**

**Calibration certificate FX300**

As standard the flow device has a 3-point calibration certificate

5-point calibration certificate **D11**

**Hardness test**

Hardness test on pressure bearing parts + certificate 3.1 **H30**

**Cleaning**

Cleaning class 1 **K46**

Cleaning class 1 + certificate 3.1 acc. EN 10204 **K48**

**Certificates**

X-ray test on pressure bearing weldings **M56**

Dye penetration test on pressure bearing weldings **M58**

**Tag name plate**

Stainless steel tag with 3 mm characters, max. 2 x 8 characters (40 x 20 mm, add plain text) **Y17**

Stainless steel tag with 2.5 mm characters, max. 8 x 40 characters (120 x 46 mm, add plain text) **Y18**

# Flow Measurement


## SITRANS FX (Vortex)


### SITRANS FX300

#### Selection and ordering data

#### Article No.

#### Article No.

**SITRANS FX300 Sandwich**  **7ME2700-** Ord.  
Code  
**Single transmitter and T<sub>max</sub> = 240 °C**  
**(464 °F)**

 Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Sensor size	Connection size	
DN 15 (1/2")	DN 15 (1/2")	<b>1 A</b>
DN 25 (1")	DN 25 (1")	<b>2 B</b>
DN 40 (1 1/2")	DN 40 (1 1/2")	<b>2 K</b>
DN 50 (2")	DN 50 (2")	<b>2 R</b>
DN 80 (3")	DN 80 (3")	<b>3 L</b>
DN 100 (4")	DN 100 (4")	<b>3 S</b>

#### Nominal pressure

Form B1/B2	EN 1092-1	
PN 16	DN 50 ... 300	<b>B</b>
PN 40	DN 15 ... 300	<b>D</b>
PN 63	DN 50 ... 150	<b>E</b>
PN 100	DN 15 ... 150	<b>F</b>
RF	ANSI B16.5	
class 150	1 1/2 ... 4"	<b>J</b>
class 300	1 1/2 ... 4"	<b>K</b>
class 600	1 1/2 ... 4"	<b>L</b>

#### Sensor material/Gasket

Stainless steel AISI 316L (1.4404)/AISI 316L (1.4435)/FPM	<b>1</b>
Stainless steel AISI 316L (1.4404)/AISI 316L (1.4435)/FFKM	<b>5</b>

#### Transmitter design

Compact version - no cable	<b>1</b>
Remote version	
5 m (16.4 ft)	<b>2</b>
10 m (32.8 ft)	<b>3</b>
15 m (49.2 ft)	<b>4</b>

#### Approval and cable gland

Non-Ex, M20 x 1.5	<b>1</b>	
Non-Ex, 1/2" NPT	<b>2</b>	
FM approval Class 1 Div. 2, M20 x 1.5	<b>3</b>	
ATEX, M20 x 1.5	<b>4</b>	
ATEX, 1/2" NPT	<b>5</b>	
FM approval Class 1 Div. 1, M20 x 1.5	<b>6</b>	
FM approval Class 1 Div. 1, 1/2" NPT	<b>7</b>	
FM approval Class 1 Div. 2, 1/2" NPT	<b>8</b>	
Further approvals and cable glands		
IEC Ex with M20 x 1.5	<b>9</b>	<b>N O A</b>
IEC Ex with 1/2" NPT	<b>9</b>	<b>N O B</b>

#### Transmitter, display and communication

With display, HART **A**

**SITRANS FX300 Sandwich** **7ME2700-** Ord.  
Code  
**Single transmitter and T<sub>max</sub> = 240 °C**  
**(464 °F)**

#### Pressure sensor and isolation valve

Without pressure sensor	<b>A</b>
With pressure sensor, range:	<b>B</b>
• 4 bar (58 psi)	<b>D</b>
• 6 bar (87 psi)	<b>E</b>
• 10 bar (145 psi)	<b>G</b>
• 16 bar (232 psi)	<b>H</b>
• 25 bar (363 psi)	<b>K</b>
• 40 bar (580 psi)	<b>L</b>
• 60 bar (870 psi)	<b>N</b>
• 100 bar (1450 psi)	
With isolation valve and pressure sensor, range:	<b>P</b>
• 4 bar (58 psi)	<b>Q</b>
• 6 bar (87 psi)	<b>R</b>
• 10 bar (145 psi)	<b>S</b>
• 16 bar (232 psi)	<b>U</b>
• 25 bar (363 psi)	<b>V</b>
• 40 bar (580 psi)	<b>W</b>
• 60 bar (870 psi)	<b>Y</b>
• 100 bar (1450 psi)	

#### Software

Uncompensated for liquids and gases, density compensated by temperature for saturated steam	<b>1</b>
Density compensation for superheated steam	<b>4</b>
Density compensated by temperature and pressure for superheated steam, gross heat meter - setting of energy metering at option Y51 ... Y56	<b>5</b>
Density compensation for gases, wet gases and mixed gases - setting of relative humidity at option Y49	<b>7</b>
Density compensation for gases, wet gases and mixed gases, Free air delivery (FAD) - setting of FAD at option Y81 ... Y87 and relative humidity at option Y49	<b>8</b>



## Selection and ordering data

## Order code

**Additional information**

Please add "-Z" to Article No. and specify as minimum Order code Y40, Y41, Y42 and Y45 and plain text.

**Input process data**

Specify medium (liquid, gas, steam or customer-specific) **Y40**

Temperature: Specify operating temperature with unit **Y41**

Pressure: Specify operating pressure with unit **Y42**

Density (only for customer-specified medium): Specify density with unit **Y43**

Viscosity (only for customer-specified medium): Specify viscosity with unit **Y44**

Flow rate: Specify max. flow rate with units **Y45**

Setting of pulse output: Specify pulse value (meter factor) for totalized flow (1 pulse/unit) **Y47**

Relative humidity of process medium in % **Y49**

**Settings of gross heat**

Variable current output: Flow rate, power **Y51**

Power unit (specify: kJ/h, MJ/h, GJ/h, Btu/h, kcal/h, kW, MW or special (custom)) **Y52**

Fullscale value power **Y53**

Variable pulse output: Totalized flow, energy **Y54**

Totalizer on/off **Y55**

Energy unit (specify: kJ, MJ, GJ, Btu th, kcal, kWh, MWh or special (custom)) **Y56**

**Settings of FAD**

Inlet suction temperature<sup>1)</sup> **Y81**

Atmospheric pressure<sup>1)</sup> **Y82**

Pressure drop at inlet suction filter<sup>2)</sup> **Y83**

Inlet relative humidity<sup>1)</sup> **Y84**

Actual compressor rotation (rpm)<sup>2)</sup> **Y85**

Rated compressor rotation (rpm)<sup>2)</sup> **Y86**

Relative humidity at compressor outlet<sup>2)</sup> **Y87**

<sup>1)</sup> Required information from customer.

<sup>2)</sup> Required information from compressor manufacturer (data sheet).

**Further designs**

Please add "-Z" to Article No. and specify Order code.

**Converter housing material**

Aluminum for increased requirement, color: petrol green **A10**

**Material certificate**

Certificate of compliance EN 10204-2.1 **C10**

Pressure test + 3.1 accordance EN 10204 **C11**

Material certificate of pressure bearing parts + certificate 3.1 **C12**

Material in accordance with NACE MR 0175-01 **C13**

PMI of pressure bearing metal parts + certificate 3.1 **C14**

Material certificate of pressure bearing parts + PMI + certificate 3.1 **C15**

**Calibration certificate FX300**

As standard the flow device has a 3-point calibration certificate

5-point calibration certificate **D11**

**Hardness test**

Hardness test on pressure bearing parts + certificate 3.1 **H30**

**Cleaning**

Cleaning class 1 **K46**

Cleaning class 1 + certificate 3.1 acc. EN 10204 **K48**

**Certificates**

X-ray test on pressure bearing weldings **M56**

Dye penetration test on pressure bearing weldings **M58**

**Tag name plate**

Stainless steel tag with 3 mm characters, max. 2 x 8 characters (40 x 20 mm, add plain text) **Y17**

Stainless steel tag with 2.5 mm characters, max. 8 x 40 characters (120 x 46 mm, add plain text) **Y18**

# Flow Measurement

## SITRANS FX (Vortex)

### SITRANS FX300

#### Selection and ordering data

#### Article No.

#### Order code

Selection and ordering data		Article No.	Ord. Code
<b>SITRANS FX300 Sandwich Dual transmitter and T<sub>max</sub> = 240 °C (464 °F)</b>		7ME2700-	
<a href="#">Click on the Article No. for the online configuration in the PIA Life Cycle Portal.</a>			
<b>Sensor size</b>	<b>Connection size</b>		
DN 40 (1½")	DN 40 (1½")	2 K	
DN 50 (2")	DN 50 (2")	2 R	
DN 80 (3")	DN 80 (3")	3 L	
DN 100 (4")	DN 100 (4")	3 S	
DN 150 (6")	DN 150 (6")	4 M	
DN 200 (8")	DN 200 (8")	4 T	
DN 250 (10")	DN 250 (10")	4 W	
DN 300 (12")	DN 300 (12")	5 E	
<b>Flange norm and nominal pressure</b>			
<b>Form B1/B2</b>	<b>EN 1092-1</b>		
PN 10	DN 200 ... 300	A	
PN 16	DN 50 ... 300	B	
PN 25	DN 200 ... 300	C	
PN 40	DN 40 ... 300	D	
PN 63	DN 50 ... 150	E	
PN 100	DN 40 ... 150	F	
<b>RF</b>	<b>ANSI B16.5</b>		
class 150	1½ ... 12"	J	
class 300	1½ ... 12"	K	
class 600	1½ ... 6"	L	
<b>Sensor material/Gasket</b>			
Stainless steel AISI 316L (1.4404)/AISI 316L (1.4435)/FPM		1	
Stainless steel AISI 316L (1.4404)/AISI 316L (1.4435)/FFKM		5	
<b>Transmitter design</b>			
Compact version - no cable		1	
Remote version			
5 m (16.4 ft)		2	
10 m (32.8 ft)		3	
15 m (49.2 ft)		4	
<b>Approval and cable gland</b>			
Non-Ex, M20 x 1.5		1	
Non-Ex, ½" NPT		2	
FM approval Class 1 Div. 2, M20 x 1.5		3	
ATEX, M20 x 1.5		4	
ATEX, ½" NPT		5	
FM approval Class 1 Div. 1, M20 x 1.5		6	
FM approval Class 1 Div. 1, 1/2" NPT		7	
FM approval Class 1 Div. 2, 1/2" NPT		8	
<b>Further approvals and cable glands</b>			
IEC Ex with M20 x 1.5		9	N 0 A
IEC Ex with ½" NPT		9	N 0 B
<b>Transmitter, display and communication</b>			
With display, HART		A	
<b>Pressure sensor and isolation valve</b>			
Without pressure sensor		A	
<b>Software</b>			
Uncompensated for liquids and gases, density-compensated by temperature for saturated steam		1	

#### Additional information

Please add "-Z" to Article No. and specify as minimum Order code Y40, Y41, Y42 and Y45 and plain text.

#### Input process data

Specify medium (liquid, gas, steam or customer-specific)	Y40
Temperature: Specify operating temperature with unit	Y41
Pressure: Specify operating pressure with unit	Y42
Density (only for customer-specified medium): Specify density with unit	Y43
Viscosity (only for customer-specified medium): Specify viscosity with unit	Y44
Flow rate: Specify max. flow rate with units	Y45
Setting of pulse output: Specify pulse value (meter factor) for totalized flow (1 pulse/unit)	Y47
Relative humidity of process medium in %	Y49

#### Further designs

Please add "-Z" to Article No. and specify Order code.

#### Converter housing material

Aluminum for increased requirement, color: petrol green

#### Material certificate

Certificate of compliance EN 10204-2.1	C10
Pressure test + 3.1 accordance EN 10204	C11
Material certificate of pressure bearing parts + certificate 3.1	C12
Material in accordance with NACE MR 0175-01	C13
PMI of pressure bearing metal parts + certificate 3.1	C14
Material certificate of pressure bearing parts + PMI + certificate 3.1	C15

#### Calibration certificate FX300

As standard the flow device has a 3-point calibration certificate

5-point calibration certificate

#### Hardness test

Hardness test on pressure bearing parts + certificate 3.1

#### Cleaning

Cleaning class 1	K46
Cleaning class 1 + certificate 3.1 acc. EN 10204	K48

#### Certificates

X-ray test on pressure bearing weldings	M56
Dye penetration test on pressure bearing weldings	M58

#### Tag name plate

Stainless steel tag with 3 mm characters, max. 2 x 8 characters (40 x 20 mm, add plain text)	Y17
Stainless steel tag with 2.5 mm characters, max. 8 x 40 characters (120 x 46 mm, add plain text)	Y18

## Selection and ordering data (continued)






## Operating instructions for SITRANS FX300

Description	Article No.
• English	<b>A5E2100423</b>
• German	<b>A5E02171807</b>

All literature is available to download for free, in a range of languages, at


<http://www.siemens.com/processinstrumentation/documentation>

## Spare parts for SITRANS FX300


Description	Article No.	
Electronic • Basic D-HART • Steam D-HART • Gas D-HART Serial number of flow meter must be specified on order.	<b>A5E02181531</b> <b>A5E02181541</b> <b>A5E02181544</b>	
Display	<b>A5E02181558</b>	
Sensor replacement (incl. seal disc, pickup, O-rings for pickup, and pressure screw) • DN 15 (incl. 1/2" socket) • DN 25 (incl. 1" socket) • DN 40 ... 100 • DN 150 ... 300	<b>KRH-16111100</b> <b>KRH-16111150</b> <b>KRH-16111200</b> <b>KRH-16111300</b>	
Pressure sensor replacement (incl. pressure sensor, DUBOX plug, 2 O-rings and calibration certificate) • 4 bar (58 psi) • 6 bar (87 psi) • 10 bar (145 psi) • 16 bar (232 psi) • 25 bar (363 psi) • 40 bar (580 psi) • 60 bar (870 psi) • 100 bar (1450 psi)	<b>A5E02181157</b> <b>A5E02181175</b> <b>A5E02181180</b> <b>A5E02181221</b> <b>A5E02181307</b> <b>A5E02181316</b> <b>A5E02181322</b> <b>A5E02181437</b>	
Service Toolbox for programming software (basic, steam and gas); for changing settings and diagnostics Note: Dedicated service training is required. Please contact Customer Support.	<b>A5E02375819</b>	
Connection cable for remote mounting • 15 m (49 ft)	<b>A5E36832003</b>	

## Dimensional drawings


## Compact version

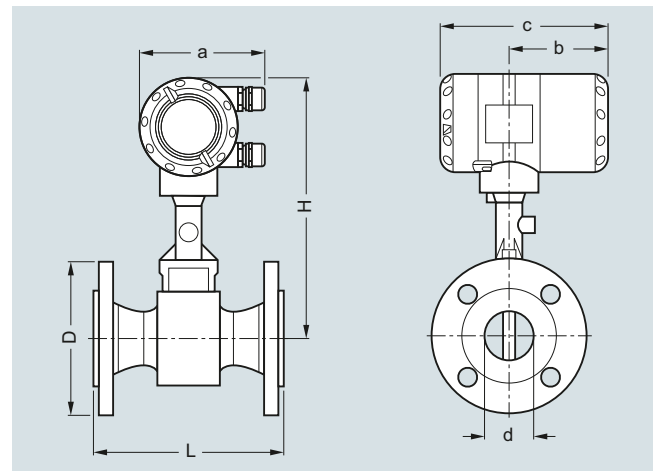

## Flange version

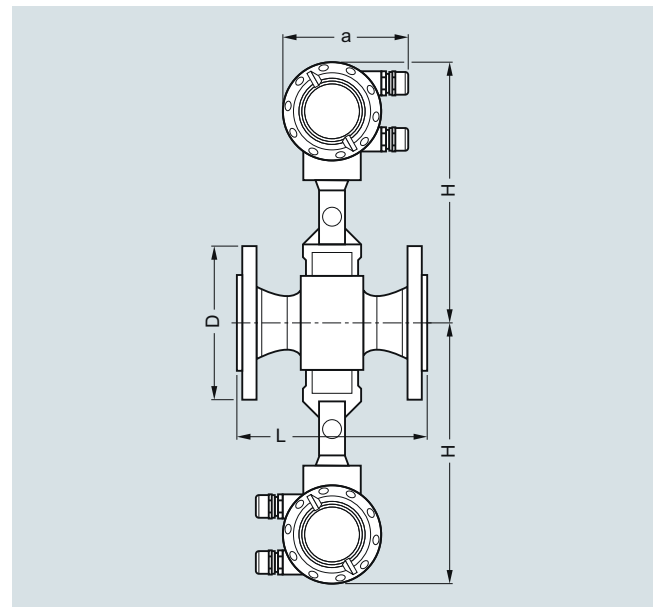

## Flange version, dual converter

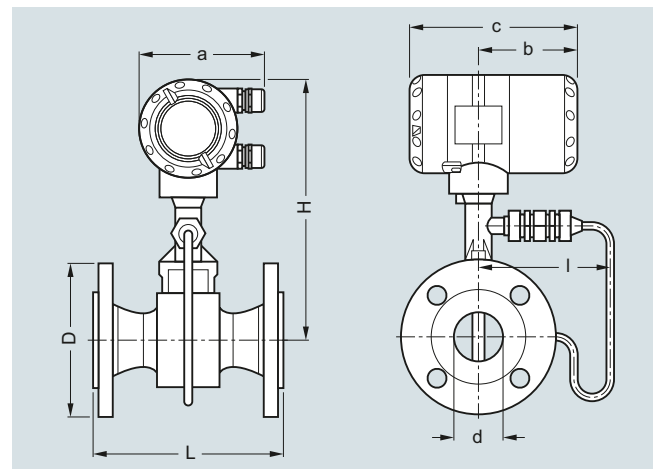

## Flange version with pressure sensor

# Flow Measurement

## SITRANS FX (Vortex)

### SITRANS FX300

#### Dimensional drawings (continued)

##### Flange version DIN EN 1092-1

Size DN	Pres- sure rating PN	Dimensions [mm (inch)] a = 135 (5.32), b = 108 (4.26), c = 184 (7.25)							Weight [kg (lb)] <sup>1)</sup>	
		d	d FR <sup>2)</sup>	d FR <sup>3)</sup>	D	L	H	I	Flowmeter (without pres- sure sensor)	Flowmeter (with pressure sensor)
15	40	17.3 (0.68)	-	-	95 (3.74)	200 (7.87)	315 (12.40)	144 (5.67)	5.5 (12.13)	6.1 (13.45)
15	100	17.3 (0.68)	-	-	105 (4.13)	200 (7.87)	315 (12.40)	144 (5.67)	6.5 (14.33)	7.1 (15.65)
25	40	28.5 (1.12)	17.3 (0.68)	-	115 (4.53)	200 (7.87)	315 (12.40)	144 (5.67)	7.3 (16.09)	7.9 (17.42)
25	100	28.5 (1.12)	17.3 (0.68)	-	140 (5.51)	200 (7.87)	315 (12.40)	144 (5.67)	9.3 (20.50)	9.9 (21.83)
40	40	43.1 (1.70)	28.5 (1.12)	17.3 (0.68)	150 (5.91)	200 (7.87)	320 (12.60)	144 (5.67)	10.2 (22.49)	10.8 (23.81)
40	100	42.5 (1.67)	28.5 (1.12)	17.3 (0.68)	170 (6.69)	200 (7.87)	320 (12.60)	144 (5.67)	14.2 (31.31)	14.8 (32.63)
50	16	54.5 (2.15)	42.5 (1.67)	28.5 (1.12)	165 (6.50)	200 (7.87)	325 (12.80)	144 (5.67)	12.1 (26.68)	12.7 (28.00)
50	40	54.5 (2.15)	42.5 (1.67)	28.5 (1.12)	165 (6.50)	200 (7.87)	325 (12.80)	144 (5.67)	12.3 (27.12)	12.9 (28.44)
50	63	54.5 (2.15)	42.5 (1.67)	28.5 (1.12)	180 (7.09)	200 (7.87)	325 (12.80)	144 (5.67)	16.3 (35.94)	16.9 (37.26)
50	100	53.9 (2.12)	42.5 (1.67)	28.5 (1.12)	195 (7.68)	200 (7.87)	325 (12.80)	144 (5.67)	17.8 (39.24)	18.4 (40.57)
80	16	82.5 (3.25)	54.5 (2.15)	42.5 (1.67)	200 (7.87)	200 (7.87)	340 (13.39)	154 (6.06)	16.8 (37.04)	17.4 (38.36)
80	40	82.5 (3.25)	54.5 (2.15)	42.5 (1.67)	200 (7.87)	200 (7.87)	340 (13.39)	154 (6.06)	18.8 (41.45)	19.4 (42.77)
80	63	81.7 (3.22)	54.5 (2.15)	42.5 (1.67)	215 (8.46)	200 (7.87)	340 (13.39)	154 (6.06)	22.8 (50.27)	23.4 (51.59)
80	100	80.9 (3.19)	54.5 (2.15)	42.5 (1.67)	230 (9.06)	200 (7.87)	340 (13.39)	154 (6.06)	26.8 (59.08)	27.4 (60.41)
100	16	107.1 (4.22)	80.9 (3.19)	54.5 (2.15)	220 (8.66)	250 (9.84)	360 (14.17)	164 (6.46)	21.4 (47.18)	22 (48.50)
100	40	107.1 (4.22)	80.9 (3.19)	54.5 (2.15)	235 (9.25)	250 (9.84)	360 (14.17)	164 (6.46)	24.4 (53.79)	25 (55.12)
100	63	106.3 (4.19)	80.9 (3.19)	54.5 (2.15)	250 (9.84)	250 (9.84)	360 (14.17)	164 (6.46)	29.4 (64.82)	30 (66.14)
100	100	104.3 (4.11)	80.9 (3.19)	54.5 (2.15)	265 (10.43)	250 (9.84)	360 (14.17)	164 (6.46)	35.4 (78.04)	36 (79.37)
150	16	159.3 (6.27)	107.1 (4.22)	80.9 (3.19)	285 (11.22)	300 (11.81)	375 (14.76)	174 (6.85)	35.2 (77.60)	35.8 (78.93)
150	40	159.3 (6.27)	107.1 (4.22)	80.9 (3.19)	300 (11.81)	300 (11.81)	375 (14.76)	174 (6.85)	41.2 (90.83)	41.8 (92.15)
150	63	157.1 (6.19)	107.1 (4.22)	80.9 (3.19)	345 (13.58)	300 (11.81)	375 (14.76)	174 (6.85)	59.2 (130.51)	59.8 (131.84)
150	100	154.1 (6.07)	107.1 (4.22)	80.9 (3.19)	355 (13.98)	300 (11.81)	375 (14.76)	174 (6.85)	67.2 (148.15)	67.8 (149.47)
200	10	206.5 (8.13)	159.3 (6.27)	107.1 (4.22)	340 (13.39)	300 (11.81)	400 (15.75)	194 (7.64)	37.8 (83.33)	38.4 (84.66)
200	16	206.5 (8.13)	159.3 (6.27)	107.1 (4.22)	340 (13.39)	300 (11.81)	400 (15.75)	194 (7.64)	37.8 (83.33)	38.4 (84.66)
200	25	206.5 (8.13)	159.3 (6.27)	107.1 (4.22)	360 (14.17)	300 (11.81)	400 (15.75)	194 (7.64)	46.8 (103.18)	47.4 (104.50)
200	40	206.5 (8.13)	159.3 (6.27)	107.1 (4.22)	375 (14.76)	300 (11.81)	400 (15.75)	194 (7.64)	54.8 (120.81)	55.4 (122.14)
250	10	260.4 (10.25)	206.5 (8.13)	159.3 (6.27)	395 (15.55)	380 (14.96)	420 (16.54)	224 (8.82)	57.4 (126.55)	58.0 (127.87)
250	16	260.4 (10.25)	206.5 (8.13)	159.3 (6.27)	405 (15.94)	380 (14.96)	420 (16.54)	224 (8.82)	58.4 (128.75)	59.0 (130.07)
250	25	258.8 (10.19)	206.5 (8.13)	159.3 (6.27)	425 (16.73)	380 (14.96)	420 (16.54)	224 (8.82)	74.4 (164.02)	75.0 (165.35)
250	40	258.8 (10.19)	206.5 (8.13)	159.3 (6.27)	450 (17.72)	380 (14.96)	420 (16.54)	224 (8.82)	92.4 (203.71)	93.0 (205.03)
300	10	309.7 (12.19)	260.4 (10.25)	206.5 (8.13)	445 (17.52)	450 (17.72)	445 (17.52)	244 (9.61)	75.7 (166.89)	76.3 (168.21)
300	16	309.7 (12.19)	260.4 (10.25)	206.5 (8.13)	460 (18.11)	450 (17.72)	445 (17.52)	244 (9.61)	82.2 (181.22)	82.8 (182.54)
300	25	307.9 (12.12)	260.4 (10.25)	206.5 (8.13)	485 (19.09)	450 (17.72)	445 (17.52)	244 (9.61)	98.7 (217.60)	99.3 (218.92)
300	40	307.9 (12.12)	260.4 (10.25)	206.5 (8.13)	515 (20.28)	450 (17.72)	445 (17.52)	244 (9.61)	127.5 (281.09)	128.1 (282.41)

<sup>1)</sup> For dual converter: specified weight + 2.80 kg (6.17 lb).

<sup>2)</sup> FR - single reduction

<sup>3)</sup> F2R - double reduction

## Dimensional drawings (continued)

## Flange version ANSI B16.5

Size DN	Pres- sure rating Class	Dimensions [mm (inch)] a = 135 (5.32), b = 108 (4.26), c = 184 (7.25)							Weight [kg (lb)] <sup>1)</sup>	
		d	d FR <sup>2)</sup>	d FR <sup>3)</sup>	D	L	H	I	Flowmeter (without pres- sure sensor)	Flowmeter (with pressure sensor)
½	150	15.8 (0.62)	-	-	90 (3.54)	200 (7.87)	315 (12.40)	144 (5.67)	4.5 (9.92)	5.1 (11.24)
½	300	15.8 (0.62)	-	-	95 (3.74)	200 (7.87)	315 (12.40)	144 (5.67)	4.9 (10.80)	5.5 (12.13)
½	600	13.9 (0.55)	-	-	95 (3.74)	200 (7.87)	315 (12.40)	144 (5.67)	5.1 (11.24)	5.7 (12.57)
1	150	26.6 (1.05)	15.8 (0.62)	-	110 (4.33)	200 (7.87)	315 (12.40)	144 (5.67)	6.2 (13.67)	6.8 (14.99)
1	300	26.6 (1.05)	15.8 (0.62)	-	125 (4.92)	200 (7.87)	315 (12.40)	144 (5.67)	7.2 (15.87)	7.8 (17.20)
1	600	24.3 (0.96)	15.8 (0.62)	-	125 (4.92)	200 (7.87)	315 (12.40)	144 (5.67)	7.5 (16.53)	8.1 (17.86)
1½	150	40.9 (1.61)	26.6 (1.05)	15.8 (0.62)	125 (4.92)	200 (7.87)	320 (12.60)	144 (5.67)	8.3 (18.30)	8.9 (19.62)
1½	300	40.9 (1.61)	26.6 (1.05)	15.8 (0.62)	155 (6.10)	200 (7.87)	320 (12.60)	144 (5.67)	10.4 (22.93)	11 (24.25)
1½	600	38.1 (1.50)	26.6 (1.05)	15.8 (0.62)	155 (6.10)	200 (7.87)	320 (12.60)	144 (5.67)	11.4 (25.13)	12 (26.46)
2	150	52.6 (2.07)	40.9 (1.61)	26.6 (1.05)	150 (5.91)	200 (7.87)	325 (12.80)	144 (5.67)	11 (24.25)	11.6 (25.57)
2	300	52.6 (2.07)	40.9 (1.61)	26.6 (1.05)	165 (6.50)	200 (7.87)	325 (12.80)	144 (5.67)	12.4 (27.34)	13 (28.66)
2	600	49.3 (1.94)	40.9 (1.61)	26.6 (1.05)	165 (6.50)	200 (7.87)	325 (12.80)	144 (5.67)	13.9 (30.64)	14.5 (31.97)
3	150	78 (3.07)	52.6 (2.07)	40.9 (1.61)	190 (7.48)	200 (7.87)	340 (13.39)	154 (6.06)	19.8 (43.65)	20.4 (44.97)
3	300	78 (3.07)	52.6 (2.07)	40.9 (1.61)	210 (8.27)	200 (7.87)	340 (13.39)	154 (6.06)	22.8 (50.27)	23.4 (51.59)
3	600	73.7 (2.90)	52.6 (2.07)	40.9 (1.61)	210 (8.27)	200 (7.87)	340 (13.39)	154 (6.06)	23.8 (52.47)	24.4 (53.79)
4	150	102.4 (4.03)	78 (3.07)	52.6 (2.07)	230 (9.06)	250 (9.84)	360 (14.17)	164 (6.46)	23.4 (51.59)	24 (52.91)
4	300	102.4 (4.03)	78 (3.07)	52.6 (2.07)	255 (10.04)	250 (9.84)	360 (14.17)	164 (6.46)	31.4 (69.23)	32 (70.55)
4	600	97.2 (3.83)	78 (3.07)	52.6 (2.07)	275 (10.83)	250 (9.84)	360 (14.17)	164 (6.46)	40.4 (89.07)	41 (90.39)
6	150	154.2 (6.07)	102.4 (4.03)	78 (3.07)	280 (11.02)	300 (11.81)	375 (14.76)	174 (6.85)	36.2 (79.81)	36.8 (81.13)
6	300	154.2 (6.07)	102.4 (4.03)	78 (3.07)	320 (12.60)	300 (11.81)	375 (14.76)	174 (6.85)	51.2 (112.88)	51.8 (114.20)
6	600	146.3 (5.76)	102.4 (4.03)	78 (3.07)	355 (13.98)	300 (11.81)	375 (14.76)	174 (6.85)	76.2 (157.99)	76.8 (169.31)
8	150	202.7 (7.98)	154.2 (6.07)	102.4 (4.03)	345 (13.58)	300 (11.81)	400 (15.75)	194 (7.64)	50.0 (110.23)	50.6 (111.55)
8	300	202.7 (7.98)	154.2 (6.07)	102.4 (4.03)	380 (14.96)	300 (11.81)	400 (15.75)	194 (7.64)	74.8 (164.91)	75.4 (166.23)
10	150	254.5 (10.02)	202.7 (7.98)	154.2 (6.07)	405 (15.94)	380 (14.96)	420 (16.54)	224 (8.82)	74.4 (164.02)	75.0 (165.35)
10	300	254.5 (10.02)	202.7 (7.98)	154.2 (6.07)	455 (17.91)	380 (14.96)	420 (16.54)	224 (8.82)	106.4 (234.57)	107.0 (235.89)
12	150	304.8 (12.00)	254.5 (10.02)	202.7 (7.98)	485 (19.09)	450 (17.72)	445 (17.52)	244 (9.61)	106.3 (234.35)	106.9 (235.67)
12	300	304.8 (12.00)	254.5 (10.02)	202.7 (7.98)	520 (20.47)	450 (17.72)	445 (17.52)	244 (9.61)	151.3 (333.56)	151.9 (334.88)

1) For dual converter: specified weight + 2.80 kg (6.17 lb)

2) FR - single reduction


3) F2R - double reduction

## Flow Measurement


### SITRANS FX (Vortex)

#### SITRANS FX300

#### Dimensional drawings (continued)

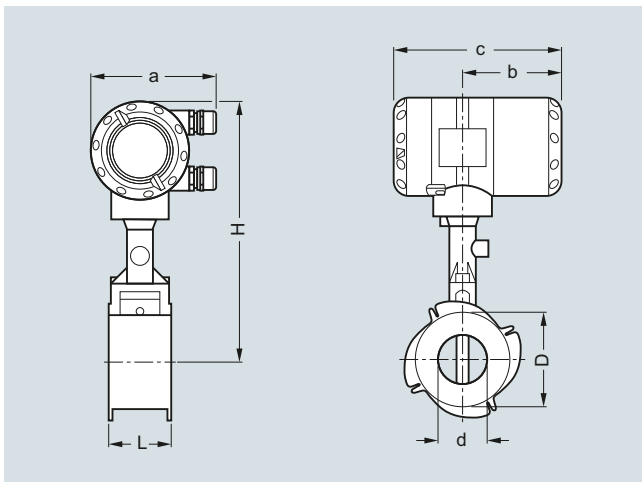

Sandwich version

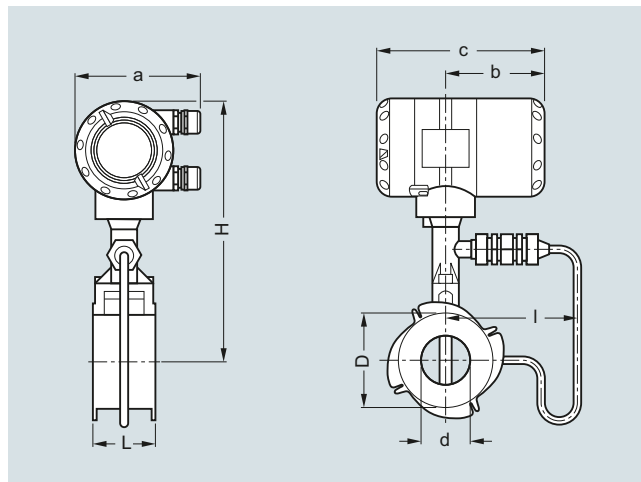

Sandwich version with pressure sensor

#### Sandwich version EN


Size DN	Pressure rating PN	Dimensions [mm (inch)]								Weight [kg (lb)]	
		a	b	c	d	D	L	H	I	Flowmeter (without pressure sensor)	Flowmeter (with pressure sensor)
15	16 ... 100	133 (5.24)	105 (4.13)	179 (7.05)	16 (0.63)	45 (1.77)	65 (2.56)	265 (10.43)	144 (5.67)	3.5 (7.72)	4.1 (9.04)
25	16 ... 100	133 (5.24)	105 (4.13)	179 (7.05)	24 (0.94)	65 (2.56)	65 (2.56)	265 (10.43)	144 (5.67)	4.3 (9.48)	4.9 (10.80)
40	16 ... 100	133 (5.24)	105 (4.13)	179 (7.05)	38 (1.50)	82 (3.23)	65 (2.56)	270 (10.63)	144 (5.67)	4.9 (10.80)	5.5 (12.13)
50	16 ... 100	133 (5.24)	105 (4.13)	179 (7.05)	50 (1.97)	102 (4.02)	65 (2.56)	275 (10.83)	144 (5.67)	6 (13.23)	6.6 (14.55)
80	16 ... 100	133 (5.24)	105 (4.13)	179 (7.05)	74 (2.91)	135 (5.31)	65 (2.56)	290 (11.42)	155 (6.10)	8.2 (18.08)	8.8 (19.40)
100	16 ... 100	133 (5.24)	105 (4.13)	179 (7.05)	97 (3.82)	158 (6.22)	65 (2.56)	310 (12.20)	164 (6.46)	9.5 (20.94)	10.1 (22.27)

#### Sandwich version ANSI

Size DN	Pressure rating Class	Dimensions [mm (inch)]								Weight [kg (lb)]	
		a	b	c	d	D	L	H	I	Flowmeter (without pressure sensor)	Flowmeter (with pressure sensor)
½"	150, 300, 600	5.24	4.13	7.05	0.63	1.77	2.56	10.43	5.67	7.72	9.04
1"	150, 300, 600	5.24	4.13	7.05	0.94	2.56	2.56	10.43	5.67	9.48	10.80
1½"	150, 300, 600	5.24	4.13	7.05	1.50	3.23	2.56	10.63	5.67	10.80	12.13
2"	150, 300, 600	5.24	4.13	7.05	1.97	4.02	2.56	10.83	5.67	13.23	14.55
3"	150, 300, 600	5.24	4.13	7.05	2.91	5.31	2.56	11.42	6.10	18.08	19.4
4"	150, 300, 600	5.24	4.13	7.05	3.82	6.22	2.56	12.20	6.46	20.94	22.27

## Dimensional drawings (continued)

## Remote version

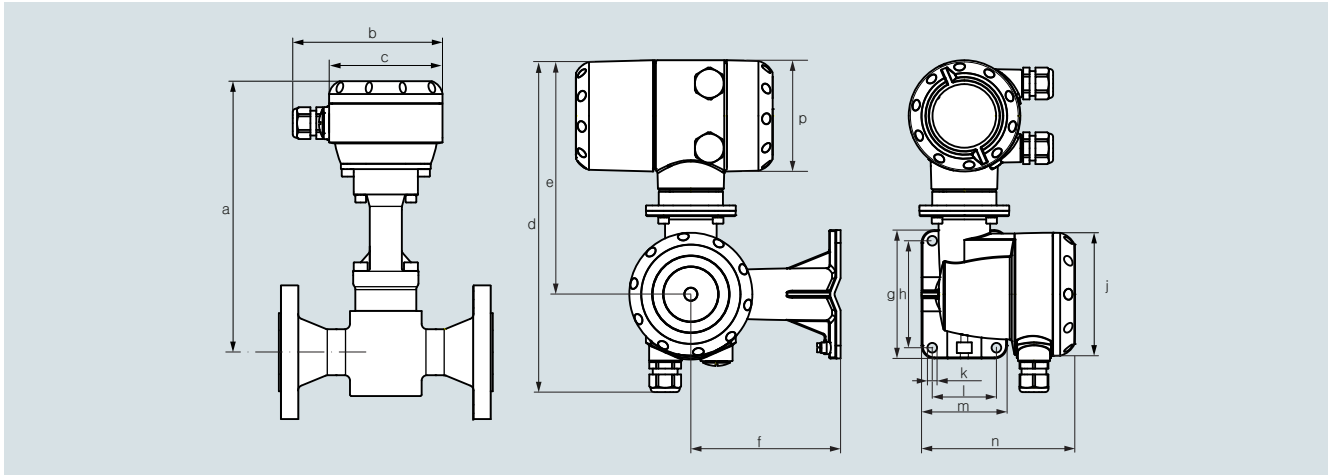

## Flanged version

DN	15	25	40	50	80	100	150	200	250	300			
	½"	1"	1½"	2"	3"	4"	6"	8"	10"	12"			
<b>a</b>													
[mm]	248	248	253	258	273	293	308	333	353	378			
[inch]	9.77	9.77	9.97	10.2	10.8	11.5	12.1	13.1	13.9	14.9			
	<b>b</b>	<b>c</b>	<b>d</b>	<b>e</b>	<b>f</b>	<b>g</b>	<b>h</b>	<b>j</b>	<b>k</b>	<b>l</b>	<b>m</b>	<b>n</b>	<b>p</b>
[mm]	140	Ø106	310	219	140	120	100	Ø115	Ø9 (4x)	60	80	144	104
[inch]	5.52	Ø4.18	12.2	8.63	5.52	4.73	3.94	Ø4.53	Ø0.36 (4x)	2.36	3.15	5.67	4.09

## Sandwich version

DN	15	25	40	50	80	100							
	½"	1"	1½"	2"	3"	4"							
<b>a</b>													
[mm]	248	248	253	258	273	293							
[inch]	9.77	9.77	9.97	10.2	10.8	11.5							
	<b>b</b>	<b>c</b>	<b>d</b>	<b>e</b>	<b>f</b>	<b>g</b>	<b>h</b>	<b>j</b>	<b>k</b>	<b>l</b>	<b>m</b>	<b>n</b>	<b>p</b>
[mm]	140	Ø106	310	219	140	120	100	Ø115	Ø9 (4x)	60	80	144	104
[inch]	5.52	Ø4.18	12.2	8.63	5.52	4.73	3.94	Ø4.53	Ø0.36 (4x)	2.36	3.15	5.67	4.09

## Flow Measurement

### SITRANS FX (Vortex)

#### SITRANS FX300

#### Dimensional drawings (continued)

##### Flow tables

##### Measuring Range Limits

##### Water

Size DN to EN 1092-1	DN to NSI B16.5	Q <sub>min</sub> EN 1092-1 [m <sup>3</sup> /h]	Q <sub>max</sub> EN 1092-1 [m <sup>3</sup> /h]	Q <sub>min</sub> ANSI B16.5 [m <sup>3</sup> /h]	Q <sub>max</sub> ANSI B16.5 [m <sup>3</sup> /h]
15	½"	0.45	5.07	0.44	4.94
25	1"	0.81	11.40	0.81	11.40
40	1½"	2.04	28.58	2.04	28.58
50	2"	3.53	49.48	3.53	49.48
80	3"	7.74	108.37	7.74	108.37
100	4"	13.30	186.22	13.30	186.21
150	6"	30.13	421.86	30.13	421.86
200	8"	56.60	792.42	56.60	792.42
250	10"	90.48	1 266.8	90.48	1 266.8
300	12"	131.41	1 839.8	131.41	1 839.8

Values based on water at 20 °C (68 °F)

##### Air

Size DN to EN 1092-1	DN to ANSI B16.5	Q <sub>min</sub> EN 1092-1 [m <sup>3</sup> /h]	Q <sub>max</sub> EN 1092-1 [m <sup>3</sup> /h]	Q <sub>min</sub> ANSI B16.5 [m <sup>3</sup> /h]	Q <sub>max</sub> ANS B16.5 [m <sup>3</sup> /h]
15	½"	6.80	25.33	6.72	24.70
25	1"	10.20	81.43	10.20	81.43
40	1½"	25.35	326.63	25.35	326.63
50	2"	43.89	565.49	43.89	565.49
80	3"	96.14	1 238.64	96.14	1 238.6
100	4"	165.19	2 128.27	165.19	2 128.27
150	6"	374.23	4 821.60	374.23	4 821.6
200	8"	702.95	9 056.8	702.95	9 056.8
250	10"	1 123.7	14 478.0	1 123.7	14 478.0
300	12"	1 632.1	21 028.0	1 632.1	21 028.0

Values based on air at 20 °C (68 °F) and 1.013 bar<sub>abs</sub> (14.7 psi<sub>abs</sub>)

##### Flow rate limits

Product	Nominal sizes		Minimum flow rates	Maximum flow rates
	to EN	to ANSI	[m/s]	[m/s]
Liquids	DN 15 ... 300	DN ½" ... 12"	$0.5 \times (998/\rho)^{0.51}$	$7 \times (998/\rho)^{0.47\ 1)}$
Gas, steam/vapor	DN 15 ... 300	DN ½" ... 12"	$6 \times (1.29/\rho)^{0.52}$	$7 \times (998/\rho)^{0.47\ 3)}$

$\rho$  = operating density [kg/m<sup>3</sup>]

<sup>1)</sup> Minimum flow rate 0.3 m/s (0.984 ft/s) - maximum flow rate 7 m/s (23 ft/s)

<sup>2)</sup> Minimum flow rate 2 m/s (6.6 ft/s)

<sup>3)</sup> Maximum flow rate 80 m/s (262 ft/s); DN 15: 45 m/s (148 ft/s) and DN 25: 70 m/s (230 ft/s)



## Dimensional drawings (continued)

Measuring range saturated steam: 1 to 7 bar

Overpressure [bar]		1		3.5		5.2		7	
Density [kg/m <sup>3</sup> ]		1.13498		2.4258		3.27653		4.16732	
Temperature [°C]		120.6		148.2		160.4		170.6	
Flow [kg/h]		min.	max.	min.	max.	min.	max.	min.	max.
DN to EN 1092-1	DN to ASME B16.5								
15	½"	5.87	28.75	7.68	61.46	8.93	83.01	10.06	105.57
25	1"	11.82	92.42	17.28	197.53	20.09	266.81	22.66	339.35
40	1½"	29.64	370.71	43.33	792.33	50.63	1 070.2	56.80	1 361.2
50	2"	51.31	641.82	75.02	1 371.8	87.19	1 852.8	98.33	2 356.6
80	3"	112.41	1 405.8	164.33	3 004.7	191.00	4 058.4	215.39	5 161.8
100	4"	193.14	2 415.5	282.36	5 162.7	328.16	6 973.3	370.09	8 869.2
150	6"	437.56	5 472.4	639.69	11 696.0	743.45	15 798.0	838.44	20 093.0
200	8"	821.9	10 279.0	1 201.6	21 970.0	1 396.5	29 675.0	1 574.9	37 743.0
250	10"	1 313.9	16 433.0	1 920.9	35 122.0	2 232.5	47 439.0	2 517.7	60 337.0
300	12"	1 908.3	23 866.0	2 789.8	51 010.0	3 242.4	68 899.0	3 656.6	87 630.0

Measuring range saturated steam: 10.5 ... 20 bar

Overpressure [bar]		10.5		14.0		17.5		20.0	
Density [kg/m <sup>3</sup> ]		5.88803		7.60297		9.31702		10.5442	
Temperature [°C]		186.2		198.5		208.7		215.0	
Flow [kg/h]		min.	max.	min.	max.	min.	max.	min.	max.
DN to EN 1092-1	DN to ANSI B16.5								
15	½"	12.78	149.17	16.51	192.61	20.23	236.04	22.89	267.12
25	1"	26.93	479.46	30.60	619.11	33.87	758.69	36.04	858.62
40	1½"	67.51	1 878.2	76.72	2 150.7	84.93	2 395.3	90.35	2 557.7
50	2"	116.89	3 251.7	132.82	3 723.4	147.03	4 147.0	156.42	4 428.1
80	3"	256.03	7 122.4	290.93	8 155.8	322.06	9 083.7	342.62	9 699.3
100	4"	439.91	12 238	499.90	14 013.0	553.38	15 608.0	588.69	16 666.0
150	6"	996.62	27 725.0	1 132.5	31 747.0	1 253.7	35 359.0	1 333.7	37 756.0
200	8"	1 872.1	52 079.0	2 127.3	59 634.0	2 354.9	66 419.0	2 505.2	70 921.0
250	10"	2 992.7	83 254.0	3 400.7	95 333.0	3 764.6	106 180.0	4 004.9	113 380.0
300	12"	4 346.5	120 920.0	4 939.1	138 460.0	5 467.5	154 210.0	5 816.5	164 660.0

Measuring range saturated steam: 15 ... 100 psig

Overpressure [psig]		15		50		75		100	
Density [lbs/ft <sup>3</sup> ]		0.0719		0.1497		0.2036		0.2569	
Temperature [°F]		249.98		297.86		320.36		338.184	
Flow [lbs/h]		min.	max.	min.	max.	min.	max.	min.	max.
DN to EN 1092-1	DN to ANSI B16.5								
15	½"	12.95	64.35	16.83	133.87	19.62	182.02	22.04	229.63
25	1"	26.25	206.83	37.86	430.30	44.15	585.06	49.59	738.09
40	1½"	65.81	829.61	94.92	1 726	110.68	2 346.7	124.32	2 960.5
50	2"	113.94	1 436.3	164.34	2 988	191.63	4 062.9	215.23	5 125.6
80	3"	249.57	3 146.1	360.00	6 545.3	419.74	8 899.4	471.45	11 227
100	4"	428.81	5 405.7	618.51	11 246	721.21	15 291	810.06	19 291
150	6"	971.47	12 246	1 401.2	25 478	1 633.9	34 642	1 835.2	43 703
200	8"	1 824.8	23 004	2 632.1	47 859	3 069.1	65 072	3 447.2	82 092
250	10"	2 917.2	36 774	4 207.7	76 508	4 906.4	104 030	5 510.8	131 230
300	12"	4 236.8	53 410	6 111.1	111 120	7 125.8	151 080	8 003.6	190 600

## Flow Measurement

### SITRANS FX (Vortex)


#### SITRANS FX300

#### Dimensional drawings (continued)


Measuring range saturated steam: 150 ... 300 psig

Overpressure [psig]	150	200	250	300
Density [lbs/ft <sup>3</sup> ]	0.3627	0.4681	0.5735	0.6792
Temperature [°F]	366.08	388.04	406.22	422.06
Flow [lbs/h]	min. max.	min. max.	min. max.	min. max.
DN to EN 1092-1	DN to ANSI B16.5			
15	½"	27.79 324.21	35.86 418.47	43.94 512.66
25	1"	58.93 1 042.1	66.94 1 345.1	74.10 1 647.8
40	1½"	147.72 4 107.2	167.83 4 702.8	185.76 5 237
50	2"	255.75 7 111.9	290.56 8 141.9	321.60 9 066.8
80	3"	560.19 15 578	636.44 17 834	704.43 19 860
100	4"	962.54 26 766	1 093.5 30 643	1 210.4 34 124
150	6"	2 180.6 60 639	2 477.4 69 421	2 742.1 77 307
200	8"	4 096.1 113 900	4 653.6 130 400	5 150.7 145 210
250	10"	6 548.1 182 090	7 439.3 208 460	8 234.1 232 140
300	12"	9 510.2 264 460	10 805 302 760	11 959 337 150

#### Circuit diagrams

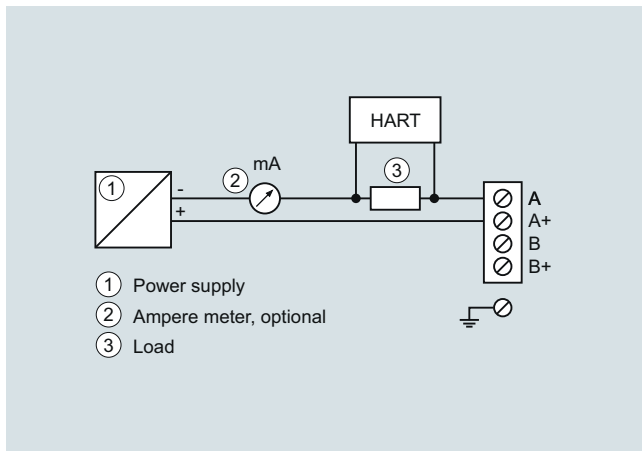

Connection power supply and HART communication

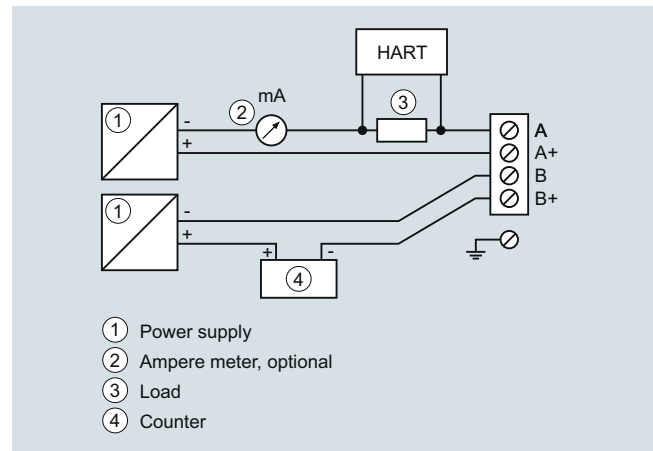

Connection pulse output

### Overview



SITRANS FX vortex flowmeters are designed for use in industrial applications and optimally suited to the demands in auxiliary supply systems.

The proven principle of vortex flowmeters is suitable for measurement of liquids, gases and vapors unaffected by conductivity, viscosity, temperature and pressure.

### Benefits

- Integrated pressure and temperature compensation
- Temperature compensation for saturated steam included as standard
- High measuring accuracy
- Maintenance-free sensor
- Non-wearing, fully welded stainless steel construction with high resistance to corrosion, pressure and temperature
- SIL2 certified according to IEC 61508 Edition 2
- Use in hazardous areas
- Integrated reduction of nominal diameter for space-saving and economic installation and large measuring ranges
- Redundant data management: Easy exchange of electronics without loss of calibration and configuration data
- FAD (Free Air Delivery) functionality
- Gross and net heat calculation to support advanced energy management
- Remote version with cable length up to 50 m (164 ft) (in preparation)


Even the basic version of the vortex flowmeter SITRANS FX330 is equipped with temperature compensation for saturated steam applications. With the optional pressure sensor the SITRANS FX330 has integrated density compensation for calculation of corrected volume and mass (online density compensation). The density compensation for calculation of corrected volume and mass is based on the standards of NIST for gases and IAPWS for steam.

### Higher measuring accuracy with the use of compact measuring systems

With the classic installation of a vortex flowmeter and separate pressure and temperature sensor as well as flow calculator, all errors occurring in the measuring chain must be taken into account when determining system accuracy. This can result in a measuring error between  $\pm 3$  to 5 %.


Using a vortex flowmeter with integrated pressure and temperature compensation such as the SITRANS FX330 allows you not only to lower installation costs but also increase the measuring accuracy of the measuring point. In this case the accuracy is  $\pm 1.5$  % of the measured value.

### classic

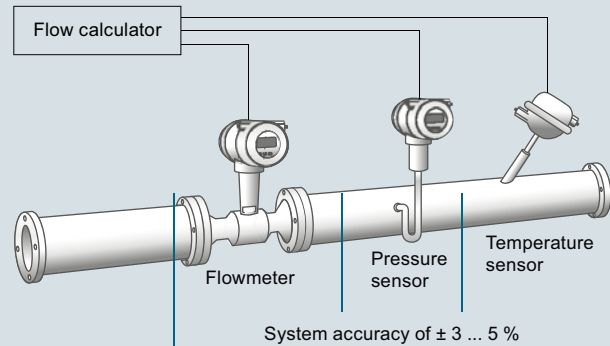

### integrated

Flowmeter with integrated pressure and temperature compensation



The SITRANS FX330 in flange design is available with integrated reduction of nominal diameter for space-saving installations and large measuring spans. About 90% of all vortex flowmeters are ordered one size smaller than the line diameter in order to increase the flow speed and to get a wider measuring range. Here, the line has to be reduced before and widened after the sensor, typically including 20x DN inlet and 5x DN outlet run. With the reduction and widening of nominal diameter included in the sensor, it is no longer necessary. To compensate the non-existent straight inlet run between reduction and the vortex bluff body, these devices are specially calibrated and linearized.

A new feature of the SITRANS FX330 is the advanced signal processing and filtering called AVFD (Advanced Vortex Frequency Detection): Interferences and disturbances in the measuring signal are suppressed, signals outside from the relevant frequency band are filtered out.

Redundant data management prevents loss of calibration and configuration data when changing electronics or display.

By default, all SITRANS FX330 meters are factory-calibrated (traceable to international standards) and pre-set according to customer specifications. The SITRANS FX330 also comes with an installation wizard to ease installation; e.g. in a steam application it will only show related settings.

Developed according to the standard IEC 61508 edition 2, the SITRANS FX330 can be used in safety-related application with classification SIL2 for continuous volume flow measurement.

## Flow Measurement

### SITRANS FX (Vortex)

#### SITRANS FX330

##### Application

- Measurement of saturated steam and superheated steam
- Steam boiler monitoring
- Heat metering of steam and hot water
- Measurement of consumption of industrial gases
- Measurement of consumption in compressed air systems
- Monitoring of compressor output
- Evaluation of Free Air Delivery (FAD)
- SIP and CIP processes in the food, beverage and pharmaceutical industries
- Measuring of conductive and non-conductive liquids
- Safety-related measurement in SIL applications (SIL2)

##### Gross and net heat quantity calculation


The SITRANS FX330 was designed for applications in auxiliary and supply service lines, such as internal monitoring of energy flows for saturated and superheated steam or hot water. Equipped with temperature sensor as standard, the device can be installed as heat meter in the feed line directly connected with an external temperature sensor in the return line. The gross and net heat calculation can be fed into a DCS to support advanced energy management.

When it comes to energy, the most accurate measurement of consumption is essential. By combining flow, temperature and pressure measurements in one device, SITRANS FX330 provides the basis for a precise mass flow calculation.



In steam applications, the software even determines the enthalpy - the heat content - of the steam. Therefore, SITRANS FX330 is able to calculate the gross heat quantity.

In case net heat quantity consumption of process is asked for, a single temperature sensor can be added to the return line. SITRANS FX330 uses the readings to calculate the amount of heat consumed.

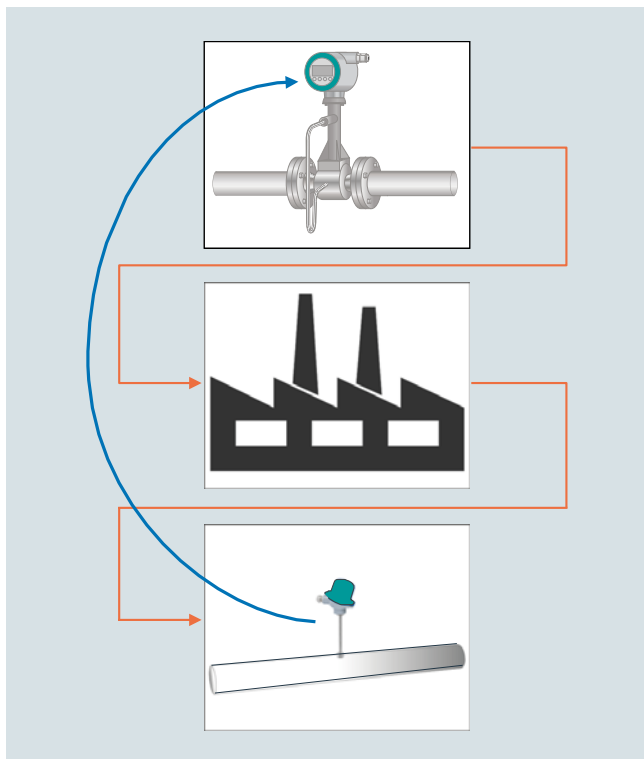The SITRANS FX330 thereby proves itself to be a reliable partner.



##### Design

SITRANS FX330 Flange	SITRANS FX330 Sandwich
	
Flange version with integrated temperature compensation as standard for saturated steam and optional pressure compensation for superheated steam, gases and wet gases.	All advantages of the flange version in a space-saving sandwich design; centering rings guarantee an easy installation without any offset.
Integrated reduction of nominal diameter for space-saving and economic installations plus large measuring ranges.	Integrated reduction of nominal diameter not available
Also in remote design with field housing and connection cable up to 50 m (164 ft) (in preparation)	
With shut off valve allowing <ul style="list-style-type: none"> <li>• exchange and calibration of pressure sensor</li> <li>• pressure and leak testing of pipeline without interrupting the process</li> </ul>	


##### Function

Vortex flowmeters are used to measure the flow of gases, vapors and liquids in completely filled pipes. The measuring principle is based on the principle of the Karman vortex street. Inside the measuring sensor vortices are shed from a bluff body and are detected by a sensor located behind. The frequency  $f$  of the vortex shedding is proportional to the flow velocity  $v$ .

The nondimensional Strouhal number  $S$  describes the relationship between vortex frequency  $f$ , width  $b$  of the bluff body and the mean flow velocity  $v$ :

$$f = (S \cdot v) / b$$

The vortex frequency is recorded at the sensor and evaluated at the converter.

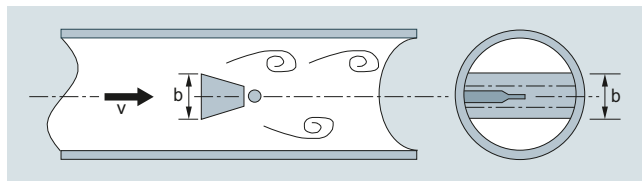

Functional principle

## Configuration

Available combinations of sensors and connection size for SITRANS FX330 in flanged design are shown in the table below.

SITRANS FX330 Flanged (7ME2610-...)										
Sensor size	Connection size	EN 1092-1, Form B1/B2, PN 10	EN 1092-1, Form B1/B2, PN 16	EN 1092-1, Form B1/B2, PN 25	EN 1092-1, Form B1/B2, PN 40	EN 1092-1, Form B1/B2, PN 63	EN 1092-1, Form B1/B2, PN 100	ANSI B16.5, class 150	ANSI B16.5, class 300	ANSI B16.5, class 600
DN15	DN 15	-	-	-	•	-	•	•	•	•
	DN 25	-	-	-	•	-	•	•	•	•
	DN 40	-	-	-	•	-	•	•	•	•
DN 25	DN 25	-	-	-	•	-	•	•	•	•
	DN 40	-	-	-	•	-	•	•	•	•
	DN 50	-	•	-	•	•	•	•	•	•
DN 40	DN 40	-	-	-	•	-	•	•	•	•
	DN 50	-	•	-	•	•	•	•	•	•
	DN 80	-	•	-	•	•	•	•	•	•
DN 50	DN 50	-	•	-	•	•	•	•	•	•
	DN 80	-	•	-	•	•	•	•	•	•
	DN 100	-	•	-	•	•	•	•	•	•
DN 80	DN 80	-	•	-	•	•	•	•	•	•
	DN 100	-	•	-	•	•	•	•	•	•
	DN 150	-	•	-	•	•	•	•	•	•
DN 100	DN 100	-	•	-	•	•	•	•	•	•
	DN 150	-	•	-	•	•	•	•	•	•
	DN 200	•	•	•	•	-	-	•	•	-
DN 150	DN 150	-	•	-	•	•	•	•	•	•
	DN 200	•	•	•	•	-	-	•	•	-
	DN 250	•	•	•	•	-	-	•	•	-
DN 200	DN 200	•	•	•	•	-	-	•	•	-
	DN 250	•	•	•	•	-	-	•	•	-
	DN 300	•	•	•	•	-	-	•	•	-
DN 250	DN 250	•	•	•	•	-	-	•	•	-
	DN 300	•	•	•	•	-	-	•	•	-
DN 300	DN 300	•	•	•	•	-	-	•	•	-

- available
- not available

# Flow Measurement

## SITRANS FX (Vortex)

### SITRANS FX330

#### Technical specifications

<b>Range of application</b>	Flow measurement of liquids, gases and vapors		For detailed information see operating instructions 'Intended use'
<b>Mode of operation</b>	Measuring principle		<b>Installation conditions</b> Inlet run <ul style="list-style-type: none"> <li>For undisturbed flow profile, after pipe section with reducer, after 1 x 90° pipe bend</li> <li>After 2 x 90° pipe bend</li> <li>After 2 x 90° three-dimensional pipe bend</li> <li>After control valves</li> <li>Before flow conditioner</li> <li>After flow conditioner</li> </ul> Outlet run
Primary measured value	Karman vortex street <ul style="list-style-type: none"> <li>Volume flow</li> <li>Mass flow</li> <li>Corrected volume flow</li> <li>Density</li> <li>Temperature</li> <li>Pressure</li> <li>Heat energy</li> </ul>		
Design	Transmitter		<b>Material</b> Sensor and process connections <ul style="list-style-type: none"> <li>Standard</li> <li>Option</li> </ul> Transmitter housing <ul style="list-style-type: none"> <li>Standard</li> <li>Option</li> </ul> Pressure sensor gasket <ul style="list-style-type: none"> <li>Standard</li> <li>Option</li> </ul> Sensor gasket (Pick-up) <ul style="list-style-type: none"> <li>Standard</li> <li>Option</li> </ul>
• Compact and remote version	Cable length up to 50 m (164 ft) (in preparation)		
Sensor	Flange version	Sandwich version	1.4404/316L Hastelloy C22 on request Aluminum Aluminum die-cast, two-layer coating (epoxy/polyester) Die-cast aluminum with finish for advanced requirements
• Integrated temperature measurement	•	•	1.4535/316L Hastelloy C276
• Reduction of nominal diameter	•	•	
• Pressure and temperature compensation	•	•	FPM FFKM
• Isolation valve	•	•	
• Dual measuring device	•	•	1.4535/316L Hastelloy C276
<b>Display</b>	4-line graphical display (backlit) with control keys		
<b>Operation</b>	<ul style="list-style-type: none"> <li>Via local display (languages: German, English, French)</li> <li>Via SIMATIC PDM</li> </ul>		<b>Process connections</b> DIN EN 1092-1 ANSI B16.5
<b>Accuracy</b>	Volume flow <ul style="list-style-type: none"> <li>Liquids</li> <li>- Re ≥ 20 000</li> <li>- 10 000 &lt; Re &lt; 20 000</li> <li>Gases and vapors</li> <li>- Re ≥ 20 000</li> <li>- 10 000 &lt; Re &lt; 20 000</li> </ul> Mass flow/Corrected volume flow <ul style="list-style-type: none"> <li>Gases and vapors</li> <li>- Re ≥ 20 000</li> <li>- 10 000 &lt; Re &lt; 20 000</li> </ul> Mass flow <ul style="list-style-type: none"> <li>Liquid/water</li> <li>- Re ≥ 20 000</li> <li>- 10 000 &lt; Re &lt; 20 000</li> </ul> Repeatability (Volume flow)		For valid combinations of connection size and pressure rating see table in section Configuration
• Liquids	± 0.75 % of measured value		<b>Enclosure rating</b> Standard Option
- Re ≥ 20 000	± 2.0 % of measured value		
- 10 000 < Re < 20 000	± 1.0 % of measured value		Compact and remote version: IP66/IP67 Remote version: IP66/IP68 for sensor
Gases and vapors	± 2.0 % of measured value		
- Re ≥ 20 000	± 1.5 % of measured value		<b>Power supply</b> Non-Ex version Ex version
- 10 000 < Re < 20 000	± 2.5 % of measured value		
Mass flow/Corrected volume flow	± 1.5 % of measured value		<b>Inputs/Outputs</b> Current output Binary output Current input
• Gases and vapors	± 2.5 % of measured value		
- Re ≥ 20 000	± 0.1 % of measured value		<b>Communication</b> HART 7
- 10 000 < Re < 20 000			
Mass flow			<b>Calibration</b> Standard calibration Special calibration
• Liquid/water			
- Re ≥ 20 000			3-point calibration: 3 x 15 %, 3 x 50 %, 3 x 80 % 5-point calibration: 3 x 15 %, 3 x 30 %, 3 x 50 %, 3 x 60 %, 3 x 80 %
- 10 000 < Re < 20 000			
Repeatability (Volume flow)			<b>Certificates and approvals</b> Ex approvals CE declaration of conformity Safety integration level (SIL)
<b>Operating conditions</b>	Temperature ratings <ul style="list-style-type: none"> <li>Medium</li> <li>Ambient</li> <li>- Non-Ex</li> <li>- Ex</li> <li>Storage</li> </ul> Pressure ratings Max. 100 bar (1450 psi), higher pressure rates on request		ATEX, QPS, IECEx PED 2014/68/EU EMC 2014/30/EU SIL2 according to IEC 61508
Temperature ratings	-40 ... +240 °C (-40 ... +465 °F) -40 ... +85 °C (-40... +185 °F) -40 ... +65 °C (-40... +140 °F) -50 ... +85 °C (-58... +185 °F)		
• Medium	-40 ... +240 °C (-40 ... +465 °F)		1.5 x PN 2 times the measuring range of pressure sensor
• Ambient	-40 ... +85 °C (-40... +185 °F)		
- Non-Ex	-40 ... +65 °C (-40... +140 °F)		Taken into consideration when sizing < 10 cP > 10000
- Ex	-50 ... +85 °C (-58... +185 °F)		
• Storage	-40 ... +85 °C (-40... +185 °F)		1.5 x PN 2 times the measuring range of pressure sensor
Pressure ratings	Max. 100 bar (1450 psi), higher pressure rates on request		
Max. allowable test pressure	1.5 x PN		3-point calibration: 3 x 15 %, 3 x 50 %, 3 x 80 % 5-point calibration: 3 x 15 %, 3 x 30 %, 3 x 50 %, 3 x 60 %, 3 x 80 %
• With integrated pressure sensor and isolation valve (closed)	2 times the measuring range of pressure sensor		
• With integrated pressure sensor and without isolation valve	2 times the measuring range of pressure sensor		<b>Certificates and approvals</b> Ex approvals CE declaration of conformity Safety integration level (SIL)
Process medium	Taken into consideration when sizing < 10 cP > 10000		
• Density	Taken into consideration when sizing < 10 cP		ATEX, QPS, IECEx PED 2014/68/EU EMC 2014/30/EU SIL2 according to IEC 61508
• Viscosity	> 10000		
• Reynold's number	> 10000		1.5 x PN 2 times the measuring range of pressure sensor
Recommended flow velocities	0.3 ... 7 m/s (0.98 ... 23 ft/s) 2.0 ... 80 m/s (6.6 ... 262.5 ft/s) 3.0 ... 45 m/s (9.8 ... 148 ft/s) 2.0 ... 70 m/s (6.6 ... 230 ft/s)		
• Liquids	0.3 ... 7 m/s (0.98 ... 23 ft/s)		1.5 x PN 2 times the measuring range of pressure sensor
• Gases and vapors	2.0 ... 80 m/s (6.6 ... 262.5 ft/s)		
DN 15:	3.0 ... 45 m/s (9.8 ... 148 ft/s)		ATEX, QPS, IECEx PED 2014/68/EU EMC 2014/30/EU SIL2 according to IEC 61508
DN 25:	2.0 ... 70 m/s (6.6 ... 230 ft/s)		

Selection and ordering data		Article No.	Article No.
<b>SITRANS FX330 Flanged</b>			
• Not approved for SIL2 safety applications	↗	7ME2610-	7ME2610-
• Approved for SIL2 safety applications	↗	7ME2611-	7ME2611-
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.			
<b>Sensor size</b>	<b>Connection size</b>		
DN 15 (½")	DN 15 (½")	1 A	0
	DN 25 (1")	1 B	1
	DN 40 (1½")	1 C	2
DN 25 (1")	DN 25 (1")	2 B	A
	DN 40 (1½")	2 C	B
	DN 50 (2")	2 D	C
DN 40 (1½")	DN 40 (1½")	2 K	D
	DN 50 (2")	2 L	E
	DN 80 (3")	2 M	F
DN 50 (2")	DN 50 (2")	2 R	G
	DN 80 (3")	2 S	H
	DN 100 (4")	2 T	J
DN 80 (3")	DN 80 (3")	3 L	K
	DN 100 (4")	3 M	L
	DN 150 (6")	3 R	M
DN 100 (4")	DN 100 (4")	3 S	N
	DN 150 (6")	3 T	A
	DN 200 (8")	3 Q	B
DN 150 (6")	DN 150 (6")	4 M	C
	DN 200 (8")	4 P	D
	DN 250 (10")	4 Q	E
DN 200 (8")	DN 200 (8")	4 T	F
	DN 250 (10")	4 U	G
	DN 300 (12")	4 V	H
DN 250 (10")	DN 250 (10")	4 W	J
	DN 300 (12")	4 Y	K
DN 300 (12")	DN 300 (12")	5 E	L
<b>Process connection and pressure rate</b>			
<b>EN 1092-1 Form B1</b>			
PN 10	DN 200 ... 300	A	M
PN 16	DN 50 ... 300	B	N
PN 25	DN 200 ... 300	C	P
PN 40	DN 15 ... 300	D	Q
PN 63	DN 50 ... 150	E	R
PN 100	DN 15 ... 150	F	S
<b>ANSI B16.5 RF</b>			
Class 150	½ ... 12"	J	T
Class 300	½ ... 12"	K	U
Class 600	½ ... 6"	L	V
<b>System design</b>			
Compact version	No cable	0	W
Remote version (in preparation)	Cable length with Order code L..	1	0
<b>Transmitter housing</b>			
Aluminum		0	1
Aluminum, silicon free		1	2
Dual version, aluminum		6	3
Dual version, aluminum, silicon free		7	
<b>SITRANS FX330 Flanged</b>			
• Not approved for SIL2 safety applications	↗	7ME2610-	7ME2610-
• Approved for SIL2 safety applications	↗	7ME2611-	7ME2611-
<b>Communication</b>			
HART			0
PROFIBUS PA			1
FOUNDATION Fieldbus			2
<b>Ex approval</b>			
Without Ex approval			A
ATEX II2 G Ex ia			B
ATEX II2 G Ex d			C
ATEX II3 G Ex nA			D
ATEX II2 D Ex tb			E
QPS IS Class I Div.1			F
QPS XP Class I Div.1			G
QPS NI Class I Div. 2			H
QPS DIP Class I, III Div. 1			J
IECEX II2 G Ex ia			K
IECEX II2 G Ex d			L
IECEX II3 G Ex nA			M
IECEX II2 D Ex tb			N
<b>Pressure sensor and gasket material</b>			
Without pressure sensor			A
With pressure sensor and gasket material FPM (Viton), Range:			B
1 bar (14.5 psi)			C
2 bar (29 psi)			D
4 bar (58 psi)			E
6 bar (87 psi)			F
10 bar (145 psi)			G
16 bar (232 psi)			H
25 bar (363 psi)			J
40 bar (580 psi)			K
60 bar (870 psi)			L
100 bar (1450 psi)			M
With pressure sensor and gasket material FFKM (Kalrez), Range:			N
1 bar (14.5 psi)			P
2 bar (29 psi)			Q
4 bar (58 psi)			R
6 bar (87 psi)			S
10 bar (145 psi)			T
16 bar (232 psi)			U
25 bar (363 psi)			V
40 bar (580 psi)			W
60 bar (870 psi)			
100 bar (1450 psi)			
<b>Software version</b>			
Standard - Uncompensated for gases, steam and liquids including temperature compensation for saturated steam			0
Standard + Heat meter for saturated steam and water			1
Density compensation for steam + Heat meter for saturated and superheated steam			2
Density compensation for gases, wet gases and mixed gases + FAD			3

# Flow Measurement

## SITRANS FX (Vortex)

### SITRANS FX330

3

#### Selection and ordering data

##### SITRANS FX330 Sandwich

- Not approved for SIL2 safety applications ↗ 7ME2710-
- Approved for SIL2 safety applications ↗ 7ME2711-

↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

##### Sensor size

DN 15 (½")	1 A
DN 25 (1")	2 B
DN 40 (1½")	2 K
DN 50 (2")	2 R
DN 80 (3")	3 L
DN 100 (4")	3 S

##### Pressure rating

EN 1092-1		
PN 16	DN 15 ... 100	B
PN 25	DN 15 ... 100	C
PN 40	DN 15 ... 100	D
PN 63	DN 15 ... 100	E
PN 100	DN 15 ... 100	F

##### ANSI B16.5

Class 150	½ ... 4"	J
Class 300	½ ... 4"	K
Class 600	½ ... 4"	L

##### System design

Compact version	No cable	0
Remote version (in preparation)	Cable length with Order code L...	1

##### Transmitter housing

Aluminum	0
Aluminum, silicon free	1

##### Communication

HART	0
PROFIBUS PA	1
FOUNDATION Fieldbus	2

##### Ex approval

Without Ex approval	A
ATEX II2 G Ex ia	B
ATEX II2 G Ex d	C
ATEX II3 G Ex nA	D
ATEX II2 D Ex tb	E
QPS IS Class I Div. 1	F
QPS XP Class I Div. 1	G
QPS NI Class I Div. 2	H
QPS DIP Class I, III Div. 1	J
IECEX II2 G Ex ia	K
IECEX II2 G Ex d	L
IECEX II3 G Ex nA	M
IECEX II2 D Ex tb	N

#### Article No.

7ME2710-
7ME2711-
0
1
0
1
0
1
2
A
B
C
D
E
F
G
H
J
K
L
M
N

#### Article No.

7ME2710-
7ME2711-
A
B
C
D
E
F
G
H
J
K
L
M
N
P
Q
R
S
T
U
V
W
0
1
2
3
Order code
Y40
Y41
Y42
Y43
Y44
Y45

##### SITRANS FX330 Sandwich

- Not approved for SIL2 safety applications
- Approved for SIL2 safety applications

##### Pressure sensor and gasket material

Without pressure sensor	
With pressure sensor and gasket material FPM (Viton), Range:	
1 bar (14.5 psi)	
2 bar (29 psi)	
4 bar (58 psi)	
6 bar (87 psi)	
10 bar (145 psi)	
16 bar (232 psi)	
25 bar (363 psi)	
40 bar (580 psi)	
60 bar (870 psi)	
100 bar (1450 psi)	
With pressure sensor and gasket material FFKM (Kalrez), Range:	
1 bar (14.5 psi)	
2 bar (29 psi)	
4 bar (58 psi)	
6 bar (87 psi)	
10 bar (145 psi)	
16 bar (232 psi)	
25 bar (363 psi)	
40 bar (580 psi)	
60 bar (870 psi)	
100 bar (1450 psi)	

##### Software version

Standard - Uncompensated for gases, steam and liquids including temperature compensation for saturated steam	0
Standard + Heat meter for saturated steam and water	1
Density compensation for steam + Heat meter for saturated and superheated steam	2
Density compensation for gases, wet gases and mixed gases + FAD	3

##### Additional information

Please add "-Z" to Article No. and specify as minimum Order code Y40, Y41, Y42 and Y45 and plain text.

##### Application data

Medium: Specify medium (Liquid, gas, steam or customer-specific)	Y40
Temperature: Specify operating temperature with unit	Y41
Pressure: Specify operating pressure with unit	Y42
Density (only for customer-specified medium): Specify density with unit	Y43
Viscosity (only for customer-specified medium): Specify viscosity with unit	Y44
Flow rate: Specify max. flow rate with units	Y45

##### Operating instruction

##### Description

English	A5E2100423
---------	------------

All literature is available to download for free, in a range of languages, at <https://intranet.entry.siemens.com>



Selection and ordering data	Order code		Order code
<b>Further designs</b> Please add "-Z" to Article No. and specify Order code.		<b>Calibration</b> 5-point calibration with certificate	<b>D11</b>
<b>Cable connection</b> Without cable glands	<b>A01</b>	<b>Cleaning</b> Free of oil and grease (wetted parts)	<b>K46</b>
M20x1.5 cable glands made of plastic, grey	<b>A02</b>	Free of oil and grease (wetted parts) + Inspection certificate according to EN 10204-3.1	<b>K48</b>
• 3 pcs	<b>A12</b>		
• 2 pcs.	<b>A22</b>		
• 1 pc.		<b>Cable length for remote version (in preparation)</b>	
M20x1.5 cable glands made of plastic, blue		5 m (16 ft)	<b>L01</b>
• 3 pcs	<b>A03</b>	10 m (32 ft)	<b>L02</b>
• 2 pcs.	<b>A13</b>	15 m (49 ft)	<b>L03</b>
• 1 pc.	<b>A23</b>	20 m (65 ft)	<b>L04</b>
M20x1.5 cable glands made of brass, Ex-d/t approved		25 m (82 ft)	<b>L05</b>
• 3 pcs	<b>A04</b>	30 m (98 ft)	<b>L06</b>
• 2 pcs.	<b>A14</b>	35 m (114 ft)	<b>L07</b>
• 1 pc.	<b>A24</b>	40 m (131 ft)	<b>L08</b>
M20x1.5 cable glands made of brass, Ex-nA approved		45 m (147 ft)	<b>L09</b>
• 3 pcs	<b>A05</b>	50 m (164 ft)	<b>L10</b>
• 2 pcs.	<b>A15</b>		
• 1 pc.	<b>A25</b>	<b>Tag name plate</b>	
M20x1.5 cable glands in stainless steel, Ex-d/t approved		TAG name plate in stainless steel 40 × 20mm (Add plain text)	<b>Y17</b>
• 3 pcs	<b>A06</b>	TAG name plate in stainless steel tag 120 × 46 mm (Add plain text)	<b>Y18</b>
• 2 pcs.	<b>A16</b>		
• 1 pc.	<b>A26</b>		
1/2" NPT conduit connection in plastic (cable glands not included)			
• 3 pcs	<b>A07</b>		
• 2 pcs.	<b>A17</b>		
• 1 pc.	<b>A27</b>		
<b>Isolation valve</b> With isolation valve	<b>B10</b>		
<b>Certificates</b> Certificate of compliance according to EN 10204-2.1	<b>C10</b>		
Pressure test + Inspection certificate according to EN 10204-3.1	<b>C11</b>		
Material certification of pressure bearing metal parts according to EN 10204-3.1	<b>C12</b>		
Material in accordance with NACE MR0175/ISO 15156	<b>C13</b>		
PMI of pressure bearing metal parts + Inspection certificate according to EN 10204-3.1	<b>C14</b>		
Material certificate of pressure bearing metal parts according to EN 10204-3.1 + PMI	<b>C15</b>		
Dye penetration test of wetted welds	<b>C16</b>		
X-ray test of wetted welds	<b>C17</b>		

# Flow Measurement

## SITRANS FX (Vortex)

### SITRANS FX330

#### Selection and ordering data


#### Article No.

#### Article No.


#### SITRANS FX330 spare parts

Transmitter electronic for SITRANS FX330 • FXT030 in compact design with HART (non-Ex/Ex-i) • FXT030 in compact design with HART (Ex-d)	<b>A5E38663070</b> <b>A5E38663398</b>
Display with HMI and data memory	<b>A5E38663613</b>
Seal disc 21.8 x12 x 0.1	<b>KRH-17000700</b>
O-ring pickup	<b>KRH-17001400</b>
O-ring for pressure screw 17.13 x 2.62, FPM 70	<b>KRH-17001200</b>
Cover gasket O-ring	<b>KRH-16000300</b>
Front Cover (non Ex)	<b>KRH-16002000</b>
Front Cover (Ex)	<b>KRH-16002500</b>
Back Cover	<b>KRH-16003000</b>
Converter housing gasket, 59,35,5-2-N	<b>KRH-16000400</b>
O-ring • 20 x 1, FPM (DIN 3771) • 10 x 2, NBR	<b>KRH-17001100</b> <b>KRH-17001000</b>
DUBOX plug 5 pole, linear, RM2	<b>KRH-17000800</b>
Cable feed through 10 pole (non Ex)	<b>KRH-16000500</b>
Shut-off valve	<b>KRH-17004000</b>
Centering rings for Sandwich-Version • DN 15 • DN 25 • DN 40 • DN 50 • DN 50 (300 lbs, 600 lbs) • DN 50 (JIS 10K, 16K, 20K) • DN 80 • DN 100	<b>KRH-17006000</b> <b>KRH-17006001</b> <b>KRH-17006002</b> <b>KRH-17006003</b> <b>KRH-17006004</b> <b>KRH-17006005</b> <b>KRH-17006006</b> <b>KRH-17006007</b>
Wall housing incl. Neck (incl. Screws, Gaskets and cable glands)	<b>KRH-16112002</b>
Sensor replacement kit including seal disc, socket, pickup and O-rings (for pickup and pressure screw) • DN 15 • DN 15 Conical • DN 25 • DN 25 Conical • DN 40 • DN 50 • DN 80 • DN 100 • DN 150 ... DN 300	<b>KRH-16111100</b> <b>KRH-16111110</b> <b>KRH-16111150</b> <b>KRH-16111160</b> <b>KRH-16111200</b> <b>KRH-16111210</b> <b>KRH-16111220</b> <b>KRH-16111230</b> <b>KRH-16111300</b>
Pressure sensor replacement kit including pressure sensor with calibration certificate, DUBOX plug and O-rings • 1 bar • 2 bar • 4 bar • 6 bar • 10 bar • 16 bar • 25 bar • 40 bar • 60 bar • 100 bar	<b>KRH-16111350</b> <b>KRH-16111370</b> <b>KRH-16111400</b> <b>KRH-16111401</b> <b>KRH-16111402</b> <b>KRH-16111403</b> <b>KRH-16111404</b> <b>KRH-16111405</b> <b>KRH-16111406</b> <b>KRH-16111407</b>
SITRANS FX330 upgrade kit (in preparation)	

<b>SITRANS FX330 Flow Straightener</b> ↗	<b>7ME2900-</b> <span style="background-color: #d3d3d3;">A</span> <span style="background-color: #d3d3d3;">B</span> <span style="background-color: #d3d3d3;">C</span> <span style="background-color: #d3d3d3;">D</span> <span style="background-color: #d3d3d3;">E</span> <span style="background-color: #d3d3d3;">F</span> <span style="background-color: #d3d3d3;">G</span> <span style="background-color: #d3d3d3;">H</span> <span style="background-color: #d3d3d3;">I</span> <span style="background-color: #d3d3d3;">J</span> <span style="background-color: #d3d3d3;">K</span> <span style="background-color: #d3d3d3;">L</span> <b>0 0</b>
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
<b>Material</b>	
Stainless steel 1.4404 (316L)	<b>1</b>
<b>Nominal size</b>	
DN 15 / ANSI ½"	<b>A</b>
DN 25 / ANSI 1"	<b>B</b>
DN 40 / ANSI 1½"	<b>C</b>
DN 50 / ANSI 2"	<b>D</b>
DN 80 / ANSI 3"	<b>E</b>
DN 100 / ANSI 4"	<b>F</b>
DN 150 / ANSI 6"	<b>G</b>
DN 200 / ANSI 8"	<b>H</b>
DN 250 / ANSI 10"	<b>J</b>
DN 300 / ANSI 12"	<b>K</b>
<b>Pressure rating</b>	
PN 10	<b>A</b>
PN 16	<b>B</b>
PN 25	<b>C</b>
PN 40	<b>D</b>
PN 63	<b>E</b>
PN 100	<b>F</b>
Class 150	<b>J</b>
Class 300	<b>K</b>
Class 600	<b>L</b>
<b>Additional information</b>	Order code
Please add "-Z" to Article No. and specify Order code.	
<b>Certificates</b>	
Certificate of compliance to EN 10204-2.1	<b>C10</b>
Material certification of pressure bearing parts to EN 10204-3.1	<b>C12</b>
Material in accordance with NACE MRO175/ISO 15156	<b>C13</b>
PMI of pressure bearing parts + Inspection certificate according to EN 10204-3.1	<b>C14</b>
Material certificate of pressure bearing parts according to EN 10204-3.1 + PMI	<b>C15</b>
<b>Cleaning</b>	
Free of oil and grease (wetted parts)	<b>K46</b>
Free of oil and grease (wetted parts) + Inspection certificate according to EN 10204-3.1	<b>K48</b>

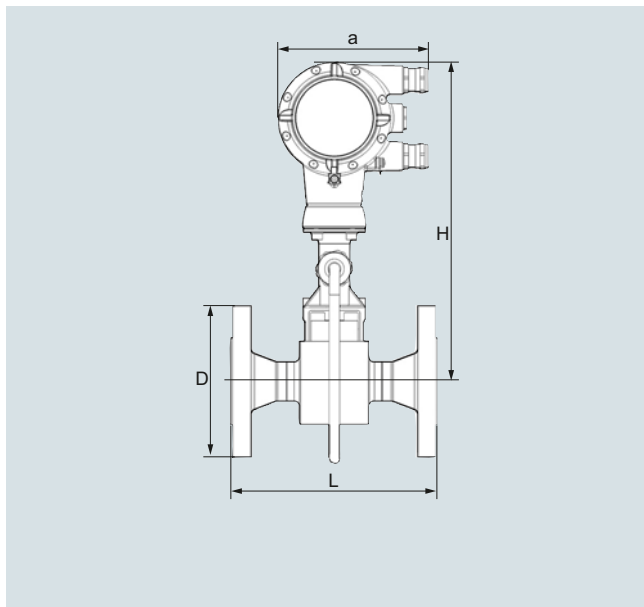**Dimensional drawings**Compact version

SITRANS FX330 (Vortex), Flanged version with pressure sensor, front view

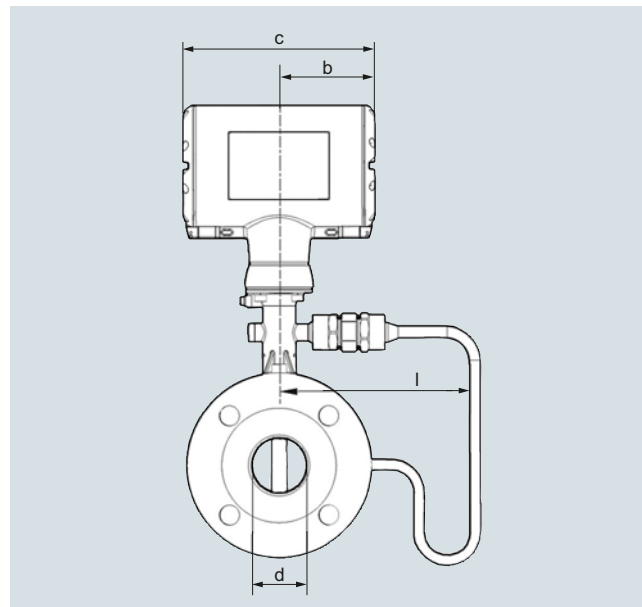

SITRANS FX330 (Vortex), Flanged version with pressure sensor, side view

## Flow Measurement

### SITRANS FX (Vortex)

#### SITRANS FX330

#### Dimensional drawings (continued)

##### Flange version EN 1092-1

Size DN	Pressure rating PN	Dimensions [mm (inch)] a = 148.5 (5.85), b = 85.8 (3.38), c = 171.5 (6.76)							Weight [kg (lb)]	
		d	d FR <sup>1)</sup>	d FR <sup>2)</sup>	D	L	H	I	Flowmeter (without pres- sure sensor)	Flowmeter (with pressure sensor)
15	40	17.3 (0.68)	-	-	95 (3.74)	200 (7.87)	358.8 (14.2)	169.3 (6.67)	5.5 (12.13)	6.1 (13.45)
15	100	17.3 (0.68)	-	-	105 (4.13)	200 (7.87)	358.8 (14.2)	169.3 (6.67)	6.5 (14.33)	7.1 (15.65)
25	40	28.5 (1.12)	17.3 (0.68)	-	115 (4.53)	200 (7.87)	358.4 (14.1)	169.3 (6.67)	7.3 (16.09)	7.9 (17.42)
25	100	28.5 (1.12)	17.3 (0.68)	-	140 (5.51)	200 (7.87)	358.4 (14.1)	169.3 (6.67)	9.3 (20.50)	9.9 (21.83)
40	40	43.1 (1.70)	28.5 (1.12)	17.3 (0.68)	150 (5.91)	200 (7.87)	362.3 (14.3)	169.5 (6.67)	10.2 (22.49)	10.8 (23.81)
40	100	42.5 (1.67)	28.5 (1.12)	17.3 (0.68)	170 (6.69)	200 (7.87)	362.3 (14.3)	169.5 (6.67)	14.2 (31.31)	14.8 (32.63)
50	16	54.5 (2.15)	42.5 (1.67)	28.5 (1.12)	165 (6.50)	200 (7.87)	368.3 (14.5)	169.3 (6.67)	12.1 (26.68)	12.7 (28.00)
50	40	54.5 (2.15)	42.5 (1.67)	28.5 (1.12)	165 (6.50)	200 (7.87)	368.3 (14.5)	169.3 (6.67)	12.3 (27.12)	12.9 (28.44)
50	63	54.5 (2.15)	42.5 (1.67)	28.5 (1.12)	180 (7.09)	200 (7.87)	368.3 (14.5)	169.3 (6.67)	16.3 (35.94)	16.9 (37.26)
50	100	53.9 (2.12)	42.5 (1.67)	28.5 (1.12)	195 (7.68)	200 (7.87)	368.3 (14.5)	169.3 (6.67)	17.8 (39.24)	18.4 (40.57)
80	16	82.5 (3.25)	54.5 (2.15)	42.5 (1.67)	200 (7.87)	200 (7.87)	380.3 (15.0)	169.3 (6.67)	16.8 (37.04)	17.4 (38.36)
80	40	82.5 (3.25)	54.5 (2.15)	42.5 (1.67)	200 (7.87)	200 (7.87)	380.3 (15.0)	169.3 (6.67)	18.8 (41.45)	19.4 (42.77)
80	63	81.7 (3.22)	54.5 (2.15)	42.5 (1.67)	215 (8.46)	200 (7.87)	380.3 (15.0)	169.3 (6.67)	22.8 (50.27)	23.4 (51.59)
80	100	80.9 (3.19)	54.5 (2.15)	42.5 (1.67)	230 (9.06)	200 (7.87)	380.3 (15.0)	169.3 (6.67)	26.8 (59.08)	27.4 (60.41)
100	16	107 (4.21)	80.9 (3.19)	54.5 (2.15)	220 (8.66)	250 (9.84)	396.8 (15.7)	171.5 (6.75)	21.4 (47.18)	22 (48.50)
100	40	107 (4.21)	80.9 (3.19)	54.5 (2.15)	235 (9.25)	250 (9.84)	396.8 (15.7)	171.5 (6.75)	24.4 (53.79)	25 (55.12)
100	63	106 (4.17)	80.9 (3.19)	54.5 (2.15)	250 (9.84)	250 (9.84)	396.8 (15.7)	171.5 (6.75)	29.4 (64.82)	30 (66.14)
100	100	104 (4.09)	80.9 (3.19)	54.5 (2.15)	265 (10.43)	250 (9.84)	396.8 (15.7)	171.5 (6.75)	35.4 (78.04)	36 (79.37)
150	16	159 (6.26)	107 (4.21)	80.9 (3.19)	285 (11.22)	300 (11.81)	416.3 (16.4)	191.5 (7.54)	35.2 (77.60)	35.8 (78.93)
150	40	159 (6.26)	107 (4.21)	80.9 (3.19)	300 (11.81)	300 (11.81)	416.3 (16.4)	191.5 (7.54)	41.2 (90.83)	41.8 (92.15)
150	63	157 (6.18)	107 (4.21)	80.9 (3.19)	345 (13.58)	300 (11.81)	416.3 (16.4)	191.5 (7.54)	59.2 (130.51)	59.8 (131.84)
150	100	154 (6.06)	107 (4.21)	80.9 (3.19)	355 (13.98)	300 (11.81)	416.3 (16.4)	191.5 (7.54)	67.2 (148.15)	67.8 (149.47)
200	10	207 (8.15)	159 (6.26)	107 (4.21)	340 (13.39)	300 (11.81)	442.1 (17.4)	202.8 (7.98)	37.8 (83.33)	38.4 (84.66)
200	16	207 (8.15)	159 (6.26)	107 (4.21)	340 (13.39)	300 (11.81)	442.1 (17.4)	202.8 (7.98)	37.8 (83.33)	38.4 (84.66)
200	25	207 (8.15)	159 (6.26)	107 (4.21)	360 (14.17)	300 (11.81)	442.1 (17.4)	202.8 (7.98)	46.8 (103.18)	47.4 (104.50)
200	40	207 (8.15)	159 (6.26)	107 (4.21)	375 (14.76)	300 (11.81)	442.1 (17.4)	202.8 (7.98)	54.8 (120.81)	55.4 (122.14)
250	10	260 (10.24)	207 (8.15)	159.3 (6.27)	395 (15.55)	380 (14.96)	468.8 (18.5)	229.5 (9.04)	57.4 (126.55)	58.0 (127.87)
250	16	260 (10.24)	207 (8.15)	159.3 (6.27)	405 (15.94)	380 (14.96)	468.8 (18.5)	229.5 (9.04)	58.4 (128.75)	59.0 (130.07)
250	25	259 (10.20)	207 (8.15)	159.3 (6.27)	425 (16.73)	380 (14.96)	468.8 (18.5)	229.5 (9.04)	74.4 (164.02)	75.0 (165.35)
250	40	259 (10.20)	207 (8.15)	159.3 (6.27)	450 (17.72)	380 (14.96)	468.8 (18.5)	229.5 (9.04)	92.4 (203.71)	93.0 (205.03)
300	10	310 (12.20)	260 (10.24)	207 (8.15)	445 (17.52)	450 (17.72)	492.8 (19.4)	255 (10.04)	75.7 (166.89)	76.3 (168.21)
300	16	310 (12.20)	260 (10.24)	207 (8.15)	460 (18.11)	450 (17.72)	492.8 (19.4)	255 (10.04)	82.2 (181.22)	82.8 (182.54)
300	25	308 (12.13)	260 (10.24)	207 (8.15)	485 (19.09)	450 (17.72)	492.8 (19.4)	255 (10.04)	98.7 (217.60)	99.3 (218.92)
300	40	308 (12.13)	260 (10.24)	207 (8.15)	515 (20.28)	450 (17.72)	492.8 (19.4)	255 (10.04)	127.5 (281.09)	128.1 (282.41)

<sup>1)</sup> FR - single reduction

<sup>2)</sup> F2R - double reduction

## Dimensional drawings (continued)

## Flange version ANSI B16.5

Size DN	Pressure rating Class	Dimensions [mm (inch)] a = 148.5 (5.85), b = 85.8 (3.38), c = 171.5 (6.76)							Weight [kg (lb)]	
		d	d FR <sup>1)</sup>	d FR <sup>2)</sup>	D	L	H	I	Flowmeter (without pres- sure sensor)	Flowmeter (with pressure sensor)
½	150	16 (0.63)	-	-	90 (3.5)	200 (7.9)	358.8 (14.2)	169.3 (6.67)	4.5 (9.92)	5.1 (11.24)
½	300	16 (0.63)	-	-	95 (3.7)	200 (7.9)	358.8 (14.2)	169.3 (6.67)	4.9 (10.80)	5.5 (12.13)
½	600	14 (0.55)	-	-	95 (3.7)	200 (7.9)	358.8 (14.2)	169.3 (6.67)	5.1 (11.24)	5.7 (12.57)
1	150	27 (1.1)	15.8 (0.62)	-	110 (4.3)	200 (7.9)	358.4 (14.1)	169.3 (6.67)	6.2 (13.67)	6.8 (14.99)
1	300	27 (1.1)	15.8 (0.62)	-	125 (4.9)	200 (7.9)	358.4 (14.1)	169.3 (6.67)	7.2 (15.87)	7.8 (17.20)
1	600	24 (1.0)	15.8 (0.62)	-	125 (4.9)	200 (7.9)	358.4 (14.1)	169.3 (6.67)	7.5 (16.53)	8.1 (17.86)
1½	150	41 (1.6)	26.6 (1.1)	15.8 (0.6)	125 (4.9)	200 (7.9)	362.3 (14.3)	169.5 (6.67)	8.3 (18.30)	8.9 (19.62)
1½	300	41 (1.6)	26.6 (1.1)	15.8 (0.6)	155 (6.1)	200 (7.9)	362.3 (14.3)	169.5 (6.67)	10.4 (22.93)	11 (24.25)
1½	600	38 (1.5)	26.6 (1.1)	15.8 (0.6)	155 (6.1)	200 (7.9)	362.3 (14.3)	169.5 (6.67)	11.4 (25.13)	12 (26.46)
2	150	53 (2.1)	40.9 (1.6)	26.6 (1.1)	150 (5.9)	200 (7.9)	368.3 (14.5)	169.5 (6.67)	11 (24.25)	11.6 (25.57)
2	300	53 (2.1)	40.9 (1.6)	26.6 (1.1)	165 (6.5)	200 (7.9)	368.3 (14.5)	169.5 (6.67)	12.4 (27.34)	13 (28.66)
2	600	49 (1.9)	40.9 (1.6)	26.6 (1.1)	165 (6.5)	200 (7.9)	368.3 (14.5)	169.5 (6.67)	13.9 (30.64)	14.5 (31.97)
3	150	78 (3.1)	52.6 (2.1)	40.9 (1.6)	190 (7.5)	200 (7.9)	380.3 (15.0)	169.3 (6.67)	19.8 (43.65)	20.4 (44.97)
3	300	78 (3.1)	52.6 (2.1)	40.9 (1.6)	210 (8.3)	200 (7.9)	380.3 (15.0)	169.3 (6.67)	22.8 (50.27)	23.4 (51.59)
3	600	74 (2.9)	52.6 (2.1)	40.9 (1.6)	210 (8.3)	200 (7.9)	380.3 (15.0)	169.3 (6.67)	23.8 (52.47)	24.4 (53.79)
4	150	102 (4.0)	78 (3.1)	52.6 (2.1)	230 (9.1)	250 (9.8)	396.8 (15.7)	171.5 (6.76)	23.4 (51.59)	24 (52.91)
4	300	102 (4.0)	78 (3.1)	52.6 (2.1)	255 (10)	250 (9.8)	396.8 (15.7)	171.5 (6.76)	31.4 (69.23)	32 (70.55)
4	600	97 (3.8)	78 (3.1)	52.6 (2.1)	275 (11)	250 (9.8)	396.8 (15.7)	171.5 (6.76)	40.4 (89.07)	41 (90.39)
6	150	154 (6.1)	102 (4.0)	78.0 (3.1)	280 (11)	300 (12)	416.3 (16.4)	191.5 (7.54)	36.2 (79.81)	36.8 (81.13)
6	300	154 (6.1)	102 (4.0)	78.0 (3.1)	320 (13)	300 (12)	416.3 (16.4)	191.5 (7.54)	51.2 (112.88)	51.8 (114.20)
6	600	146 (5.8)	102 (4.0)	78.0 (3.1)	355 (14)	300 (12)	416.3 (16.4)	191.5 (7.54)	76.2 (167.99)	76.8 (169.31)
8	150	203 (8.0)	154 (6.1)	102 (4.0)	345 (14)	300 (12)	442.1 (17.4)	202.8 (8.0)	50.0 (110.23)	50.6 (111.55)
8	300	203 (8.0)	154 (6.1)	102 (4.0)	380 (15)	300 (12)	442.1 (17.4)	202.8 (8.0)	74.8 (164.91)	75.4 (166.23)
10	150	255 (10.0)	203 (8.0)	154 (6.1)	405 (16)	380 (15)	468.8 (18.5)	229.5 (9.04)	74.4 (164.02)	75.0 (165.35)
10	300	255 (10.0)	203 (8.0)	154 (6.1)	455 (18)	380 (15)	468.8 (18.5)	229.5 (9.04)	106.4 (234.57)	107.0 (235.89)
12	150	305 (12.0)	255 (10.0)	203 (8.0)	485 (19)	450 (18)	492.8 (19.4)	255 (10.0)	106.4 (234.35)	107.0 (235.67)
12	300	305 (12.0)	255 (10.0)	203 (8.0)	520 (21)	450 (18)	492.8 (19.4)	255 (10.0)	151.4 (333.56)	152.0 (334.88)

1) FR - single reduction


2) F2R - double reduction

## Flow Measurement


### SITRANS FX (Vortex)

#### SITRANS FX330

#### Dimensional drawings (continued)

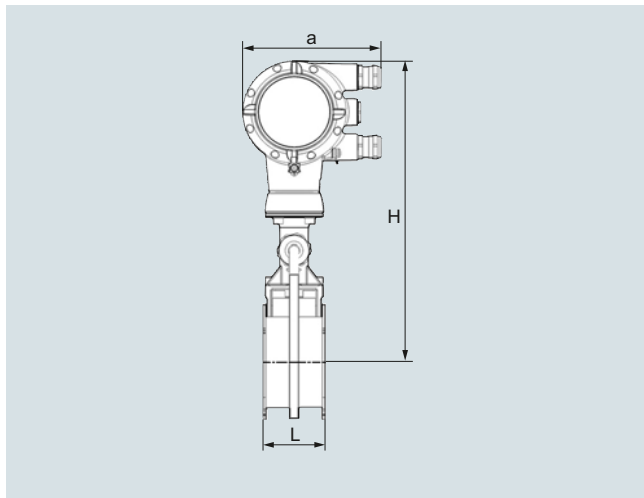

SITRANS FX330 (Vortex), Sandwich version with pressure sensor, front view

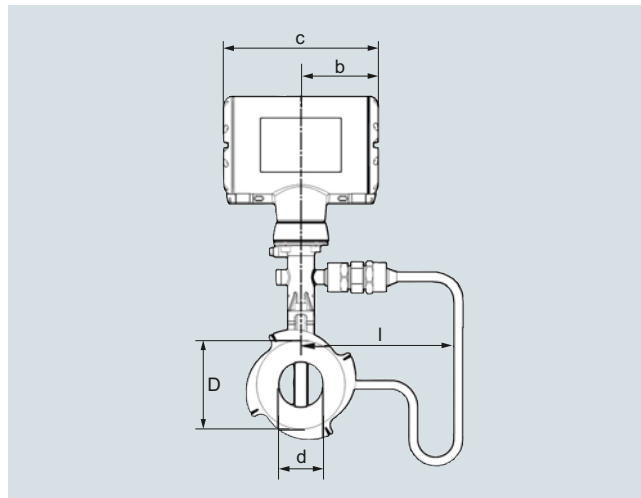

SITRANS FX330 (Vortex), Sandwich version with pressure sensor, side view

#### Sandwich version EN


Size DN	Pressure rating PN	Dimensions [mm (inch)]								Weight [kg (lb)]	
		a	b	c	d	D	L	H	I	Flowmeter (without pres- sure sensor)	Flowmeter (with pressure sensor)
15	16 ... 100	133 (5.24)	105 (4.13)	179 (7.05)	16 (0.63)	45 (1.77)	65 (2.56)	265 (10.43)	174.25 (6.86)	3.5 (7.72)	4.1 (9.04)
25	16 ... 100	133 (5.24)	105 (4.13)	179 (7.05)	24 (0.94)	65 (2.56)	65 (2.56)	265 (10.43)	174.25 (6.86)	4.3 (9.48)	4.9 (10.80)
40	16 ... 100	133 (5.24)	105 (4.13)	179 (7.05)	38 (1.50)	82 (3.23)	65 (2.56)	270 (10.63)	174.5 (6.87)	4.9 (10.80)	5.5 (12.13)
50	16 ... 100	133 (5.24)	105 (4.13)	179 (7.05)	50 (1.97)	102 (4.02)	65 (2.56)	275 (10.83)	174.5 (6.87)	6 (13.23)	6.6 (14.55)
80	16 ... 100	133 (5.24)	105 (4.13)	179 (7.05)	74 (2.91)	135 (5.31)	65 (2.56)	290 (11.42)	174.25 (6.86)	8.2 (18.08)	8.8 (19.40)
100	16 ... 100	133 (5.24)	105 (4.13)	179 (7.05)	97 (3.82)	158 (6.22)	65 (2.56)	310 (12.20)	176.5 (6.95)	9.5 (20.94)	10.1 (22.27)

#### Sandwich version ANSI

Size DN	Pressure rating Class	Dimensions [inch]								Weight [lb]	
		a	b	c	d	D	L	H	I	Flowmeter (without pres- sure sensor)	Flowmeter (with pressure sensor)
½"	150, 300	5.32	4.26	7.25	0.63	1.77	2.56	10.43	6.82	7.72	9.04
½"	600	5.32	4.26	7.25	0.55	1.77	2.56	10.43	6.82	7.72	9.04
1"	150, 300, 600	5.32	4.26	7.25	0.94	2.56	2.56	10.43	6.82	9.48	10.80
1½"	150, 300, 600	5.32	4.26	7.25	1.50	3.23	2.56	10.63	6.82	10.80	12.13
2"	150, 300, 600	5.32	4.26	7.25	1.97	4.02	2.56	10.83	6.82	13.23	14.55
3"	150, 300, 600	5.32	4.26	7.25	2.91	5.31	2.56	11.42	6.82	18.08	19.40
4"	150, 300, 600	5.32	4.26	7.25	3.82	6.22	2.56	12.20	6.82	20.94	22.27

## Dimensional drawings (continued)

## Remote version

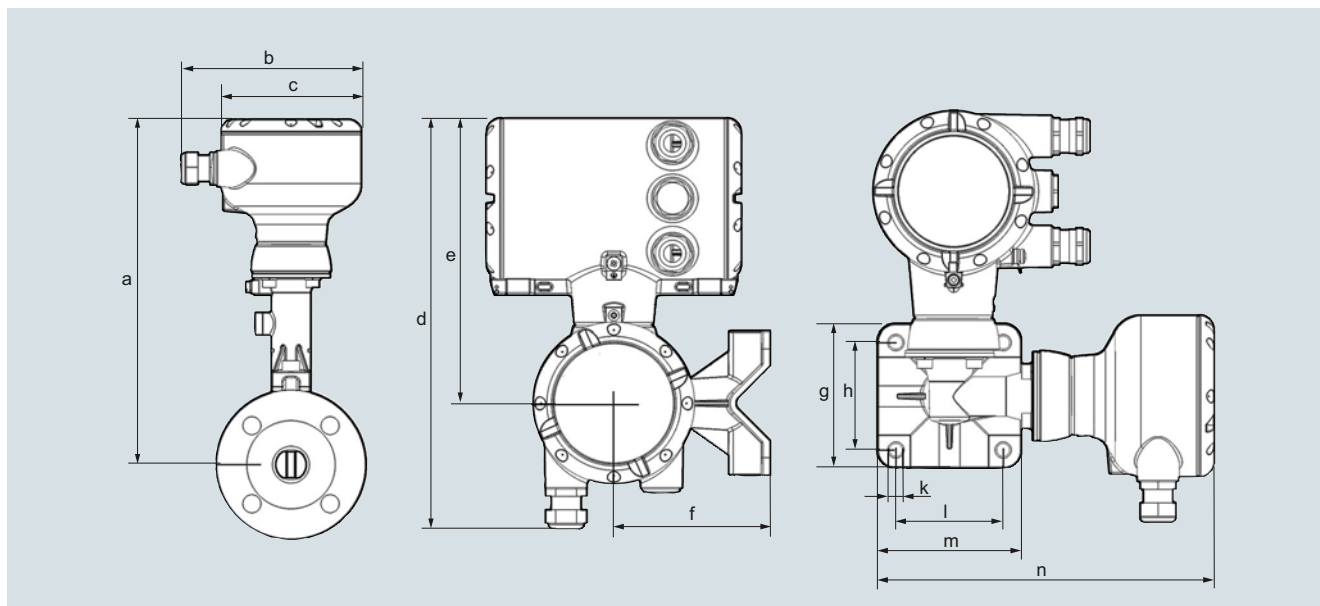

SITRANS FX330 (Vortex), Remote version

**Dimension a**

DN	Flanged and Sandwich version						Flanged version			
	15 ½"	25 1"	40 1½"	50 2"	80 3"	100 4"	150 6"	200 8"	250 10"	300 12"
[mm]	265.7	265.2	269.2	275.2	287.2	303.7	323.2	348.9	375.7	399.7
[inch]	10.5	10.4	10.6	10.8	11.3	12.0	12.7	13.7	14.8	15.7

**Dimension a F1/2R**

DN	Flanged version									
	15 ½"	25 1"	40 1½"	50 2"	80 3"	100 4"	150 6"	200 8"	250 10"	300 12"
F1R <sup>1)</sup> [mm]	-	315.7	315.2	319.2	325.2	337.2	353.7	373.2	398.9	425.7
F1R <sup>1)</sup> [inch]	-	12.4	12.4	12.6	12.8	13.3	13.9	14.7	15.7	16.8
F2R <sup>2)</sup> [mm]	-	-	315.7	315.2	319.2	325.2	337.2	353.7	373.2	398.9
F2R <sup>2)</sup> [inch]	-	-	12.4	12.4	12.6	12.8	13.3	13.9	14.7	15.7

**Dimension b ... n**

	b	c	d	e	f	g	h	j	k	l	m	n
[mm]	139	108	276	191	105	97	72	108	9	72	97	226
[inch]	5.46	4.25	10.9	7.53	4.14	3.82	2.84	4.25	0.35	2.84	3.82	8.90

## Flow Measurement

### SITRANS FX (Vortex)

#### SITRANS FX330

#### Dimensional drawings (continued)

##### Flow tables

##### Measuring Range Limits

##### Water

Size DN to EN 1092-1	DN to NSI B16.5	Q <sub>min</sub> EN 1092-1 [m <sup>3</sup> /h]	Q <sub>max</sub> EN 1092-1 [m <sup>3</sup> /h]	Q <sub>min</sub> ANSI B16.5 [m <sup>3</sup> /h]	Q <sub>max</sub> ANSI B16.5 [m <sup>3</sup> /h]
15	½"	0.45	5.07	0.44	4.94
25	1"	0.81	11.40	0.81	11.40
40	1½"	2.04	28.58	2.04	28.58
50	2"	3.53	49.48	3.53	49.48
80	3"	7.74	108.37	7.74	108.37
100	4"	13.30	186.22	13.30	186.21
150	6"	30.13	421.86	30.13	421.86
200	8"	56.60	792.42	56.60	792.42
250	10"	90.48	1 266.8	90.48	1 266.8
300	12"	131.41	1 839.8	131.41	1 839.8

Values based on water at 20 °C (68 °F)

##### Air

Size DN to EN 1092-1	DN to ANSI B16.5	Q <sub>min</sub> EN 1092-1 [m <sup>3</sup> /h]	Q <sub>max</sub> EN 1092-1 [m <sup>3</sup> /h]	Q <sub>min</sub> ANSI B16.5 [m <sup>3</sup> /h]	Q <sub>max</sub> ANS B16.5 [m <sup>3</sup> /h]
15	½"	6.80	25.33	6.72	24.70
25	1"	10.20	81.43	10.20	81.43
40	1½"	25.35	326.63	25.35	326.63
50	2"	43.89	565.49	43.89	565.49
80	3"	96.14	1 238.64	96.14	1 238.6
100	4"	165.19	2 128.27	165.19	2 128.27
150	6"	374.23	4 821.60	374.23	4 821.6
200	8"	702.95	9 056.8	702.95	9 056.8
250	10"	1 123.7	14 478.0	1 123.7	14 478.0
300	12"	1 632.1	21 028.0	1 632.1	21 028.0

Values based on air at 20 °C (68 °F) and 1.013 bar<sub>abs</sub> (14.7 psi<sub>abs</sub>)

##### Flow rate limits

Product	Nominal sizes		Minimum flow rates [m/s]	Maximum flow rates [m/s]
	to EN	to ANSI		
Liquids	DN 15 ... DN 300	DN ½" ... DN 12"	0.5 x (998/ρ) <sup>0.51</sup>	7 x (998/ρ) <sup>0.47 1)</sup>
Gas, steam/vapor	DN 15 ... DN 300	DN ½" ... DN 12"	6 x (1.29/ρ) <sup>0.52</sup>	7 x (998/ρ) <sup>0.47 3)</sup>

ρ = operating density [kg/m<sup>3</sup>]

1) Minimum flow rate 0.3 m/s (0.984 ft/s) - maximum flow rate 7 m/s (23 ft/s)

2) Minimum flow rate 2 m/s (6.6 ft/s)

3) Maximum flow rate 80 m/s (262 ft/s); DN 15: 45 m/s (148 ft/s) and DN 25: 70 m/s (230 ft/s)



## Dimensional drawings (continued)

Measuring range saturated steam: 1 to 7 bar

Overpressure [bar]		1		3.5		5.2		7	
Density [kg/m <sup>3</sup> ]		1.13498		2.4258		3.27653		4.16732	
Temperature [°C]		120.6		148.2		160.4		170.6	
Flow [kg/h]		min.	max.	min.	max.	min.	max.	min.	max.
DN to EN 1092-1	DN to ASME B16.5								
15	½"	5.87	28.75	7.68	61.46	8.93	83.01	10.06	105.57
25	1"	11.82	92.42	17.28	197.53	20.09	266.81	22.66	339.35
40	1½"	29.64	370.71	43.33	792.33	50.63	1 070.2	56.80	1 361.2
50	2"	51.31	641.82	75.02	1 371.8	87.19	1 852.8	98.33	2 356.6
80	3"	112.41	1 405.8	164.33	3 004.7	191.00	4 058.4	215.39	5 161.8
100	4"	193.14	2 415.5	282.36	5 162.7	328.16	6 973.3	370.09	8 869.2
150	6"	437.56	5 472.4	639.69	11 696.0	743.45	15 798.0	838.44	20 093.0
200	8"	821.9	10 279.0	1 201.6	21 970.0	1 396.5	29 675.0	1 574.9	37 743.0
250	10"	1 313.9	16 433.0	1 920.9	35 122.0	2 232.5	47 439.0	2 517.7	60 337.0
300	12"	1 908.3	23 866.0	2 789.8	51 010.0	3 242.4	68 899.0	3 656.6	87 630.0

Measuring range saturated steam: 10.5 to 20 bar

Overpressure [bar]		10.5		14.0		17.5		20.0	
Density [kg/m <sup>3</sup> ]		5.88803		7.60297		9.31702		10.5442	
Temperature [°C]		186.2		198.5		208.7		215.0	
Flow [kg/h]		min.	max.	min.	max.	min.	max.	min.	max.
DN to EN 1092-1	DN to ANSI B16.5								
15	½"	12.78	149.17	16.51	192.61	20.23	236.04	22.89	267.12
25	1"	26.93	479.46	30.60	619.11	33.87	758.69	36.04	858.62
40	1½"	67.51	1 878.2	76.72	2 150.7	84.93	2 395.3	90.35	2 557.7
50	2"	116.89	3 251.7	132.82	3 723.4	147.03	4 147.0	156.42	4 428.1
80	3"	256.03	7 122.4	290.93	8 155.8	322.06	9 083.7	342.62	9 699.3
100	4"	439.91	12 238	499.90	14 013.0	553.38	15 608.0	588.69	16 666.0
150	6"	996.62	27 725.0	1 132.5	31 747.0	1 253.7	35 359.0	1 333.7	37 756.0
200	8"	1 872.1	52 079.0	2 127.3	59 634.0	2 354.9	66 419.0	2 505.2	70 921.0
250	10"	2 992.7	83 254.0	3 400.7	95 333.0	3 764.6	106 180.0	4 004.9	113 380.0
300	12"	4 346.5	120 920.0	4 939.1	138 460.0	5 467.5	154 210.0	5 816.5	164 660.0

## Flow Measurement

### SITRANS FX (Vortex)

#### SITRANS FX330

#### Dimensional drawings (continued)

Measuring range saturated steam: 15 to 100 psig

Overpressure [psig]		15		50		75		100	
Density [lbs/ft <sup>3</sup> ]		0.0719		0.1497		0.2036		0.2569	
Temperature [°F]		249.98		297.86		320.36		338.184	
Flow [lbs/h]		min.	max.	min.	max.	min.	max.	min.	max.
DN to EN 1092-1	DN to ANSI B16.5								
15	½"	12.95	64.35	16.83	133.87	19.62	182.02	22.04	229.63
25	1"	26.25	206.83	37.86	430.30	44.15	585.06	49.59	738.09
40	1½"	65.81	829.61	94.92	1 726	110.68	2 346.7	124.32	2 960.5
50	2"	113.94	1 436.3	164.34	2 988	191.63	4 062.9	215.23	5 125.6
80	3"	249.57	3 146.1	360.00	6 545.3	419.74	8 899.4	471.45	11 227
100	4"	428.81	5 405.7	618.51	11 246	721.21	15 291	810.06	19 291
150	6"	971.47	12 246	1 401.2	25 478	1 633.9	34 642	1 835.2	43 703
200	8"	1 824.8	23 004	2 632.1	47 859	3 069.1	65 072	3 447.2	82 092
250	10"	2 917.2	36 774	4 207.7	76 508	4 906.4	104 030	5 510.8	131 230
300	12"	4 236.8	53 410	6 111.1	111 120	7 125.8	151 080	8 003.6	190 600

Measuring range saturated steam: 150 to 300 psig

Overpressure [psig]		150		200		250		300	
Density [lbs/ft <sup>3</sup> ]		0.3627		0.4681		0.5735		0.6792	
Temperature [°F]		366.08		388.04		406.22		422.06	
Flow [lbs/h]		min.	max.	min.	max.	min.	max.	min.	max.
DN to EN 1092-1	DN to ANSI B16.5								
15	½"	27.79	324.21	35.86	418.47	43.94	512.66	52.04	607.12
25	1"	58.93	1 042.1	66.94	1 345.1	74.10	1 647.8	80.63	1 951.5
40	1½"	147.72	4 107.2	167.83	4 702.8	185.76	5 237	202.15	5 728
50	2"	255.75	7 111.9	290.56	8 141.9	321.60	9 066.8	350.00	9 917
80	3"	560.19	15 578	636.44	17 834	704.43	19 860	766.60	21 722
100	4"	962.54	26 766	1 093.5	30 643	1 210.4	34 124	1 317.2	37 324
150	6"	2 180.6	60 639	2 477.4	69 421	2 742.1	77 307	2 984	84 556
200	8"	4 096.1	113 900	4 653.6	130 400	5 150.7	145 210	5 605.2	158 830
250	10"	6 548.1	182 090	7 439.3	208 460	8 234.1	232 140	8 960.6	253 910
300	12"	9 510.2	264 460	10 805	302 760	11 959	337 150	13 014	368 770

### Overview



SITRANS FVA250 variable area meter

### Benefits

- Standard version available at short notice
- Robust all-metal valve with impact-resistant housing cover
- Can also be used for corrosive and flammable media
- Can be used at high pressures and temperatures
- Product and percentage scales
- Can be optionally fitted with heating and cooling sheaths
- Contamination-resistant guiding for float

### Application

The devices are particularly suitable for measuring:

- Water
- Liquids
- Anti-corrosives and lubricants
- Solvents
- Saturated and superheated steam
- Food and beverages
- Industrial gases


### Design

Due to its full metal design, the SITRANS FVA250 variable area meter with a standard length of 250 mm (9.84 inch) can be used to measure many different types of liquids and gases passing through closed piping. The robust design means that it can also be used in harsh conditions. The various types of flange connections, linings and float materials satisfy the requirements of the pharmaceutical and chemical industries.

The measured value is displayed directly on the scale with the standard version. For process monitoring and control, the device can be equipped with a transmitter (MEM) as well as limit switches.

### Function

Flow measurement with the SITRANS FVA250 is performed according to the float principle. The flowing medium lifts the conical float in the measuring ring. This increases the ring gap until an equilibrium is established between the buoyant force of the medium and the weight of the float. The height of the float is directly proportional to the flow rate. The movement of the float is transmitted from one magnet to another magnet in the display unit outside of the measuring tube.

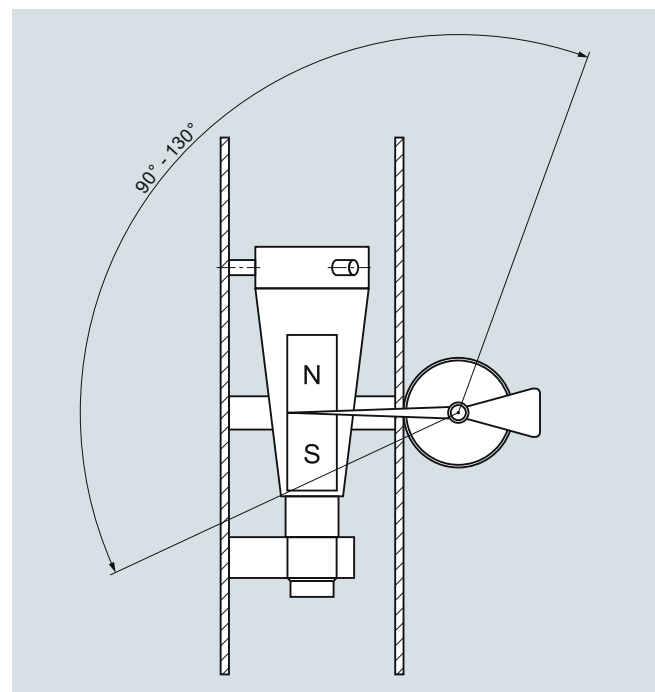

Measuring cone/scale angle

# Flow Measurement

## SITRANS FVA

### SITRANS FVA250

#### Technical specifications

<b>Application</b>	See page 3/395
<b>Design and function</b>	See page 3/395
Principle of measurement	Variable-area flowmeter
<b>Input</b>	
Measuring range	See table on page 3/397
Pressure ratings	PN 16 to PN 100 (232 to 1 450 psi) depending on the version (see table on page 3/397)
Installation / flow direction	Vertical/from bottom to top
<b>Rated conditions</b>	
Ambient temperature	
• With local display	-40 ... +80 °C (-40 ... +176 °F)
• With limit switches	-40 ... +65 °C (-40 ... +149 °F)
• With electric remote encoder (MEM)	-40 ... +70 °C (-40 ... +158 °F)
Measuring accuracy acc. to VDI/VDE 3513-2	
• For liquids	± 1.6 % (q <sub>G</sub> = 50 %)
• For gases	± 2.0 % (q <sub>G</sub> = 50 %)
Reproducibility	0.5 % of the measuring range limit (URV)
Operating temperature	See page 3/397
Operating pressure	Minimum operating pressure > 2x pressure drop (see table on page 3/397)
<b>Design</b>	
Flanges	EN 1092-1, ANSI B16.5
Material	
• Fitting	Stainless steel, Hastelloy
• Float	Stainless steel, Hastelloy, PTFE
• Wetted parts materials	Stainless steel, PTFE, Hastelloy depending on version
Degree of protection (display unit)	
• Display unit made of aluminum	IP65
• Display unit made of stainless steel	IP66
<b>Electromagnetic compatibility</b>	
• EN 61000-6-2: 2011	Interference immunity industrial sector
• EN 61000-6-3	Interference immunity residential sector
• EN 55011: 2011	Group 1, Class B
• NAMUR recommendation	NE 21

#### Classification according to pressure equipment directive (PED 2014/68/EU)

	Article No. 7ME586.-	Permissible media	Category
DN 15	xAxxx-xxxx	Gases of fluid group 1 and liquids of fluid group 1	Article 4.3
DN 20	xBxxx-xxxx		Article 4.3
DN 25	xCxxx-xxxx		Article 4.3
DN 32	xDxxx-xxxx		III
DN 40	xExxx-xxxx		III
DN 50	xFxxx-xxxx		III
DN 65	xGxxx-xxxx		III
DN 80	xHxxx-xxxx		III
DN 100	xJxxx-xxxx		III

#### Technical specifications of contacts

<b>Limit switch</b>	
Cable gland	M20x1.5
Auxiliary power supply	5 ... 25 V DC
Isolation (2 contacts)	Electrically isolated
Limit switch	SJ3.5-N-BU
• Switching function	NAMUR NC
Nominal voltage U <sub>O</sub>	8.2 V DC (R <sub>i</sub> approx. 1 kΩ)
Explosion protection	II 2G EEx ia IIC T6 - T4 Gb
EC Type Examination Certificate for Directive 2014/34/EU	PTB 99 ATEX 2219 X
<b>Transmitter (MEM) with 4 to 20 mA, pulse output and limit switch</b>	
Cable gland	M20x1.5
Auxiliary power supply	14 ... 30 V DC
Analog output	4 ... 20 mA (2-wire)
Binary output	Pulses, limit switch
• Pulses	Max. pulse rate 10 Hz
• Limit switch	SJ3.5-N-BU (NAMUR, IEC 60947-5-6:1999)
Temperature influence	≤ ± 0.5% of the measuring range limit (URV)/10 K
Explosion protection	II 2G Ex ia IIC T6 Gb
EC Type Examination Certificate for Directive 2014/34/EU	BVS 07 ATEX E 033
<b>Transmitter (MEM) PROFIBUS PA</b>	
Cable gland	M20x1.5
Auxiliary power supply	10 ... 25 V DC
Basic current	< 16.5 mA
Fault current	< 18 mA
Transfer rate	31.25 Kbaud
Temperature influence	≤ ± 0.5% of the measuring range limit (URV)/10 K
Explosion protection	II 2G Ex ia IIC T6 Gb
EC Type Examination Certificate for Directive 2014/34/EU	BVS 07 ATEX E 033

#### Float damping

Float damping is recommended

- Generally for gas measurement
- When air bubbles in the medium cannot be avoided
- When there are pressure surges in the lines caused by a delay in the flow, for example, due to rapid throttling or blocking
- When turbulence, pulsations or other instabilities cause the float to vibrate
- When the flow pressure cannot be built up slowly
- When vibrations in the line cannot be avoided

## Technical specifications (continued)

## Measuring range availability guide

Version	CF-S	EF-H	FF-P
<b>Wetted parts materials</b>	Mat. No. 1.4404/AISI 316L	Hastelloy	PTFE
<b>Fitting</b>	Mat. No. 1.4404/AISI 316L	≤ DN 25 (1"): Hastelloy > DN 25 (1"): Hastelloy/Mat. No. 1.4404/AISI 316L	Mat. No. 1.4404/AISI 316L with PTFE lining
<b>Flange</b>	Mat. No. 1.4404/AISI 316L	≤ DN 25 (1"): Hastelloy > DN 25 (1"): Hastelloy/Mat. No. 1.4404/AISI 316L	Mat. No. 1.4404/AISI 316L with PTFE lining
<b>Float/flow tube</b>	Mat. No. 1.4404/AISI 316L	Hastelloy	PTFE
<b>Max. media temperature</b>	-20 ... +200 °C (-4 ... +392 °F) (optional -80 ... +350 °C (-112 ... +662 °F))		-20 ... +125 °C (-4 ... +257 °F)
<b>Nominal pressure</b>	DN15 ... 50 (1/2" ... 2") PN 40 (580 psi) DN 65 ... 100 (2 1/2" ... 4") PN 16 (232 psi)	DN15 ... 50 (1/2" ... 2") PN 40 (580 psi) DN 65 ... 100 (2 1/2" ... 4") PN 16 (232 psi)	PN 16 (232 psi)
<b>Reference data for measuring range specifications</b>	Fluid in l/h with density: 1.0 kg/l, temperature 20 °C (68 °F), viscosity: 1 mPa.s Gas in m <sup>3</sup> /h with density: 1.293 kg/m <sup>3</sup> , temperature 0 °C (32 °F), viscosity: 0.0181 mPa.s, p <sub>e</sub> = 0 bar (0 psi)		

Order code	Pressure loss [mbar]							Measuring ranges (dynamic 1:10)			
	Measurement cone							Liquids		Gases	
	1	2	3	4	5	6	7	[l/h]	[USgpm]	[m <sup>3</sup> /h]	[scfm]
10	40 <sup>1)</sup>	-	-	-	-	-	-	0.5 ... 5	0.0022 ... 0.022	0.015 ... 0.15	0.0088 ... 0.088
11	44 <sup>1)</sup>	-	-	-	-	-	-	0 ... 10	0.0044 ... 0.044	0.03 ... 0.3	0.0177 ... 0.177
12	40 <sup>1)</sup>	-	-	-	-	-	-	1.6 ... 16	0.007 ... 0.07	0.045 ... 0.48	0.0265 ... 0.283
13	40 <sup>1)</sup>	-	-	-	-	-	-	2.5 ... 25	0.11 ... 0.11	0.075 ... 0.75	0.0441 ... 0.441
14	40 <sup>1)</sup>	-	-	-	-	-	-	4 ... 40	0.018 ... 0.18	0.13 ... 1.3	0.0765 ... 0.765
15	-	40 <sup>2)</sup>	-	-	-	-	-	5 ... 50	0.022 ... 0.22	0.15 ... 1.5	0.0883 ... 0.883
16	-	40 <sup>2)</sup>	-	-	-	-	-	7 ... 70	0.031 ... 0.31	0.2 ... 2.1	0.12 ... 1.24
17	-	60	-	-	-	-	-	10 ... 100	0.044 ... 0.44	0.3 ... 3	0.177 ... 1.77
20	-	60	-	-	-	-	-	16 ... 160	0.07 ... 0.7	0.5 ... 4.6	0.29 ... 2.71
21	-	60	-	-	-	-	-	25 ... 250	0.11 ... 1.1	0.07 ... 7	0.412 ... 4.12
22	-	70	-	-	-	-	-	40 ... 400	0.176 ... 1.76	1.0 ... 11	0.589 ... 6.47
23	-	80	-	-	-	-	-	60 ... 600	0.264 ... 2.64	1.7 ... 17	1 ... 10
24	-	-	60	-	-	-	-	100 ... 1 000	0.44 ... 4.4	2 ... 30	1.77 ... 17.66
25	-	-	70	-	-	-	-	160 ... 1 600	0.7 ... 7	3 ... 46	2.35 ... 27.07
26	-	-	100	50 <sup>2)</sup>	-	-	-	250 ... 2 500	1.1 ... 11	6 ... 70	4.12 ... 41.2
27	-	-	240 <sup>2)</sup>	120 <sup>2)</sup>	80	-	-	400 ... 4 000	1.76 ... 17.6	10 ... 110	6.47 ... 64.74
30	-	-	-	180 <sup>2)</sup>	90	-	-	600 ... 6 000	2.64 ... 26.4	16 ... 170	10 ... 100
31	-	-	-	-	110	-	-	1 000 ... 10 000	4.4 ... 44	28 ... 290	17.1 ... 170.7
32	-	-	-	-	230	70	-	1 600 ... 16 000	7 ... 70	45 ... 460	27.1 ... 270.7
33	-	-	-	-	230	70 <sup>2)</sup>	-	2 000 ... 20 000	8.8 ... 88	55 ... 550	32.4 ... 323.7
34	-	-	-	-	500 <sup>2)</sup>	100	-	2 500 ... 25 000	11 ... 110	69 ... 700	41.2 ... 412
35	-	-	-	-	-	350 <sup>2)</sup>	120	4 000 ... 40 000	17.6 ... 176	109 ... 1 100	64.7 ... 647.4
36	-	-	-	-	-	350 <sup>2)</sup>	120 <sup>2)</sup>	5 000 ... 50 000	22 ... 220	134 ... 1 350	79.5 ... 794.6
37	-	-	-	-	-	-	360 <sup>2)</sup>	6 000 ... 60 000	26.4 ... 264	169 ... 1 700	100 ... 1 000
40	-	-	-	-	-	-	600 <sup>2)</sup>	8 000 ... 80 000	35.2 ... 352	239 ... 2 400	141.3 ... 1 413
41	-	-	-	-	-	-	600 <sup>2)</sup>	10 000 ... 100 000	44 ... 440	299 ... 3 000	176.6 ... 1 766

- Not available

1) Not available for EF-H and FF-P

2) Not available for FF-P

Note: Female thread connector (DIN ISO 228, NPT ANSI B 1.20.1) not available for FF-P.

## Flow Measurement

### SITRANS FVA

#### SITRANS FVA250

#### Technical specifications (continued)

##### Sensor size availability guide

##### Type CF-S and EF-H

Order code	Diameter		Flow tube						
	Flange		1	2	3	4	5	6	7
A	DN 15	½"	• <sup>1)</sup>	•	•	-	-	-	-
B	DN 20	¾"	• <sup>1)</sup>	•	•	-	-	-	-
C	DN 25	1"	• <sup>1)</sup>	•	•	• <sup>2)</sup>	-	-	-
D	DN 32	1¼"	• <sup>1)</sup>	•	•	•	-	-	-
E	DN 40	1½"	• <sup>1)</sup>	•	•	•	• <sup>2)</sup>	-	-
F	DN 50	2"	• <sup>1)</sup>	•	•	•	•	-	-
G	DN 65	2½"	-	-	•	•	•	• <sup>2)</sup>	-
H	DN 80	3"	-	-	-	•	•	•	-
J	DN 100	4"	-	-	-	-	•	•	•

##### Type FF-P

Order code	Diameter		Flow tube						
	Flange		1	2	3	4	5	6	7
A	DN 15	½"	-	• <sup>2)</sup>	-	-	-	-	-
B	DN 20	¾"	-	• <sup>3)</sup>	-	-	-	-	-
C	DN 25	1"	-	•	•	-	-	-	-
D	DN 32	1¼"	-	-	-	-	-	-	-
E	DN 40	1½"	-	-	-	•	-	-	-
F	DN 50	2"	-	-	-	-	•	-	-
G	DN 65	2½"	-	-	-	-	-	-	-
H	DN 80	3"	-	-	-	-	-	•	-
J	DN 100	4"	-	-	-	-	-	-	•

##### Type CF-S and EF-H

Order code	Diameter		Flow tube						
	Female thread		1	2	3	4	5	6	7
Q	G ¼"	¼" NPT	•	•	-	-	-	-	-
R	G 3/8"	3/8" NPT	•	•	-	-	-	-	-
S	G ½"	½" NPT	•	•	•	•	-	-	-
T	G ¾"	¾" NPT	•	•	•	•	-	-	-
U	G 1"	1" NPT	•	•	•	•	•	-	-
V	G 1¼"	1¼" NPT	•	•	-	•	•	-	-
W	G 1½"	1½" NPT	-	-	-	•	•	-	-
X	G 2"	2" NPT	-	-	-	-	•	-	-

Note: Female thread not available for type FF-P.

• Available

- Not available

<sup>1)</sup> Not available for type EF-H.

<sup>2)</sup> Only with EN 1092-1 flange.

<sup>3)</sup> Only with ANSI B16.5 flange.

## Technical specifications (continued)

## Flange sealing surface selection guide

Order code	Diameter flange EN 1092-1	Flow tube						
		1	2	3	4	5	6	7
A	DN 15	N11	N11	N11	-	-	-	-
B	DN 20	N12	N12	N12	-	-	-	-
C	DN 25	-	-	N13	N13	-	-	-
D	DN 32	-	-	-	N14	-	-	-
E	DN 40	-	-	-	N15	N15	-	-
F	DN 50	-	-	-	-	N16	-	-
G	DN 65	-	-	-	-	-	N17	-
H	DN 80	-	-	-	-	-	N18	-
J	DN 100	-	-	-	-	-	-	N19

## Type FF-P

Order code	Diameter flange ASME B16.5	Flow tube						
		1	2	3	4	5	6	7
A	½"	N21	N21	N21	-	-	-	-
B	¾"	N22	N22	N22	-	-	-	-
C	1"	-	-	N23	-	-	-	-
D	1¼"	-	-	-	N24	-	-	-
E	1½"	-	-	-	N25	-	-	-
F	2"	-	-	-	-	N26	-	-
G	2½"	-	-	-	-	N27	-	-
H	3"	-	-	-	-	-	N28	-
J	4"	-	-	-	-	-	-	N29

# Flow Measurement

## SITRANS FVA

### SITRANS FVA250

#### Selection and ordering data

#### Article No.

#### SITRANS FVA250 Full metal variable area meter



7ME586

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Flow tube

##### Liquid

5 ... 40 l/h

50 ... 600 l/h

1 000 ... 4 000 l/h

2.5 ... 6 m<sup>3</sup>/h4 ... 25 m<sup>3</sup>/h16 ... 50 m<sup>3</sup>/h60 ... 100 m<sup>3</sup>/h

##### Gas

0.15 ... 1.3 m<sup>3</sup>/h1.5 ... 17 m<sup>3</sup>/h30 ... 110 m<sup>3</sup>/h70 ... 170 m<sup>3</sup>/h30 ... 700 m<sup>3</sup>/h460 ... 1 350 m<sup>3</sup>/h1 700 ... 3 000 m<sup>3</sup>/h1  
2  
3  
4  
5  
6  
7

#### Design

Type: CF-S (standard)

Fitting: Stainless steel  
Flange: Stainless steel  
Float: Stainless steel

Type: EF-H

Fitting: Stainless steel, Hastelloy  
Flange: Stainless steel, Hastelloy  
Float: Hastelloy

Type: FF-P

Fitting: Stainless steel with PTFE lining  
Flange: Stainless steel with PTFE lining  
Float: PTFE

2  
4  
5

#### Diameter

DN 15/ANSI ½"

DN 20/ANSI ¾"

DN 25/ANSI 1"

DN 32/ANSI 1¼"

DN 40/ANSI 1½"

DN 50/ANSI 2"

DN 65/ANSI 2½"

DN 80/ANSI 3"

DN 100/ANSI 4"

Female thread ¼"

Female thread 3/8"

Female thread ½"

Female thread ¾"

Female thread 1"

Female thread 1¼"

Female thread 1½"

Female thread 2"

A  
B  
C  
D  
E  
F  
G  
H  
J  
K  
Q  
R  
S  
T  
U  
V  
W  
X

#### Process connection

EN 1092-1, PN 16, Form B1

EN 1092-1, PN 40, Form B1

EN 1092-1, PN 63, Form B2

EN 1092-1, PN 100, Form B2

ANSI B16.5, class 150 RF

ANSI B16.5, class 300 RF

ANSI B16.5, class 600 RF

ISO 228-1 G pipe thread PN 63

ISO 228-1 G pipe thread PN 100

ANSI B1.20.1 NPT pipe thread 900 lbs

ANSI B1.20.1 NPT pipe thread 1500 lbs

B  
D  
E  
F  
J  
K  
L  
T  
U  
N  
P



## Selection and ordering data

## Article No.

## SITRANS FVA250 Full metal variable area meter

7ME586 - - - - -

## Measuring ranges

Liquids		Gases		
l/h	(USgpm)	m <sup>3</sup> /h	(scfm)	
0.5 ... 5	(0.0022 ... 0.022)	0.015 ... 0.15	(0.0088 ... 0.088)	1 0
0 ... 10	(0.0044 ... 0.044)	0.03 ... 0.3	(0.0177 ... 0.177)	1 1
1.6 ... 16	(0.007 ... 0.07)	0.045 ... 0.45	(0.0265 ... 0.283)	1 2
2.5 ... 25	(0.011 ... 0.11)	0.075 ... 0.75	(0.0441 ... 0.441)	1 3
4 ... 40	(0.018 ... 0.18)	0.13 ... 1.3	(0.0765 ... 0.765)	1 4
5 ... 50	(0.022 ... 0.22)	0.15 ... 1.5	(0.0883 ... 0.883)	1 5
7 ... 70	(0.031 ... 0.31)	0.2 ... 2	(0.12 ... 1.24)	1 6
10 ... 100	(0.044 ... 0.44)	0.3 ... 3	(0.177 ... 1.77)	1 7
16 ... 160	(0.07 ... 0.7)	0.5 ... 5	(0.29 ... 2.71)	2 0
25 ... 250	(0.11 ... 1.1)	0.7 ... 7	(0.412 ... 4.12)	2 1
40 ... 400	(0.176 ... 1.76)	1.0 ... 11	(0.589 ... 6.47)	2 2
60 ... 600	(0.264 ... 2.64)	1.7 ... 17	(1 ... 10)	2 3
100 ... 1 000	(0.44 ... 4.4)	2 ... 30	(1.77 ... 17.66)	2 4
160 ... 1 600	(0.7 ... 7)	3 ... 46	(2.35 ... 27.07)	2 5
250 ... 2 500	(1.1 ... 11)	6 ... 70	(4.12 ... 41.2)	2 6
400 ... 4 000	(1.76 ... 17.6)	10 ... 110	(6.47 ... 64.74)	2 7
600 ... 6 000	(2.64 ... 26.4)	16 ... 170	(10 ... 100)	3 0
1 000 ... 10 000	(4.4 ... 44)	28 ... 290	(17.1 ... 170.7)	3 1
1 600 ... 16 000	(7 ... 70)	45 ... 460	(27.1 ... 270.7)	3 2
2 000 ... 20 000	(8.8 ... 88)	55 ... 550	(32.4 ... 323.7)	3 3
2 500 ... 25 000	(11 ... 110)	69 ... 700	(41.2 ... 412)	3 4
4 000 ... 40 000	(17.6 ... 176)	109 ... 1 100	(64.7 ... 647.4)	3 5
5 000 ... 50 000	(22 ... 220)	134 ... 1 350	(79.5 ... 794.6)	3 6
6 000 ... 60 000	(26.4 ... 264)	169 ... 1 700	(100 ... 1 000)	3 7
8 000 ... 80 000	(35.2 ... 352)	239 ... 2 400	(141.3 ... 1 413)	4 0
10 000 ... 100 000	(44 ... 440)	299 ... 3 000	(176.6 ... 1 766)	4 1

## Display unit / process temperature

Standard (aluminum) - up to 200 °C with local display/150 °C with electrical output	0
Standard (aluminum) with displaced display - up to 350 °C with local display and electrical outputs	1
Stainless steel IP66 - up to 200 °C with local display/150 °C with electrical outputs	2
Stainless steel IP66 with displaced display - up to 350 °C with local display and electrical outputs	3

## Heating/cooling jacket

Without (standard)	A
With flange connection EN1092-1 DN 15 PN 40	B
With flange connection ½ " ANSI B16.5 Class 150 RF	C

## Display/outputs

With display	A
With display, 1 limit switch	B
With display, 2 limit switches	C
With display, HART and 4 to 20 mA	D
With display, HART, 4 to 20 mA, 2 limit switches	E
With display, HART, 4 to 20 mA, 1 limit switch	F
With display, PROFIBUS PA	G

## Calibration

Standard calibration	0
• Without calibration certificate	1
• With calibration certificate	

# Flow Measurement

## SITRANS FVA

### SITRANS FVA250

#### Selection and ordering data

#### Order code

#### Article No.

##### *Other types of liquid and gas measurement*

Please add "-Z" to Article No. and specify Order code.

##### Certificates

Certificate of compliance EN 10204-2.1	<b>C10</b>
Factory inspection certificate EN 10204-2.2	<b>C11</b>
Material certificate according to EN 10204-3.1	<b>C12</b>
Dye penetration test on pressure bearing weldings	<b>C13</b>
X-ray test of pressure bearing weldings	<b>C14</b>
Pressure test with acceptance test certificate 3.1 according to EN 10204	<b>C15</b>
PMI (positive material identification) test of pressure bearing metal parts	<b>C16</b>

##### Float damping

With float damping	<b>D01</b>
--------------------	------------

##### Flange sealing surface

Sealing surface according to EN 1092-1 welding neck flange

• DN 15	<b>N11</b>
• DN 20	<b>N12</b>
• DN 25	<b>N13</b>
• DN 32	<b>N14</b>
• DN 40	<b>N15</b>
• DN 50	<b>N16</b>
• DN 65	<b>N17</b>
• DN 80	<b>N18</b>
• DN 100	<b>N19</b>

Sealing surface according to ANSI B16.5 welding neck flange

• ½ inch	<b>N21</b>
• ¾ inch	<b>N22</b>
• 1 inch	<b>N23</b>
• 1¼ inch	<b>N24</b>
• 1½ inch	<b>N25</b>
• 2 inch	<b>N26</b>
• 2½ inch	<b>N27</b>
• 3 inch	<b>N28</b>
• 4 inch	<b>N29</b>

##### Specification of medium process data (specify in plain text)

<b>Specification always required for each order:</b> Medium Operating pressure Operating temperature Density (only for customer-specified medium) Viscosity (only for customer-specified medium) Measuring range	<b>Y01</b>
--	------------

##### TAG plate

TAG plate in stainless steel (add plain text)	<b>Y17</b>
---	------------

##### Cleaning to company standard

Cleaning Class 2, with identification free of oil and grease	<b>K46</b>
Cleaning Class 1, with identification free of oil, grease and silicon	<b>K48</b>

##### Approvals

With ATEX approval	<b>M51</b>
--------------------	------------

##### Special version (specify in plain text)

	<b>Y99</b>
--	------------

Note:

For possible combinations of nominal sizes and flow tube, see table on page 3/403

#### Operating instructions

##### SITRANS FVA250


- English
- German

**A5E03821131**  
**A5E32108136**

All literature is available to download for free, in a range of languages, at

<https://www.siemens.com/processinstrumentation/documentation>

## Dimensional drawings

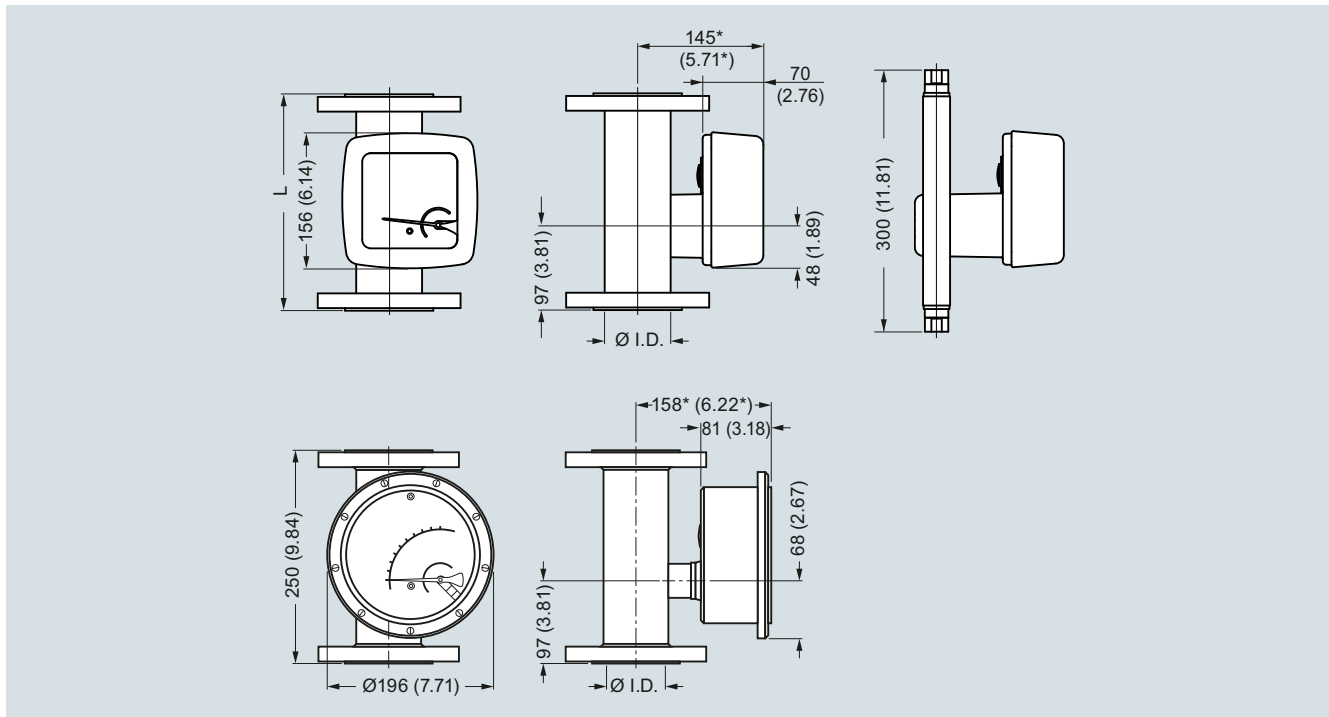

SITRANS FVA250, dimensions in mm

Order code	Diameter flange EN 1092-1	Flow tube I.D. [mm]						
		1	2	3	4	5	6	7
A	DN 15	26 <sup>1)</sup>	26 <sup>1)</sup>	32 <sup>1)</sup>	-	-	-	-
B	DN 20	26 <sup>1)</sup>	26 <sup>1)</sup>	32 <sup>1)</sup>	-	-	-	-
C	DN 25	26	26	32 <sup>1)</sup>	46 <sup>1)</sup>	-	-	-
D	DN 32	26	26	32	46 <sup>1)</sup>	-	-	-
E	DN 40	26	26	32	46 <sup>1)</sup>	70 <sup>1)</sup>	-	-
F	DN 50	26	26	32	46	70 <sup>1)</sup>	-	-
G	DN 65	-	-	32	46	70	102 <sup>1)</sup>	-
H	DN 80	-	-	-	46	70	102 <sup>1)</sup>	-
J	DN 100	-	-	-	-	70	102	125 <sup>1)</sup>

\*) +100 mm with pulled-out display unit

1) Flange sealing surface not according to EN 1092-1 (Please select N-option for EN 1092-1 compliant flange sealing surface)

Order code	Diameter flange ANSI 1092-1	Flow tube I.D. [mm]						
		1	2	3	4	5	6	7
A	½"	1.02 <sup>1)</sup>	1.02 <sup>1)</sup>	1.26 <sup>1)2)</sup>	-	-	-	-
B	¾"	1.02 <sup>1)</sup>	1.02 <sup>1)</sup>	1.26 <sup>1)</sup>	-	-	-	-
C	1"	1.02	1.02	1.26 <sup>1)</sup>	-	-	-	-
D	1¼"	1.02	1.02	1.26	1.81 <sup>1)</sup>	-	-	-
E	1½"	1.02	1.02	1.26	1.81 <sup>1)</sup>	-	-	-
F	2"	1.02	1.02	1.26	1.81	2.76 <sup>1)</sup>	-	-
G	2½"	-	-	1.26	1.81	2.76	-	-
H	3"	-	-	-	1.81	2.76	4.02 <sup>1)</sup>	-
J	4"	-	-	-	-	2.76	4.02	4.92 <sup>1)</sup>

\*) +3.94 inch with pulled-out display unit

1) Flange sealing surface not according to ANSI B16.5 (Please select N-option for ANSI B16.5 compliant flange sealing surface)


2) Flange with threaded holes

## Flow Measurement

### SITRANS FVA

#### SITRANS FVA250


#### Dimensional drawings (continued)

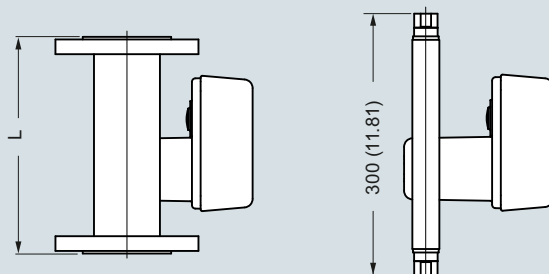

SITRANS FVA250 build-in length, dimensions in mm (inch)

Diameter	EN 1092-1				Diameter	ANSI B16.5		
	PN 16	PN 16	PN 16	PN 16		class 150	class 300	class 600
DN 15	-	250 (9.84)	-	250 (9.84)	½"	250 (9.84)	250 (9.84)	250 (9.84)
DN 20	-	250 (9.84)	-	250 (9.84)	¾"	250 (9.84)	250 (9.84)	250 (9.84)
DN 25	-	250 (9.84)	-	250 (9.84)	1"	250 (9.84)	250 (9.84)	250 (9.84)
DN 32	-	250 (9.84)	-	250 (9.84)	1¼"	250 (9.84)	250 (9.84)	250 (9.84)
DN 40	-	250 (9.84)	-	250 (9.84)	1½"	250 (9.84)	250 (9.84)	250 (9.84)
DN 50	-	250 (9.84)	250 (9.84)	300 (11.81)	2"	250 (9.84)	250 (9.84)	300 (11.81)
DN 65	250 (9.84)	250 (9.84)	-	-	2½"	250 (9.84)	300 (11.81)	300 (11.81)
DN 80	250 (9.84)	250 (9.84)	-	-	3"	250 (9.84)	300 (11.81)	300 (11.81)
DN 100	250 (9.84)	250 (9.84)	-	-	4"	250 (9.84)	300 (11.81)	300 (11.81)


- not available

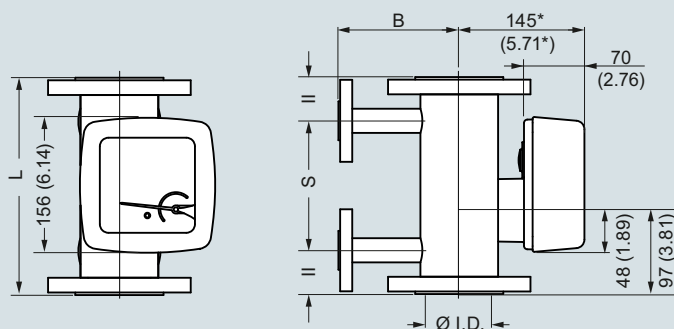

SITRANS FVA250 with heating/cooling jacket, dimensions, in mm (inch)

Diameter	B (flange)		B (Ermeto)		S		Weight		
	mm	inch	mm	inch	mm	inch	kg	lbs	
15	½"	110	4.33	53	2.09	150	5.91	3,0	6.6
20	¾"	110	4.33	53	2.09	150	5.91	3,0	6.6
25	1"	110	4.33	58,5	2.3	150	5.91	4,2	9.3
32	1¼"	110	4.33	58,5	2.3	150	5.91	5,2	11.5
40	1½"	130	5.12	63	2.48	150	5.91	6,0	13.2
50	2"	140	5.51	77,5	3.05	150	5.91	7,5	16.5
65	2½"	140	5.51	77,5	3.05	150	5.91	8,5	18.7
80	3"	160	6.3	93,5	3.68	150	5.91	13	28.7
100	4"	175	6.89	110	4.33	120	4.72	18	39.7

\* + 100 mm (3.94 inch) with pulled-out display unit

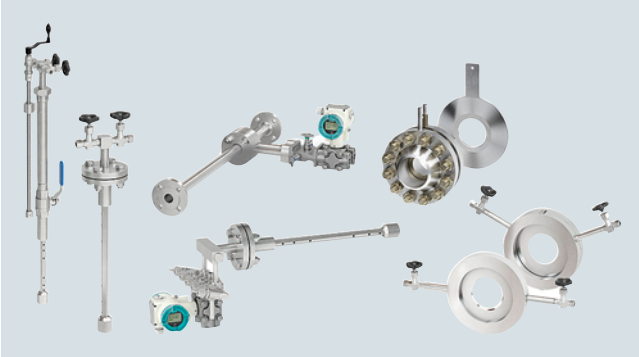**Overview**

With the SITRANS FP product line Siemens offers a complete solution for differential pressure flow measurements. This well-established technology is suitable for all kinds of applications – liquids, dry or wet gases and steam. Due to the robust though variable design it has been and still is one of the main technologies for flow measurement in various industries.

The new product line offers full flexibility for your processes. SITRANS FP is not a simple substitution of our previous orifice program but a completely new setup. A new digital sizing process ensures minimum effort during presales and full traceability in aftersales. The differential pressure portfolio consists of the averaging pitot tube measuring system SITRANS FPS300 and the differential pressure sensors according to ISO 5167 (orifices) SITRANS FPS200.

## Flow Measurement






### SITRANS FP (differential pressure flow measurement)

#### Introduction




#### Overview (continued)

##### Product overview

SITRANS FP230/FPS200 primary elements according to ISO 5167

	Product name	Fluid	Design	Pressure tapping	Nominal size	Article No.	Catalog page
	<b>Orifice plate with pressure tappings</b> Compact orifice plate with integrated pressure tappings in carbon or stainless steel	<ul style="list-style-type: none"> <li>• Gas</li> <li>• Steam</li> <li>• Liquid</li> </ul>	<ul style="list-style-type: none"> <li>• Remote</li> <li>• Compact</li> </ul>	Corner tapping	DN 50 ... 500 (2 ...20 inch)	7ME171.-.....-....	3/413
	<b>Orifice plate with annular chamber</b> Orifice plate with annular chamber pressure tapping in carbon or stainless steel	<ul style="list-style-type: none"> <li>• Gas</li> <li>• Steam</li> <li>• Liquid</li> </ul>	<ul style="list-style-type: none"> <li>• Remote</li> <li>• Compact</li> </ul>	Annular chamber	DN 50 ... 600 (2 ...24 inch)	7ME172.-.....-....	3/421
	<b>Orifice meter run</b> Orifice meter run with flanges ends in carbon or stainless steel	<ul style="list-style-type: none"> <li>• Gas</li> <li>• Steam</li> <li>• Liquid</li> </ul>	<ul style="list-style-type: none"> <li>• Remote</li> <li>• Compact</li> </ul>	Annular chamber	DN 10 ... 50 (3/8 ...2 inch)	7ME173.-.....-....	3/428
	<b>Orifice plate</b> Orifice plate for installation between flanges in stainless steel	<ul style="list-style-type: none"> <li>• Gas</li> <li>• Steam</li> <li>• Liquid</li> </ul>	<ul style="list-style-type: none"> <li>• Remote</li> </ul>	Not included	DN 50 ... 600 (2 ...24 inch)	7ME174.-.....-....	3/434
	<b>Orifice plate with orifice flange</b> Orifice flange pair according to ASME B36.16 with orifice plate in carbon steel (flanges) or stainless steel	<ul style="list-style-type: none"> <li>• Gas</li> <li>• Liquid</li> </ul>	<ul style="list-style-type: none"> <li>• Remote</li> </ul>	In the flange	DN 50 ... 600 (2 ...24 inch)	7ME175.-.....-....	3/437

SITRANS FP330/FPS300 averaging pitot tube

	Product name	Fluid	Design	Mounting type	Nominal size	Article No.	Catalog page
	<b>Averaging pitot tube for gas and liquids</b>	<ul style="list-style-type: none"> <li>• Gas</li> <li>• Liquid</li> </ul>	<ul style="list-style-type: none"> <li>• Remote</li> <li>• Compact</li> </ul>	Flange, cutting ring	DN 40 ... 4000	7ME161.-.....-....	3/443
	<b>Averaging pitot tube for steam</b>	<ul style="list-style-type: none"> <li>• Superheated steam</li> <li>• Saturated steam</li> </ul>	<ul style="list-style-type: none"> <li>• Remote</li> <li>• Compact</li> </ul>	Flange	DN 40 ... 2000	7ME162.-.....-....	3/450
	<b>Averaging pitot tube with FASTLOK</b> The sensor can be assembled and disassembled into the pipe without interrupting plant operation.	<ul style="list-style-type: none"> <li>• Dry gas</li> <li>• Wet gas</li> <li>• Liquid</li> </ul>	<ul style="list-style-type: none"> <li>• Remote</li> <li>• Compact</li> </ul>	Screwed ball valve	DN 40 ... 2000	7ME163.-.....-....	3/455

**Overview** (continued)**Sizing procedure**

The SITRANS FP sizing tool is available via PIA Life Cycle Portal and supports you in choosing the right device within this portfolio:

<https://www.pia-portal.automation.siemens.com>

After registration you have access to a web-based sizing procedure generating reference IDs which can be used as application data for the ordering process.

**Benefits**

- Suitable for a vast range of different applications
- Available as pre-mounted compact system as well as remote parts
- Advanced intelligent sizing procedure
- Web-based sizing and data storage enables full traceability and easy communication
- All benefits of SITRANS P320 available

**Application**

The SITRANS FP230/330 devices are applicable in a variety of applications:

## Chemical industry

- Different materials for aggressive substances
- Namur NE107, self-monitoring and diagnostics
- Namur NE21, increase EMC conformity
- Measurement of various liquid and gas media

## Oil &amp; Gas

- Complete setup made of stainless steel
- Robust design and well-established technology
- Measurement of liquid and gas hydrocarbons

## Power

- QAL1 approval for continuous emission monitoring applications according to EN 15267
- Specific design for steam applications
- Measurement of steam, condensate and water


## and others

- Cost-effective device
- Easy commissioning

**Function****Mode of operation**

The so-called primary element (orifice plate, averaging pitot tube, etc.) creates a differential pressure. The pressure is transferred to the measuring cell of the differential pressure transmitter. This can be done through a compact installation where the differential pressure transmitter is installed directly at the primary element or as remote installation through separately installed pipes that connect primary element and differential pressure transmitter.

Different types and designs of primary elements for differential pressure flow measurement have been established historically. Traditional primary elements such as orifice meters are harmonized in the international standard ISO 5167. Other primary elements such as the averaging pitot tube follow the same working principle, they are not standardized but are widely used and accepted.

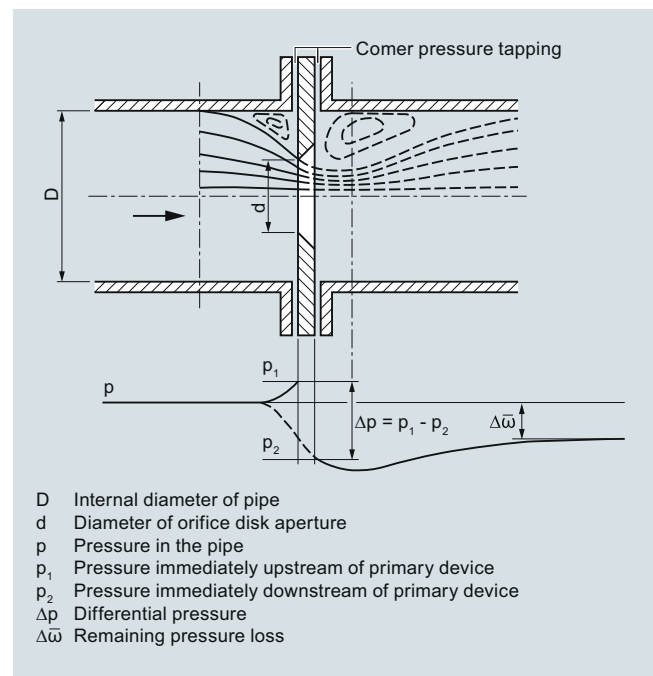**Principle of the differential pressure method**

Principle of the differential pressure method: Pressure curve at orifice plate

The differential pressure method is based on the law of continuity and Bernoulli's energy equation. A primary differential pressure device is installed at the measuring point to measure the flow. The primary element restricts the pipe.

According to the law of continuity, the mass flow of a moving fluid (gas, steam or liquid) in a pipeline is the same at all points. If the cross-section is reduced at one point, the flow velocity must increase at this point. Thus, the restriction causes an overpressure directly in front of the primary element and a drop in pressure behind the primary element. This pressure drop is greatly influenced by the degree of restriction. This degree is usually measured in relation of the diameters of the restriction to the diameter of the pipe, the diameter ratio  $\beta$ :

$$\beta = \frac{d}{D}$$

## Flow Measurement

### SITRANS FP (differential pressure flow measurement)

#### Introduction

#### Function (continued)

The difference between overpressure before the primary element and lower pressure after the primary element is called differential pressure ( $\Delta p$ , "delta p"). According to Bernoulli's energy equation, the square-root of the differential pressure is proportional to the flow rate:

$$q \sim \sqrt{\Delta p}$$

The created differential pressure is partly recovered with sufficient distance to the primary element but a permanent pressure drop,  $\Delta\omega$ , remains.

The exact flow equation of ISO 5167 additionally considers the properties of the primary device, the pipe, and the fluid:

$$q = f(C, \Delta p, \rho, \varepsilon, \beta)$$

Where:

- $q$ : mass flow
- $\Delta p$ : differential pressure
- $C$ : "coefficient of discharge"
- $\rho$ : density of fluid before the point of measurement
- $\varepsilon$ : expansion number
- $\beta$ : diameter ratio

The C-factor is determined during design of the differential pressure flow meter. For certain types of flow meters it is a constant (e.g. Venturi flow meters), for others it is slightly non-linear and dependent on flow rate (orifice flow meters).

The expansion number considers the change in fluid properties due to the differential pressure itself.

All factors will be considered during the design of the differential pressure flow meter.


For flow measurement applications where all quantities (density, pressure, temperature, etc.) can – with sufficient accuracy – be considered constant, it can be reduced to the basic relation given above:

$$q \sim \sqrt{\Delta p}$$

#### Differential pressure flow measurement in practice

A differential pressure flow measurement usually consists of at least 3 components:

- primary element (orifice, pitot tube, etc.)
- manifold (plus primary shut-off valve for remote installations)
- differential pressure transmitter

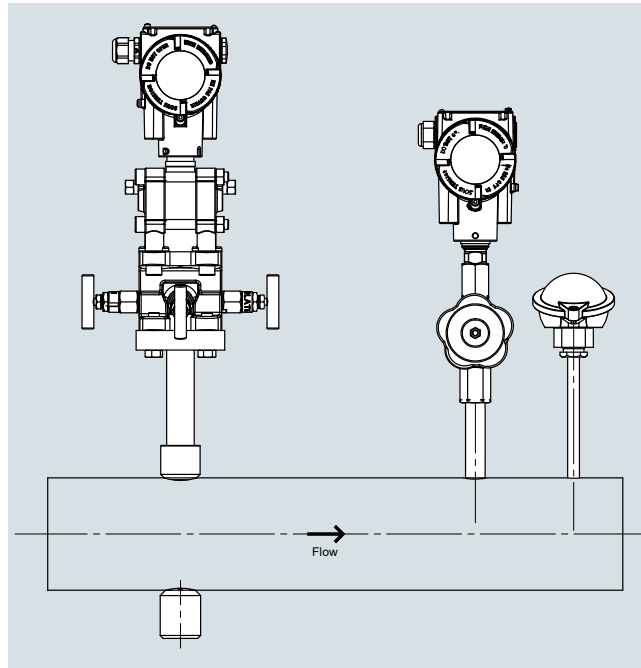

The picture above shows all these components installed together in a "compact" arrangement (manifold and differential pressure transmitter sitting on top of the primary element).

Depending on the process the application might require additional components such as:

- absolute pressure measurement
- temperature measurement


which are also shown above. If absolute pressure and/or temperature are not constant, these quantities have to be measured as well to calculate the density changes caused by the change of these process conditions. This process is called "compensation" meaning re-calculation of actual fluid density based on actual process conditions as explained above.



### Characteristic curves

Based on the relations described above differential pressure measurement systems generally show a square-root relationship between differential pressure and flow. Therefore, a square-root transmitter is required to create a linear flow characteristic. If no square-root characteristic is selected, the transmitter will output a signal proportional to differential pressure.

The conversion from differential pressure to flow has to be done in a subsequent system (flow computer, DCS, etc.). This is required if additional measurements such as absolute pressure and/or temperature are connected to such a system to correct for changes in operational density (so called "compensation").

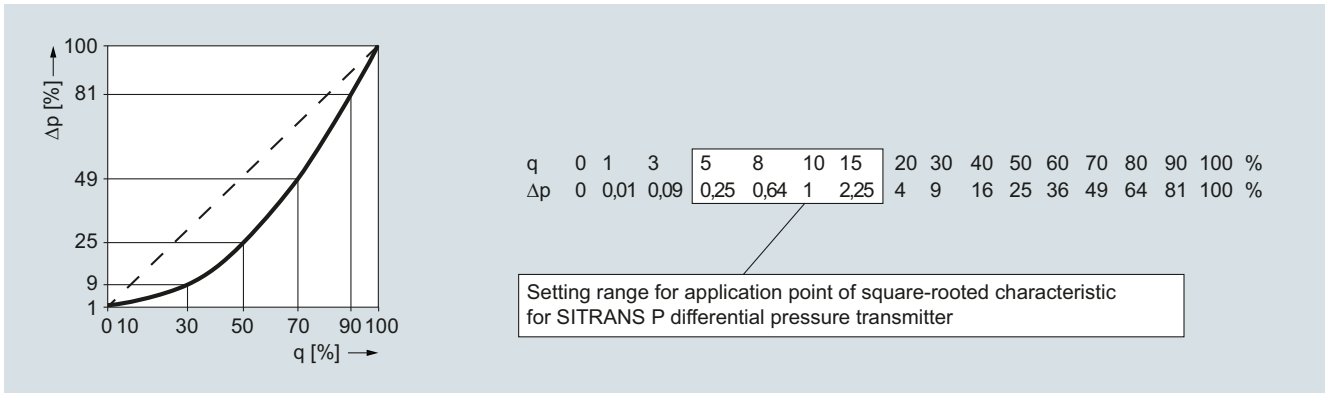

Relationship between flow  $q$  and differential pressure  $\Delta p$

## Flow Measurement

### SITRANS FP (differential pressure flow measurement)

#### SITRANS FP230/FPS200 primary elements according to ISO 5167

##### Overview



Primary differential pressure devices are standardized mechanical flow sensors, often also referred to as differential pressure transducers. The primary differential pressure devices are calculated and manufactured according to DIN EN ISO 5167.

Through constriction of the line diameter in the pressure device, the flow rate creates a differential pressure that is converted with the help of a differential pressure transmitter into a proportional current signal or flow value. The assignment of differential pressure to flow is created by a calculation of the primary differential pressure device.

Primary differential pressure devices are suitable for single-phase media such as gas, vapor and liquids without solid components.

##### Benefits

- Suitable for universal use across the globe and widely accepted in all industries
- Very robust and can be used in a wide range of nominal sizes
- Suitable for high temperature and pressure ranges
- Low uncertainty of measurement
- No wet calibration required as they use an internationally standardized flow rate measurement procedure
- Differential pressure transmitter can be used over a long distance from the measuring location
- Differential pressure method is well known and has a large installed base
- SITRANS P differential pressure transmitter is easy to parameterize again if process data change. They are adapted by recalculating and assigning new parameters to the transmitter or, in case of an orifice plate with annular chamber, by using a new orifice disk.

##### Application


- Technical Gases
- Compressed Air
- Fresh and Combustion Air
- Steam/Heat Quantities
- Heat Transfer Fluids
- Water

##### Design

###### Basics: Orifices for flow measurement

Orifice plates are usually differentiated by their type of installation, type of differential pressure tapping and the shape of the orifice.

The characteristic differential pressure is created by the orifice bore which is the defined circular opening. It is usually of square edged concentric type according to ISO 5167-2 positioned in the middle of the pipe.

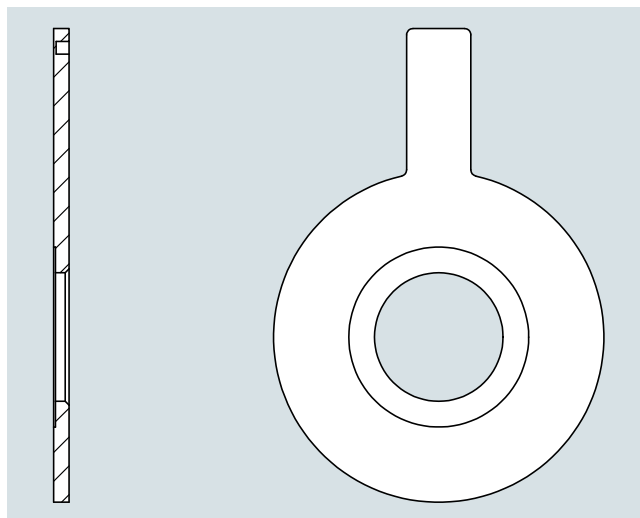

The main features are a sharp edge, a cylindrical bore of a certain length and a conical bevel tapering to the rear. Alternatively, the relevant standards provide for deviating designs, which are used for applications with highly viscous (e.g. quarter-circle nozzles) or contaminated media (e.g. segment orifices).

The standard design is permitted by the standard for an inner diameter of the pipe between 50 mm and 1000 mm. For pipes with smaller inside diameters, standards such as ISO 15377-TR or ASME MFC-14M which go beyond these standards must be taken into account. Orifice plates for pipes with small inside diameters are usually designed as meter tubes.

In order to reduce the uncertainties of these meter tubes, the devices can be calibrated on a flow test bench if required on request.

**Design** (continued)**Types of differential pressure tappings**

The differential pressure can be tapped in different ways:

Corner tapping

Directly in front of and behind the orifice plate an opening is placed in the corner of a carrier ring to measure upstream and downstream pressure. Both pressure signals are routed through these openings to the outside.

Corner tapping with annular chamber

The orifice plate is held by an annular chamber. Upstream and downstream pressure are measured through an annular gap opening between carrier ring and orifice plate. Both pressure signals are averaged over the entire circumference and routed outside.

Flange tapping

The orifice plate is held between two so-called orifice flanges. Upstream and downstream pressure signals are measured through flange taps which are drilled into the flanges.

Tapping with distance D, D/2

The orifice plate is held between regular flanges. Upstream and downstream pressure signals are measured through taps in the pipe with distance of D (upstream) and D/2 (downstream) to the orifice plate.

**Designs**

- Orifice plate with pressure tappings (7ME171)
- Orifice plate with annular chamber (7ME172)
- Orifice meter run (7ME173)
- Orifice plate (7ME174)
- Orifice plate with orifice flange (7ME175)

**Mounting arrangements**

For more information on installation position and piping, please see the Operating Instructions "SITRANS FPS200" on SIOS.

**Integration**

The orifice plate is installed between two flanges in the pipeline. Using condensation pots (for steam) and initial shut-off valves, the differential pressure of the high-pressure side and low-pressure side is directed through differential pressure lines to a manifold and to the differential pressure transmitter. For fluids with pressure and temperature fluctuations it makes sense to take an additional measurement of the pressure and temperature in order to correct the flow signal of the transmitter in a subsequent correction computer.

**Selection of mounting point**

The flow measuring regulations DIN EN ISO 5167 not only consider the design of primary differential pressure devices, but also assume that their installation is in accordance with the standard so that the specified tolerances can be retained. The required inlet and outlet pipe sections according to ISO 5167 can be found in the calculation protocol of the respective orifice plate. Configuration of the pipeline should allow for standardized installation (required inlet and outlet pipe section). Particular attention must be paid to ensure that the primary device can be fitted in a sufficiently long straight section of pipe. Bends, valves and similar should be fitted sufficiently far upstream of the primary device to prevent them having a detrimental effect. Primary devices with a large diameter ratio are particularly sensitive to interferences.

**Design of measuring point**

The design of the measuring point depends on the medium and on the spatial conditions. The designs for gas and water only differ with regard to the position of the tapping sockets (see section "Tapping sockets"); condensation pots are provided for steam applications.

**Orifice meter runs**

On lines with small nominal sizes (DN 10 to DN 50) the measurements are influenced by the wall roughness and diameter tolerances of the pipes, more than measurements with larger nominal sizes. These influences are counteracted by using orifice meter runs with fitted inlet and outlet pipe sections made of precision pipes. For exact measurements with orifice meter runs, the flow coefficient C can be determined by means of calibration.

## Flow Measurement

### SITRANS FP (differential pressure flow measurement)

#### SITRANS FP230/FPS200 primary elements according to ISO 5167

#### Technical specifications

##### General design

Working principle	Differential pressure orifice meter (other ISO 5167 primary elements on request)
Media	<ul style="list-style-type: none"> <li>• Steam (saturated, superheated)</li> <li>• Gas (dry, up to 100% water saturated)</li> <li>• Liquids (water, non-conductive liquids, oil, etc.)</li> </ul>
Transmitter installation	<ul style="list-style-type: none"> <li>• Compact mount with differential pressure transmitter (acc. to IEC 61518)</li> <li>• Remote mounted differential pressure transmitter</li> </ul>
Bidirectional flow	On request
Design	According to ISO 5167-2 (2003); for orifice plates smaller than 50 mm inner diameter according to ISO/TR 15377 or ASME MFC-14M:2003

##### Accuracy

Uncertainty at design flow (of Sensor Coefficient of Discharge)	Typically in the range of 0.5 ... 1.2% (depends on application and final design)
Measurement range	Typically between up to 1:5 ... 1:10 (real measurement range depends on transmitter performance and non-linearity of coefficient of discharge)

##### Operating conditions

Pressure	Max. PN 100 or Class 600 (higher pressure ratings on request)
Temperature	According to EN 1092-1 or ASME B16.5 (exact maximum temperature depends on sensor design)
Pressure loss	30 ... 80% of differential pressure

##### Installation conditions

Straight inlet diameter	Will be calculated by sizing tool (depends on $\beta$ -coefficient, typically in the range of 16 ... 44 $\times$ inner diameter behind 90° elbow, can be reduced with 0.5% added uncertainty)
Straight outlet diameter	Will be calculated by sizing tool (depends on $\beta$ -coefficient, typically in the range of 6 ... 8 $\times$ inner diameter, can be reduced with 0.5% added uncertainty)  Note: For detailed calculation of recommended installation pipe length please refer to sizing tool or manual

##### Design

Material orifice plate	Standard: <ul style="list-style-type: none"> <li>• Stainless steel 1.4404/AISI 316L</li> <li>• Carbon steel</li> </ul> (other materials on request)
Material orifice flanges / orifice holder	<ul style="list-style-type: none"> <li>• Stainless steel 1.4404/AISI 316L</li> <li>• Carbon steel</li> </ul> (other materials on request)
Pipe diameter	<ul style="list-style-type: none"> <li>• DIN: DN 10 ... DN 600</li> <li>• ASME: 3/8" ... 24"</li> </ul> (other sizes on request)
Process connection	Orifice meter runs: Flanges EN 1092-1 B1 or ASME B16.5 RF  All other designs: Suitable for installation between flanges EN 1092-1 B1 or ASME B16.5 RF (other process connections on request)
Length	Orifice with carrier ring and pressure tapings: 40 mm (65 mm for compact steam applications) Orifice plate with annular chamber: 65 mm Orifice meter run: depends on pipe diameter (see below)  Single piece orifice for orifice flanges (with or without orifice flanges): depends on pipe diameter (see below)
Approvals	<ul style="list-style-type: none"> <li>• Hazardous area (see differential pressure transmitter)</li> <li>• Enclosure rating (see differential pressure transmitter)</li> <li>• Operational safety (see differential pressure transmitter)</li> </ul>

#### Options

Further versions that are available on request:

- Other types of primary differential pressure device: nozzles, venturi nozzles, classic venturi tubes etc.
- Other nominal sizes and nominal pressures to EN, ASME and other standards
- Other lengths, special lengths
- Other materials
- Sealing face with recess or groove
- Flushing rings
- Other tapping sockets, multiple tapings
- Material acceptance test certificates or cold water pressure tests


#### More information

For more information please see the Installation Instructions and the Instruction Manuals SITRANS P on SIOS.

**Application**



SITRANS FP230 compact design

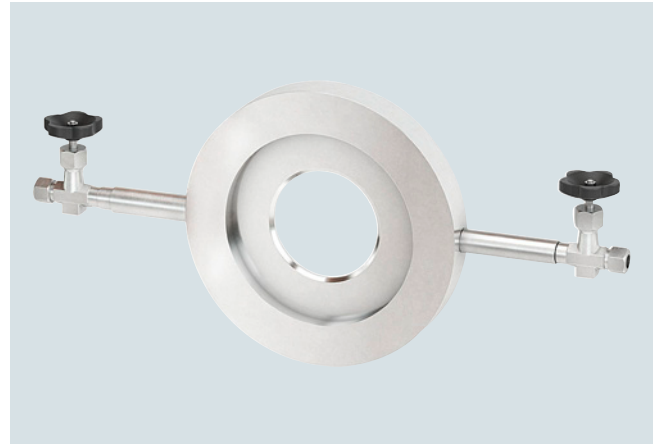

SITRANS FPS200 remote design

Compact orifice plate with integrated pressure tapings in carbon or stainless steel for flow measurement of gas, steam and liquid.

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP230/FPS200 primary elements according to ISO 5167

### Orifice plate with pressure tapplings

#### Design

Orifice plates with integral tapplings are manufactured from a single body and are therefore particularly inexpensive. The pressure tapping takes place at two points and is integrated into the carrier ring. Differential pressure connection can be compact and remote. The instruments are easy to handle and offer good accuracy with reasonable inlet and outlet runs. They are installed between regular flanges.

#### Nominal size


- EN: DN 50 ... 500
- ASME: 2 ... 20 inch

#### Nominal pressure

- EN: PN 6 ... 100
- ASME: class 150 ... 600

#### Connection length

##### Compact mount for gas and liquids

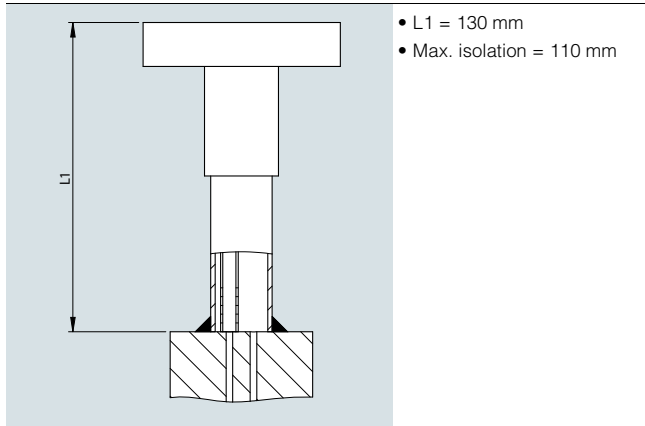

#### Differential pressure tapping

- Corner tapping: Measurement of differential pressure at 2 points in the corner of the carrier ring

#### Sealing face

- According to EN 1092-1: flat (for flanges form B1 and B2)
- According to ASME B16.5: flat (for flanges RF and SF)


#### Overall length

- 40 mm (65 mm for compact steam applications)


#### Material

- Orifice: Carbon steel / orifice edge: 316L/1.4404
- Orifice: 316L/1.4404 / orifice edge: 316L/1.4404


##### Compact mount for steam

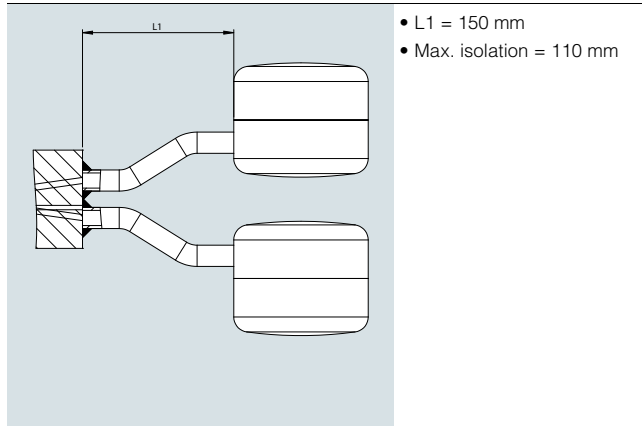

##### Remote mount for gas and liquids

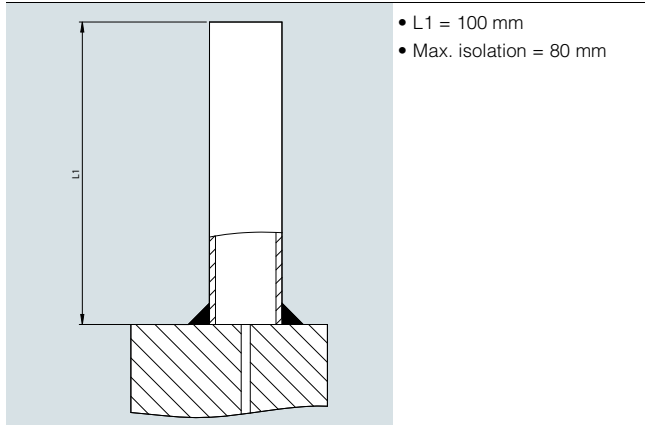

##### Remote mount for steam

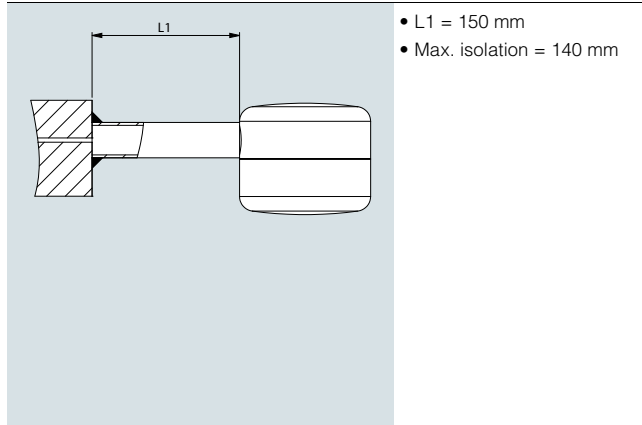


**Design** (continued)

**Tapping sockets**


Gases and liquids

**Remote design**

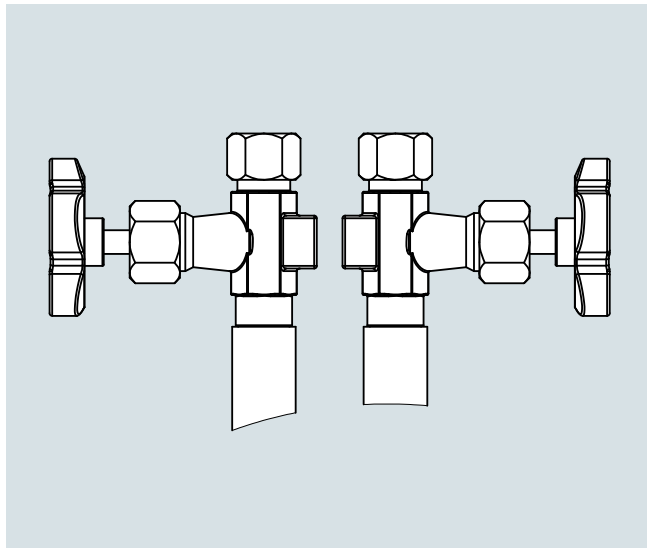


For single body orifice plates in remote design, the angle  $\alpha$  between the pressure tap depends on the pressure rating and the nominal size of the flanges.

**Compact design**

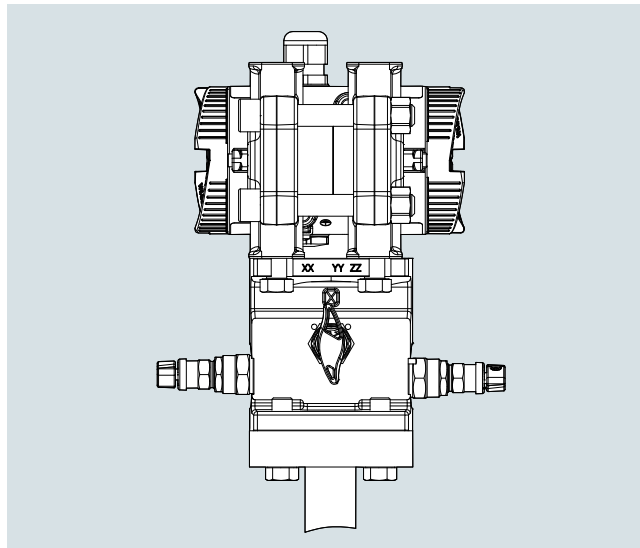


For single body orifice plates in compact design, a so-called flange plate is used. The manifold and the differential pressure transmitter are mounted on this flange plate.

**Tap position/angle in horizontal pipe:**

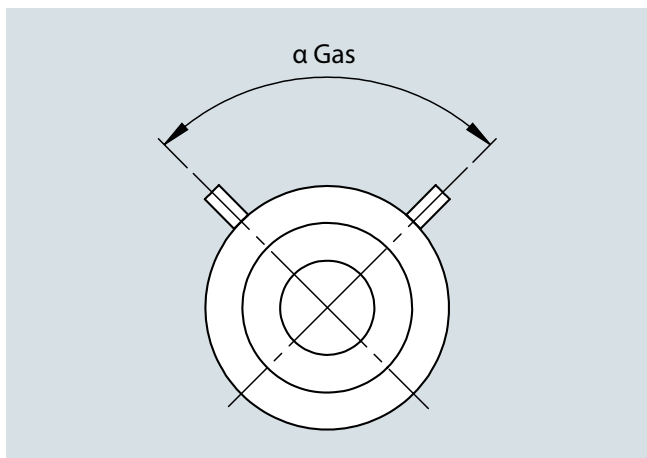

Tap position/angle in horizontal pipe (gas)

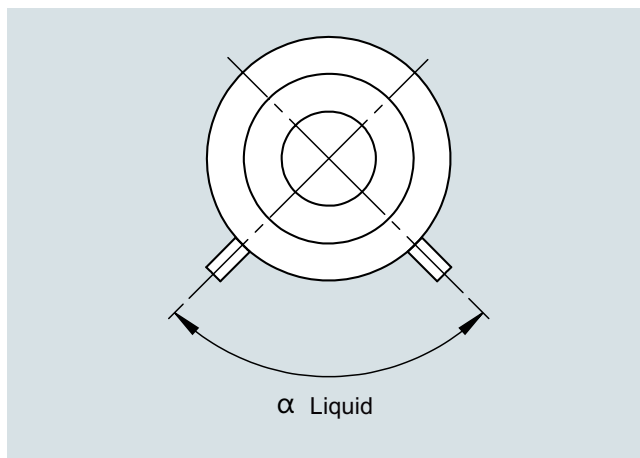

Tap position/angle in horizontal pipe (liquid)

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP230/FPS200 primary elements according to ISO 5167

### Orifice plate with pressure tapings

#### Design (continued)

Remote design for gases and liquids for DIN flange


DIN flange							
Nominal size	PN 6	PN 10	PN 16	PN 25	PN 40	PN 64	PN 100
DN 50	135	135	135	135	135	135	135
DN 65	135	135	135 <sup>*)</sup>	90	90	90	90
DN 80	135	90	90	90	90	90	90
DN 100	135	90	90	90	90	90	90
DN 125	90	90	90	90	90	90	90
DN 150	90	90	90	90	90	90	60
DN 175	90	90	90	60	60	60	60
DN 200	90	90	60	60	60	60	60
DN 250	60	60	60	60	60	60	60
DN 300	60	60	60	45	45	45	45
DN 350	60	45	45	45	45	45	45
DN 400	45	45	45	45	45	45	45
DN 450	45	36	36	36	-	-	-
DN 500	36	36	36	36	36	36	36

Remote design for gases and liquids for ANSI flange


ANSI flange			
Nominal size	Class 150	Class 300	Class 600
2"	135	90	90
2,5"	135	90	90
3"	135	90	90
4"	90	90	90
5"	90	90	90
6"	90	60	60
8"	90	60	60
10"	60	45	45
12"	60	45	36
14"	60	36	36
16"	45	36	36
18"	45	30	36
20"	36	30	30

\*) Fitting for DN 65 PN 16 flange with 4 holes. If design for flange with 8 holes is required, please add a comment to the corresponding project within the sizing tool.

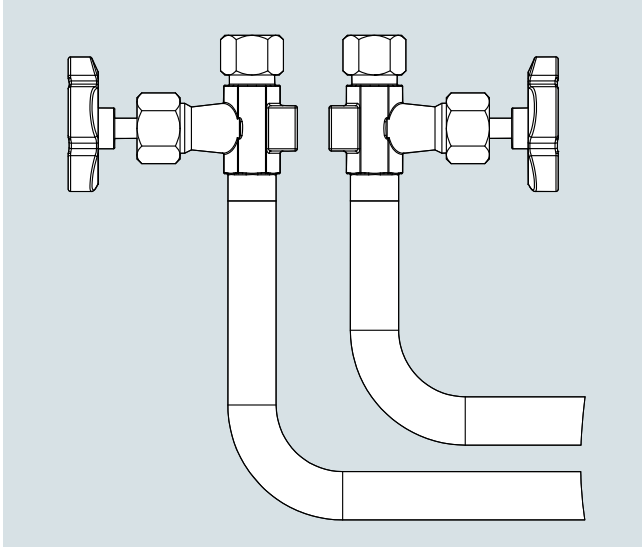


**Design (continued)**Wet gases**Remote design**


For single body orifice plates in remote design for wet gases, nozzles bent at right angles with welded-on valves are used. This design is only necessary for vertical pipes. For horizontal pipes, the design for gases and liquids can be selected because the nozzles point up as listed in the table above.

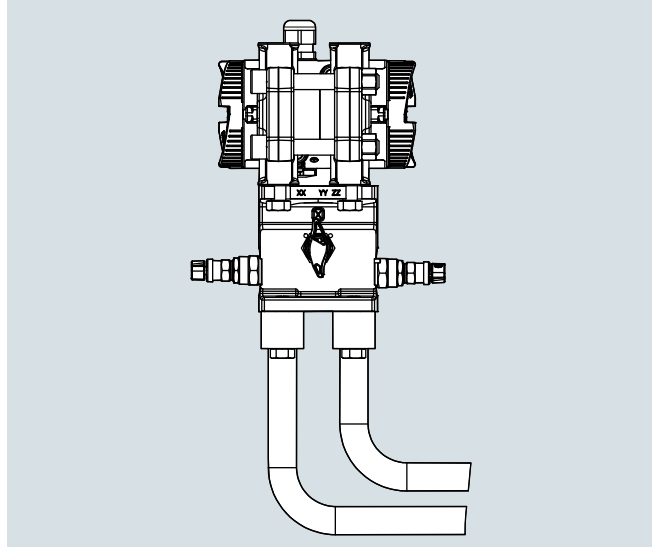**Compact design**

For single body orifice plates in compact design for wet gases, nozzles bent at right angles with oval flanges are used. The manifold and the differential pressure transmitter are mounted on these oval flanges. This design is only necessary for vertical pipes. For horizontal pipes, the design for gases and liquids can be selected because the flange plate with manifold and transmitter always points up.

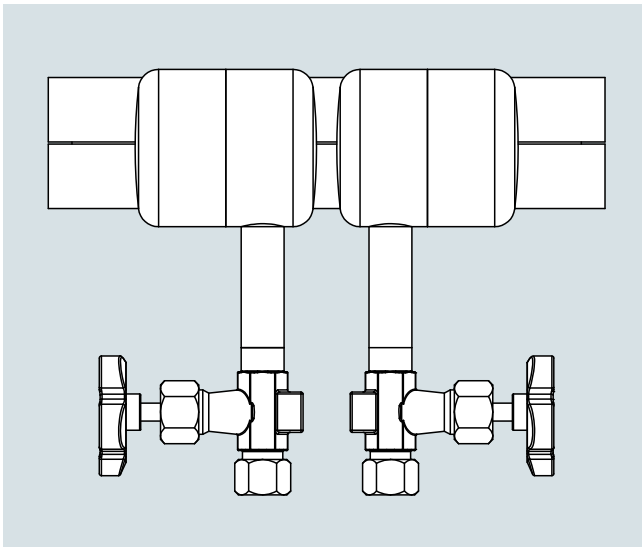Steam**Remote design**

For single body orifice plates in remote design for steam, the condensate vessels with shut-off valves are welded at an angle of 180°.

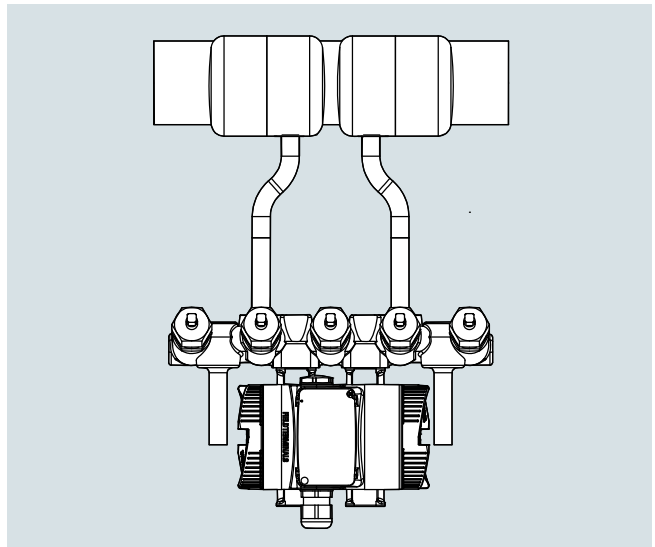**Compact design**

For single body orifice plates in compact design for steam, the condensate vessels and the manifold are welded-on one side. The orifice has a width of 65 mm in this case (deviating from the standard).

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP230/FPS200 primary elements according to ISO 5167

### Orifice plate with pressure tapings

#### Selection and ordering data

#### Article No.

#### SITRANS FP230/FPS200 orifice plate with pressure tapings



7ME171

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Communication

HART (4 ... 20 mA)

Without transmitter

0  
8

#### Nominal size

DN 50 (2")

DN 65 (2½")

DN 80 (3")

DN 100 (4")

DN 125 (5")

DN 150 (6")

DN 200 (8")

DN 250 (10")

DN 300 (12")

DN 350 (14")

DN 400 (16")

DN 450 (18")

DN 500 (20")

1 D  
1 E  
1 F  
2 G  
2 H  
2 J  
2 K  
2 L  
2 M  
2 N  
2 P  
2 Q  
2 R

#### Nominal pressure

Flange EN 1092-1 Form B1 PN 6

Flange EN 1092-1 Form B1 PN 10

Flange EN 1092-1 Form B1 PN 16

Flange EN 1092-1 Form B1 PN 25

Flange EN 1092-1 Form B1 PN 40

Flange EN 1092-1 Form B1 PN 64

Flange EN 1092-1 Form B1 PN 100

Flange ASME B16.5 Class 150

Flange ASME B16.5 Class 300

Flange ASME B16.5 Class 600

A  
B  
C  
D  
E  
F  
G  
Q  
R  
S

#### Wetted parts material

Orifice: Carbon steel / orifice edge: 316L/1.4404

Orifice: 316L/1.4404 / orifice edge: 316L/1.4404

0  
1

#### System design

Compact design for dry gases (horizontal and vertical pipes)

Compact design for liquids

Compact design for wet gases (only vertical pipes)

Compact design for steam

Remote design for dry gases

Remote design for liquids

Remote design for wet gases

Remote design for steam

0  
1  
2  
3  
4  
5  
6  
7

#### Type of protection of pressure transmitter

No Ex / without pressure transmitter

Intrinsic safety

Explosion proof

Intrinsic safety, Explosion proof

Dust ignition proof zone 21/22 (DIP), increased safety zone 2

Dust ignition proof zone 20/21/22 (DIP), increased safety zone 2

Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2

Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2, class division

A  
B  
C  
D  
L  
M  
S  
T

#### Electrical connections/cable entries of pressure transmitter

Without pressure transmitter

2 x M20 x 1.5

2 x 1/2-14 NPT

A  
F  
M

#### Local operation/display of pressure transmitter

Without display (closed lid) / without pressure transmitter

With display (closed lid)

With display (lid with glass window)

0  
1  
2

SITRANS FP (differential pressure flow measurement)  
SITRANS FP230/FPS200 primary elements according to ISO 5167

## Orifice plate with pressure tapplings

## Selection and ordering data

## Order code

Further designs\*

Please add "-Z" to Article No. and specify Order code(s) and plain text.

**Certificates of primary element incl. manifolds**

Inspection certificate of the primary element (EN 10204-3.1) - material of pressure-containing and wetted parts **C52**

Factory certificate of the primary element (EN 10204-2.2) - wetted parts (MR 0175-2015) **C54**

Dimensional record of the primary element **C55**

Inspection certificate (DIN EN 571-1) - dye penetration test of weldings **C56**

Hydrostatic pressure test of the primary element (EN 13480-5) of weldings **C58**

Dimensional drawing 1:1 DWG of the primary element **C59**

**Maximum measuring span of pressure transmitter**

20 mbar (8.037 inH<sub>2</sub>O) **I01**

60 mbar (24.11 inH<sub>2</sub>O) **I02**

250 mbar (100.5 inH<sub>2</sub>O) **I03**

600 mbar (241.1 inH<sub>2</sub>O) **I04**

1600 mbar (643 inH<sub>2</sub>O) **I05**

**Shut-off valves**

With mounted shut-off valves DN8 made of carbon steel, up to 300 °C with tube fitting 12 mm **T50**

With mounted shut-off valves DN8 made of stainless steel, up to 300 °C with tube fitting 12 mm **T51**

With mounted shut-off valves DN8 made of carbon steel, up to 300 °C and condensate vessel made of carbon steel with tube fitting 12 mm **T56**

With mounted shut-off valves DN8 made of stainless steel, and condensate vessel made of stainless steel with tube fitting 12 mm **T57**

**Valve manifolds for mounting on primary element**

With mounted manifold (3-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws **U40**

With mounted manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws **U41**

With mounted manifold (5-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws **U42**

With mounted manifold (5-fold) made of stainless steel, PTFE sealings, stainless steel screws **U43**

With mounted manifold (5-fold) made of carbon steel, up to 300 °C cadmium-plated steel screws and condensate vessel made of carbon steel **U46**

With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm **U50**

With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm **U51**

With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm **U52**

With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm **U53**

With enclosed manifold (5-fold) made of carbon steel, up to 300 °C cadmium-plated steel screws with tube fitting 12 mm **U56**

**Application data**

ID number of the primary element according to sizing tool **Y40**

Scope of delivery

- Orifice with pressure tapping in carrier ring
- Condensation pots for steam applications
- Shut-off valves for remote design (options T5x selected in PIA)
- Manifold for compact/remote design (options U4x, U5x selected in PIA)

\* For further options, please refer to SITRANS P320.


## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP230/FPS200 primary elements according to ISO 5167

### Orifice plate with pressure tapings

#### Dimensional drawings

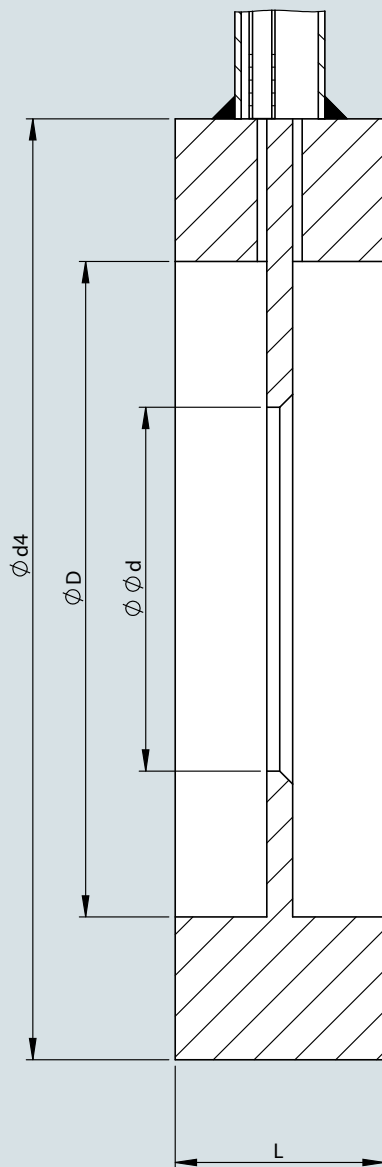

D: According to inner diameter of pipe (sizing tool)

d: According to sizing calculation

d4:

Outer diameter d4 / Sealing face: flat							
Nominal size	PN 6	PN 10	PN 16	PN 25	PN 40	PN 63	PN 100
DN 50	96	107	107	107	107	113	119
DN 65	116	127	127	127	127	138	144
DN 80	132	142	142	142	142	148	154
DN 100	152	162	162	168	168	174	180
DN 125	182	192	192	194	194	210	217
DN 150	207	218	218	224	224	247	257
DN 200	262	273	273	284	290	309	324
DN 250	317	328	329	340	352	364	391
DN 300	373	378	384	400	417	424	458
DN 350	423	438	444	457	474	486	512
DN 400	473	489	495	514	546	543	-
DN 500	578	594	617	624	628	-	-

Outer diameter d4 / Sealing face: flat			
Nominal size	Class 150	Class 300	Class 600
2"	105	111	111
2,5"	124	130	130
3"	137	149	149
4"	175	181	194
5"	197	216	241
6"	222	251	267
8"	279	308	321
10"	340	362	400
12"	410	422	457
14"	451	486	492
16"	514	540	565
20"	549	597	613

**Application**

SITRANS FP230 compact design



SITRANS FPS200 remote design

Orifice plate with annular chamber pressure tapping in carbon or stainless steel for flow measurement of gas, steam and liquid.

**Design**

Annular chamber orifice plates consist of two rings pressed together, between which the orifice plate is clamped. The pressure is measured upstream and downstream through an annular chamber. The accuracy is comparable to that of the standard orifice plate.

Orifice plates with annular chamber tappings consist of a two-piece carrier ring with annular chamber and integral tappings and an inserted orifice plate. Pressure before and after the orifice is averaged through the annular chamber. Tapping connections are integrated into each part of the carrier ring. Differential pressure connection can be compact and remote. The instruments are easy to handle and offer good accuracy with reasonable inlet and outlet runs. They are installed between regular flanges. The orifice can be disassembled to replace the inserted orifice plate.

Nominal sizes

- EN: DN 50 ... 600
- ASME: 2 ... 24 inch

Nominal pressure

- EN: PN 6 ... 64 (for steam applications maximum of PN 16 is recommended)
- ASME: class 150 ... 600 (for steam applications maximum of class 150 is recommended)

Pressure tapping

- Annular chamber: Corner tapping through annular chamber

Connection length

- Suitable for gases and liquids for a maximum of approx. 80 mm pipe insulation
- Suitable for steam for a maximum of approx. 140 mm pipe insulation

Sealing face

- According to EN 1092-1: flat (for flanges form B1 and B2)
- According to ASME B16.5: flat (for flanges RF and SF)

Overall length

- 65 mm

Material

- Carrier ring: Carbon steel / orifice plate: 316L/1.4404
- Carrier ring: 316L/1.4404 / orifice plate: 316L/1.4404

Gaskets

- Gas and liquids: Klingersil C4400
- Steam: Graphite with stainless steel inlay

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP230/FPS200 primary elements according to ISO 5167


### Orifice plate with annular chamber

**Design** (continued)

#### Tapping sockets


Gases and liquids

#### Remote design

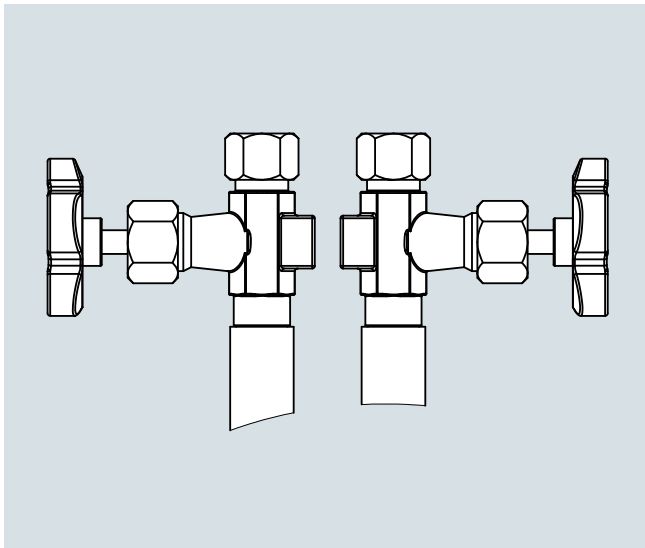


For annular chamber orifice plates in remote design, the angle  $\alpha$  between the pressure tap depends on the pressure rating and the nominal size of the flanges.

#### Compact design

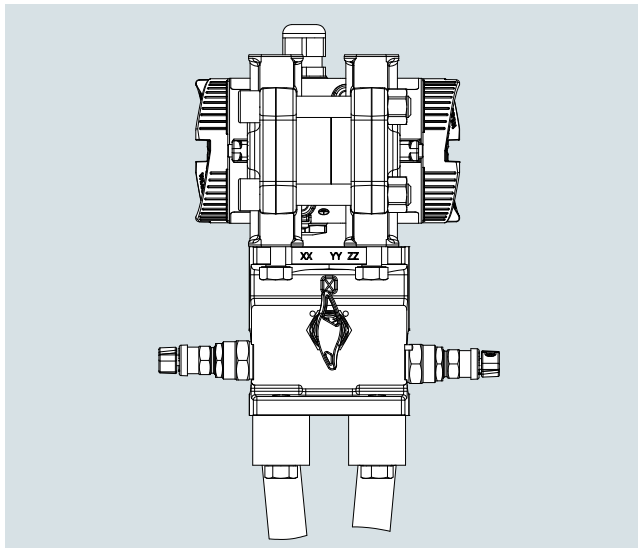


For annular chamber orifice plates in compact design, so-called oval flanges are used. The manifold and the differential pressure transmitter are mounted on these oval flanges.

#### Tap position/angle in horizontal pipe:

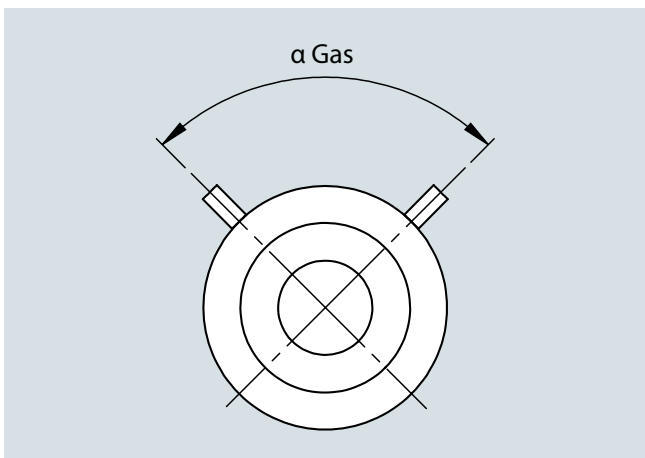

Tap position/angle in horizontal pipe (gas)

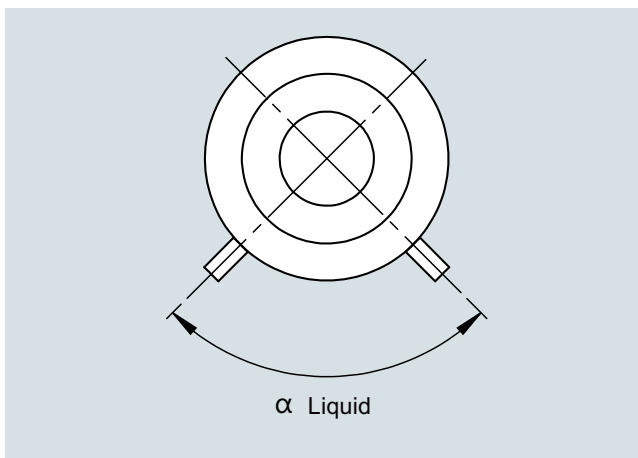

Tap position/angle in horizontal pipe (liquid)

## Design (continued)

DIN flange						
Nominal size	PN 6	PN 10	PN 16	PN 25	PN 40	PN 64
DN 50	135	135	135	135	135	135
DN 65	135	135	135 <sup>*)</sup>	90	90	90
DN 80	135	90	90	90	90	90
DN 100	135	90	90	90	90	90
DN 125	90	90	90	90	90	90
DN 150	90	90	90	90	90	90
DN 175	90	90	90	60	60	60
DN 200	90	90	60	60	60	60
DN 250	60	60	60	60	60	60
DN 300	60	60	60	45	45	45
DN 350	60	45	45	45	45	45
DN 400	45	45	45	45	45	45
DN 450	45	36	36	36	-	-
DN 500	36	36	36	36	36	36

ANSI flange			
Nominal size	Class 150	Class 300	Class 600
2"	135	90	90
2.5"	135	90	90
3"	135	90	90
4"	90	90	90
5"	90	90	90
6"	90	60	60
8"	90	60	60
10"	60	45	45
12"	60	45	36
14"	60	36	36
16"	45	36	36
18"	45	30	36
20"	36	30	30
22"	36	30	30
24"	36	30	30

\*) Fitting for DN 65 PN 16 flange with 4 holes. If design for flange with 8 holes is required, please add a comment to the corresponding project within the sizing tool.

## Flow Measurement

SITRANS FP (differential pressure flow measurement)


SITRANS FP230/FPS200 primary elements according to ISO 5167

### Orifice plate with annular chamber

#### Design (continued)


##### Wet gases

##### Remote design

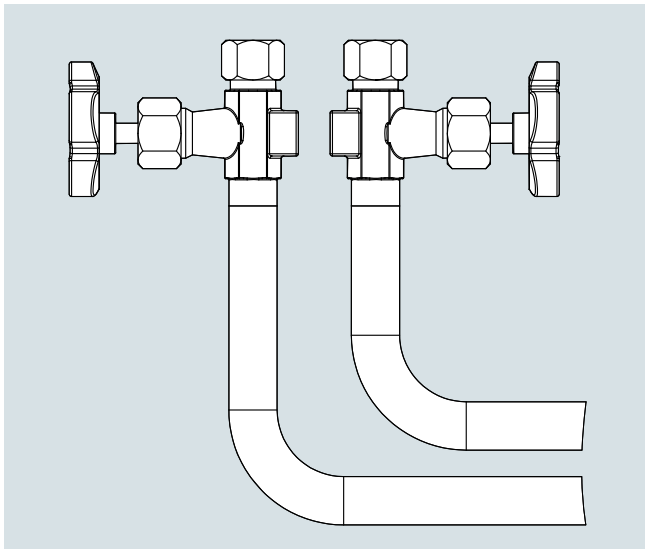

For annular chamber orifice plates in remote design for wet gases, nozzles bent at right angles with welded-on valves are used. This design is only necessary **for vertical pipes**. For horizontal pipes, the design for gases and liquids can be selected because the nozzles point up as listed in the table above.


##### Compact design

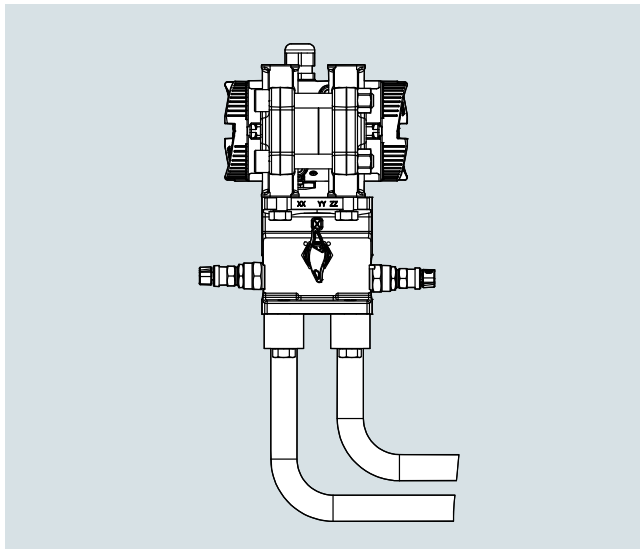

For annular chamber orifice plates in compact design for wet gases, nozzles bent at right angles with oval flanges are used. The manifold and the differential pressure transmitter are mounted on these oval flanges. This design is only necessary **for vertical pipes**. For horizontal pipes, the design for gases and liquids can be selected because the flange plate with manifold and transmitter always points up.


##### Steam

##### Remote design

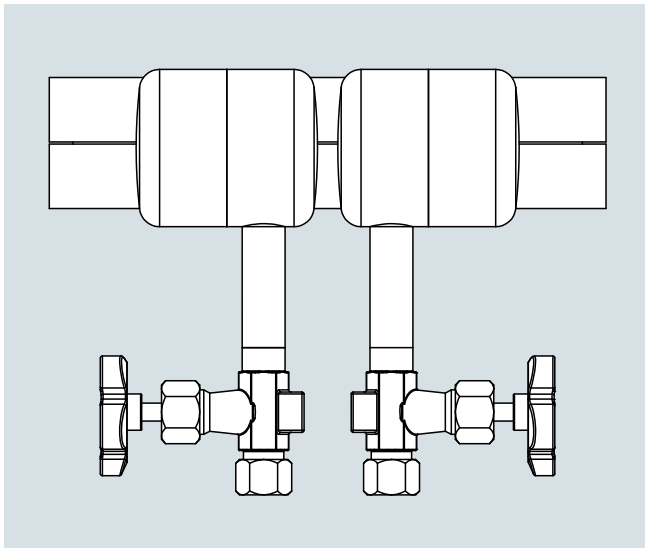

For annular chamber orifice plates in remote design for steam, the condensate vessels with shut-off valves are mounted at an angle of 0°.

##### Compact design

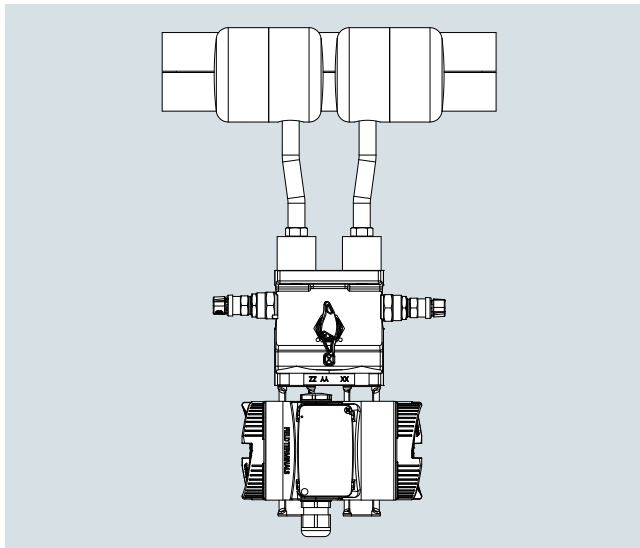



For annular chamber orifice plates in compact design for steam, the condensate vessels are mounted on one side. The manifold and the differential pressure transmitter are mounted to the condensate vessels using oval flanges. The condensate vessels are equipped with filling nozzles, which means a 3-way manifold can be used.



SITRANS FP (differential pressure flow measurement)  
SITRANS FP230/FPS200 primary elements according to ISO 5167

## Orifice plate with annular chamber

Selection and ordering data	Article No.
<b>SITRANS FP230/FPS200 orifice plate with annular chamber</b>   Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	<b>7ME172</b> - - - - - 0 - - - - -
<b>Communication</b> HART (4 ... 20 mA) Without transmitter	0 8
<b>Nominal size</b> DN 50 (2") DN 65 (2½") DN 80 (3") DN 100 (4") DN 125 (5") DN 150 (6") DN 200 (8") DN 250 (10") DN 300 (12") DN 350 (14") DN 400 (16") DN 450 (18") DN 500 (20") DN 600 (24")	1 D 1 E 1 F 2 G 2 H 2 J 2 K 2 L 2 M 2 N 2 P 2 Q 2 R 2 S
<b>Nominal pressure</b> Flange EN 1092-1 Form B1 PN 6 Flange EN 1092-1 Form B1 PN 10 Flange EN 1092-1 Form B1 PN 16 Flange EN 1092-1 Form B1 PN 25 Flange EN 1092-1 Form B1 PN 40 Flange EN 1092-1 Form B1 PN 64 Flange ASME B16.5 Class 150 Flange ASME B16.5 Class 300 Flange ASME B16.5 Class 600	A B C D E F Q R S
<b>Wetted part materials</b> Carrier ring: Carbon steel / orifice plate: 316L/1.4404 Carrier ring: 316L/1.4404 / orifice plate: 316L/1.4404	2 3
<b>System design</b> Compact design for dry gases (horizontal and vertical pipes) Compact design for liquids Compact design for wet gases (only vertical pipes) Compact design for steam Remote design for dry gases Remote design for liquids Remote design for wet gases Remote design for steam	0 1 2 3 4 5 6 7
<b>Type of protection of pressure transmitter</b> No Ex / without pressure transmitter Intrinsic safety Explosion proof Intrinsic safety, Explosion proof Dust ignition proof zone 21/22 (DIP), increased safety zone 2 Dust ignition proof zone 20/21/22 (DIP), increased safety zone 2 Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2 Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2, class division	A B C D L M S T
<b>Electrical connections/cable entries of pressure transmitter</b> Without pressure transmitter 2 x M20 x 1.5 2 x 1/2-14 NPT	A F M
<b>Local operation/display of pressure transmitter</b> Without display (closed lid) / without pressure transmitter With display (closed lid) With display (lid with glass window)	0 1 2

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP230/FPS200 primary elements according to ISO 5167

### Orifice plate with annular chamber

#### Selection and ordering data

#### Order code

##### Further designs\*

Please add "-Z" to Article No. and specify Order code(s) and plain text.

##### Certificates of primary element incl. manifolds

Inspection certificate of the primary element (EN 10204-3.1) - material of pressure-containing and wetted parts

C52

Factory certificate of the primary element (EN 10204-2.2) - wetted parts (MR 0175-2015)

C54

Dimensional record of the primary element

C55

Inspection certificate (DIN EN 571-1) - dye penetration test of weldings

C56

Hydrostatic pressure test of the primary element (EN 13480-5) of weldings

C58

Dimensional drawing 1:1 DWG of the primary element

C59

##### Maximum measuring span of pressure transmitter

20 mbar (8.037 inH<sub>2</sub>O)

I01

60 mbar (24.11 inH<sub>2</sub>O)

I02

250 mbar (100.5 inH<sub>2</sub>O)

I03

600 mbar (241.1 inH<sub>2</sub>O)

I04

1600 mbar (643 inH<sub>2</sub>O)

I05

##### Shut-off valves

With mounted shut-off valves DN8 made of carbon steel, up to 300 °C with tube fitting 12 mm

T50

With mounted shut-off valves DN8 made of stainless steel, up to 300 °C with tube fitting 12 mm

T51

With mounted shut-off valves DN8 made of carbon steel, up to 300 °C and condensate vessel made of carbon steel with tube fitting 12 mm

T56

With mounted shut-off valves DN8 made of stainless steel, and condensate vessel made of stainless steel with tube fitting 12 mm

T57

##### Valve manifolds for mounting on primary element

With mounted manifold (3-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws

U40

With mounted manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws

U41

With mounted manifold (5-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws

U42

With mounted manifold (5-fold) made of stainless steel, PTFE sealings, stainless steel screws

U43

With mounted manifold (5-fold) made of carbon steel, up to 300 °C cadmium-plated steel screws and condensate vessel made of carbon steel

U46

With mounted manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws and condensation vessels incl. filling union 1/2" NPT made of stainless steel

U47

With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm

U50

With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm

U51

With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm

U52

With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm

U53

With enclosed manifold (5-fold) made of carbon steel, up to 300 °C cadmium-plated steel screws with tube fitting 12 mm

U56


##### Application data

ID number of the primary element according to sizing tool

Y40

#### Scope of delivery

- Annular chamber consisting of two pieces, each with integrated pressure tapping
- Orifice plate mounted in annular chamber
- Gasket for annular chamber
- Condensation pots for steam applications
- Shut-off valves for remote design (options T5x selected in PIA)
- Manifold for compact/remote design (options U4x, U5x selected in PIA)

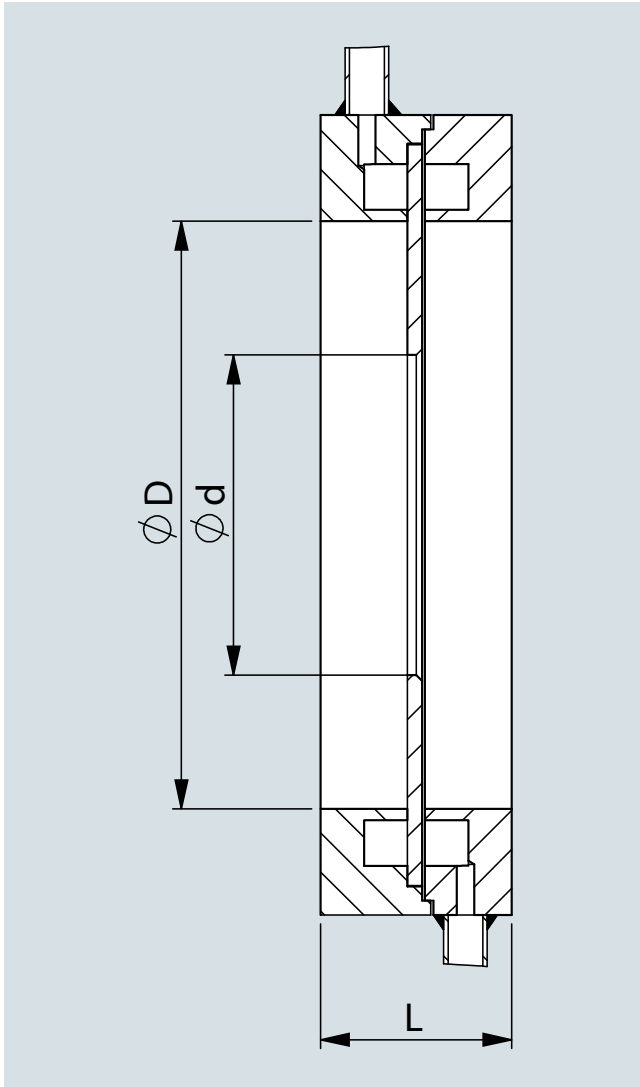**Dimensional drawings**

D: According to inner diameter of pipe (sizing tool)

d: According to sizing calculation

L: See overall length above

d4:

Outer diameter d4 / Sealing face: flat							
Nominal size	PN 6	PN 10	PN 16	PN 25	PN 40	PN 63	PN 100
DN 50	96	107	107	107	107	113	119
DN 65	116	127	127	127	127	138	144
DN 80	132	142	142	142	142	148	154
DN 100	152	162	162	168	168	174	180
DN 125	182	192	192	194	194	210	217
DN 150	207	218	218	224	224	247	257
DN 200	262	273	273	284	290	309	324
DN 250	317	328	329	340	352	364	391
DN 300	373	378	384	400	417	424	458
DN 350	423	438	444	457	474	486	512
DN 400	473	489	495	514	546	543	-
DN 500	578	594	617	624	628	-	-

Outer diameter d4 / Sealing face: flat			
Nominal size	Class 150	Class 300	Class 600
2"	105	111	111
2,5"	124	130	130
3"	137	149	149
4"	175	181	194
5"	197	216	241
6"	222	251	267
8"	279	308	321
10"	340	362	400
12"	410	422	457
14"	451	486	492
16"	514	540	565
20"	549	597	613


## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP230/FPS200 primary elements according to ISO 5167

### Orifice meter run

#### Application

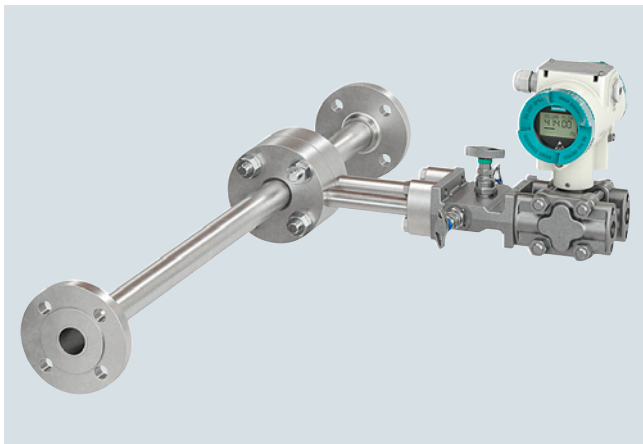

SITRANS FP230 compact design



SITRANS FPS200 remote design

Orifice meter run with flanges ends in carbon or stainless steel for flow measurement of gas, steam and liquid.

#### Design

Orifice meter runs for small diameter pipes come with partial straight inlet and outlet pipe runs with flanged ends. The pipes are connected to an annular chamber where the orifice plate is mounted. The annular chamber consists of a two-piece carrier ring with annular chamber and integral tappings and an inserted orifice plate.

Pressure before and after the orifice is averaged through the annular chamber. Tapping connections are integrated into each part of the carrier ring. Differential pressure connection can be compact and remote. The instruments are easy to install in the pipe system. Additional straight pipe length may be required before and after the orifice meter run. The orifice can be disassembled to replace the inserted orifice plate.

##### Nominal sizes

- EN: DN 10 ... 50
- ASME: 3/8 ... 2 inch

##### Nominal pressure

- EN: PN 6 ... 64
- ASME: class 150 ... 600

##### Pressure tapping

- Annular chamber: Corner tapping through annular chamber

##### Connection length

- Suitable for gases for a maximum of approx. 80 mm pipe insulation
- Suitable for steam for a maximum of approx. 140 mm pipe insulation

##### Sealing face

- According to EN 1092-1: flat (for flanges form B1 and B2)
- According to ASME B16.5: flat (for flanges RF and SF)

##### Overall length

- See table below

##### Material

- Pipe/Flanges: Carbon steel / orifice plate: 316L/1.4404
- Pipe/Flanges: 316L/1.4404 / orifice plate: 316L/1.4404

##### Gaskets


- Gas and liquids: Klingersil C4400
- Steam: Graphite with stainless steel inlay

**Design (continued)**

**Tapping sockets**


Gases and liquids

**Remote design**

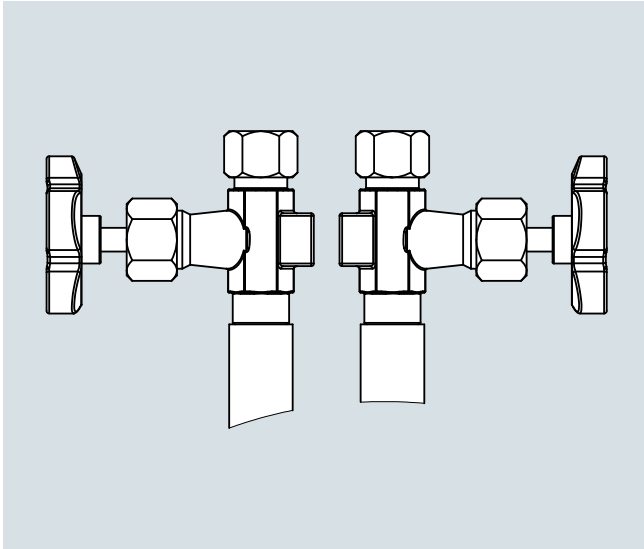


For metering pipes in remote design, the angle  $\alpha$  between the pressure taps is 135°.

**Compact design**

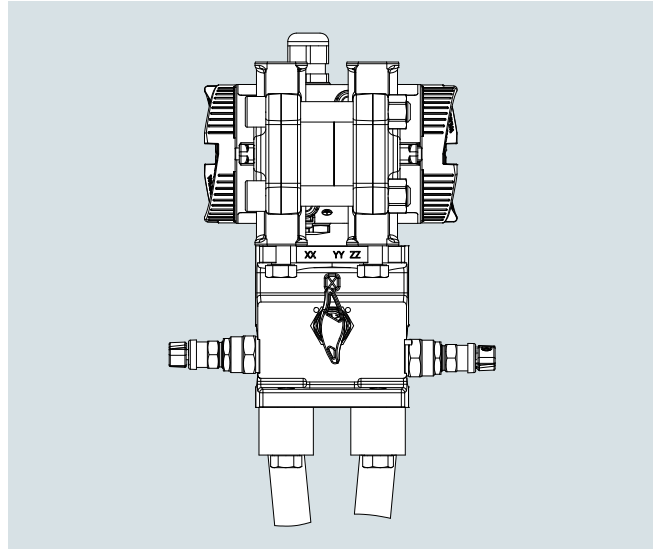


For metering pipes in compact design, so-called oval flanges are used. The manifold and the differential pressure transmitter are mounted on these oval flanges.

**Tap position/angle in horizontal pipe:**

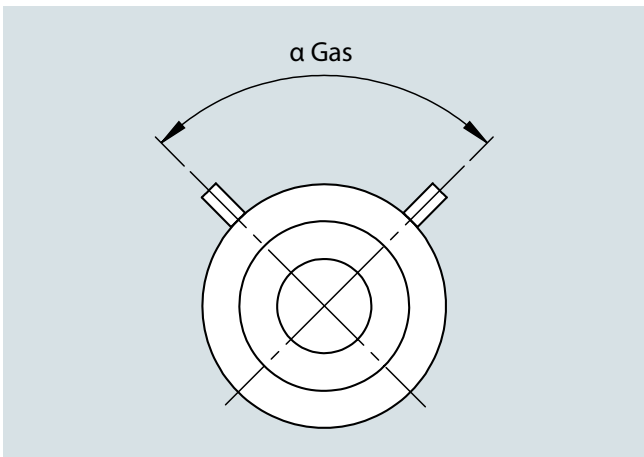

Tap position/angle in horizontal pipe (gas)

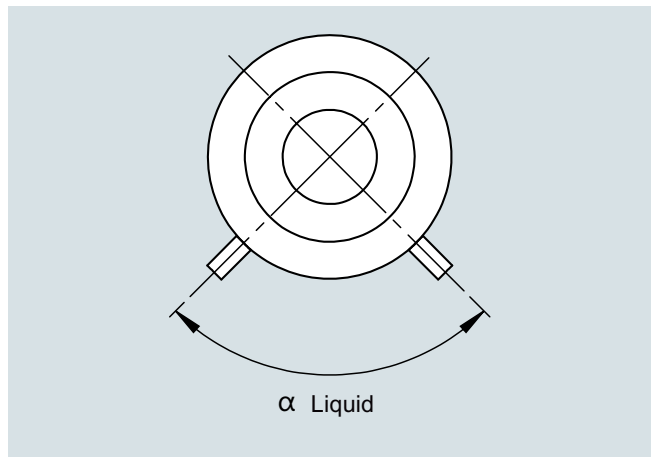

Tap position/angle in horizontal pipe (liquid)

## Flow Measurement

SITRANS FP (differential pressure flow measurement)


SITRANS FP230/FPS200 primary elements according to ISO 5167

### Orifice meter run

#### Design (continued)


##### Wet gases

#### Remote design

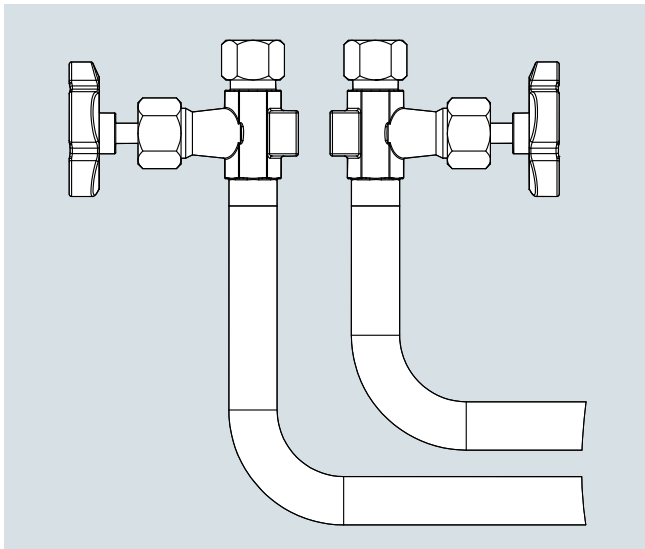

For metering pipes in remote design for wet gases, nozzles bent at right angles with welded-on valves are used. This design is only necessary for vertical pipes. For horizontal pipes, the design for gases and liquids can be selected because the nozzles point up as listed in the table above.


#### Compact design

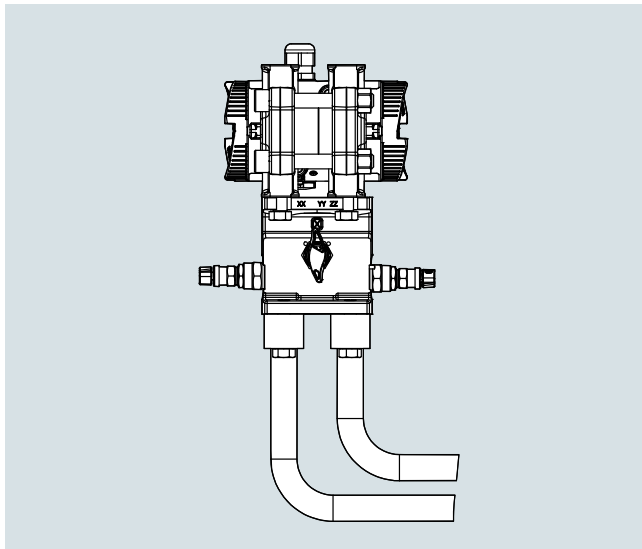

For metering pipes in compact design for wet gases, nozzles bent at right angles with oval flanges are used. The manifold and the differential pressure transmitter are mounted on these oval flanges. This design is only necessary for vertical pipes. For horizontal pipes, the design for gases and liquids can be selected because the flange plate with manifold and transmitter always points up.


##### Steam

#### Remote design

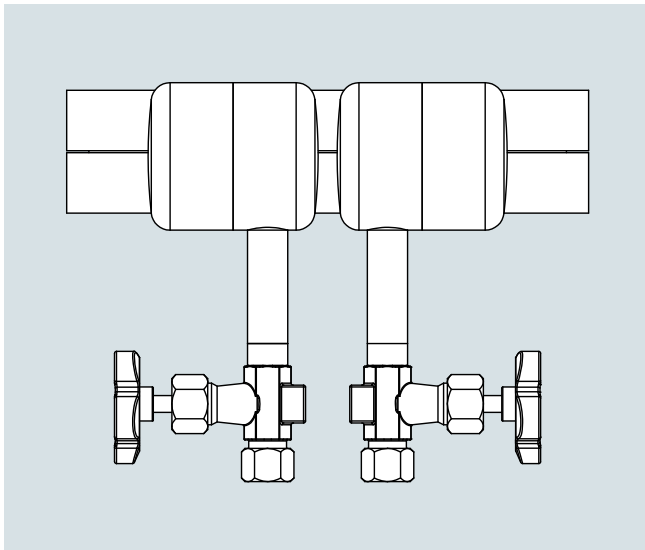

For metering pipes in remote design for steam, the condensate vessels with shut-off valves are mounted at an angle of 180°.

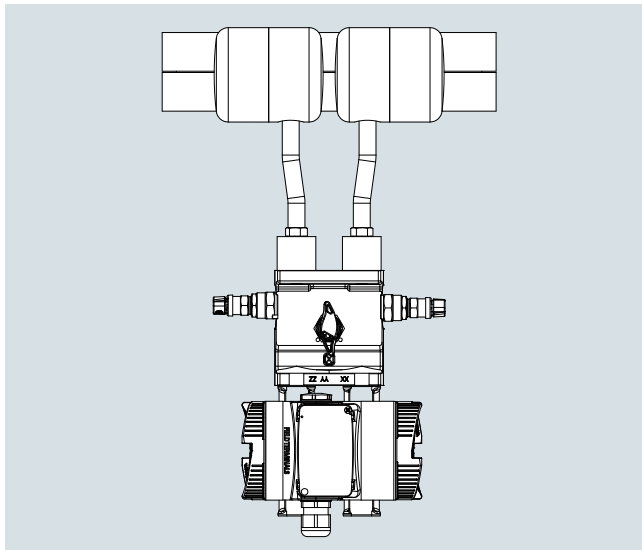

#### Compact design



For metering pipes in compact design for steam, the condensate vessels are mounted on one side. The manifold and the differential pressure transmitter are mounted to the condensate vessels using oval flanges. The condensate vessels are equipped with filling nozzles, which means a 3-way manifold can be used.

SITRANS FP (differential pressure flow measurement)  
SITRANS FP230/FPS200 primary elements according to ISO 5167

Orifice meter run

Selection and ordering data	Article No.									
<b>SITRANS FP230/FPS200 orifice meter run</b>   Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	7ME173	-				0	-			
<b>Communication</b> HARTHART (4 ... 20 mA) Without transmitter	0	8								
<b>Nominal size</b> DN 10 (3/8") DN 15 (1/2") DN 20 (3/4") DN 25 (1") DN 32 (1 1/4") DN 40 (1 1/2") DN 50 (2")	0	A	0	B	0	C	0	D	0	E
<b>Nominal pressure</b> Flange EN 1092-1 Form B1 PN 6 Flange EN 1092-1 Form B1 PN 10 Flange EN 1092-1 Form B1 PN 16 Flange EN 1092-1 Form B1 PN 25 Flange EN 1092-1 Form B1 PN 40 Flange EN 1092-1 Form B1 PN 64 Flange ASME B16.5 Class 150 Flange ASME B16.5 Class 300 Flange ASME B16.5 Class 600									A	B
<b>Wetted parts material</b> Pipe/Flanges: Carbon steel / orifice plate: 316L/1.4404 Pipe/Flanges: 316L/1.4404 / orifice plate: 316L/1.4404									4	5
<b>System design</b> Compact design for dry gases (horizontal and vertical pipes) Compact design for liquids Compact design for wet gases (only vertical pipes) Compact design for steam Remote design for dry gases Remote design for liquids Remote design for wet gases Remote design for steam									0	1
<b>Type of protection of pressure transmitter</b> No Ex / without pressure transmitter Intrinsic safety Explosion proof Intrinsic safety, Explosion proof Dust ignition proof zone 21/22 (DIP), increased safety zone 2 Dust ignition proof zone 20/21/22 (DIP), increased safety zone 2 Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2 Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2, class division									A	B
<b>Electrical connections/cable entries of pressure transmitter</b> Without pressure transmitter 2 x M20 x 1.5 2 x 1/2-14 NPT									A	F
<b>Local operation/display of pressure transmitter</b> Without display (closed lid) / without pressure transmitter With display (closed lid) With display (lid with glass window)									0	1
									2	

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP230/FPS200 primary elements according to ISO 5167

### Orifice meter run

#### Selection and ordering data

#### Order code

##### Further designs\*

Please add "-Z" to Article No. and specify Order code(s) and plain text.

##### Certificates of primary element incl. manifolds

Inspection certificate of the primary element (EN 10204-3.1) - material of pressure-containing and wetted parts **C52**

Factory certificate of the primary element (EN 10204-2.2) - wetted parts (MR 0175-2015) **C54**

Dimensional record of the primary element **C55**

Inspection certificate (DIN EN 571-1) - dye penetration test of weldings **C56**

Hydrostatic pressure test of the primary element (EN 13480-5) of weldings **C58**

Dimensional drawing 1:1 DWG of the primary element **C59**

##### Maximum measuring span of pressure transmitter

20 mbar (8.037 inH<sub>2</sub>O) **I01**

60 mbar (24.11 inH<sub>2</sub>O) **I02**

250 mbar (100.5 inH<sub>2</sub>O) **I03**

600 mbar (241.1 inH<sub>2</sub>O) **I04**

1600 mbar (643 inH<sub>2</sub>O) **I05**

##### Shut-off valves

With mounted shut-off valves DN8 made of carbon steel, up to 300 °C with tube fitting 12 mm **T50**

With mounted shut-off valves DN8 made of stainless steel, up to 300 °C with tube fitting 12 mm **T51**

With mounted shut-off valves DN8 made of carbon steel, up to 300 °C and condensate vessel made of carbon steel with tube fitting 12 mm **T56**

With mounted shut-off valves DN8 made of stainless steel, and condensate vessel made of stainless steel with tube fitting 12 mm **T57**

##### Valve manifolds for mounting on primary element

With mounted manifold (3-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws **U40**

With mounted manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws **U41**

With mounted manifold (5-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws **U42**

With mounted manifold (5-fold) made of stainless steel, PTFE sealings, stainless steel screws **U43**

With mounted manifold (5-fold) made of carbon steel, up to 300 °C cadmium-plated steel screws and condensate vessel made of carbon steel **U46**

With mounted manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws and condensation vessels incl. filling union 1/2" NPT made of stainless steel **U47**

With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm **U50**

With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm **U51**

With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm **U52**

With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm **U53**

With enclosed manifold (5-fold) made of carbon steel, up to 300 °C cadmium-plated steel screws with tube fitting 12 mm **U56**

##### Application data


ID number of the primary element according to sizing tool **Y40**

#### Scope of delivery

- Orifice meter run consisting of 2 parts, each with flanged ends, pipe, and annular chamber with integrated pressure tapping
- Orifice plate mounted in annular chamber
- Gasket for annular chamber
- Screws and nuts for annular chamber
- Condensation pots for steam applications
- Shut-off valves for remote design (options T5x selected in PIA)
- Manifold for compact/remote design (options U4x, U5x selected in PIA)



## Dimensional drawings

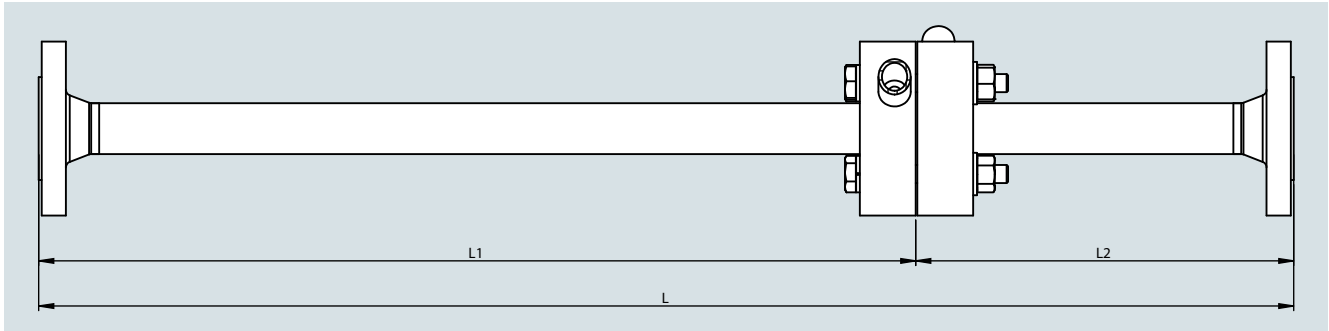

## Overall length

Nominal size	DN 10	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50
	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
L	400	550	700	900	1100	1300	1500
L1	230	380	500	650	800	1000	1200
L2	170	170	200	250	300	300	300

## Pipe dimensions

Carbon steel							
Nominal size	PN 16	PN 40	PN 63	Nominal size	Class 150	Class 300	Class 600
DN 10	21.3 × 6.3	21.3 × 6,3	21.3 × 6,3	3/8"	21.3 × 7.47 <sup>1)</sup>	21.3 × 7.47 <sup>1)</sup>	21.3 × 7.47 <sup>1)</sup>
DN 15	21.3 × 2.6	21.3 × 2.6	21.3 × 2.6	1/2"	21.3 × 3.73	21.3 × 3.73	21.3 × 3.73
DN 20	26.9 × 2.6	26.9 × 2.6	26.9 × 2.6	3/4"	26.7 × 2.87	26.7 × 2.87	26,7 × 2.87
DN 25	33.7 × 2.6	33,7 × 2.6	33,7 × 2.6	1"	33.4 × 3.38	33.4 × 3.38	33.4 × 3.38
DN 32	42.4 × 2.6	42.4 × 2.6	n/a	1 1/4"	42.2 × 3.56	42.2 × 3.56	42.2 × 3.56
DN 40	48.3 × 2.6	48.3 × 2.6	48.3 × 2.9	1 1/2"	48.3 × 3.68	48.3 × 3.68	48.3 × 3.68
DN 50	60.3 × 2.9	60.3 × 2.9	60.3 × 3.6	2"	60.3 × 3.91	60.3 × 3.91	60.3 × 3.91

Stainless steel							
Nominal size	PN 16	PN 40	PN 63	Nominal size	Class 150	Class 300	Class 600
DN 10	21.3 × 7.47	21.3 × 7.47	21.3 × 7.47	3/8"	21.3 × 2.77 <sup>1)</sup>	21.3 × 2.77 <sup>1)</sup>	21.3 × 2.77 <sup>1)</sup>
DN 15	21.3 × 2.77	21.3 × 2.77	21.3 × 3.73	1/2"	21.3 × 2.77	21.3 × 2.77	21.3 × 2.77
DN 20	26.7 × 2.87	26.7 × 2.87	26.7 × 3.91	3/4"	26.7 × 2.87	26.7 × 2.87	26.7 × 2.87
DN 25	33.4 × 3.38	33.4 × 3.38	33.4 × 3.38	1"	33.4 × 3.38	33.4 × 3.38	33.4 × 3.38
DN 32	42.2 × 3.56	42.2 × 3.56	n/a	1 1/4"	42.2 × 3.56	42.2 × 3.56	42.2 × 3.56
DN 40	48.3 × 2.77	48.3 × 2.77	48.3 × 3.68	1 1/2"	48.3 × 3.68	48.3 × 3.68	48.3 × 3.68
DN 50	60.3 × 3.91	60.3 × 3.91	60.3 × 3.91	2"	60.3 × 3.91	60.3 × 3.91	60.3 × 3.91

<sup>1)</sup> Orifice meter runs with 3/8" diameter will be built with 1/2" flanges.

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP230/FPS200 primary elements according to ISO 5167

### Orifice plate

#### Application



SITRANS FPS200 remote design

Orifice plate for installation between flanges in stainless steel for flow measurement of gas, steam and liquid.

#### Design

Orifice plates for the installation with flange tappings consist of the orifice plate with a welded-on marking and grip plate. The plates have no pressure tappings and are therefore normally mounted between measuring flanges containing the pressure tappings.

##### Pressure tapping



- Not included

##### Sealing face

- According to EN 1092-1: flat (for flanges form B1 and B2)
- According to ASME B16.5: flat (for flanges RF and SF)

##### Material

- 316L/1.4404

Selection and ordering data	Article No.									
<b>SITRANS FP230/FPS200 insertion orifice plate</b>   Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	7ME174	-	-	-	-	0	-	-	-	-
<b>Communication</b> HART (4 ... 20 mA) Without transmitter		0								
<b>Nominal size</b> DN 50 (2") DN 65 (2½") DN 80 (3") DN 100 (4") DN 125 (5") DN 150 (6") DN 200 (8") DN 250 (10") DN 300 (12") DN 350 (14") DN 400 (16") DN 450 (18") DN 500 (20") DN 600 (24")			1	D						
<b>Nominal pressure</b> Flange EN 1092-1 Form B1 PN 6 Flange EN 1092-1 Form B1 PN 10 Flange EN 1092-1 Form B1 PN 16 Flange EN 1092-1 Form B1 PN 25 Flange EN 1092-1 Form B1 PN 40 Flange EN 1092-1 Form B1 PN 64 Flange EN 1092-1 Form B1 PN 100 Flange ASME B16.5 Class 150 Flange ASME B16.5 Class 300 Flange ASME B16.5 Class 600								A	B	C
<b>Wetted parts material</b> Orifice plate: 316L/1.4404							6			
<b>System design</b> Without connection for pressure lines									8	
<b>Type of protection of pressure transmitter</b> No Ex / without pressure transmitter Intrinsic safety Explosion proof Intrinsic safety, Explosion proof Dust ignition proof zone 21/22 (DIP), increased safety zone 2 Dust ignition proof zone 20/21/22 (DIP), increased safety zone 2 Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2 Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2, class division									A	B
<b>Electrical connections/cable entries of pressure transmitter</b> Without pressure transmitter 2 x M20 x 1.5 2 x 1/2-14 NPT										A
<b>Local operation/display of pressure transmitter</b> Without display (closed lid) / without pressure transmitter With display (closed lid) With display (lid with glass window)										0
										1
										2

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP230/FPS200 primary elements according to ISO 5167

### Orifice plate

#### Selection and ordering data

#### Order code

##### Further designs\*

Please add "-Z" to Article No. and specify Order code(s) and plain text.

##### Certificates of primary element incl. manifolds

Inspection certificate of the primary element (EN 10204-3.1) - material of pressure-containing and wetted parts **C52**

Factory certificate of the primary element (EN 10204-2.2) - wetted parts (MR 0175-2015) **C54**

Dimensional record of the primary element **C55**

Dimensional drawing 1:1 DWG of the primary element **C59**

##### Maximum measuring span of pressure transmitter

20 mbar (8.037 inH<sub>2</sub>O) **I01**

60 mbar (24.11 inH<sub>2</sub>O) **I02**

250 mbar (100.5 inH<sub>2</sub>O) **I03**

600 mbar (241.1 inH<sub>2</sub>O) **I04**

1600 mbar (643 inH<sub>2</sub>O) **I05**

##### Valve manifolds for mounting on primary element

With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm **U50**

With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm **U51**

With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm **U52**

With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm **U53**

##### Application data


ID number of the primary element according to sizing tool **Y40**

\* For further options, please refer to SITRANS P320.

##### Scope of delivery

- Orifice plate
- Manifold for compact/remote design (options U4x, U5x selected in PIA)

#### Dimensional drawings

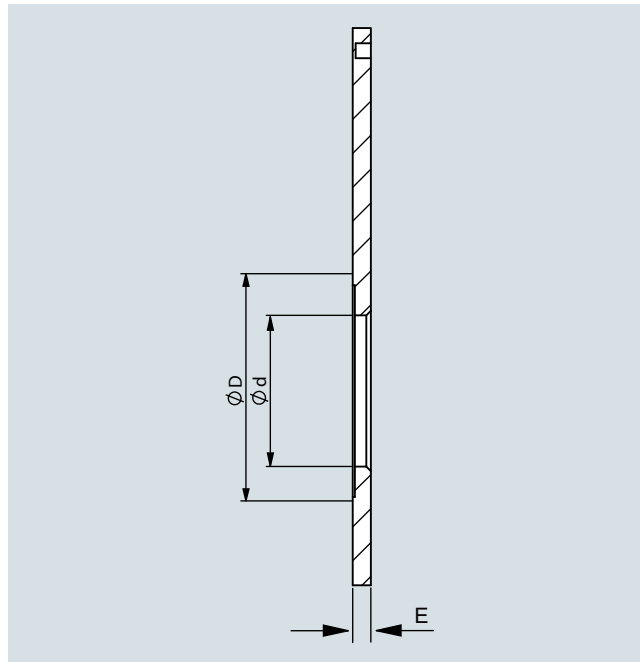

#### Nominal size of orifice plate

##### DIN/EN

Nominal size, up to	
DN	50 65 80 100 125 150 175 200 250 300 350 400 450 500 600
mm	3 3 4 4 4 4 4 4 4 4 4 4 4 6 6

##### ASME

Nominal size, up to	
DN	2" 2.5" 3" 4" 5" 6" 7" 8" 10" 12" 14" 16" 18" 20" 22" 24"
mm	3 3 3 3 3 3 6 6 6 6 6 10 10 10 12 12


<sup>1)</sup> Not standardized in DIN standard.

Up to DN 50 adjusted for general practice. Nominal size designed for a differential pressure of up to 1000 mbar.

SITRANS FP (differential pressure flow measurement)  
SITRANS FP230/FPS200 primary elements according to ISO 5167

Orifice plate with orifice flange according to ASME B16.36

### Application

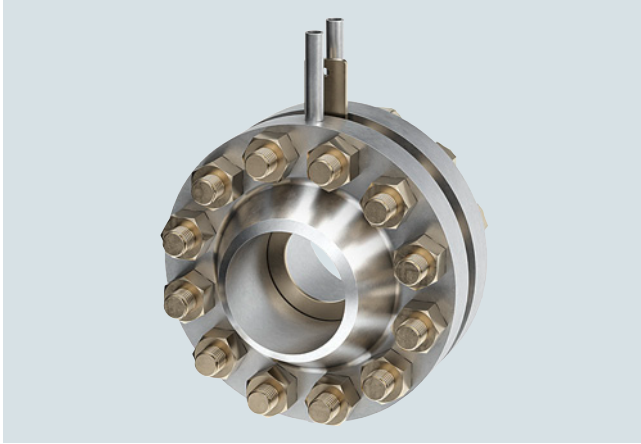

SITRANS FPS200 remote design

Orifice flange pair according to ASME B36.16 with orifice plate in carbon steel (flanges) or stainless steel for flow measurement of gas and liquid.

### Design

The orifice plate is mounted between traditional orifice flanges according to ASME B16.36. The orifice flanges are manufactured with integral pressure tapplings. System design is always remote. The orifice plate can be exchanged. The flanges have to be welded into the pipe.

- Design of orifice plate, see Orifice plates

#### Differential pressure tapping

- In the flange: Differential pressure tapping in special measuring flanges with integrated connectors in the flange, always remote

#### Tapping sockets

- 0°

#### Connection length

- For gases and liquids suitable for up to approx. 80 mm pipe insulation

#### Sealing face

- According to ASME B16.5: flat

#### Materials

- Flange carbon steel, plate 316L
- Flange and plate 316L

#### Gaskets

- Spiral graphite

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP230/FPS200 primary elements according to ISO 5167

Orifice plate with orifice flange according to ASME B16.36

### Selection and ordering data

### Article No.

#### Selection and Ordering data



7ME175

- - - - - 0 - - - - -

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Communication

HART (4 ... 20 mA)

Without transmitter

0

8

#### Nominal size

DN 50 (2")

DN 65 (2½")

DN 80 (3")

DN 100 (4")

DN 125 (5")

DN 150 (6")

DN 200 (8")

DN 250 (10")

DN 300 (12")

DN 350 (14")

DN 400 (16")

DN 450 (18")

DN 500 (20")

DN 600 (24")

1 D

1 E

1 F

2 G

2 H

2 J

2 K

2 L

2 M

2 N

2 P

2 Q

2 R

2 S

#### Nominal pressure

Flange ASME B16.5 Class 300

Flange ASME B16.5 Class 600

R

S

#### Wetted parts material

Flanges: Carbon steel / orifice plate: 316L/1.4404

Flanges: 316L/1.4404 / orifice plate: 316L/1.4404

7

8

#### System design

Remote design for dry gases

Remote design for liquids

Remote design for wet gases

4

5

6

#### Type of protection of pressure transmitter

No Ex / without pressure transmitter

Intrinsic safety

Explosion proof

Intrinsic safety, Explosion proof

Dust ignition proof zone 21/22 (DIP), increased safety zone 2

Dust ignition proof zone 20/21/22 (DIP), increased safety zone 2

Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2

Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2, class division

A

B

C

D

L

M

S

T

#### Electrical connections/cable entries of pressure transmitter

Without pressure transmitter

2 x M20 x 1.5

2 x 1/2-14 NPT

A

F

M

#### Local operation/display of pressure transmitter

Without display (closed lid) / without pressure transmitter

With display (closed lid)

With display (lid with glass window)

0

1

2

Selection and ordering data	Order code
<b>Further designs*</b>	
Please add "-Z" to Article No. and specify Order code(s) and plain text.	
<b>Certificates of primary element incl. manifolds</b>	
Inspection certificate of the primary element (EN 10204-3.1) - material of pressure-containing and wetted parts	<b>C52</b>
Factory certificate of the primary element (EN 10204-2.2) - wetted parts (MR 0175-2015)	<b>C54</b>
Dimensional record of the primary element	<b>C55</b>
Dimensional drawing 1:1 DWG of the primary element	<b>C59</b>
<b>Maximum measuring span of pressure transmitter</b>	
20 mbar (8.037 inH <sub>2</sub> O)	<b>I01</b>
60 mbar (24.11 inH <sub>2</sub> O)	<b>I02</b>
250 mbar (100.5 inH <sub>2</sub> O)	<b>I03</b>
600 mbar (241.1 inH <sub>2</sub> O)	<b>I04</b>
1600 mbar (643 inH <sub>2</sub> O)	<b>I05</b>
<b>Shut-off valves</b>	
With mounted shut-off valves DN8 made of carbon steel, up to 300 °C with tube fitting 12 mm	<b>T50</b>
With mounted shut-off valves DN8 made of stainless steel, up to 300 °C with tube fitting 12 mm	<b>T51</b>
<b>Valve manifolds for mounting on primary element</b>	
With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm	<b>U50</b>
With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm	<b>U51</b>
With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm	<b>U52</b>
With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm	<b>U53</b>
<b>Application data</b>	
ID number of the primary element according to sizing tool	<b>Y40</b>

\* For further options, please refer to SITRANS P320.

#### Scope of delivery

- Orifice plate
- Orifice flanges according to ASME B16.36 with pressure tapings
- 2x Gaskets for orifice flanges
- Screws and nuts
- Shut-off valves for remote design (options T5x selected in PIA)
- Manifold for compact/remote design (options U4x, U5x selected in PIA)

## Flow Measurement


SITRANS FP (differential pressure flow measurement)

SITRANS FP230/FPS200 primary elements according to ISO 5167

Orifice plate with orifice flange according to ASME B16.36

### Dimensional drawings

#### Overall length

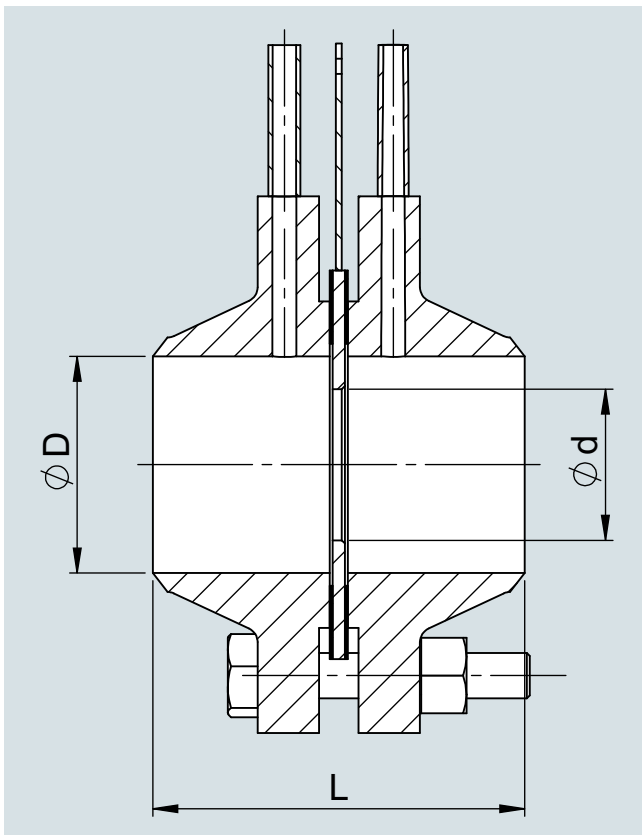

DN/Inch	PN/lbs	L	Hex nut bolt	Bolts (pcs.)	Gasket
24	600	433.10	1 7/8	24	2.0
20	600	407.70	1 5/8	24	2.0
18	600	395.00	1 5/8	20	2.0
16	600	382.30	1 1/2	20	2.0
14	600	352.90	1 3/8	20	2.0
12	600	333.60	1 1/4	20	2.0
10	600	327.50	1 1/4	16	2.0
8	600	286.40	1 1/8	12	2.0
6	600	254.40	1	12	2.0
4	600	222.90	7/8	8	2.0
3	600	184.80	3/4	8	2.0
2 1/2	600	184.80	3/4	8	2.0
2	600	178.70	5/8	8	2.0
24	300	350.30	1 1/2	24	2.0
20	300	338.10	1 1/4	24	2.0
18	300	331.50	1 1/4	24	2.0
16	300	306.10	1 1/4	20	2.0
14	300	295.50	1 1/8	20	2.0
12	300	270.10	1 1/8	16	2.0
10	300	244.70	1	16	2.0
8	300	229.50	7/8	12	2.0
6	300	207.16	3/4	12	2.0
4	300	190.90	3/4	8	2.0
3	300	184.80	3/4	8	2.0
2 1/2	300	184.80	3/4	8	2.0
2	300	178.70	5/8	4	2.0

#### Nominal size of orifice plate

##### DIN/EN

Nominal size, up to															
DN	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
mm	3	3	4	4	4	4	4	4	4	4	4	4	4	6	6

##### ASME

Nominal size, up to																
DN	2"	2.5"	3"	4"	5"	6"	7"	8"	10"	12"	14"	16"	18"	20"	22"	24"
mm	3	3	3	3	3	3	6	6	6	6	6	10	10	10	12	12

Nominal size designed for a differential pressure of up to 1 000 mbar.

The specified dimensions are approximate dimensions, exact dimensions depend on the gasket used.



## Overview



Due to the robust technology and the simple principle of measurement, averaging pitot tubes can be used in many different ways even under difficult conditions and offer considerable advantages over other measuring technology from easy installation to long-term measuring stability.

Further special advantages are the possibilities of bidirectional flow measurement as well as the integration of temperature and pressure measurement.

## Benefits

- Easy to retrofit (no rebuilding of the pipe)
- Easy to install
- Good for large nominal sizes
- Wide range of application (media, nominal sizes, process conditions)
- Minor measurement inaccuracy
- Special designs possible for special applications
- Also work in rectangular ducts and pipes

## Application

- Technical Gases
- Compressed Air
- Exhaust Air
- Fresh and Combustion Air
- Heat Transfer Fluids
- Water
- Exhaust Gas
- Steam/Heat Quantities

## Design

### Basics: Averaging pitot tubes for flow measurement

- Mounting by insertion into the pipe (no flange-to-flange instrument)
- Differential pressure generation through forced flow
- Variation of the classic "pitot tube" through multiple metering orifices (so-called "averaging pitot tube")
- Design follows manufacturer guidelines, not standardized

### Designs

- Averaging Pitot Tube for gas and liquids (7ME161)
- Averaging Pitot Tube for steam (7ME162)
- Averaging Pitot Tube with FASTLOK (7ME163), to remove sensor during operation without interruption of process

## System design

- Compact design for dry gases and liquids without integrated temperature measurement
- Compact design for wet gases with or without integrated temperature measurement as well as for dry gases and liquids with integrated temperature measurement
- Compact design for steam with or without integrated temperature measurement
- Remote design for dry or wet gases, liquids and steam

## Function

### Design of the averaging pitot tube

Similar to other differential pressure devices averaging pitot tubes create a differential pressure to measure flow. They are not specified in the general standard ISO 5167, but they follow the same technical principle. In contrast to the classic differential pressure sensors, averaging pitot tube sensors are not "inline" devices but consist of a "profile" that is inserted into the side of the pipeline.

Differential pressure is created when fluid flows around the profile of the averaging pitot tube. Since the constriction of the pipeline by the profile in relation to the cross-sectional area is much smaller than, for example, with an orifice plate, the created differential pressure and the respective permanent pressure drop are smaller.

The flow comes to a complete stop at the upstream side of the averaging pitot tube creating the upstream pressure. At the downstream side a negative pressure is created by the so-called Kármán vortex street. The differential pressure (difference between upstream pressure and negative pressure) is the measurement signal and is proportional to the flow rate. This results in the following basic formula for flow measurement with averaging pitot tubes:  $q_m = A \cdot k \cdot \sqrt{2 \cdot \Delta p \cdot \rho}$


$q_m$ : mass flow

$A$ : cross-sectional area of the pipe

$k$ : device factor of the pitot tube

$\Delta p$ : differential pressure

$\rho$ : density

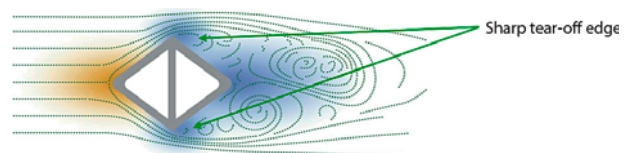

The k-factor is the device factor of the averaging pitot tube and is determined, among other things, by the shape of the profile of the pitot tube. Thanks to the sharp-edged shape of the profile, it remains constant over a very wide Reynolds number range and enables linear flow measurement.

The averaging pitot tube features the same number of measuring openings on the front and back. The special distribution of the measuring openings over the cross section allows geometric averaging in case of uneven flow distribution and thus an accurate measurement even with very short inlet and outlet distances. The generated upstream and downstream pressures are averaged in the respective chambers and routed to the differential pressure transmitter.

## Flow Measurement

### SITRANS FP (differential pressure flow measurement)

#### SITRANS FP330/FPS300 averaging pitot tube

#### Technical specifications

##### General design

Working principle	Multi-port averaging pitot tube for round and rectangular pipes
Media	<ul style="list-style-type: none"> <li>• Steam (saturated, superheated)</li> <li>• Gas (dry, up to 100% water saturated) (automatic purging unit for high dust applications on request)</li> <li>• Liquids (water, non-conductive liquids, oil, etc.)</li> </ul>
Transmitter installation	<ul style="list-style-type: none"> <li>• Compact mount with differential pressure transmitter</li> <li>• Remote mounted differential pressure transmitter</li> </ul>
Bidirectional flow	Yes (symmetric sensor design)
Calculation	According to manufacturer standard

##### Accuracy

Linearity (of Sensor k-Factor)	Re > 20.000: 1%
Repeatability (of Sensor k-Factor)	Re > 20.000: 0,1%
Measurement range	Typically, up to 1:10 (real measurement range depends on transmitter performance)

##### Operating Conditions

Pressure	Flange: Max. PN 100 Cutting Ring: Max. PN 40 (max. 180 °C) FASTLOK: Max. PN 16 (max. 180 °C) (Higher pressure ratings on request)
Temperature	Stainless Steel sensor: -100 ... 500 °C 16Mo3: -20 ... 530 °C Hastelloy: -20 ... 700 °C (exact maximum temperature depends on sensor design, feasibility will be calculated by sizing tool)
Pressure loss	generally, <10 % of differential pressure

##### Installation conditions

Straight inlet diameter	7x Inner diameter behind 90 ° elbow
Straight outlet diameter	3x Inner diameter (for detailed calculation of recommended installation pipe length please refer to sizing tool or manual)

##### Design

Material sensor	Standard: Stainless steel 1.4404/ AISI 316L Optional: 1.5415/16Mo3, Hastelloy C22 (other materials on request)
Diameter	40 ... 4000 mm (larger sensors on request)
Material mounting parts	Standard: Carbon Steel Optional: Stainless Steel 1.4404 / AISI 316L (other materials on request)
Process connection	Flange EN 1092-1 B1 Flange ASME B16.5 RF Cutting Ring Fitting FASTLOK (retractable design) (other process connections on request)
Thickness of pipe insulation	0 ... 200 mm

##### Approvals

Hazardous area	(see differential pressure transmitter)
Enclosure rating	(see differential pressure transmitter)
Operational safety	(see differential pressure transmitter)
QAL1, SIRA	

#### Options

Further versions that are available on request:

- Weld-in sensor for high pressure steam
- Calibrated metering pipes
- FASTLOK with flange ball valve
- Etc.

#### More information

For more information please see the Installation Instructions and the Instruction Manuals SITRANS P on SIOS.

**Application**



SITRANS FP330 compact design



SITRANS FPS300 remote design

These sensors are using the averaging pitot tube technology and can be used wherever flow rates of gases or liquids are to be measured.

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP330/FPS300 averaging pitot tube

### Averaging pitot tube for gas and liquids


#### Design

##### Mounting type


- Flange, cutting ring (carbon steel, stainless steel)

The averaging pitot tube can be mounted to pipes and ducts either with a traditional flange or a cutting ring fitting:

##### Flange mounting

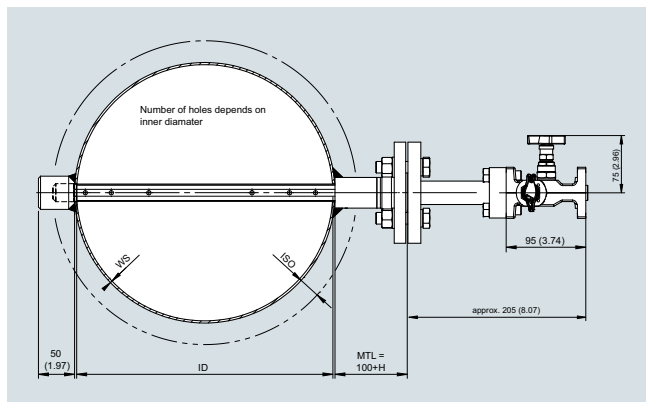

##### Cutting ring mounting

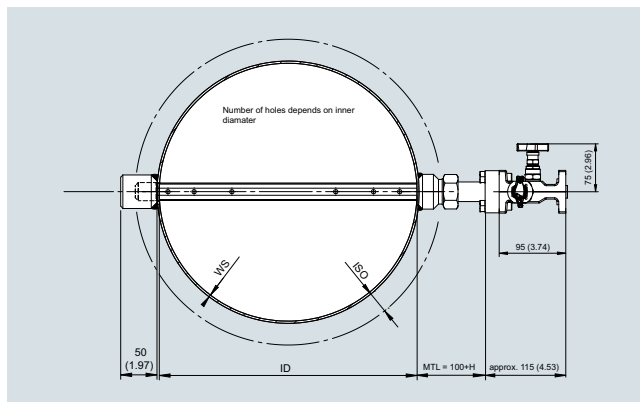

The required mounting components are always supplied together with the averaging pitot tube.

Flange mounting style can be applied to a large range of applications and is widely accepted. Cutting ring mounting style has a limited temperature and pressure range (see max. pressure and max. temperature below) but provides an economic alternative for simple flow measurement applications.

##### Dimensions of mounting parts

Flange	Profile 10	Profile 22	Profile 32	Profile 50
PN 16	(min. PN 40)	(min. PN 40)	(min. PN 40)	DN 80
PN 40	DN 15	DN 32	DN 40	On request
PN 100	DN 25	DN 40	DN 40	On request
Class 150	½"	1 ¼"	1 ½"	3"
Class 300	½"	1 ¼"	1 ½"	On request
Class 600	1"	1 ½"	1 ½"	On request
Cutting ring	Profile 10	Profile 22		
PN 40	M22	M36		


##### Standard lengths of mounting parts (MTL)

Profile 10	Profile 22	Profile 32	Profile 50
80 mm	100 mm	100 mm	120 mm


Mounting part length can be increased based on thermal pipe insulation in 50 mm steps (H).

**Design** (continued)**System design of differential pressure connection**

The differential pressure transmitter can be installed in compact design (at the averaging pitot tube) or in remote design.

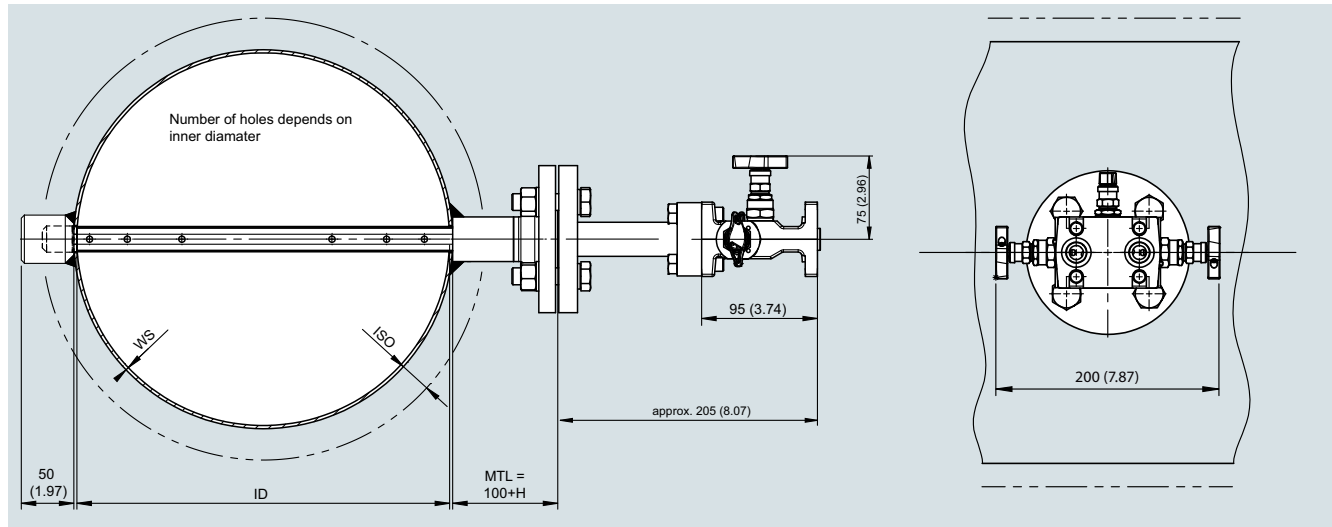Gas and liquid application, compact design

For gas and liquid applications with compact design the averaging pitot tube sensor is equipped with a traditional flange plate to mount manifold and differential pressure transmitter directly at the sensor.

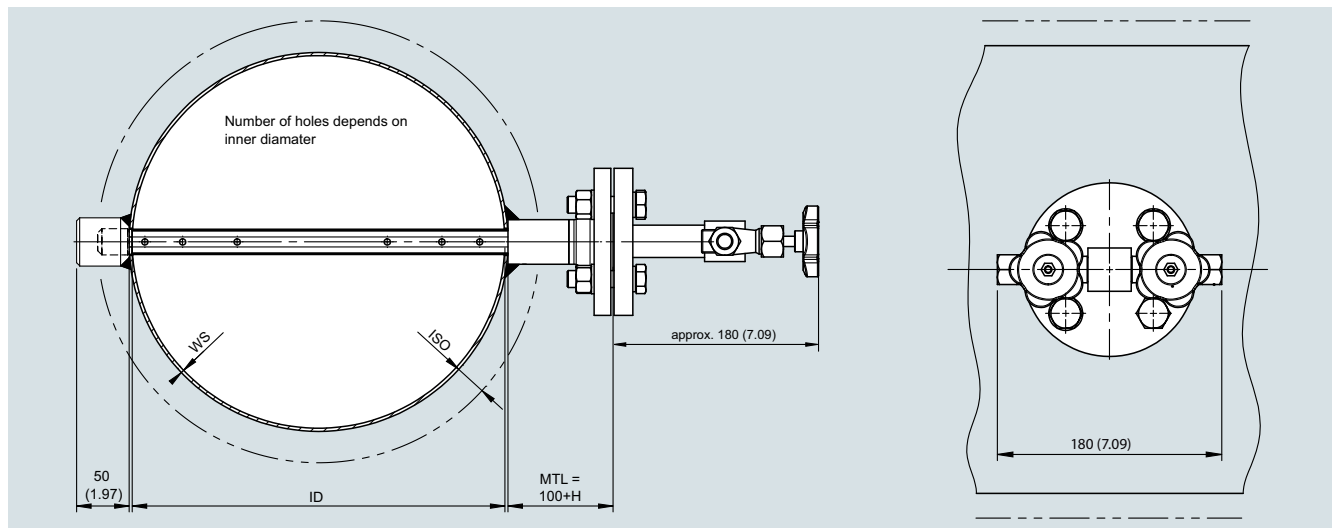Gas and liquid application, remote design

For gas and liquid applications with remote design the averaging pitot tube sensor is equipped with valves mounted directly to the sensor. Impulse pressure piping (not supplied) has to be installed from the valves to the remote mounted manifold and differential pressure transmitter.

## Flow Measurement


SITRANS FP (differential pressure flow measurement)

SITRANS FP330/FPS300 averaging pitot tube

### Averaging pitot tube for gas and liquids

#### Design (continued)

Gas and liquid application, compact design for wet gases and/or with integrated temperature measurement with PT100

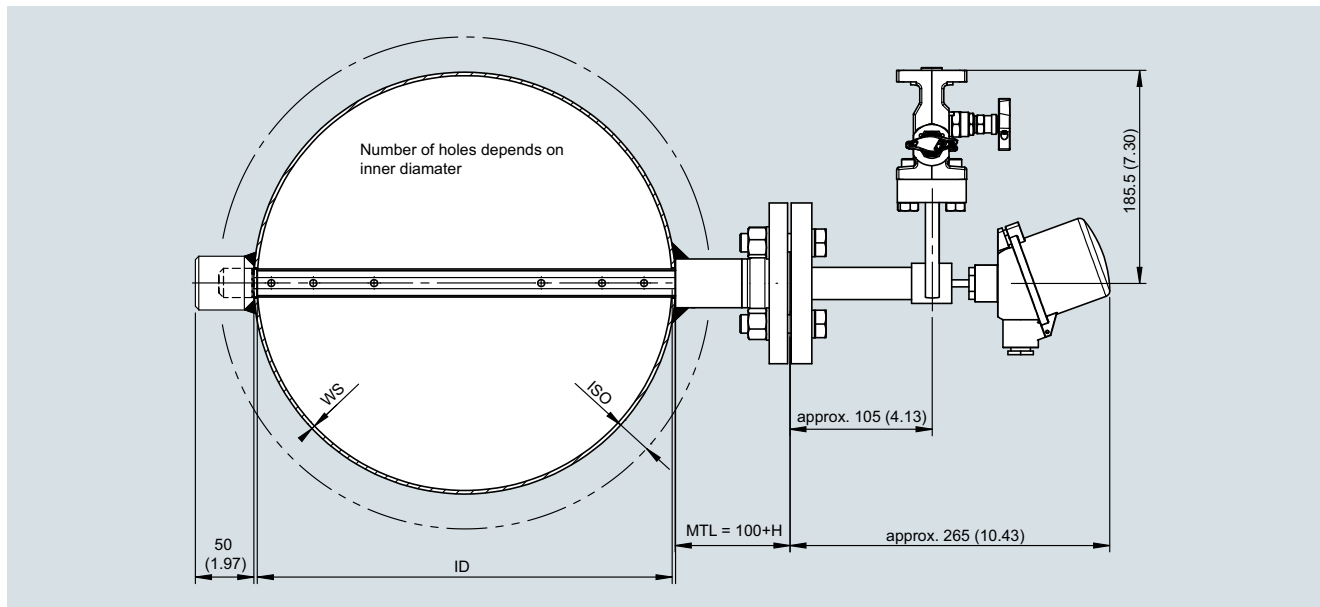

The averaging pitot tube sensor is equipped with a 90° rotated flange plate to mount manifold and differential pressure transmitter directly at the sensor. The rotated flange plate serves the purpose of providing space for the integrated temperature measurement and will also allow condensed water of wet gases to flow back from the outside assembly into the averaging pitot tube. This is particularly useful for installations in vertical pipes, or in horizontal pipes where the averaging pitot tube has to be mounted from the side. If the pitot tube can be mounted from the top, a regular flange plate is sufficient.

#### Averaging pitot tube materials

- Standard: 1.4404/316L
- Option: Hastelloy C-22

#### Mounting parts materials

- Carbon steel, 1.4404/316L

#### Flange gaskets

- Up to PN 40: Klingsil C4400
- As of PN 63: graphite with stainless steel insert

#### Integrated temperature measurement using PT100

- Can be integrated in averaging pitot tube (> DN 100, only 1.4404, ≤ PN 40)

#### Max. pressure

- EN: up to PN 100 (for flange), PN 40 (for cutting ring)
- ASME: up to Class 600 (for flange)

#### Max. temperature

- Mounting parts:
  - Flange: according to EN 1092-1 or ASME B16.5
  - Cutting ring: 200 °C (carbon steel), 400 °C (stainless steel)
- Sensor: will be calculated by sizing tool

Selection and ordering data	Article No.									
<b>SITRANS FP330/FPS300 averaging pitot tube for gas and liquids</b>   Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	7ME161	-								
<b>Communication</b> HART (4 ... 20 mA) Without transmitter	0	8								
<b>Nominal size/Sensor type (according to sizing tool)</b> DN 40/Sensor type 10 DN 50/Sensor type 10 DN 65/Sensor type 10 DN 80/Sensor type 10 DN 100/Sensor type 10 DN 125/Sensor type 10 DN 100/Sensor type 22 DN 125/Sensor type 22 DN 150/Sensor type 22 DN 200/Sensor type 22 DN 250/Sensor type 22 DN 300/Sensor type 22 DN 350/Sensor type 22 DN 400/Sensor type 22 DN 450/Sensor type 22 DN 500/Sensor type 22 DN 600/Sensor type 22 DN 700/Sensor type 22 DN 800/Sensor type 22 DN 900/Sensor type 22 DN 1000/Sensor type 22 DN 1100/Sensor type 22 DN 1200/Sensor type 22 DN 300/Sensor type 32 DN 350/Sensor type 32 DN 400/Sensor type 32 DN 450/Sensor type 32 DN 500/Sensor type 32 DN 600/Sensor type 32 DN 700/Sensor type 32 DN 800/Sensor type 32 DN 900/Sensor type 32 DN 1000/Sensor type 32 DN 1100/Sensor type 32 DN 1200/Sensor type 32 DN 1400/Sensor type 32 DN 1500/Sensor type 32 DN 1600/Sensor type 32 DN 1800/Sensor type 32 DN 2000/Sensor type 32 DN 2200/Sensor type 32 DN 2400/Sensor type 32 DN 500/Sensor type 50 DN 600/Sensor type 50 DN 700/Sensor type 50 DN 800/Sensor type 50 DN 900/Sensor type 50 DN 1000/Sensor type 50	1	C	1	D	1	E	1	F	1	G
	1	H	2	G	2	H	2	J	2	K
	2	L	2	M	2	N	2	P	2	Q
	2	R	2	S	2	T	2	U	2	V
	2	W	2	X	2	Y	3	M	3	N
	3	P	3	Q	3	R	3	S	3	T
	3	U	3	V	3	W	3	X	3	Y
	4	A	4	B	4	C	4	D	4	E
	4	F	4	G	5	R	5	S	5	T
	5	U	5	V	5	W				

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP330/FPS300 averaging pitot tube

### Averaging pitot tube for gas and liquids

#### Selection and ordering data

#### Article No.

SITRANS FP330/FPS300 averaging pitot tube for gas and liquids	7ME161	-	-	-	-	-	-	-	-	-
DN 1100/Sensor type 50										5 X
DN 1200/Sensor type 50										5 Y
DN 1400/Sensor type 50										6 A
DN 1500/Sensor type 50										6 B
DN 1600/Sensor type 50										6 C
DN 1800/Sensor type 50										6 D
DN 2000/Sensor type 50										6 E
DN 2200/Sensor type 50										6 F
DN 2400/Sensor type 50										6 G
DN 2600/Sensor type 50										6 H
DN 2800/Sensor type 50										6 J
DN 3000/Sensor type 50										6 K
DN 3200/Sensor type 50										6 L
DN 3400/Sensor type 50										6 M
DN 3600/Sensor type 50										6 N
DN 3800/Sensor type 50										6 P
DN 4000/Sensor type 50										6 Q
<b>Process connection/wetted parts material</b>										
Flange EN 1092-1 Form B1, PN16/stainless steel 316L/1.4404										C
Flange EN 1092-1 Form B1, PN40/stainless steel 316L/1.4404										E
Flange EN 1092-1 Form B1, PN64/100/stainless steel 316L/1.4404										F
Flange EN 1092-1 Form B1, PN160/stainless steel 316L/1.4404										H
Flange EN 1092-1 Form B1, PN16/ally C22 (up to max. 0.5 bar g)										L
Flange EN 1092-1 Form B1, PN40/ally C22 (up to max. 0.5 bar g)										M
Cutting ring PN40/stainless steel 316L/1.4404										N
Flange ASME B16.5, Class 150 RF/stainless steel 316L/1.4404										Q
Flange ASME B16.5, Class 300 RF/stainless steel 316L/1.4404										R
Flange ASME B16.5, Class 600 RF/stainless steel 316L/1.4404										S
Flange ASME B16.5, Class 900 RF/stainless steel 316L/1.4404										T
Flange ASME B16.5, Class 150 RF/ally C22 (up to max. 0.5 bar g)										W
<b>Material of welding parts/type of end support</b>										
Carbon steel P235GH/without end support										0
Stainless steel 316L/1.4404 / without end support										1
Heat-resistant steel 16Mo3/1.5415 / without end support										2
Carbon steel P235GH mounting components with closed end support										3
Stainless steel 316L/1.4404 / closed end support										4
Heat-resistant steel 16Mo3/1.5415 / closed end support										5
Carbon steel P235GH/end support with flange										6
Stainless steel 316L/1.4404 / end support with flange										7
<b>Thickness of pipe insulation</b>										
Pipe insulation: 0 ... < 50 mm										0
Pipe insulation: 50 ... < 100 mm										1
Pipe insulation: 100 ... < 150 mm										2
Pipe insulation: 150 ... < 200 mm										3
<b>System design</b>										
Compact design for dry gases and liquids without integrated temperature measurement										0
Compact design for wet gases with or without integrated temperature measurement as well as for dry gases and liquids with integrated temperature measurement										1
Remote design for dry gases, wet gases and liquids										3
<b>Type of protection of pressure transmitter</b>										
No Ex/without pressure transmitter										A
Intrinsic safety										B
Explosion proof										C
Intrinsic safety, Explosion proof										D
Dust ignition proof zone 21/22 (DIP), increased safety zone 2										L



Selection and ordering data	Article No.
<b>SITRANS FP330/FPS300 averaging pitot tube for gas and liquids</b>	7ME161
Dust ignition proof zone 20/21/22 (DIP), increased safety zone 2	
Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2	
Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2, class division	
<b>Electrical connections/cable entries of pressure transmitter</b>	
Without pressure transmitter	
2 x M20 x 1.5	
2 x 1/2-14 NPT	
<b>Local operation/display of pressure transmitter</b>	
Without display (closed lid)/without pressure transmitter	
With display (closed lid)	
With display (lid with glass window)	

Selection and ordering data	Order code	Further designs*	Order code
<i>Further designs*</i>		Please add "-Z" to Article No. and specify Order code(s) and plain text.	
<b>Certificates of primary element incl. fittings</b>		With mounted manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws	<b>U41</b>
Inspection certificate of the primary element (EN 10204-3.1) - material of pressure-containing and wetted parts	<b>C52</b>	With mounted manifold (5-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws	<b>U42</b>
Factory certificate of the primary element (EN 10204-2.2) - wetted parts (MR 0175-2015)	<b>C54</b>	With mounted manifold (5-fold) made of stainless steel, PTFE sealings, stainless steel screws	<b>U43</b>
Dimensional record of the primary element	<b>C55</b>	With mounted multi-way cock made of stainless steel, PTFE sealings, cadmium-plated steel screws	<b>U44</b>
Inspection certificate (DIN EN 571-1) - dye penetration test of weldings	<b>C56</b>	With mounted multi-way cock made of stainless steel, PTFE sealings, stainless steel screws	<b>U45</b>
Hydrostatic pressure test of the primary element (EN 13480-5)	<b>C58</b>	With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm	<b>U50</b>
Dimensional drawing 1:1 DWG of the primary element	<b>C59</b>	With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm	<b>U51</b>
<b>Maximum measuring span of pressure transmitter</b>		With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm	<b>U52</b>
20 mbar (8.037 inH <sub>2</sub> O)	<b>I01</b>	With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm	<b>U53</b>
60 mbar (24.11 inH <sub>2</sub> O)	<b>I02</b>	With enclosed multi-way cock made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm	<b>U54</b>
250 mbar (100.5 inH <sub>2</sub> O)	<b>I03</b>	With enclosed multi-way cock made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm	<b>U55</b>
600 mbar (241.1 inH <sub>2</sub> O)	<b>I04</b>		
1600 mbar (643 inH <sub>2</sub> O)	<b>I05</b>	<b>Application data</b>	
<b>Integrated temperature measurement</b>		ID number of the primary element according to sizing tool	<b>Y40</b>
Integrated temperature measurement with Pt100; cl. A; 3-wire; without head transmitter	<b>S01</b>	Measuring range setting (temperature transmitter): lower range value (max. 5 characters), upper range value (max. 5 characters), unit (C, F)	<b>Y41</b>
Integrated temperature measurement with Pt100; cl. A; 3-wire; ATEX II 1/2G Ex ia IIC T5 Ga/Gb; without head transmitter	<b>S02</b>		
Integrated temperature measurement with Pt100; cl. A; 3-wire; incl. Head transmitter TH320, General Purpose (non Ex) (CE, RCM, FM, CSA) (7NG0310-0BA00-0AA0)	<b>S03</b>		
Integrated temperature measurement with Pt100; cl. A; 3-wire; ATEX II 1/2G Ex ia IIC T5 Ga/Gb; incl. Head transmitter TH320, Ex i, Ex nA (ec)(Ex-Zone)/IS, NIFW, NI (Class-Div) (ATEX, IECEx, CSA, FM, NEPSI) (7NG0310-0BA00-0NA0)	<b>S04</b>		
<b>Shut-off valves</b>		* For further options, please refer to SITRANS P320.	
With mounted shut-off valves DN8 made of carbon steel, up to 300 °C with tube fitting 12 mm	<b>T50</b>	<b>Scope of delivery</b>	
With mounted shut-off valves DN8 made of stainless steel, up to 300 °C with tube fitting 12 mm	<b>T51</b>	• Averaging pitot tube with differential pressure connections	
With mounted ball valve made of stainless steel, up to 200 °C with tube fitting 12 mm	<b>T59</b>	• Mounting part: - Flanged installation: Flanged mounting part including gasket, screws and nuts. - Cutting ring installation: Welding socket, cutting ring, nut	
<b>Valve manifolds for mounting on primary element</b>		• If necessary: closed counter support	
With mounted manifold (3-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws	<b>U40</b>	• Shut-off valves for remote design (options T5x selected in PIA)	
		• Manifold for compact/remote design (options U4x, U5x selected in PIA)	


## Flow Measurement

SITRANS FP (differential pressure flow measurement)


SITRANS FP330/FPS300 averaging pitot tube

### Averaging pitot tube for steam

#### Application

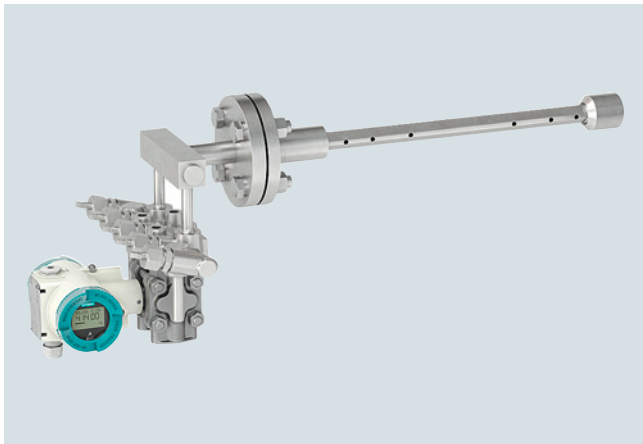

SITRANS FP330 compact design

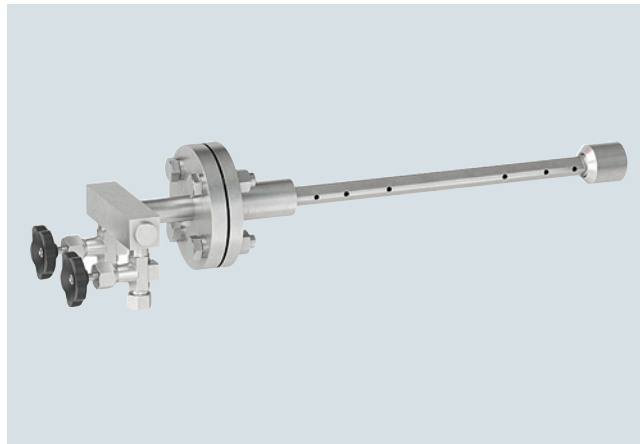


SITRANS FPS300 remote design

These sensors for steam probes are used wherever flow of superheated or saturated steam is to be measured.

#### Design

##### Mounting type

The averaging pitot tube for steam can be mounted to pipes with a traditional flange:

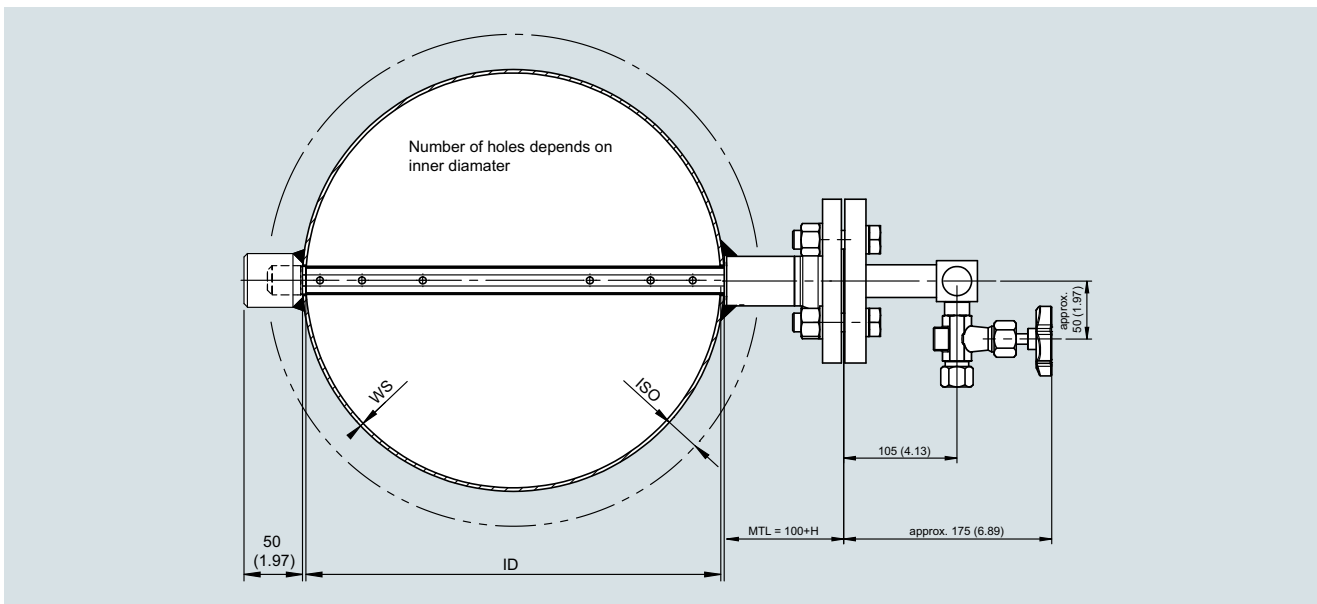

##### Dimensions of mounting parts


Flange	Profile 10	Profile 22	Profile 32
PN40	DN 15	DN 32	DN 40
PN100	DN 25	DN 40	DN 40
Class 150	1/2"	1 1/4"	1 1/2"
Class 300	1/2"	1 1/4"	1 1/2"
Class 600	1"	1 1/2"	1 1/2"

##### Standard lengths of mounting parts


Profile 10	Profile 22	Profile 32
80 mm	100 mm	100 mm

**Design** (continued)**System design of differential pressure connection**

The differential pressure transmitter can be installed in compact design (at the averaging pitot tube) or in remote design.

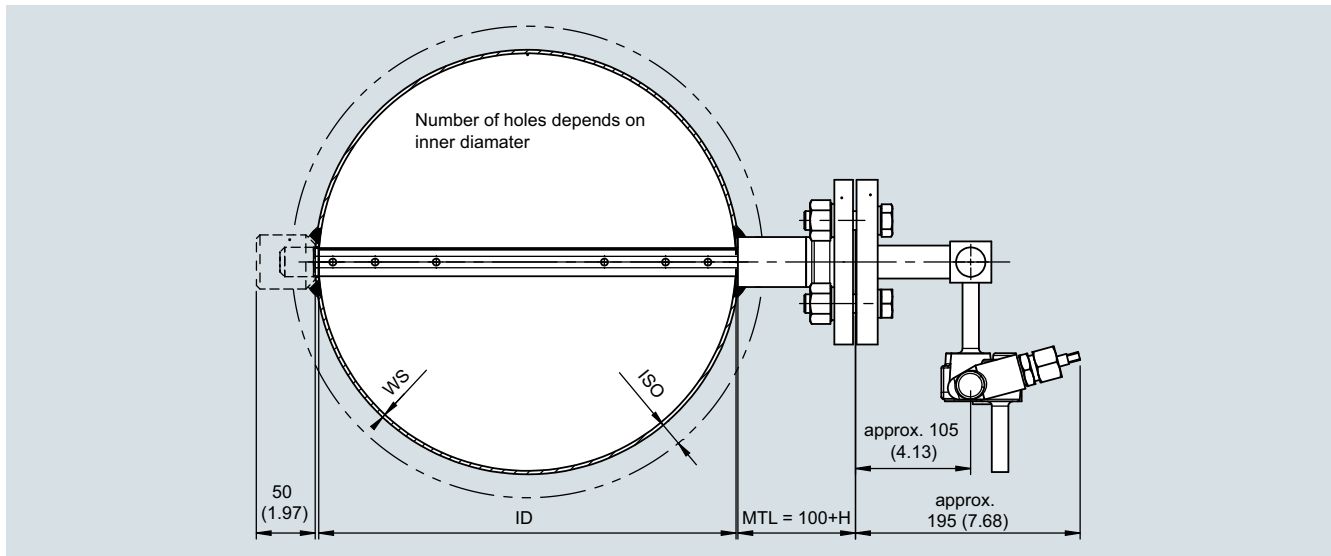Steam applications, compact design

For steam applications with compact design the averaging pitot tube sensor is equipped with integrated condensation pots, a 5-way-manifold is welded directly to the sensor.

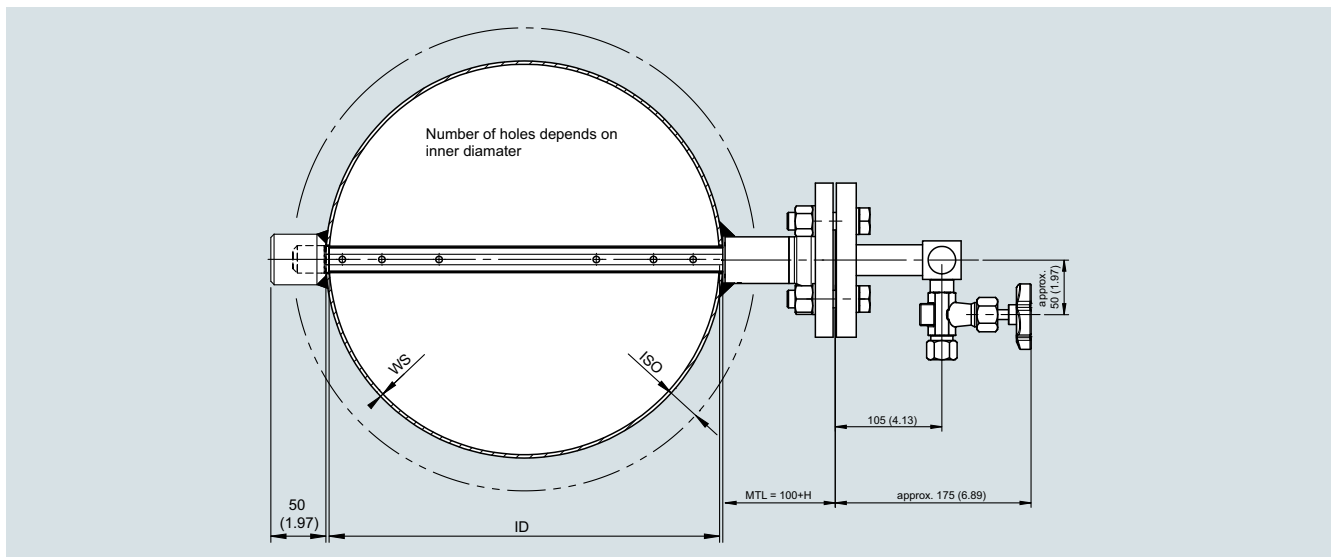Steam applications, remote design

For steam applications with remote design the averaging pitot tube sensor is equipped with integrated condensation pots, valves are welded directly to the sensor. Impulse pressure piping (not supplied) has to be installed from the valves to the remote mounted manifold and differential pressure transmitter.

Profile width

- Depending on selected type

Averaging pitot tube materials

- Standard: 1.4404/316L
- Option: 16Mo3/1.5415

Mounting parts materials

- Carbon steel, 1.4404/316L

Flange gaskets

- Up to PN 40: graphite
- As of PN 63: graphite with stainless steel insert

Integrated temperature measurement using PT100

- Can be integrated in averaging pitot tube (> DN 100, only 1.4404, ≤ PN 40)

Max. pressure

- EN: up to PN 100
- ASME: up to Class 600

Max. temperature

- Mounting parts: According to EN 1092-1 or ASME B16.5
- Sensor: Will be calculated by sizing tool

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP330/FPS300 averaging pitot tube

### Averaging pitot tube for steam

#### Selection and ordering data

#### Article No.

SITRANS FP330/FPS300 averaging pitot tube for steam



7ME162

- - - - - 0 - - - - -

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Communication

HART (4 ... 20 mA)

Without transmitter

0

8

#### Nominal size/Sensor type (according to sizing tool)

DN 40/Sensor type 10

DN 50/Sensor type 10

DN 65/Sensor type 10

DN 80/Sensor type 10

DN 100/Sensor type 10

DN 125/Sensor type 10

DN 100/Sensor type 22

DN 125/Sensor type 22

DN 150/Sensor type 22

DN 200/Sensor type 22

DN 250/Sensor type 22

DN 300/Sensor type 22

DN 350/Sensor type 22

DN 400/Sensor type 22

DN 450/Sensor type 22

DN 500/Sensor type 22

DN 600/Sensor type 22

DN 700/Sensor type 22

DN 800/Sensor type 22

DN 900/Sensor type 22

DN 1000/Sensor type 22

DN 1100/Sensor type 22

DN 1200/Sensor type 22

DN 300/Sensor type 32

DN 350/Sensor type 32

DN 400/Sensor type 32

DN 450/Sensor type 32

DN 500/Sensor type 32

DN 600/Sensor type 32

DN 700/Sensor type 32

DN 800/Sensor type 32

DN 900/Sensor type 32

DN 1000/Sensor type 32

DN 1100/Sensor type 32

DN 1200/Sensor type 32

DN 1400/Sensor type 32

DN 1500/Sensor type 32

DN 1600/Sensor type 32

DN 1800/Sensor type 32

DN 2000/Sensor type 32

DN 500/Sensor type 50

DN 600/Sensor type 50

DN 700/Sensor type 50

DN 800/Sensor type 50

DN 900/Sensor type 50

DN 1000/Sensor type 50

1 C

1 D

1 E

1 F

1 G

1 H

2 G

2 H

2 J

2 K

2 L

2 M

2 N

2 P

2 Q

2 R

2 S

2 T

2 U

2 V

2 W

2 X

2 Y

3 M

3 N

3 P

3 Q

3 R

3 S

3 T

3 U

3 V

3 W

3 X

3 Y

4 A

4 B

4 C

4 D

4 E

5 R

5 S

5 T

5 U

5 V

5 W

## Selection and ordering data

## Article No.

SITRANS FP330/FPS300 averaging pitot tube for steam	7ME162	-	-	-	-	0	-	-	-	-
DN 1100/Sensor type 50						5	X			
DN 1200/Sensor type 50						5	Y			
DN 1400/Sensor type 50						6	A			
DN 1500/Sensor type 50						6	B			
DN 1600/Sensor type 50						6	C			
DN 1800/Sensor type 50						6	D			
DN 2000/Sensor type 50						6	E			
<b>Process connection/wetted parts material</b>										
Flange EN 1092-1 Form B1, PN16/stainless steel 316L/1.4404									C	
Flange EN 1092-1 Form B1, PN40/stainless steel 316L/1.4404									E	
Flange EN 1092-1 Form B1, PN64/100/stainless steel 316L/1.4404									F	
Flange EN 1092-1 Form B1, PN160/stainless steel 316L/1.4404									H	
Flange EN 1092-1 Form B1, PN64/100/heat-resistant steel 16Mo3/1.5415									J	
Flange ASME B16.5, Class 150 RF/stainless steel 316L/1.4404									Q	
Flange ASME B16.5, Class 300 RF/stainless steel 316L/1.4404									R	
Flange ASME B16.5, Class 600 RF/stainless steel 316L/1.4404									S	
Flange ASME B16.5, Class 900 RF/stainless steel 316L/1.4404									T	
Flange ASME B16.5, Class 600 RF/heat-resistant steel 16Mo3/1.5415									U	
<b>Material of welding parts/type of end support</b>										
Carbon steel P235GH/without end support										0
Stainless steel 316L/1.4404 / without end support										1
Heat-resistant steel 16Mo3/1.5415 / without end support										2
Carbon steel P235GH mounting components with closed end support										3
Stainless steel 316L/1.4404 / closed end support										4
Heat-resistant steel 16Mo3/1.5415 / closed end support										5
Carbon steel P235GH/end support with flange										6
Stainless steel 316L/1.4404 / end support with flange										7
<b>Thickness of pipe insulation</b>										
Pipe insulation: 0 ... < 50 mm										0
Pipe insulation: 500 ... < 100 mm										1
Pipe insulation: 1000 ... < 150 mm										2
Pipe insulation: 1500 ... < 200 mm										3
<b>System design</b>										
Compact design for steam with or without integrated temperature measurement										2
Remote design for dry gases, wet gases and liquids										3
<b>Type of protection of pressure transmitter</b>										
No Ex/without pressure transmitter										A
Intrinsic safety										B
Explosion proof										C
Intrinsic safety, Explosion proof										D
Dust ignition proof zone 21/22 (DIP), increased safety zone 2										L
Dust ignition proof zone 20/21/22 (DIP), increased safety zone 2										M
Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2										S
Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2, class division										T
<b>Electrical connections/cable entries of pressure transmitter</b>										
Without pressure transmitter										A
2 x M20 x 1.5										F
2 x 1/2-14 NPT										M
<b>Local operation/display of pressure transmitter</b>										
Without display (closed lid)/without pressure transmitter										0
With display (closed lid)										1
With display (lid with glass window)										2

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP330/FPS300 averaging pitot tube

### Averaging pitot tube for steam

#### Selection and ordering data

#### Order code

##### Further designs\*

Please add "-Z" to Article No. and specify Order code(s) and plain text.

##### Certificates of primary element incl. fittings

Inspection certificate of the primary element (EN 10204-3.1) - material of pressure-containing and wetted parts **C52**

Factory certificate of the primary element (EN 10204-2.2) - wetted parts (MR 0175-2015) **C54**

Dimensional record of the primary element **C55**

Inspection certificate (DIN EN 571-1) - dye penetration test of weldings **C56**

Hydrostatic pressure test of the primary element (EN 13480-5) **C58**

Dimensional drawing 1:1 DWG of the primary element **C59**

##### Maximum measuring span of pressure transmitter

20 mbar (8.037 inH<sub>2</sub>O) **I01**

60 mbar (24.11 inH<sub>2</sub>O) **I02**

250 mbar (100.5 inH<sub>2</sub>O) **I03**

600 mbar (241.1 inH<sub>2</sub>O) **I04**

1600 mbar (643 inH<sub>2</sub>O) **I05**

##### Integrated temperature measurement

Integrated temperature measurement with Pt100; cl. A; 3-wire; without head transmitter **S01**

Integrated temperature measurement with Pt100; cl. A; 3-wire; ATEX II 1/2G Ex ia IIC T5 Ga/Gb; without head transmitter **S02**

Integrated temperature measurement with Pt100; cl. A; 3-wire; incl. Head transmitter TH320, General Purpose (non Ex) (CE, RCM, FM, CSA) (7NG0310-0BA00-0AA0) **S03**

Integrated temperature measurement with Pt100; cl. A; 3-wire; ATEX II 1/2G Ex ia IIC T5 Ga/Gb; incl. Head transmitter TH320, Ex i, Ex nA (ec)(Ex-Zone)/IS, NIFW, NI (Class-Div) (ATEX, IECEx, CSA, FM, NEPSI) (7NG0310-0BA00-0NA0) **S04**

##### Shut-off valves

With mounted shut-off valves DN8 made of carbon steel, up to 300 °C with tube fitting 12 mm **T50**

With mounted shut-off valves DN8 made of stainless steel, up to 300 °C with tube fitting 12 mm **T51**

With mounted shut off valves DN8 made of carbon steel, up to 550 °C with butt weld end 14 x 2,5 mm **T58**

##### Valve manifolds for mounting on primary element

With mounted manifold (5-fold) made of carbon steel, up to 300 °C cadmium-plated steel screws **U46**

With mounted manifold (5-fold) made of carbon steel, up to 550 °C cadmium-plated steel screws with butt weld end 14 x 2,5 mm **U48**

With enclosed manifold (5-fold) made of carbon steel, up to 300 °C cadmium-plated steel screws with tube fitting 12 mm **U56**

With enclosed manifold (5-fold) made of carbon steel, up to 550 °C cadmium-plated steel screws with butt weld end 14 x 2,5 mm **U58**

##### Application data

ID number of the primary element according to sizing tool **Y40**

Measuring range setting (temperature transmitter): lower range value (max. 5 characters), upper range value (max. 5 characters), unit (C, F) **Y41**

#### Scope of delivery

- Averaging pitot tube with integrated condensation pots and differential pressure connections
- Flanged mounting part including gasket, screws and nuts
- If necessary: closed counter support
- Shut-off valves for remote design (options T5x selected in PIA)
- Manifold for compact/remote design (options U4x, U5x selected in PIA)

**Application**

SITRANS FP330 compact design




SITRANS FPS300 remote design

In the FASTLOK version the sensor can be assembled and disassembled into the pipe without interrupting plant operation. This pitot tube is used for dry gases, wet gases and liquids. On request it is available in different pressure ratings or with an integrated gear drive.

**Design****Mounting type**

The averaging pitot tube with FASTLOK mechanism is mounted with a screwed ball valve. A threaded nozzle is welded to the pipe onto which the ball valve is screwed.

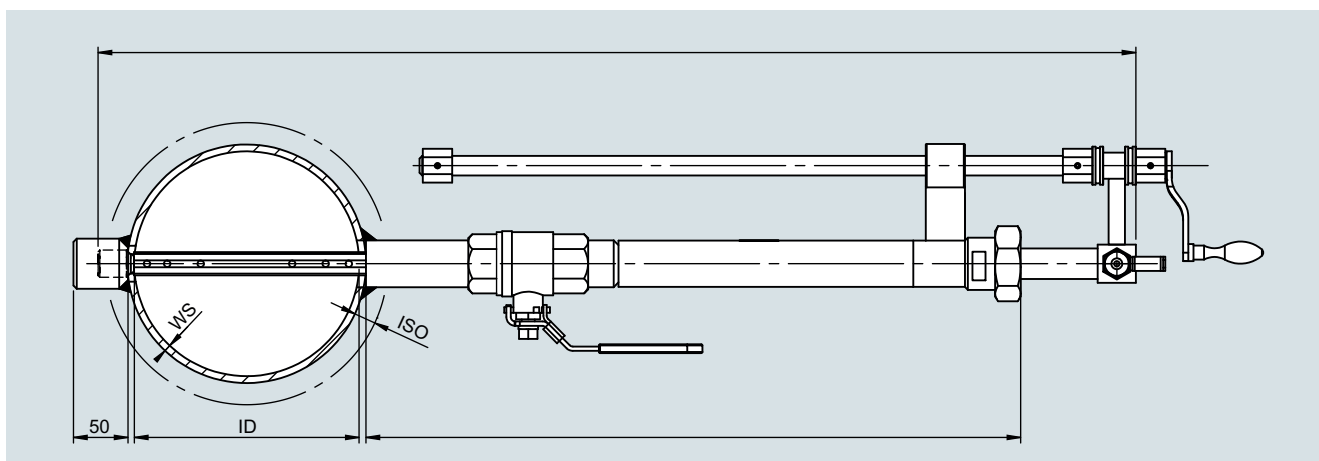Isolation mechanism

- Ball valve with screwed-on threaded pipe with gland packing

Retraction mechanism

- The sensor is inserted or removed into/out of the pipe by turning the operating handle on top of the threaded rod. A gland packing prevents gas or liquid from exiting while the isolation ball valve is opened.

System design of differential pressure connection<sup>1)</sup>

- Compact, remote

Profile width

- Depending on selected type

Averaging pitot tube materials

- 1.4404/316L

Mounting parts materials

- Carbon steel, 1.4404/316L

Ball valve material

- Stainless steel 1.4404

Gasket ball valve

- PTFE

Pressure rating

- PN16

Max. temperature

- Approx. 200 °C

<sup>1)</sup> For details see Design under the section "Averaging pitot tube for gas and liquids" on page 3/445.

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP330/FPS300 averaging pitot tube

### Averaging pitot tube with FASTLOK

#### Selection and ordering data

#### Article No.

SITRANS FP330/FPS300 averaging pitot tube with FASTLOK ↗

7ME163

↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Communication

HART (4 ... 20 mA)

Without transmitter

0

8

#### Nominal size/Sensor type (according to sizing tool)

DN 40/Sensor type 10

1 C

DN 50/Sensor type 10

1 D

DN 65/Sensor type 10

1 E

DN 80/Sensor type 10

1 F

DN 100/Sensor type 10

1 G

DN 125/Sensor type 10

1 H

DN 100/Sensor type 22

2 G

DN 125/Sensor type 22

2 H

DN 150/Sensor type 22

2 J

DN 200/Sensor type 22

2 K

DN 250/Sensor type 22

2 L

DN 300/Sensor type 22

2 M

DN 350/Sensor type 22

2 N

DN 400/Sensor type 22

2 P

DN 450/Sensor type 22

2 Q

DN 500/Sensor type 22

2 R

DN 600/Sensor type 22

2 S

DN 700/Sensor type 22

2 T

DN 800/Sensor type 22

2 U

DN 900/Sensor type 22

2 V

DN 1000/Sensor type 22

2 W

DN 1100/Sensor type 22

2 X

DN 1200/Sensor type 22

2 Y

DN 300/Sensor type 32

3 M

DN 350/Sensor type 32

3 N

DN 400/Sensor type 32

3 P

DN 450/Sensor type 32

3 Q

DN 500/Sensor type 32

3 R

DN 600/Sensor type 32

3 S

DN 700/Sensor type 32

3 T

DN 800/Sensor type 32

3 U

DN 900/Sensor type 32

3 V

DN 1000/Sensor type 32

3 W

DN 1100/Sensor type 32

3 X

DN 1200/Sensor type 32

3 Y

DN 1400/Sensor type 32

4 A

DN 1500/Sensor type 32

4 B

DN 1600/Sensor type 32

4 C

DN 1800/Sensor type 32

4 D

DN 2000/Sensor type 32

4 E

DN 500/Sensor type 50

5 R

DN 600/Sensor type 50

5 S

DN 700/Sensor type 50

5 T

DN 800/Sensor type 50

5 U

DN 900/Sensor type 50

5 V

DN 1000/Sensor type 50

5 W

3



Selection and ordering data	Article No.									
<b>SITRANS FP330/FPS300 averaging pitot tube with FASTLOK</b> DN 1100/Sensor type 50 DN 1200/Sensor type 50 DN 1400/Sensor type 50 DN 1500/Sensor type 50 DN 1600/Sensor type 50 DN 1800/Sensor type 50 DN 2000/Sensor type 50	7ME163	-	-	-	-	-	-	-	-	-
<b>Process connection/wetted parts material</b> Cutting ring PN40/stainless steel 316L/1.4404							N			
<b>Material of welding parts/type of end support</b> Carbon steel P235GH/without end support Stainless steel 316L/1.4404 / without end support Carbon steel P235GH mounting components with closed end support Stainless steel 316L/1.4404 / closed end support								0 1 3 4		
<b>Thickness of pipe insulation</b> Pipe insulation: 0 ... < 50 mm Pipe insulation: 50 ... < 100 mm Pipe insulation: 100 ... < 150 mm Pipe insulation: 150 ... < 200 mm								0 1 2 3		
<b>System design</b> Compact design for dry gases and liquids without integrated temperature measurement Compact design for wet gases with or without integrated temperature measurement as well as for dry gases and liquids with integrated temperature measurement Remote design for dry gases, wet gases and liquids									0 1 3	
<b>Type of protection of pressure transmitter</b> No Ex/without pressure transmitter Intrinsic safety Explosion proof Intrinsic safety, Explosion proof Dust ignition proof zone 21/22 (DIP), increased safety zone 2 Dust ignition proof zone 20/21/22 (DIP), increased safety zone 2 Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2 Intrinsic safety, Explosion proof, Dust ignition proof zone 21/22 (DIP), increased safety zone 2, class division									A B C D L M S T	
<b>Electrical connections/cable entries of pressure transmitter</b> Without pressure transmitter 2 x M20 x 1.5 2 x 1/2-14 NPT									A F M	
<b>Local operation/display of pressure transmitter</b> Without display (closed lid)/without pressure transmitter With display (closed lid) With display (lid with glass window)									0 1 2	

## Flow Measurement

SITRANS FP (differential pressure flow measurement)

SITRANS FP330/FPS300 averaging pitot tube

### Averaging pitot tube with FASTLOK

#### Selection and ordering data

#### Order code

##### Further designs\*

Please add "-Z" to Article No. and specify Order code(s) and plain text.

##### Certificates of primary element incl. fittings

Inspection certificate of the primary element (EN 10204-3.1) - material of pressure-containing and wetted parts

C52

Factory certificate of the primary element (EN 10204-2.2) - wetted parts (MR 0175-2015)

C54

Dimensional record of the primary element

C55

Dimensional drawing 1:1 DWG of the primary element

C59

##### Maximum measuring span of pressure transmitter

20 mbar (8.037 inH<sub>2</sub>O)

I01

60 mbar (24.11 inH<sub>2</sub>O)

I02

250 mbar (100.5 inH<sub>2</sub>O)

I03

600 mbar (241.1 inH<sub>2</sub>O)

I04

1600 mbar (643 inH<sub>2</sub>O)

I05

##### Shut-off valves

With mounted shut-off valves DN8 made of carbon steel, up to 300 °C with tube fitting 12 mm

T50

With mounted shut-off valves DN8 made of stainless steel, up to 300 °C with tube fitting 12 mm

T51

With mounted ball valve made of stainless steel, up to 200 °C with tube fitting 12 mm

T59

##### Valve manifolds for mounting on primary element

With mounted manifold (3-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws

U40

With mounted manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws

U41

With mounted manifold (5-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws

U42

With mounted manifold (5-fold) made of stainless steel, PTFE sealings, stainless steel screws

U43

With mounted multi-way cock made of stainless steel, PTFE sealings, cadmium-plated steel screws

U44

With mounted multi-way cock made of stainless steel, PTFE sealings, stainless steel screws

U45

With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm

U50

With enclosed manifold (3-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm

U51

With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm

U52

With enclosed manifold (5-fold) made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm

U53

With enclosed multi-way cock made of stainless steel, PTFE sealings, cadmium-plated steel screws with tube fitting 12 mm

U54

With enclosed multi-way cock made of stainless steel, PTFE sealings, stainless steel screws with tube fitting 12 mm

U55

##### Application data

ID number of the primary element according to sizing tool

Y40

#### Scope of delivery

- Averaging pitot tube with removal mechanism, packing gland, differential pressure connection
- Mounting part threaded welding socket with isolation ball valve
- If necessary: closed counter support
- Shut-off valves for remote design (options T5x selected in PIA)
- Manifold for compact/remote design (options U4x, U5x selected in PIA)

\* For further options, please refer to SITRANS P320.