

CATALOG | JUNE 2021

Low voltage

Process performance motors
400 V 50 Hz, 460V 60 Hz

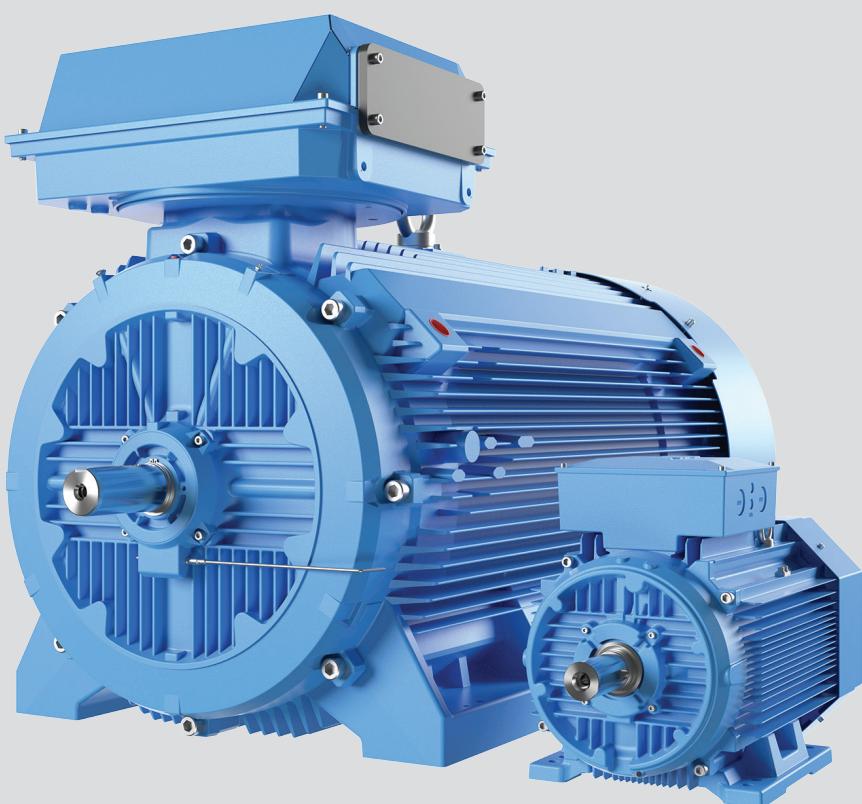


With expertise, and a comprehensive portfolio of products and life-cycle services, we help value-minded industrial customers their energy efficiency and productivity.

Low voltage Process performance motors

Sizes 56 to 450, 0.09 to 1000 kW

4	General information
4	International motor efficiency standards and regulations
7	Mounting arrangements
8	Cooling
9	Degrees of protection: IP code/IK code
10	Insulation
11	Voltage and frequency
12	Surface treatment
13	Variable speed drives with Process performance motors
18	Cast iron motors
18	Ordering information
19	Rating plates
20	Technical data
64	Variant codes
71	Mechanical design
95	Dimension drawings
100	Accessories
108	Cast iron motors in brief
111	Motor construction
114	Aluminum motors
114	Ordering information
115	Rating plates
116	Technical data
136	Variant codes
141	Mechanical design
155	Dimension drawings
157	Accessories
158	Aluminum motors in brief
160	Total product offering
161	ABB's portfolio of drives

International motor efficiency standards and regulations

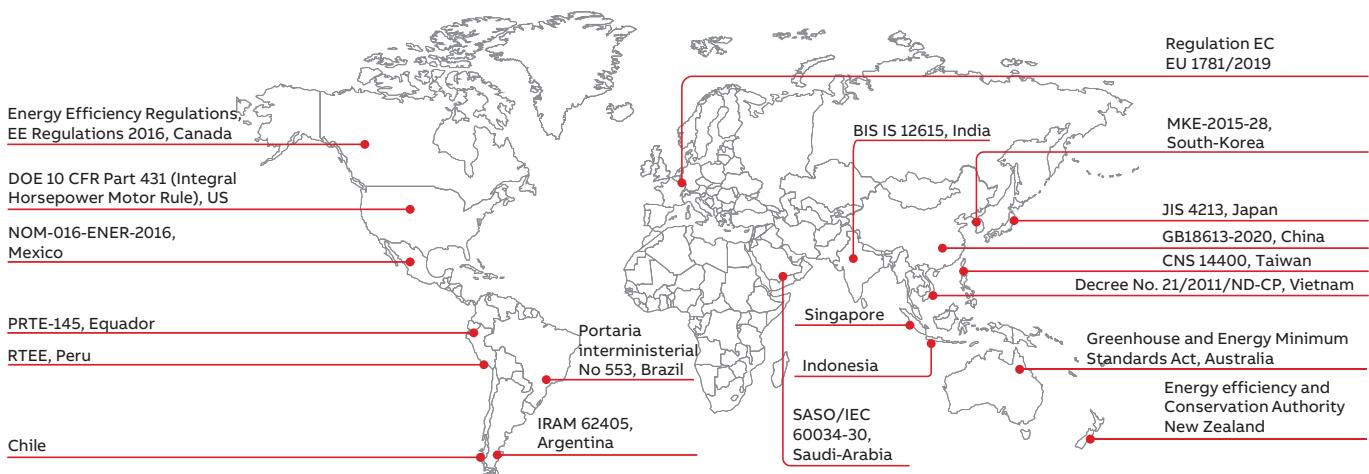

Since the validation of IEC 60034-30:2008 and its refined version IEC 60034-30-1:2014, a worldwide energy efficiency classification system has existed for low voltage three-phase asynchronous motors. These international standards have been created to enable and increase the level of harmonization in efficiency regulations around the world and to also cover motors for explosive atmospheres.

IEC 60034-30-1:2014 defines International Efficiency (IE) classes for single speed, three-phase, 50 Hz and 60 Hz induction motors. The efficiency levels defined in IEC 60034-30-1 are based on the test method specified in IEC 60034-2-1:2014. Both standards are part of an effort to unify motor testing procedures with CSA390-10 and IEEE 112 standards as well as efficiency and product labeling (IE) requirements to enable motor purchasers worldwide to easily recognize premium efficiency products.

To promote transparency in the market, IEC 60034-30-1 states that both the efficiency class and efficiency value must be shown on the motor rating plate and in product documentation. The documentation must clearly indicate the efficiency testing method used as different methods can produce differing results.

Minimum energy performance standards

While the IEC as an international standardization organization sets guidelines for motor testing and efficiency classes, the organization does not regulate efficiency levels in countries. The biggest drivers for mandatory Minimum Energy Perfor-

mance Standard (MEPS) levels for electric motors are global climate change, government targets to curb CO₂ emissions and rising electricity demand, especially in developing countries. The whole value chain, from manufacturer up to end user, must be aware of the legislation in order to meet local requirements, to save energy and reduce the carbon footprint.

Harmonized global standards and the increasing adoption of MEPS around the world are good news for all of us. However, it is important to remember that harmonization is an ongoing process. Even though MEPS are already in effect in several regions and countries, they are evolving and differ in terms of scope and requirements. At the same time, more countries are planning to adopt their own MEPS regulations. A view of existing and coming MEPS regulations in the world can be seen on the World map above.

To get the latest information please visit www.abb.com/motors&generators/energyefficiency.

IEC 60034-30-1:2014

This standard defines four International Efficiency (IE) classes for single speed electric motors that are rated according to IEC 60034-1 or IEC 60079-0 (explosive atmospheres) and designed for operation on sinusoidal voltage.

- IE4 = Super premium efficiency
- IE3 = Premium efficiency, identical to the table in 10CFR431 ('NEMA Premium') in the USA and CSA C390-10:2015 for 60 Hz
- IE2 = High efficiency
- IE1 = Standard efficiency

IEC 60034-30-1 covers the power range from 0.12 kW up to 1000 kW. Most of the different technical constructions of electric motors are covered as long as they are rated for direct on-line operation. The coverage of the standard includes:


- Single speed electric motors (single and three-phase), 50 and 60 Hz
- 2, 4, 6 and 8 poles
- Rated output P_N from 0.12 kW to 1000 kW
- Rated voltage U_N above 50 V up to 1 kV
- Motors capable of continuous operation at their rated power with a temperature rise within the specified insulation temperature class
- Motors, marked with any ambient temperature within the range of -20 °C to +60 °C
- Motors, marked with an altitude up to 4000 m above sea level

By comparing IEC 60034-30-1 to CSA C390-10:2015 and "10CFR431 Subpart B – Electric motors", it can be seen that the efficiency limits and tables are well aligned and their major difference is in the scope of the output power where CSA and 10CFR431 have a maximum power of 500 hp. There are also some minor differences in the scope of excluded motors.

Note: CFR is Code of Federal Regulations.

The following motors are excluded from IEC 60034-30-1:

- Single-speed motors with 10 or more poles or multi-speed motors
- Motors completely integrated into a machine (for example pump, fan or compressor) that cannot be tested separately from the machine
- Brake motors, when the brake cannot be dismantled or separately fed

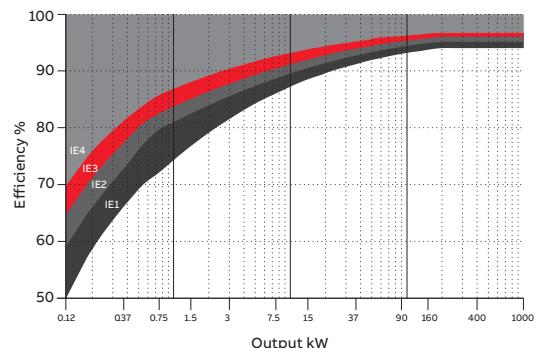

—
01

ABB and efficiency standards

ABB determines efficiency values according to IEC 60034-2-1 using the low uncertainty method (i.e. summarization of losses), with additional load losses determined by the method of residual loss.

It is good to mention and emphasize that the IEC 60034-2-1 test method, which is known as an indirect method, is technically equivalent to the test methods in the standards CSA 390-10 and IEEE 112 Method B leading to the equivalent losses and thus efficiency values. Both test methods can be used by ABB and shall be used for both Canada and the US where IEC 60034-2-1 is not recognized yet.

As the world market leader, ABB offers the largest range of LV motors available. It has long advocated the need for efficiency in motors, and high efficiency products have formed the core of its portfolio for many years. The core of ABB's Process performance range is based on a full range of IE2 and IE3 motors - with many available from stock. We also supply IE4 motors for additional energy savings.


**Nominal efficiency limits defined in IEC
60034-30-1:2014 (reference values at 50 Hz,
based on test methods specified in IEC 60034-
2-1:2014).**

Out- put	IE1 Standard efficiency				IE2 High efficiency				IE3 Premium efficiency				IE4 Super Premium efficiency			
	kW	2 pole	4 pole	6 pole	8 pole	2 pole	4 pole	6 pole	8 pole	2 pole	4 pole	6 pole	8 pole	2 pole	4 pole	6 pole
0.12	45.0	50.0	38.3	31.0	53.6	59.1	50.6	39.8	60.8	64.8	57.7	50.7	66.5	69.8	64.9	62.3
0.18	52.8	57.0	45.5	38.0	60.4	64.7	56.6	45.9	65.9	69.9	63.9	58.7	70.8	74.7	70.1	67.2
0.20	54.6	58.5	47.6	39.7	61.9	65.9	58.2	47.4	67.2	71.1	65.4	60.6	71.9	75.8	71.4	68.4
0.25	58.2	61.5	52.1	43.4	64.8	68.5	61.6	50.6	69.7	73.5	68.6	64.1	74.3	77.9	74.1	70.8
0.37	63.9	66.0	59.7	49.7	69.5	72.7	67.6	56.1	73.8	77.3	73.5	69.3	78.1	81.1	78.0	74.3
0.40	64.9	66.8	61.1	50.9	70.4	73.5	68.8	57.2	74.6	78.0	74.4	70.1	78.9	81.7	78.7	74.9
0.55	69.0	70.0	65.8	56.1	74.1	77.1	73.1	61.7	77.8	80.8	77.2	73.0	81.5	83.9	80.9	77.0
0.75	72.1	72.1	70.0	61.2	77.4	79.6	75.9	66.2	80.7	82.5	78.9	75.0	83.5	85.7	82.7	78.4
1.1	75.0	75.0	72.9	66.5	79.6	81.4	78.1	70.8	82.7	84.1	81.0	77.7	85.2	87.2	84.5	80.8
1.5	77.2	77.2	75.2	70.2	81.3	82.8	79.8	74.1	84.2	85.3	82.5	79.7	86.5	88.2	85.9	82.6
2.2	79.7	79.7	77.7	74.2	83.2	84.3	81.8	77.6	85.9	86.7	84.3	81.9	88.0	89.5	87.4	84.5
3	81.5	81.5	79.7	77.0	84.6	85.5	83.3	80.0	87.1	87.7	85.6	83.5	89.1	90.4	88.6	85.9
4	83.1	83.1	81.4	79.2	85.8	86.6	84.6	81.9	88.1	88.6	86.8	84.8	90.0	91.1	89.5	87.1
5.5	84.7	84.7	93.1	81.4	87.0	87.7	86.0	83.8	89.2	89.6	88.0	86.2	90.9	91.9	90.5	88.3
7.5	86.0	86.0	84.7	83.1	88.1	88.7	87.2	85.3	90.1	90.4	89.1	87.3	91.7	92.6	91.3	89.3
11	87.6	87.6	86.4	85.0	89.4	89.8	88.7	86.9	91.2	91.4	90.3	88.6	92.6	93.3	92.3	90.4
15	88.7	88.7	87.7	86.2	90.3	90.6	89.7	88.0	91.9	92.1	91.2	89.6	93.3	93.9	92.9	91.2
18.5	89.3	89.3	88.6	86.9	90.9	91.2	90.4	88.6	92.5	92.6	91.7	90.1	93.7	94.2	93.4	91.7
22	89.9	89.9	89.2	87.4	91.3	91.6	90.9	89.1	92.7	93.0	92.2	90.6	94.0	94.5	93.7	92.1
30	90.7	90.7	90.2	88.3	92.0	92.3	91.7	89.8	93.3	93.6	92.9	91.3	94.5	94.9	94.2	92.7
37	91.2	91.2	90.8	88.8	92.5	92.7	92.2	90.3	93.7	93.9	93.3	91.8	94.8	95.2	94.5	93.1
45	91.7	91.7	91.4	89.2	92.9	93.1	92.7	90.7	94.0	94.2	93.7	92.2	95.0	95.4	94.8	93.4
55	92.1	92.1	91.9	89.7	93.2	93.5	93.1	91.0	94.3	94.6	94.1	92.5	95.3	95.7	95.1	93.7
75	92.7	92.7	92.6	90.3	93.8	94.0	93.7	91.6	94.7	95.0	94.6	93.1	95.6	96.0	95.4	94.2
90	93.0	93.0	92.9	90.7	94.1	94.2	94.0	91.9	95.0	95.2	94.9	93.4	95.8	96.1	95.6	94.4
110	93.3	93.3	93.3	91.1	94.3	94.5	94.3	92.3	95.2	95.4	95.1	93.7	96.0	96.3	95.8	94.7
132	93.5	93.5	93.5	91.5	94.6	94.7	94.6	92.6	95.4	95.6	95.4	94.0	96.2	96.4	96.0	94.9
160	93.8	93.8	93.8	91.9	94.8	94.9	94.8	93.0	95.6	95.8	95.6	94.3	96.3	96.6	96.2	95.1
200	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.3	95.4
250	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.5	95.4
315	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.6	95.4
355	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.6	95.4
400	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.6	95.4
450	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.6	95.4
500- 1000	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.6	95.4

Mounting arrangements

Foot-mounted motor

Code I / code II


					
IM B3	IM V5	IM V6	IM B6	IM B7	IM B8
IM 1001	IM 1011	IM 1031	IM 1051	IM 1061	IM 1071

Product code pos. 12

A: foot-mounted, term. box top
R: foot-mounted, term. box RHS
L: foot-mounted, term. box LHS

Flange-mounted motor, large flange

Code I / code II


					
IM B5	IM V1	IM V3	*)	*)	*)
IM 3001	IM 3011	IM 3031	IM 3051	IM 3061	IM 3071

Product code pos. 12

B: flange mounted, large flange

Flange-mounted motor, small flange

Code I / code II


					
IM B14	IM V18	IM V19	*)	*)	*)
IM 3601	IM 3611	IM 3631	IM 3651	IM 3661	IM 3671

Product code pos. 12

C: flange mounted, small flange

Foot- and flange-mounted motor with feet, large flange

Code I / code II


					
IM B35	IM V15	IM V35	*)	*)	*)
IM 2001	IM 2011	IM 2031	IM 2051	IM 2061	IM 2071

Product code pos. 12

H: foot/flange-mounted, term. box top
S: foot/flange-mounted, term. box RHS
T: foot/flange-mounted, term. box LHS

Foot- and flange-mounted motor with feet, small flange

Code I / code II


					
IM B34	IM V17				
IM 2101	IM 2111	IM 2131	IM 2151	IM 2161	IM 2171

Product code pos. 12

J: foot/flange-mounted, small flange

Foot-mounted motor, shaft with free extensions

Code I / code II

					
IM 1002	IM 1012	IM 1032	IM 1052	IM 1062	IM 1072

Product code pos. 12

*) Not stated in IEC 60034-7.

Note: If the motor is mounted shaft upwards, take measures to prevent water or any other liquid from running down the shaft into the motor.

General information

Cooling

Designation system concerning methods of cooling refers to standard IEC 60034-6.

Explanation of the product code

International Cooling	Circuit arrangement	Primary coolant	Method of movement of primary coolant	Secondary coolant	Method of movement of secondary coolant
IC	4	(A)	1	(A)	6

Position 1

- 0: Free circulation (open circuit)
4: Free circulation (open circuit)

Position 2

- A: For air (omitted for simplified designation)

Position 3

- 0: Free convection
1: Self-circulation
6: Machine-mounted independent component

Position 4

- A: For air (omitted for simplified designation)
W: For water

Position 5

- 0: Free convection
1: Self-circulation
6: Machine-mounted independent component
8: Relative displacement

General information

Degrees of protection: IP code/IK code

Classification of degrees of protection provided by enclosures of rotating machines refers to:

- Standard IEC 60034-5 or EN 60529 for IP code
- Standard EN 50102 for IK code

IP protection

Protection of persons against getting in contact with (or approaching) live parts and against contact with moving parts inside the enclosure. Also protection of the machine against ingress of solid foreign objects. Protection of machines against the harmful effects due to the ingress of water.

Explanation of the IP code

Ingress protection	Degree of protection to persons and to parts of the motors inside the enclosure	Degree of protection provided by the enclosure with respect to harmful effects due to ingress of water
IP	5	5
	1	2

Position 1

- | | |
|----|---|
| 2: | Motors protected against solid objects greater than 12 mm |
| 4: | Motors protected against solid objects greater than 1 mm |
| 5: | Dust-protected motors |
| 6: | Dust-tight motors |

Position 2

- | | |
|----|--|
| 3: | Motors protected against spraying water |
| 4: | Motors protected against splashing water |
| 5: | Motors protected against water jets |
| 6: | Motors protected against heavy seas |

IK code

Classification of degrees of protection provided by enclosure for motors against external mechanical impacts.

Explanation of the IK code

International mechanical protection	Characteristic group
IK	08

Position 1

Relation between IK code and impact energy:

IK code Impact energy/Joule

0:	Not protected according to EN 50102
01:	0.15
02:	0.2
03:	0.35
04:	0.5
05:	0.7
06:	1
07:	2
08:	5 (ABB Standard)
09:	10
10:	20

Insulation

—
01 Safety margins per thermal class.

ABB uses class F insulation, which, with temperature rise B, is the most common requirement among industry today.

The use of class F insulation with class B temperature rise gives ABB products a 25 °C safety margin. This can be used to increase the loading for limited periods, to operate at higher ambient temperatures or altitudes, or with greater voltage and frequency tolerances. It can also be used to extend insulation. For instance, a 10 K temperature reduction will extend the insulation life.

Thermal class 130 (B)


- Nominal ambient temperature 40 °C
- Max permissible temperature rise 80 K
- Hot spot temperature margin 10 K

Thermal class 155 (F)

- Nominal ambient temperature 40 °C
- Max permissible temperature rise 105 K
- Hot spot temperature margin 10 K

Thermal class 180 (H)

- Nominal ambient temperature 40 °C
- Max permissible temperature rise 125 K
- Hot spot temperature margin 10 K

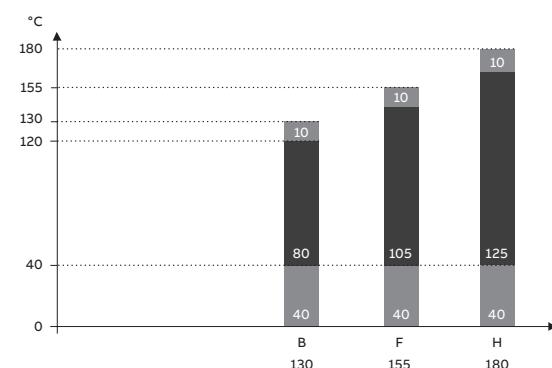

—
01

General information


Voltage and frequency

—
01 Voltage and frequency deviation in zones A and B.

The impact on temperature rise caused by voltage and frequency fluctuation is defined in IEC 60034-1. The standard divides the combinations into two zones, A and B. Zone A is the combination of voltage deviation of +/- 5 % and frequency deviation of +/- 2 %. Zone B is the combination of voltage deviation of +/- 10 % and frequency deviation of +3/-5 %. This is illustrated in figure below.

Motors are capable of supplying the rated torque in both zones A and B, but the temperature rise will be higher than at rated voltage and frequency. Motors can be run in zone B only for a short period of time.

Key	
X axis	frequency p.u.
Y axis	voltage p.u.
1	zone A
2	zone B (outside zone A)
3	rating point

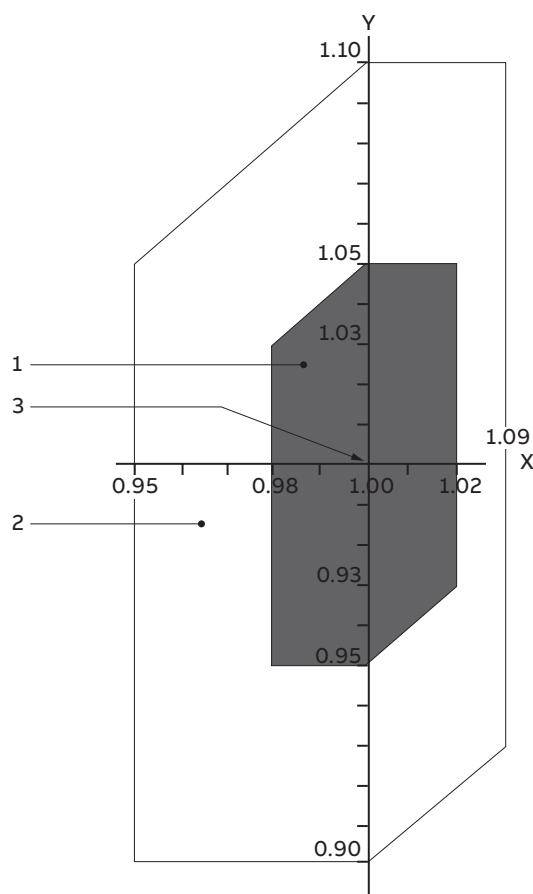

—
01

Surface treatment

The standard surface treatment of the Process performance motors is designed to meet corrosivity category C3, both outdoors and indoors. This also meets the requirements in C1 and C2.

The corrosivity categories are defined in standard ISO12944-2.

Special surface treatments for other corrosivity categories as well as offshore environments are available as options.

The standard ABB paint color for motors is Munsell blue 8B 4.5/3.25, except for special systems such as NORSO where a specific color is requested.

Atmospheric-corrosivity categories and examples of typical environments

Corrosivity category	Examples of typical environments (informative only)	
	Exterior	Interior
C1	-	Heated buildings with clean atmospheres, e.g., offices, shops, schools, hotels
C2	Atmospheres with low levels of pollution: mostly rural areas	Unheated buildings where condensation can occur, e.g., depots, sports halls
C3	Urban and industrial atmospheres, moderate sulfur dioxide pollution; coastal areas with low salinity	Production rooms with high humidity and some air pollution, e.g., food-processing plants, laundries, breweries, dairies
C4	Industrial areas and coastal areas with moderate salinity	Chemical plants, swimming pools, coastal ship- and boatyards
C5	Industrial areas with high humidity and an aggressive atmosphere, and coastal areas with high salinity	Buildings or areas with almost permanent condensation and with high pollution
CX	Offshore areas with high salinity, and industrial areas with extreme humidity and an aggressive atmosphere, and sub-tropical and tropical atmospheres	Industrial areas with extreme humidity and an aggressive atmosphere

Variable speed drives with Process performance motors

—
01 Isotherm loadability curves for motors with 50Hz nominal frequency

Variable speed drives (VSD) provide significant benefits when used together with ABB Process performance motors. The advantages include better process control and energy savings through a regulation of motor speed, and smooth starting with a reduced inrush current, reducing the stress on the equipment and supply network.

By choosing an ABB motor-drive package, users can be confident that the motor and drive combination is optimized for their application; it is a working package with a known performance.

Process performance motors are designed for both direct on line (DOL) and variable speed operation, and will, either as standard or by adding a few extras, be suitable for variable speed operations.

When selecting process performance motors for VSDs, the following points must be taken into consideration. The DriveSize selection tool helps in selecting the optimal combination of motor, drive and supply transformer.

Motor loadability with variable speed drives

The difference in the temperature rise of a motor run direct on line compared to the same motor run with a drive is influenced by factors such as the cooling effect of a shaft-mounted fan, depending on the speed of the motor, increased losses due to harmonics generated by the drive and reduced flux above the field weakening point. The effects of all these factors are combined in the loadability curves.

The isotherm loadability curves in Figure 01 show the maximum continuous load torque as a function of frequency (speed), which results in the same temperature rise as an operation with the rated sinusoidal supply at a nominal frequency and full rated load. These curves are based on measurements with ABB ACS880 drives.


The motor's maximum continuous loadability depends on the motor's actual temperature rise and the desired or allowed maximum temperature rise, typically class B or class F. Use the DriveSize dimensioning tool to choose the right motor and drive for your application. In DriveSize, you can specify the desired temperature rise and the tool

scales the loadability curve according to the actual motor temperature rise.

If the motor is loaded according to the temperature rise F , it will be necessary to check the temperature rise in other parts of the motor and ensure that the lubrication intervals and grease type are still appropriate.

Many applications also demand short time overloadability. In the DriveSize tool, you can also specify short time overload needs and the tool will choose the right products for your task.

Temperature rise B

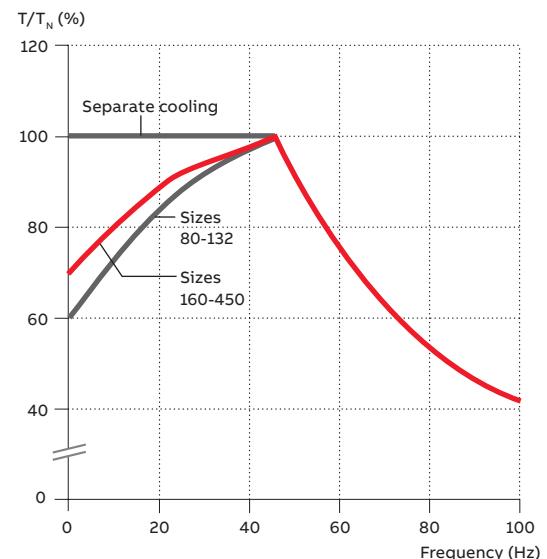

—
01

Operating speed

Process performance motors are designed to work over a wide speed range and also at speeds significantly higher than nominal. The maximum speeds can be found on motor rating plates or in DriveSize. In addition to the motor speed, make sure that the maximum or critical speed of the entire application is not exceeded.

—
02 Maximum allowed phase-to-phase voltage peaks at motor terminals, as a function pulse rise time.

Ventilation

When the motor is operating at low speeds, the cooling capacity of the fan decreases, which again reduces the motor's load capacity. A separate, constant-speed fan (variant codes 183, 422, 514) can be used to increase the cooling capacity at low speed, if required for loads with constant torque characteristics.

Lubrication

The lubrication interval of regreasable bearings depends on the running speed of the motor and the bearing temperature. Motors in frame size 280 and larger are delivered as standard with a lubrication plate in tabular format that states the relubrication intervals at different speeds and temperatures. A similar plate is optional for sizes 160–250 and can be ordered by using the variant code 795. Smaller motors usually have greased, sealed-for-life bearings. Please refer to the installation, operation and safety manual for further information on lubrication.

Winding insulation

To ensure that motors operate reliably, the effects of non-sinusoidal output voltages from the converter must be taken into consideration when selecting the correct insulation system for the motor and output filters for the drive. The insulation and filters must be selected according to the table below.

Winding insulation and filters required	
$U_N \leq 500 \text{ V}$	Standard insulation
$U_N \leq 600 \text{ V}$	Standard insulation + dU/dt filters OR Special insulation (variant code 405)
$U_N \leq 690 \text{ V}$	Special insulation (variant code 405) AND dU/dt-filters at converter output
$600 \text{ V} < U_N \leq 690 \text{ V}$ cable length $> 150 \text{ m}$	Special insulation (variant code 405)

Table 1. Guideline maximum speed values for Process performance motors.

For more information on dU/dt filters, see the relevant ABB drives documents.


For other drives and cases where the guidelines shown in table above cannot be applied, the selection must be based on the voltages present at the motor terminals.

Allowed phase-to-ground voltage peaks at motor terminals:

- 1,300 V peak: standard insulation
- 1,800 V peak: special insulation, variant code 405

The maximum allowed phase-to-phase voltage peaks at the motor terminals as a function of the pulse rise time are shown in Figure 02. The higher

curve (special insulation) applies to motors with special winding insulation for a variable speed drive supply (variant code 405). Standard insulation applies to motors with a standard design.

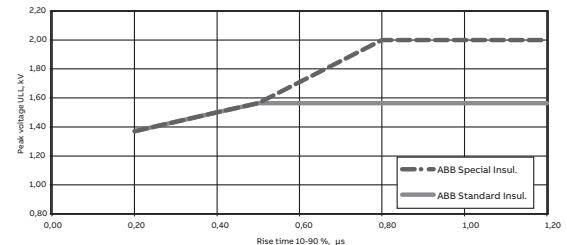

—
02

Bearing currents

Bearing voltages and currents must be avoided in all motors to ensure reliable operation of the entire application. Table 2 below gives the selection rules, depending on motor output power and frame size, when used together with ABB drive products; the same rules can also be applied as guidance when using ABB Process performance motors with other manufacturers' drives.

Nominal power (P_N and / or Frame size (IEC))	Precautionary measures
$P_N < 100 \text{ kW}$	No action needed
$P_N \geq 100 \text{ kW}$ OR IEC 315 ≤ Frame size ≤ IEC 355	Insulated non-drive end bearing
$P_N \geq 350 \text{ kW}$ OR IEC 400 ≤ Frame size ≤ IEC 450	Insulated non-drive end bearing AND Common mode filter at the converter

Table 2. Precautionary measures to avoid bearing currents in variable speed drives.

Common mode filters

Common mode filters are installed at the output of the variable speed drive. These filters reduce common mode currents and, thus, decrease the risk of bearing currents. Common mode filters do not significantly affect the phase of main voltages on motor terminals. For more information, see the ABB drives documents.

Insulated bearings

ABB uses bearings with an insulated outer race or hybrid bearings with ceramic rolling elements.

Insulated bearings at the non-drive end should be selected as indicated in Table 2. This solution can be ordered by using variant code 701.

Earthing and cabling

For motors with a nominal power above 30 kW, cables with a symmetrical concentric protective earth should be used across the system. The same type of cables are also recommended for motors with an output of 30 kW and below.

Solutions for persistent bearing currents

In exceedingly rare cases, bearing currents might still exist even if the measures specified above have been taken. For such installations, there are two advanced methods that would provide a remedy: either a shaft grounding bush, or insulated bearings at both ends.

The shaft grounding bush is installed inside the motor to protect it from the environment and ensure good grounding of the shaft. The shaft grounding brush can be ordered by using variant code 588.

The second advanced solution is to mount insulated bearings at both ends. These can either be bearings with an insulated outer cage, or hybrid bearings with ceramic rolling elements. Insulated bearings at both ends can be ordered by using variant code 702. Note that this variant cannot be combined with special drive-end bearing solutions, such as roller bearings or angular contact ball bearings.

Electromagnetic compatibility (EMC)

The high-frequency components in a variable speed drive might cause electromagnetic interference with other equipment in the installation. To avoid this, certain measures should be taken. To meet EMC requirements, special EMC cables glands with a 360° connection to the concentric protective earth conductor should be used. Such cable glands can be used with variant code 704.

Low voltage

Process performance cast iron motors

Sizes 71 to 450, 0.09 to 1000 kW

18	Ordering information
19	Rating plates
20	Technical data 400 V 50 Hz
20	IE4 cast iron motors
23	IE3 cast iron motors
33	IE2 cast iron motors
42	Technical data 460 V 60 Hz
42	IE4 cast iron motors
45	IE3 cast iron motors
55	IE2 cast iron motors
64	Variant codes
71	Mechanical design
71	Motor frame and drain holes
74	Bearings
85	Terminal box
95	Dimension drawings
95	IE4 cast iron motors
97	IE3 cast iron motors
99	IE2 cast iron motors
100	Accessories
100	Built-in brake
103	Separate cooling
105	Silencer
106	Slide rails
108	Cast iron motors in brief
111	Motor construction

Ordering information

Explanation of the product code

Motor type	Motor size	Product code	Mounting arrangement code, Voltage and frequency code, Generation code	Variant codes
				1 2 3 4 5 6 7 8 9 10 11 12 13 14
M3BP 160MLA 3GBP 161 410 - ADG				003, etc.

Positions 1 to 4

3GBP Totally enclosed fan cooled squirrel cage motor with cast iron frame

Positions 5 and 6

IEC size	IEC size
07:	71
08:	80
09:	90
10:	100
12:	112
13:	132
16:	160
18:	180
	20: 200
	22: 225
	25: 250
	28: 280
	31: 315
	35: 355
	40: 400
	45: 450

Position 7

Speed (Pole pairs)

1:	2 poles
2:	4 poles
3:	6 poles
4:	8 poles
5:	10 poles
6:	12 poles
7:	> 12 poles
8:	Two-speed motors for fan drive motors for constant torque
9:	Multi-speed motors, two-speed

Positions 8 to 10

Serial number

Position 11

-(dash)

Position 12 (marked with black dot in data tables)

Mounting arrangement

A:	Foot-mounted, top-mounted terminal box
R:	Foot-mounted, terminal box RHS seen from D-end
L:	Foot-mounted, terminal box LHS seen from D-end
B:	Flange-mounted, large flange
C:	Flange-mounted, small flange (sizes 71 to 112)
H:	Foot- and flange-mounted, terminal box top-mounted

Position 12 (marked with black dot in data tables)

J:	Foot- and flange-mounted, small flange with tapped holes
S:	Foot- and flange-mounted, terminal box RHS seen from D-end
T:	Foot- and flange-mounted, terminal box LHS seen from D-end
V:	Flange-mounted, special flange
F:	Foot- and flange-mounted. Special flange

Position 13 (marked with black dot in data tables)

Voltage and frequency	
Single-speed motors	
B:	380 VΔ 50 Hz
D:	400 VΔ, 415 VΔ, 690 VY 50 Hz
E:	500 VΔ 50 Hz
F:	500 VY 50 Hz
S:	230 VΔ, 400 VY, 415 VY 50 Hz
T:	660 VΔ 50 Hz
U:	690 VΔ 50 Hz
X:	Other rated voltage, connection or frequency, 690 V maximum

Position 14

Generation code

A, B, C...G...K: The product code must be, if needed, followed by variant codes.

Efficiency values are given according to IEC 60034-2-1; 2014

For detailed dimension drawings please see our web-pages 'www.abb.com/motors&generators' or contact ABB.

Rating plates


—
01 Rating plate example,
motor size 250, IE5.

02 Rating plate example,
motor size 280, K genera-
tion, IE3.


03 Rating plate example,
motor size 160, K genera-
tion, IE3.

04 Rating plate example,
motor size 280, IE2.

The motor's main rating plate shows the motor's performance values with various connections at nominal speed. The rating plate also shows the efficiency level (IE2, IE3, or IE4), year of manufac-
ture, and the lowest nominal efficiency at 100, 75,
and 50 % nominal load.

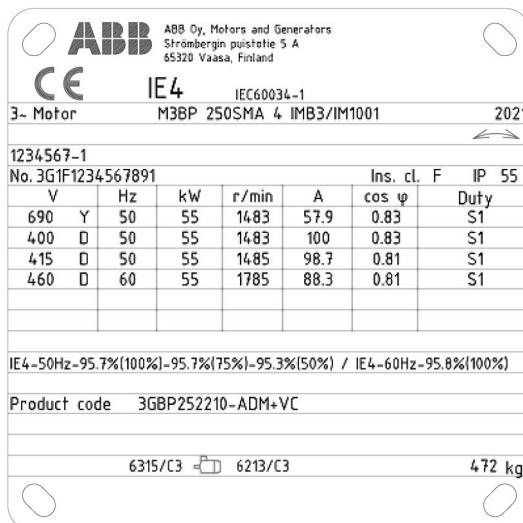


—
01

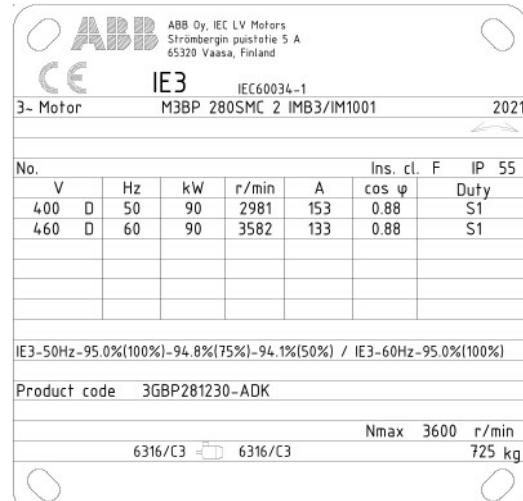


—
02

The plate samples shown on this page present typical data rows. The actual content of the plate may vary according to your order and according to the motor's IE class.

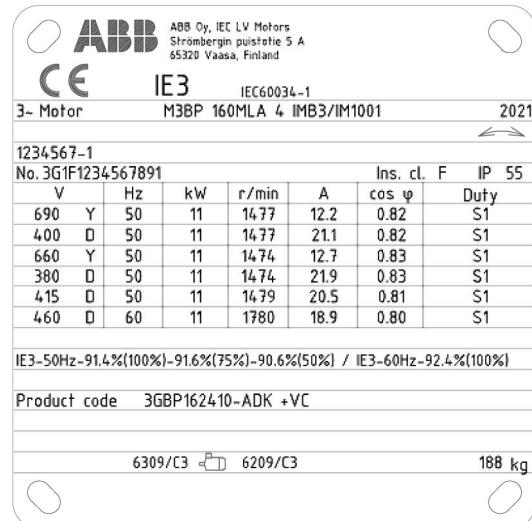

—
03

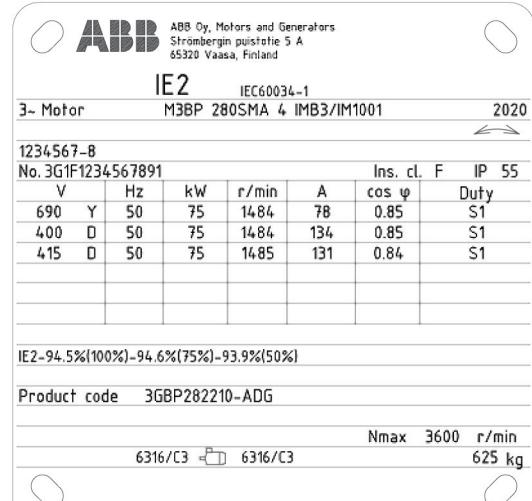

—
04

Technical data, 400 V 50 Hz

IE4 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE4 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1: 2014			Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_b/T_N	T_i/T_N	Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
				Full load 100%	3/4 load 75%	1/2 load 50%									
3000 r/min = 2 poles															
3	M3BP 100LKA 2	3GBP101810---M	2920	89.1	88.7	86.1	0.90	5.41	9.6	10	2.7	4.2	0.0087	57	57
4	M3BP 112MB 2	3GBP111320---M	2882	90.0	91.3	91.7	0.91	7.05	8.8	13.4	2.4	3.9	0.0134	66	61
5.5	M3BP 132SMB 2	3GBP131220---M	2933	90.9	91.8	91.9	0.93	9.28	7.6	17.91	1.6	3.5	0.0158	85	62
7.5	M3BP 132SMC 2	3GBP131230---M	2933	91.7	92.7	92.8	0.92	13	9.3	24.4	2.4	4.0	0.0177	90	62
11	M3BP 160MLA 2	3GBP161410---M	2953	92.6	92.9	92.4	0.88	19.5	8.3	35.57	3.3	4.1	0.0514	141	69
15	M3BP 160MLB 2	3GBP161420---M	2955	93.3	93.5	93.0	0.88	26.4	9.0	48.48	3.8	4.4	0.0612	170	69
18.5	M3BP 160MLC 2	3GBP161430---M	2943	93.7	94.4	94.5	0.90	31.6	8.6	60.7	3.3	4.0	0.079	179	67
22	M3BP 180MLA 2	3GBP181410---M	2960	94.0	94.3	94.1	0.88	38.1	8.5	71.5	2.7	3.5	0.126	224	67
30	M3BP 200MLA 2	3GBP201410---M	2957	94.5	94.8	94.9	0.91	50.4	7.3	96.88	2.1	3.0	0.196	289	72
37	M3BP 200MLB 2	3GBP201420---M	2955	94.8	95.4	95.4	0.89	63.4	7.5	121	2.7	3.7	0.217	309	72
45	M3BP 225SMA 2	3GBP221210---M	2971	95.0	95.2	94.5	0.88	77.3	8.0	145	3.4	3.6	0.323	395	74
55	M3BP 250SMA 2	3GBP251210---M	2976	95.3	95.5	95.2	0.88	94.4	8.4	178	3.3	3.6	0.634	483	75
75	M3BP 280SMB 2	3GBP281220---M	2980	95.6	95.6	94.9	0.87	129	7.3	240	2.5	2.9	0.9	665	77
90	M3BP 280SMC 2	3GBP281230---M	2981	95.8	95.6	95.0	0.88	153	8.0	288	3.0	3.1	1.15	725	77
110	M3BP 315SMB 2	3GBP311220---M	2982	96.0	96.0	95.3	0.88	189	6.7	352	1.9	2.6	1.4	940	77
132	M3BP 315SMC 2	3GBP311230---M	2986	96.2	96.3	95.9	0.88	226	7.9	422	2.4	3.0	1.7	1025	77
160	M3BP 315MLA 2	3GBP311410---M	2983	96.3	96.5	96.3	0.90	268	7.3	512	2.2	2.7	2.1	1190	77
200	M3BP 315MLB 2	3GBP311420---M	2983	96.5	96.8	96.7	0.90	333	6.8	640	1.9	2.6	2.2	1220	77
250	M3BP 355SMB 2	3GBP351220---M	2983	96.5	96.6	96.2	0.90	415	7.6	800	2.2	3.0	3.4	1680	83
315	M3BP 355SMC 2	3GBP351230---M	2984	96.5	96.5	95.9	0.89	533	7.8	1008	2.3	2.8	3.6	1750	83
355	M3BP 355MLA 2	3GBP351410---M	2981	96.5	96.7	96.3	0.90	595	7.5	1137	2.3	2.6	4.1	2000	83
400	M3BP 355MLB 2	3GBP351420---M	2982	96.5	96.2	95.5	0.88	677	7.1	1280	2.3	2.9	4.1	2000	83
450	M3BP 355MLC 2	3GBP351430---M	2983	96.5	96.5	95.7	0.90	743	7.9	1440	2.2	2.9	4.3	2080	83
500	M3BP 355LKA 2	3GBP351810---M	2982	96.5	96.5	96.0	0.90	827	7.5	1601	2.0	3.9	4.8	2320	83
560	²⁾ M3BP 400LA 2	3GBP401510---M	2988	96.5	96.5	95.7	0.89	934	7.8	1789	2.5	3.7	7.9	2950	82
630	²⁾ M3BP 400LB 2	3GBP401520---M	2987	96.5	96.2	95.6	0.89	1049	7.6	2014	2.6	3.7	8.2	2950	82
710	²⁾ M3BP 400LC 2	3GBP401530---M	2987	96.5	96.3	95.7	0.89	1178	7.2	2270	2.6	3.4	9.3	3050	82
800	^{2) 3)} M3BP 450LA 2	3GBP451510---M	2990	96.5	96.2	95.4	0.87	1362	7.8	2555	1.3	3.4	12.2	4000	85
900	^{2) 3)} M3BP 450LB 2	3GBP451520---M	2990	96.5	96.2	95.5	0.87	1534	7.6	2874	1.5	3.1	13.5	4000	85
1000	^{2) 3) 8)} M3BP 450LC 2	3GBP451530---M	2990	96.5	96.3	95.5	0.88	974	7.2	3194	1.7	3	14.5	4400	85

²⁾ Unidirectional fan construction as standard. Direction of rotation must be stated when ordering, see variant codes 044 and 045.

³⁾ Temperature rise class F

⁸⁾ Only available network voltage 690VDC

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1: 2014			Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N	Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
				Full load 100%	3/4 load 75%	1/2 load 50%									
3000 r/min = 2 poles															
110	M3BP 280SMD 2	3GBP281240---M	2979	96.0	96.0	95.3	0.85	192	8.4	352	2.9	3.7	1.15	725	77
132	M3BP 280MLA 2	3GBP281410---M	2979	96.2	96.2	95.6	0.87	225	8.2	423	3.0	3.5	1.4	840	81
160	M3BP 280MLB 2	3GBP281420---M	2968	96.3	96.6	96.6	0.90	266	6.7	515	2.4	2.6	1.55	890	81
250	M3BP 315LKB 2	3GBP311820---M	2982	96.5	96.8	96.8	0.91	413	7.9	800	2.5	2.7	2.9	1540	77

Technical data, 400 V 50 Hz

IE4 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE4 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB		
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
				400 V 50 Hz	CENELEC-design											
1500 r/min = 4 poles																
2.2	M3BP 100LKA 4	3GBP102810--M	1460	89.5	89.7	89.7	0.81	4.4	7.4	14.39	2.5	3.9	0.0233	57	54	
3	M3BP 100LKB 4	3GBP102820--M	1460	90.4	90.3	90.4	0.78	6.12	8.8	19.8	3.0	3.9	0.0266	62	54	
4	M3BP 112MB 4	3GBP112320--M	1463	91.1	91.6	90.8	0.77	8.2	8.2	26.3	3.3	4.2	0.0244	70	55	
5.5	M3BP 132SMB 4	3GBP132220--M	1468	91.9	92.4	91.9	0.81	10.6	7.3	35.78	2.5	3.7	0.0425	93	60	
7.5	M3BP 132SMC 4	3GBP132230--M	1465	92.6	93.2	92.8	0.76	15.4	8.5	49.2	3.2	4.0	0.0488	101	60	
11	M3BP 160MLA 4	3GBP162410--M	1477	93.3	93.4	92.9	0.79	21.6	7.6	71.1	2.7	3.7	0.123	188	62	
15	M3BP 160MLB 4	3GBP162420--M	1478	93.9	94.1	93.2	0.76	30.3	8.3	98.4	3.5	3.9	0.127	175	62	
18.5	M3BP 180MLA 4	3GBP182410--M	1482	94.2	94.2	93.5	0.83	34.2	8.6	121	3.0	3.8	0.191	226	62	
22	M3BP 180MLC 4	3GBP182430--M	1479	94.5	94.5	93.9	0.81	40.7	9.4	141	3.2	3.9	0.22	247	62	
30	M3BP 200MLA 4	3GBP202410--M	1486	94.9	94.9	94.2	0.76	59.8	8.7	194	4.1	4.2	0.369	304	63	
37	M3BP 225SMA 4	3GBP222210--M	1480	95.2	95.7	95.6	0.84	66.8	7.5	239	3.1	3.2	0.536	383	66	
45	M3BP 225SMB 4	3GBP222220--M	1478	95.4	96.0	96.2	0.85	80.1	7.3	291	2.5	2.9	0.536	403	66	
55	M3BP 250SMA 4	3GBP252210--M	1483	95.7	95.8	95.4	0.83	100	7.8	354	3.3	3.5	0.933	467	67	
75	M3BP 280SMC 4	3GBP282230--M	1487	96.0	96.4	96.1	0.86	130	7.8	481	2.8	2.9	1.85	725	72	
90	M3BP 280MLA 4	3GBP282410--M	1489	96.1	96.5	96.4	0.85	160	8.8	577	3.4	3.2	2.3	840	72	
110	M3BP 315SMC 4	3GBP312230--M	1491	96.3	96.5	96.1	0.85	194	7.8	704	2.4	3.1	2.9	1000	68	
132	M3BP 315SMD 4	3GBP312240--M	1490	96.4	96.6	96.2	0.85	234	7.9	846	2.6	3.2	3.2	1065	68	
160	M3BP 315MLB 4	3GBP312420--M	1490	96.6	96.8	96.4	0.86	278	7.9	1026	2.7	3.0	3.9	1220	68	
200	M3BP 315LKB 4	3GBP312820--M	1490	96.7	96.9	96.8	0.87	346	7.6	1282	2.5	2.9	5	1480	74	
250	M3BP 355SMB 4	3GBP352220--M	1491	96.7	96.8	96.5	0.87	433	7.8	1601	2.5	2.9	6.9	1780	74	
315	M3BP 355SMC 4	3GBP352230--M	1490	96.7	96.8	96.5	0.86	554	7.4	2017	2.8	2.9	7.2	1820	74	
355	M3BP 355MLA 4	3GBP352410--M	1491	96.7	96.9	96.5	0.87	616	7.9	2274	2.7	2.9	8.4	2140	78	
400	M3BP 355MLB 4	3GBP352420--M	1490	96.7	96.7	96.3	0.85	700	6.8	2563	2.1	2.8	8.4	2140	78	
450	M3BP 355MLC 4	3GBP352430--M	1489	96.7	96.7	96.5	0.86	779	6.8	2886	2.4	2.8	8.4	2140	78	
500	M3BP 355LKA 4	3GBP352810--M	1490	96.7	96.7	96.1	0.86	865	6.8	3204	2.0	3.0	10	2500	78	
560	³⁾ M3BP 400LA 4	3GBP402510--M	1491	96.7	96.7	96.3	0.85	982	7.4	3586	2.4	2.8	15	3200	78	
630	M3BP 400LB 4	3GBP402520--M	1491	96.7	96.7	96.2	0.86	1091	7.6	4034	2.2	2.9	16	3300	78	
710	³⁾ M3BP 400LC 4	3GBP402530--M	1491	96.7	96.7	96.2	0.84	1227	7.6	4547	2.4	3.0	17	3300	78	
800	M3BP 450LA 4	3GBP452510--M	1491	96.7	96.7	96.2	0.86	1388	7.0	5121	1.3	2.8	23	4050	85	
900	M3BP 450LB 4	3GBP452520--M	1491	96.7	96.5	96.0	0.85	1575	7.0	5761	1.3	2.8	25	4050	85	
1000	³⁾ M3BP 450LC 4	3GBP452530--M	1491	96.7	96.7	96.1	0.86	1724	6.8	6404	1.3	2.7	30	4350	85	

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB		
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
				400 V 50 Hz	High-output design											
1500 r/min = 4 poles																
110	M3BP 280MLB 4	3GBP282420--M	1489	96.3	96.3	95.7	0.80	205	8.8	706	4.0	4.0	2.5	890	75	
132	M3BP 280MLC 4	3GBP282430--M	1489	96.4	96.4	95.8	0.80	247	8.3	846	3.5	4.1	2.5	890	75	
250	M3BP 315LKC 4	3GBP312830--M	1490	96.7	96.9	96.8	0.87	432	7.8	1601	2.3	3.0	5.5	1600	74	

³⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE4 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE4 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N					
				400 V 50 Hz	CENELEC-design												
1000 r/min = 6 poles																	
1.5	M3BP 100LKB 6	3GBP103820--M	972	85.9	85.8	83.7	0.73	3.34	6.2	14.74	2.1	3.5	0.0159	51	49		
2.2	M3BP 112MB 6	3GBP113320--M	973	87.4	87.9	87.0	0.71	5	6.8	21.4	2.3	3.4	0.0198	63	55		
3	M3BP 132SMB 6	3GBP133220--M	979	88.6	89.1	88.1	0.80	5.9	5.7	29.27	1.5	2.8	0.0347	85	64		
4	M3BP 132SMC 6	3GBP133230--M	978	89.5	90.0	89.3	0.80	7.92	5.6	39.07	1.5	2.8	0.0385	90	64		
5.5	M3BP 132SMD 6	3GBP133240--M	973	90.5	91.3	91.1	0.75	11.7	5.8	54	1.7	2.8	0.0422	97	64		
7.5	M3BP 160MLA 6	3GBP163410--M	984	91.3	91.0	89.4	0.75	15.8	7.1	72.78	1.8	3.6	0.133	187	59		
11	M3BP 160MLB 6	3GBP163420--M	980	92.3	92.3	91.7	0.76	22.8	7.3	109	1.9	3.4	0.133	189	59		
15	M3BP 180MLA 6	3GBP183410--M	985	92.9	92.8	91.8	0.72	32.1	7.4	147	2.8	3.8	0.254	240	59		
18.5	M3BP 200MLA 6	3GBP203410--M	991	93.4	94.1	93.6	0.81	35.2	7.8	178	2.3	3.5	0.448	291	63		
22	M3BP 200MLB 6	3GBP203420--M	986	93.7	94.0	94.0	0.81	42	6.9	216	2.5	3.1	0.531	306	63		
30	M3BP 225SMA 6	3GBP223210--M	988	94.2	94.5	94.1	0.78	59.2	7.3	290	3.0	3.4	0.813	369	63		
37	M3BP 250SMA 6	3GBP253210--M	992	94.5	94.9	94.8	0.76	74	8.6	357	3.7	3.7	1.49	457	63		
45	M3BP 280SMB 6	3GBP283220--M	992	94.8	95.1	94.6	0.85	80.9	7.5	434	2.4	2.6	2.2	680	65		
55	M3BP 280SMC 6	3GBP283230--M	990	95.1	95.4	95.1	0.85	99.4	6.8	506	2.4	2.6	2.85	725	65		
75	M3BP 315SMC 6	3GBP313230--M	994	95.4	95.6	95.2	0.83	138	7.0	721	2.2	2.8	4.9	1000	67		
90	M3BP 315SMD 6	3GBP313240--M	994	95.6	95.8	95.4	0.81	170	7.2	864	2.4	2.9	4.9	1040	67		
110	M3BP 315MLB 6	3GBP313420--M	994	95.8	96.0	95.8	0.83	202	6.9	1057	2.3	2.7	6.3	1200	68		
132	M3BP 315LKA 6	3GBP313810--M	993	96.0	96.2	96.0	0.82	243	6.9	1269	2.4	2.7	7.3	1410	68		
160	M3BP 355SMB 6	3GBP353220--M	995	96.2	96.2	95.7	0.82	294	7.0	1536	2.1	2.7	9.7	1680	73		
200	M3BP 355SMC 6	3GBP353230--M	995	96.3	96.5	96.1	0.82	367	7.3	1920	2.3	2.8	11.3	1820	73		
250	M3BP 355MLB 6	3GBP353420--M	995	96.5	96.7	96.6	0.83	456	7.1	2399	2.3	2.7	13.5	2180	73		
315	M3BP 355LKA 6	3GBP353810--M	994	96.6	96.7	96.5	0.83	576	6.9	3026	2.3	2.6	15.5	2500	76		
355	M3BP 355LKB 6	3GBP353820--M	995	96.7	96.7	96.3	0.81	668	7.7	3407	2.7	2.9	16.5	2600	76		
400	M3BP 400LA 6	3GBP403510--M	993	96.6	96.7	96.4	0.82	729	7.4	3846	2.5	2.6	17	2900	76		
450	M3BP 400LB 6	3GBP403520--M	993	96.6	96.7	96.4	0.82	820	7.0	4327	2.4	2.4	18.6	2990	76		
500	M3BP 400LC 6	3GBP403530--M	994	96.6	96.5	95.8	0.83	900	8.0	4803	2.6	3.1	22	3300	76		
560	M3BP 400LD 6	3GBP403540--M	993	96.6	96.6	96.1	0.85	984	7.4	5386	2.4	2.8	24	3400	77		
630	M3BP 450LA 6	3GBP453510--M	995	96.6	96.6	95.9	0.82	1146	7.5	6046	1.4	3.2	31	4150	81		
710	M3BP 450LB 6	3GBP453520--M	995	96.6	96.7	96.1	0.85	1244	7.0	6814	1.3	2.5	37	4500	81		
800	³⁾ M3BP 450LC 6	3GBP453530--M	995	96.6	96.6	96.0	0.84	1415	7.2	7677	1.3	2.7	41	4800	81		

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N					
				400 V 50 Hz	High-output design												
1000 r/min = 6 poles																	
160	M3BP 315LKC 6	3GBP313830--M	994	96.2	96.4	96.3	0.82	297	7.4	1537	2.7	2.9	9.2	1600	68		

³⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1: 2014			Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_f/T_N	T_b/T_N	Moment of inertia $J = 1/4$ $GD^2 \text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
				Full load 100%	3/4 load 75%	1/2 load 50%									
3000 r/min = 2 poles															
0.37	M3BP 71MC 2	3GBP071330---K	2743	73.8	74.4	71.7	0.76	0.94	4.9	1.26	2.3	2.8	0.00088	10	58
0.55	M3BP 71ME 2	3GBP071350---K	2755	77.8	79.3	78.4	0.83	1.25	6.8	1.9	2.8	3.1	0.00045	11	56
0.75	M3BP 80MD 2	3GBP081340---K	2894	80.7	80.4	77.2	0.74	1.7	7.9	2.4	3.7	4.2	0.0008	18	57
1.1	M3BP 80MG 2	3GBP081370---K	2883	82.7	82.4	80.6	0.81	2.3	7.9	3.6	3.7	4.2	0.001	19	56
1.5	M3BP 90LB 2	3GBP091520---K	2906	84.2	84.7	84.6	0.89	2.8	7.9	4.9	2.3	3.3	0.0027	31	60
2.2	M3BP 90LC 2	3GBP091530---K	2900	85.9	87.5	87.6	0.89	4	8.3	7.2	2.9	3.5	0.0032	35	60
3	M3BP 100LKA 2	3GBP101810---K	2896	87.1	88.2	88.0	0.90	5.4	8.4	9.8	3.2	3.9	0.0057	50	62
4	M3BP 112MG 2	3GBP111370---K	2888	88.1	89.4	89.6	0.91	7.1	8.4	13.2	3.2	4.0	0.0104	56	68
5.5	M3BP 132SMF 2	3GBP131260---K	2901	89.2	89.9	90.1	0.91	9.7	7.9	18.1	2.3	3.4	0.0154	77	68
7.5	M3BP 132SMG 2	3GBP131270---K	2909	90.1	91.2	91.4	0.90	13.1	8.3	24.6	3.0	3.9	0.0173	77	70
11	M3BP 160MLA 2	3GBP161410---K	2943	91.2	92.0	91.6	0.91	19.1	7.2	35.57	2.6	3.6	0.057	141	69
15	M3BP 160MLB 2	3GBP161420---K	2947	91.9	92.2	91.8	0.88	26.5	8.2	48.49	3.2	4.2	0.063	170	69
18.5	M3BP 160MLC 2	3GBP161430---K	2949	92.4	93.0	92.6	0.90	32	9.0	59.8	3.3	3.9	0.076	183	73
22	M3BP 180MLA 2	3GBP181410---K	2956	92.7	93.1	92.7	0.90	37.7	7.8	71.0	3.0	3.8	0.11	234	73
30	M3BP 200MLA 2	3GBP201410---K	2962	93.3	93.5	92.8	0.87	53.2	7.6	96.8	3.1	3.8	0.159	289	73
37	M3BP 200MLB 2	3GBP201420---K	2959	93.7	93.9	93.2	0.90	63.5	8.2	119	3.0	3.3	0.196	314	73
45	M3BP 225SMA 2	3GBP221210---K	2968	94.0	94.0	93.0	0.87	79.6	7.3	145	3.2	3.1	0.296	409	76
55	M3BP 250SMA 2	3GBP251210---K	2968	94.3	93.7	93.4	0.89	94.8	6.8	177	2.4	3.0	0.426	452	76
75	M3BP 280SMB 2	3GBP281220---K	2978	94.7	94.4	93.5	0.88	130	7.0	240	2.3	3.0	0.9	665	77
90	M3BP 280SMC 2	3GBP281230---K	2981	95.7	95.6	95.0	0.88	153	8.0	288	3.0	3.1	1.15	725	77
110	M3BP 315SMB 2	3GBP311220---K	2982	95.9	95.9	95.2	0.88	189	6.7	352	1.9	2.6	1.4	940	77
132	M3BP 315SMC 2	3GBP311230---K	2986	96.1	96.2	95.9	0.88	226	7.9	422	2.4	3.0	1.7	1025	77
160	M3BP 315MLA 2	3GBP311410---K	2983	95.6	95.6	94.9	0.87	275	7.4	512	2.2	2.8	1.7	1190	78
200	M3BP 315MLB 2	3GBP311420---K	2983	95.8	95.8	95.3	0.88	342	7.7	640	2.5	3.1	2.1	1220	81
250	M3BP 355SMB 2	3GBP351220---K	2984	95.8	95.5	94.5	0.89	423	7.7	800	2.1	3.3	3	1680	83
315	M3BP 355SMC 2	3GBP351230---K	2980	95.8	95.7	95.0	0.89	531	7.0	1009	2.1	3.0	3.4	1750	83
355	M3BP 355MLA 2	3GBP351410---K	2984	95.8	95.8	94.9	0.88	603	7.2	1136	2.2	3.0	3.6	2000	83
400	M3BP 355MLB 2	3GBP351420---K	2982	95.8	95.6	94.7	0.88	677	7.1	1280	2.3	2.9	4.1	2000	83
450	M3BP 355MLC 2	3GBP351430---K	2983	95.8	95.8	95.0	0.90	743	7.9	1440	2.2	2.9	4.3	2080	83
500	M3BP 355LKA 2	3GBP351810---K	2982	95.8	95.8	95.3	0.90	827	7.5	1601	2.0	3.9	4.8	2320	83
560	²⁾ M3BP 400LA 2	3GBP401510---K	2988	95.8	95.8	94.9	0.89	934	7.8	1789	2.5	3.7	7.9	2950	82
560	M3BP 355LKB 2	3GBP351820---K	2983	95.8	95.8	95.1	0.90	925	8.0	1792	2.2	4.1	5.2	2460	83
630	²⁾ M3BP 400LB 2	3GBP401520---K	2987	95.8	95.5	94.8	0.89	1049	7.6	2014	2.6	3.7	8.2	3050	82
710	²⁾ M3BP 400LC 2	3GBP401530---K	2987	95.8	95.7	94.9	0.89	1178	7.2	2270	2.6	3.4	9.3	3300	82
800	^{2) 3)} M3BP 450LA 2	3GBP451510---K	2990	95.8	95.5	94.5	0.87	1362	7.8	2555	1.3	3.4	12.2	4000	85
900	^{2) 3)} M3BP 450LB 2	3GBP451520---K	2990	95.8	95.5	94.7	0.87	1534	7.6	2874	1.5	3.1	13.5	4200	85
1000	^{2) 3) 8)} M3BP 450LC 2	3GBP451530---K	2990	95.8	95.6	94.6	0.88	974	7.2	3194	1.7	3	14.5	4400	85

²⁾ Unidirectional fan construction as standard. Direction of rotation must be stated when ordering, see variant codes 044 and 045.

³⁾ Temperature rise class F

⁸⁾ Only available network voltage 690VD

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
3000 r/min = 2 poles			400 V 50 Hz					High-output design							
22	M3BP 160MLD 2	3GBP161440--K	2944	92.7	93.5	93.5	0.90	38	8.4	71.4	3.2	3.7	0.071	174	74
30	M3BP 180MLB 2	3GBP181420--K	2957	93.3	94.0	93.9	0.88	52.7	8.7	96.9	3.0	3.8	0.104	215	74
37	M3BP 180MLC 2	3GBP181430--K	2950	93.7	94.2	94.2	0.86	66	8.4	120	3.4	4.3	0.117	229	74
45	M3BP 200MLC 2	3GBP201430--K	2956	94.0	94.6	94.8	0.89	77.2	7.8	145	2.9	3.3	0.216	305	74
55	M3BP 225SMB 2	3GBP221220--K	2968	94.3	94.5	94.0	0.89	93.8	8.2	177	2.9	2.9	0.274	355	76
75	M3BP 225SMC 2	3GBP221230--K	2965	94.7	95.0	94.7	0.88	130	8.7	242	3.4	3.0	0.309	408	76
75	M3BP 250SMB 2	3GBP251220--K	2971	94.7	95.1	94.8	0.90	127	7.9	241	2.8	3.3	0.583	479	81
90 ³⁾	M3BP 250SMC 2	3GBP251230--K	2974	95.0	95.2	94.7	0.89	154	9.7	289	3.3	3.6	0.644	495	81
200	M3BP 315MLB 2	3GBP311420--K	2983	95.8	95.8	95.3	0.88	342	7.7	640	2.5	3.1	2.1	1220	81
250	M3BP 315LKB 2	3GBP311820--K	2982	96.4	96.7	96.7	0.91	413	7.9	800	2.5	2.7	2.9	1540	77

³⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
1500 r/min = 4 poles												CENELEC-design			
0.25	M3BP 71MD 4	3GBP072340--K	1416	73.5	75.1	73.8	0.80	0.6	4.8	1.68	2.0	2.6	0.0009	11	45
0.37	M3BP 71MLE 4	3GBP072450--K	1432	77.3	77.4	74.5	0.76	0.9	5.8	2.46	2.7	3.3	0.00122	15	45
0.55	M3BP 80MLD 4	3GBP082440--K	1439	82.9	84.2	83.5	0.81	1.18	6.3	3.6	2.7	3.3	0.0028	20	45
0.75	M3BP 80MLG 4	3GBP082470--K	1440	82.5	82.4	80.2	0.76	1.68	7.9	4.9	3.3	3.7	0.0027	22	54
1.1	M3BP 90LC 4	3GBP092530--K	1442	84.1	83.5	81.7	0.80	2.3	7.9	7.2	3.3	3.9	0.0055	33	56
1.5	M3BP 90LD 4	3GBP092540--K	1439	85.3	84.7	82.8	0.78	3.2	8.2	9.9	3.5	4.0	0.0055	34	55
2.2	M3BP 100LKA 4	3GBP102810--K	1454	86.7	87.2	86.1	0.83	4.3	8.9	14.5	3.1	4.1	0.0144	49	54
3	M3BP 100LKB 4	3GBP102820--K	1452	87.7	88.1	87.1	0.83	5.9	9.0	19.7	3.5	4.2	0.0144	49	54
4	M3BP 112MG 4	3GBP112370--K	1451	88.6	89.4	89.0	0.77	8.6	7.6	26.3	3.1	4.1	0.018	52	64
5.5	M3BP 132SMF 4	3GBP132260--K	1463	89.6	89.8	88.7	0.74	11.9	7.6	36	2.8	3.9	0.0295	81	70
7.5	M3BP 132SMG 4	3GBP132270--K	1464	90.4	90.8	90.7	0.81	14.7	7.7	48.9	2.5	3.6	0.0414	81	64
11	M3BP 160MLA 4	3GBP162410--K	1477	91.4	91.8	91.1	0.82	21.1	7.6	71.3	2.6	3.3	0.11	188	61
15	M3BP 160MLB 4	3GBP162420--K	1477	92.1	92.4	91.6	0.82	28.5	8.2	97.0	3.0	3.6	0.135	187	61
18.5	M3BP 180MLA 4	3GBP182410--K	1481	92.6	93.2	92.9	0.83	34.9	7.2	119	2.8	3.0	0.219	235	60
22	M3BP 180MLB 4	3GBP182420--K	1480	93.3	94.1	94.1	0.82	41.5	8.2	141	2.8	3.1	0.217	235	62
30	M3BP 200MLA 4	3GBP202410--K	1483	93.6	93.9	93.4	0.84	54.8	7.5	193	2.7	3.2	0.385	319	63
37	M3BP 225SMA 4	3GBP222210--K	1481	93.9	94.1	93.4	0.82	69.8	8.0	235	3.3	3.5	0.433	398	66
45	M3BP 225SMB 4	3GBP222220--K	1482	94.2	94.4	94.0	0.84	82.3	8.0	290	3.1	3.5	0.525	398	66
55	M3BP 250SMA 4	3GBP252210--K	1485	95.4	95.9	95.7	0.85	97.8	7.9	353	3.0	3.3	0.933	476	67
75	M3BP 280SMB 4	3GBP282220--K	1485	95.0	95.2	94.8	0.86	133	6.4	483	2.3	2.8	1.38	665	72
90	M3BP 280SMC 4	3GBP282230--K	1485	95.2	95.5	95.2	0.86	158	7.1	578	2.5	2.9	1.73	725	72
110	M3BP 315SMC 4	3GBP312230--K	1491	96.2	96.5	96.1	0.85	194	7.8	704	2.4	3.1	2.9	1000	68
132	M3BP 315SMD 4	3GBP312240--K	1490	96.3	96.6	96.2	0.85	234	7.9	846	2.6	3.2	3.2	1065	68
160	M3BP 315MLB 4	3GBP312420--K	1490	96.5	96.7	96.4	0.86	278	7.9	1026	2.7	3.0	3.9	1220	68
200	M3BP 315LKB 4	3GBP312820--K	1487	96.0	96.4	96.4	0.86	351	6.8	1284	2.4	3.0	3.9	1480	74
250	M3BP 355SMB 4	3GBP352220--K	1491	96.0	96.0	95.6	0.86	435	6.4	1601	2.1	2.9	5.9	1780	78
315	M3BP 355MLA 4	3GBP352410--K	1490	96.0	96.2	95.8	0.86	616	6.3	2273	2.3	2.8	7.2	2140	78
355	M3BP 355MLB 4	3GBP352420--K	1489	96.0	96.0	95.5	0.85	705	6.8	2565	2.3	2.6	8.4	2140	78
400	M3BP 355MLC 4	3GBP352430--K	1490	96.0	96.1	95.6	0.86	780	6.9	2884	2.3	2.9	8.4	2140	78
450	M3BP 355LKA 4	3GBP352810--K	1490	96.0	96.0	95.3	0.86	865	6.8	3204	2.0	3.0	10	2500	78
560	³⁾ M3BP 355LKB 4	3GBP352820--K	1490	96.0	96.0	95.5	0.85	981	7.2	3588	2.6	2.7	10.6	2600	78
560	³⁾ M3BP 400LA 4	3GBP402510--K	1491	96.0	96.0	95.4	0.85	982	7.4	3586	2.4	2.8	15	3200	78
630	M3BP 400LB 4	3GBP402520--K	1491	96.0	96.0	95.4	0.86	1077	7.6	4034	2.2	2.9	16	3300	78
710	³⁾ M3BP 400LC 4	3GBP402530--K	1491	96.0	96.0	95.5	0.85	1227	7.6	4547	2.4	3.0	17	3400	78
800	M3BP 450LA 4	3GBP452510--K	1491	96.0	96.0	95.4	0.86	1396	7.0	5121	1.3	2.8	23	4050	85
900	M3BP 450LB 4	3GBP452520--K	1492	96.0	95.9	95.2	0.86	1573	7.0	5761	1.3	2.8	25	4350	85
1000	³⁾ M3BP 450LC 4	3GBP452530--K	1491	96.0	96.0	95.3	0.86	1724	6.8	6404	1.3	2.7	30	4700	85

³⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
1500 r/min = 4 poles																High-output design
18.5	M3BP 160MLC 4	3GBP162430--K	1476	92.6	93.1	92.7	0.77	37.2	8.3	120	3.3	3.6	0.12	180	67	
28	M3BP 180MLC 4	3GBP182430--K	1482	93.4	93.3	92.3	0.77	56.5	8.2	180	3.0	3.6	0.191	235	62	
37	M3BP 200MLB 4	3GBP202420--K	1482	93.9	94.1	93.7	0.82	69.3	7.8	238	3.1	3.3	0.362	305	63	
53	M3BP 225SMC 4	3GBP222230--K	1483	94.5	94.7	94.2	0.83	97	8.7	341	3.2	3.4	0.532	391	71	
75	M3BP 250SMB 4	3GBP252220--K	1483	95.0	95.3	95.00	0.82	139	7.8	486	3.3	3.5	0.796	464	73	
200	M3BP 315LKB 4	3GBP312820--K	1487	96.00	96.4	96.4	0.86	351	6.8	1284	2.4	3.0	3.9	1480	74	
250	M3BP 315LKC 4	3GBP312830--K	1490	96.6	96.9	96.8	0.87	432	7.8	1601	2.3	3.0	5.5	1600	74	

Technical data, 400 V 50 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				Load 100%	Load 75%	Load 50%									
1000 r/min = 6 poles															
0.18	M3BP 71ME 6	3GBP073350--K	887	63.9	64.3	59.8	0.74	0.57	3.2	1.9	1.9	2.2	0.0009	10	45
0.25	M3BP 80MA 6	3GBP083310--K	937	73.3	72.2	67.6	0.64	0.76	2.6	2.52	1.4	2	0.0019	14	47
0.37	M3BP 80MD 6	3GBP083340--K	930	75.4	76.2	74.1	0.72	0.95	3.3	3.75	1.5	1.9	0.0028	16	47
0.55	M3BP 80MLG 6	3GBP083470--K	937	80.4	81	79.5	0.63	1.56	4.4	5.6	3.4	3.8	0.0044	21	47
0.75	M3BP 90LG 6	3GBP093570--K	938	81.5	82.8	82.2	0.74	1.8	4.8	7.7	2.4	2.7	0.0072	34	44
1.1	M3BP 90LH 6	3GBP093580--K	944	81.0	81.7	80.1	0.75	2.62	4.7	11.1	2.1	2.8	0.0068	33	44
1.1 ⁷⁾	M3BP 100LKG 6	3GBP103870--K	969	84.4	84.5	82.8	0.68	2.6	4.1	10.9	1.6	2.2	0.0025	47	49
1.5	M3BP 100LKH 6	3GBP103880--K	969	82.5	81.5	77.6	0.66	3.77	7.0	14.8	3.3	4.1	0.0138	47	49
1.5 ⁷⁾	M3BP 112MH 6	3GBP113380--K	972	85.8	85.6	83.6	0.64	3.8	7.0	14.7	2.7	4.5	0.0196	53	66
2.2 ⁷⁾	M3BP 132SMC 6	3GBP133230--K	978	87.3	87.5	86.1	0.69	5.1	5.4	21.5	2.0	2.6	0.0416	81	57
2.2	M3BP 112MJ 6	3GBP113390--K	967	87.2	87.9	87.1	0.69	5.2	6.5	21.7	2.4	3.5	0.0187	53	68
3	M3BP 132SMD 6	3GBP133240--K	977	88.5	88.8	87.5	0.69	6.9	5.9	29	1.9	3.3	0.0416	82	57
4	M3BP 132SMG 6	3GBP133270--K	974	89.4	89.9	89.3	0.69	9.3	5.6	38.7	2.2	2.8	0.0416	82	57
5.5	M3BP 132SMH 6	3GBP133280--K	966	89.6	90.4	90.2	0.73	12.1	5.0	54.1	1.8	2.7	0.0654	79	57
7.5	M3BP 160MLA 6	3GBP163410--K	980	90.8	91.5	91.0	0.78	15.2	7.9	73	1.7	3.3	0.114	172	59
11	M3BP 160MLB 6	3GBP163420--K	979	91.2	91.8	91.1	0.74	23.5	8.5	107	2.2	3.9	0.131	199	59
15	M3BP 180MLA 6	3GBP183410--K	981	92.2	92.5	91.5	0.77	30.4	5.5	146	1.7	2.7	0.225	234	59
18.5	M3BP 200MLA 6	3GBP203410--K	990	92.8	93.2	92.6	0.77	37.3	7.5	178	2.6	3.2	0.448	291	63
22	M3BP 200MLB 6	3GBP203420--K	990	93.3	93.7	93.1	0.79	43	7.8	212	2.6	3.2	0.531	318	63
30	M3BP 225SMA 6	3GBP223210--K	989	94.1	94.7	94.5	0.81	56.8	7.9	289	2.8	3.1	0.813	392	63
37	M3BP 250SMA 6	3GBP253210--K	991	94.4	94.9	94.7	0.83	68	7.7	356	2.7	2.9	1.49	467	63
45	M3BP 280SMB 6	3GBP283220--K	992	94.7	95.1	94.6	0.85	80.9	7.5	434	2.4	2.6	2.2	680	65
55	M3BP 280SMC 6	3GBP283230--K	990	95.0	95.4	95.0	0.85	99.4	6.8	506	2.4	2.6	2.85	725	65
75	M3BP 315SMC 6	3GBP313230--K	994	95.3	95.6	95.2	0.83	138	7.0	721	2.2	2.8	4.9	1000	67
90	M3BP 315SMD 6	3GBP313240--K	994	95.5	95.8	95.4	0.81	170	7.2	864	2.4	2.9	4.9	1040	67
110	M3BP 315MLB 6	3GBP313420--K	994	95.7	95.9	95.7	0.83	202	6.9	1058	2.3	2.7	6.3	1200	68
132	M3BP 315LKA 6	3GBP313810--K	993	95.9	96.1	95.9	0.82	243	6.9	1269	2.4	2.7	7.3	1410	68
160	M3BP 355SMB 6	3GBP353220--K	995	96.1	96.1	95.6	0.82	294	7.0	1536	2.1	2.7	9.7	1680	73
200	M3BP 355SMC 6	3GBP353230--K	995	96.2	96.4	96.1	0.82	367	7.3	1920	2.3	2.8	11.3	1820	73
250	M3BP 355MLB 6	3GBP353420--K	995	96.4	96.6	96.5	0.83	456	7.1	2399	2.3	2.7	13.5	2180	73
315	M3BP 355LKA 6	3GBP353810--K	994	96.5	96.7	96.4	0.83	576	6.9	3026	2.3	2.6	15.5	2500	76
355	M3BP 355LKB 6	3GBP353820--K	995	96.5	96.6	96.1	0.81	668	7.7	3407	2.7	2.9	16.5	2600	76
400	M3BP 355LKC 6	3GBP353830--K	992	96.0	96.0	95.5	0.83	724	7.2	3850	2.6	2.6	16.5	2600	75
400	M3BP 400LA 6	3GBP403510--K	993	95.8	95.8	95.1	0.82	731	7.1	3846	2.3	2.7	17	2900	76
450	M3BP 400LB 6	3GBP403520--K	994	95.8	95.8	95.2	0.82	819	7.4	4323	2.4	2.8	20.5	3150	76
500	M3BP 400LC 6	3GBP403530--K	993	95.8	95.6	95.2	0.83	891	7.2	4809	2.5	2.7	22	3300	76
560	M3BP 400LD 6	3GBP403540--K	993	95.8	95.8	95.2	0.85	984	7.4	5386	2.4	2.8	24	3400	77
630	M3BP 450LA 6	3GBP453510--K	994	95.8	95.9	95.3	0.84	1127	6.5	6053	1.1	2.5	31	4150	81
710	M3BP 450LB 6	3GBP453520--K	995	95.8	95.9	95.3	0.85	1244	7.0	6814	1.3	2.5	37	4500	81
800 ³⁾	M3BP 450LC 6	3GBP453530--K	995	95.8	95.8	95.1	0.84	1415	7.2	7677	1.3	2.7	41	4800	81

³⁾ Temperature rise class F

⁷⁾ Non-cenelec frame size

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
1000 r/min = 6 poles			400 V 50 Hz					High-output design							
18.5	M3BP 180MLB 6	3GBP183420--K	980	91.7	92.1	91.5	0.72	40.3	6.8	180	2.3	3.2	0.191	219	60
37	M3BP 225SMB 6	3GBP223220--K	985	93.3	93.7	93.4	0.80	71.5	7.0	359	2.7	3.0	0.813	382	68
45	M3BP 250SMB 6	3GBP253220--K	991	93.7	93.8	93.1	0.79	87.3	8.0	433	3.1	3.2	1.33	465	68
160	M3BP 315LKC 6	3GBP313830--K	994	96.1	96.3	96.2	0.82	297	7.4	1537	2.7	2.9	9.2	1600	68

Technical data, 400 V 50 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1: 2014				Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
				Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
750 r/min = 8 poles				400 V 50 Hz				CENELEC-design							
0.12	M3BP 71ME 8	3GBP074350---K	659	50.7	48.9	41.9	0.68	0.49	2.5	1.7	1.9	2.1	0.00107	11	43
0.18	M3BP 80MF 8	3GBP084360---K	679	58.8	57.3	51.7	0.55	0.8	2.2	2.6	1.3	1.9	0.0035	18	45
0.25	M3BP 80MLG 8	3GBP084470---K	674	64.1	66.4	64.1	0.58	0.92	2.3	3.5	1.3	1.9	0.0044	21	50
0.37	M3BP 90SLF 8	3GBP094060---K	710	69.3	67.8	62.5	0.54	1.37	3.3	4.96	2.3	3.3	0.0056	28	50
0.55	M3BP 90LG 8	3GBP094570---K	710	73.0	70.8	64.6	0.53	2	4.1	7.7	2.5	3.2	0.0072	32	53
0.75	M3BP 100LKA 8	3GBP104810---K	710	75	74.5	70.5	0.65	2.13	4.4	10	2.4	2.8	0.00855	37	53
1.1	M3BP 100LKB 8	3GBP104820---K	703	77.7	77.7	74.7	0.65	3.08	4.4	14.9	2.7	2.9	0.0128	45	53
1.5	M3BP 112MC 8	3GBP114330---K	717	79.7	80.1	78.8	0.62	4.12	4.3	19.9	1.8	2.6	0.0194	53	55
2.2	M3BP 132SMA 8	3GBP134210---K	725	81.9	82.3	80.2	0.64	5.8	5.2	28.9	2.0	3.0	0.0291	66	57
3	M3BP 132SMG 8	3GBP134270---K	723	83.5	84.1	82.8	0.66	7.5	4.8	39.6	1.8	2.8	0.0375	76	57
4	M3BP 160MLA 8	3GBP164410---K	734	84.8	85.1	83.2	0.65	10.3	4.5	52	1.8	2.3	0.091	130	59
5.5	M3BP 160MLB 8	3GBP164420---K	732	86.2	87.1	86.1	0.69	13	5.0	71.7	2.0	2.4	0.091	132	59
7.5	M3BP 160MLC 8	3GBP164430---K	733	87.3	88.2	87.2	0.69	17.6	5.1	97.7	2.0	2.4	0.12	167	59
11	M3BP 180MLA 8	3GBP184410---K	731	88.6	89.2	88.4	0.70	25.3	5.0	144	2.1	2.1	0.2	219	59
15	M3BP 200MLA 8	3GBP204410---K	737	89.6	90.5	90.1	0.74	32.5	5.2	194	2.1	2.4	0.45	290	60
18.5	M3BP 225SMA 8	3GBP224210---K	736	90.1	90.8	90.2	0.74	39.8	5.2	240	2.0	2.3	0.669	350	63
22	M3BP 225SMB 8	3GBP224220---K	736	90.6	91.6	91.5	0.73	47.5	5.3	285	2.3	2.5	0.722	363	63
30	M3BP 250SMA 8	3GBP254210---K	741	91.3	91.7	91.0	0.71	67	5.6	386	2.7	2.7	1.4	440	63
37	M3BP 280SMA 8	3GBP284210---K	741	91.8	92.0	91.3	0.79	72.6	7.3	476	1.7	3.0	1.85	605	65
45	M3BP 280SMB 8	3GBP284220---K	741	92.2	92.3	91.7	0.78	89.2	7.6	579	1.8	3.1	2.2	645	65
55	M3BP 315SMA 8	3GBP314210---K	742	92.5	93.1	92.5	0.80	106	7.1	707	1.6	2.7	3.2	830	62
75	M3BP 315SMB 8	3GBP314220---K	741	93.1	93.2	93.1	0.82	146	7.1	966	1.7	2.7	4.1	930	62
90	M3BP 315SMC 8	3GBP314230---K	741	93.4	93.7	93.4	0.82	170	7.4	1159	1.8	2.7	4.9	1000	64
110	M3BP 315MLA 8	3GBP314410---K	740	93.7	94.0	94.1	0.83	211	7.3	1419	1.8	2.7	5.8	1150	72
132	M3BP 355SMA 8	3GBP354210---K	744	94.0	93.9	93.4	0.79	256	7.5	1694	1.5	2.6	7.9	1520	69
160	M3BP 355SMB 8	3GBP354220---K	744	94.3	94.3	93.8	0.79	293	7.6	1926	1.6	2.6	9.7	1680	69
200	M3BP 355SMC 8	3GBP354230---K	742	94.6	95.0	94.8	0.79	385	7.4	2576	1.6	2.6	11.3	1820	69
250	M3BP 355MLB 8	3GBP354420---K	743	94.6	94.7	94.1	0.80	472	7.5	3213	1.6	2.7	13.5	2180	72
315	M3BP 400LA 8	3GBP404510---K	744	94.6	94.5	94.0	0.80	592	7.0	4043	1.2	2.6	17	2900	71
315 ³⁾	M3BP 355LKB 8	3GBP354820---K	742	94.6	94.8	94.2	0.80	595	7.9	4053	1.7	2.7	16.5	2600	75
355	M3BP 400LB 8	3GBP404520---K	743	94.6	94.9	94.6	0.83	641	6.8	4562	1.2	2.5	21	3200	71
400	M3BP 400LC 8	3GBP404530---K	744	94.6	94.9	94.3	0.81	735	6.0	5134	1.3	2.7	24	3400	71
450	M3BP 450LA 8	3GBP454510---K	744	94.6	95.0	94.6	0.83	813	6.0	5775	1.0	2.5	26	3750	80
500	M3BP 450LB 8	3GBP454520---K	744	94.6	94.7	94.5	0.83	902	6.4	6417	1.0	2.6	29	4000	80
560	M3BP 450LC 8	3GBP454530---K	744	94.6	94.9	94.2	0.81	1038	7.0	7188	1.2	2.9	35	4350	80
630 ³⁾	M3BP 450LD 8	3GBP454540---K	745	94.6	94.8	94.0	0.82	1162	7.6	8075	1.3	3.2	41	4800	80

³⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014						Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N						
3000 r/min = 2 poles			400 V 50 Hz						CENELEC-design									
75	M3BP 280SMB 2	3GBP281220--L	2977	94.7	94.2	92.8	0.88	131	7.6	240	2.1	3.0	0.8			665	77	
90	M3BP 280SMC 2	3GBP281230--L	2976	95.0	95.1	94.3	0.89	154	7.4	288	2.1	2.9	0.9			690	77	
110	M3BP 315SMB 2	3GBP311220--L	2982	95.2	94.9	93.9	0.87	192	7.0	352	1.8	2.7	1.3			910	78	
132	M3BP 315SMC 2	3GBP311230--L	2982	95.4	95.1	94.0	0.88	227	7.4	422	2.2	3.0	1.4			965	78	
160	M3BP 315SMD 2	3GBP311240--L	2983	95.6	95.6	94.9	0.87	275	7.4	512	2.2	2.8	1.7			1025	78	
200	M3BP 315MLA 2	3GBP311410--L	2983	95.8	95.8	95.3	0.88	342	7.7	640	2.5	3.1	2.1			1190	81	
250	M3BP 355SMA 2	3GBP351210--L	2985	95.8	95.6	94.6	0.89	423	7.7	800	2.1	3.3	3			1600	83	
315	M3BP 355SMB 2	3GBP351220--L	2980	95.8	95.7	95.0	0.89	529	7.0	1009	2.1	3.0	3.4			1680	83	
355	M3BP 355SMC 2	3GBP351230--L	2984	95.8	95.8	95.0	0.88	605	7.2	1136	2.2	3.0	3.6			1750	83	

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014						Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N						
3000 r/min = 2 poles			400 V 50 Hz						High-output design									
110	M3BP 280SMD 2	3GBP281240--L	2977	95.2	95.2	94.4	0.88	190	7.5	353	2.4	3.1	1.15			725	75	
250	M3BP 315LKB 2	3GBP311820--L	2983	95.8	96.0	95.5	0.90	419	7.7	800	2.5	3.3	2.9			1540	81	

Technical data, 400 V 50 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014						Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load	3/4 load	1/2 load	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N						
				100%	75%	50%												
1500 r/min = 4 poles																		
75	M3BP 280SMB 4	3GBP282220--L	1485	95.0	95.2	94.8	0.86	133	6.4	483	2.3	2.8	1.38	645	75			
90	M3BP 280SMC 4	3GBP282230--L	1485	95.2	95.5	95.2	0.86	158	7.1	578	2.5	2.9	1.73	700	75			
110	M3BP 315SMB 4	3GBP312220--L	1489	95.4	95.5	95.0	0.84	198	7.0	705	2.1	3.0	2.43	930	71			
132	M3BP 315SMC 4	3GBP312230--L	1488	95.6	95.9	95.5	0.86	231	6.7	847	2.2	2.9	2.9	1000	71			
160	M3BP 315SMD 4	3GBP312240--L	1488	95.8	96.0	95.8	0.85	282	6.9	1026	2.2	3.0	3.2	1065	71			
200	M3BP 315MLB 4	3GBP312420--L	1487	96.0	96.4	96.4	0.86	351	6.8	1284	2.4	3.0	3.9	1220	74			
250	M3BP 355SMA 4	3GBP352210--L	1491	96.0	96.0	95.6	0.86	435	6.4	1601	2.1	2.9	5.9	1610	78			
315	M3BP 355SMB 4	3GBP352220--L	1491	96.0	96.1	95.7	0.85	550	7.3	2018	2.4	3.3	6.9	1780	78			
355	M3BP 355SMC 4	3GBP352230--L	1490	96.0	96.2	95.8	0.86	616	6.3	2273	2.3	2.8	7.2	1820	78			

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014						Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load	3/4 load	1/2 load	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N						
				100%	75%	50%												
1500 r/min = 4 poles																		
110	M3BP 280SMD 4	3GBP282240--L	1486	95.4	95.7	95.3	0.85	196	7.3	707	2.7	3.0	1.95	750	76			
132	M3BP 280MLA 4	3GBP282410--L	1483	95.6	95.9	95.7	0.86	232	7.0	849	2.7	2.8	2.3	840	75			
160	M3BP 280MLB 4	3GBP282420--L	1484	95.8	96.0	95.8	0.86	280	7.4	1029	2.9	2.9	2.5	890	75			
250	M3BP 315LKA 4	3GBP312810--L	1488	96.0	96.3	96.1	0.85	442	6.9	1604	2.5	3.2	4.4	1410	78			
315	M3BP 315LKC 4	3GBP312830--L	1489	96.0	96.1	95.8	0.85	557	8.3	2020	3.0	3.3	5.5	1600	78			

Technical data, 400 V 50 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
1000 r/min = 6 poles														CENELEC-design	
45	M3BP 280SMB 6	3GBP283220--L	991	93.7	94.0	93.5	0.84	82	7.4	433	2.7	3.0	1.87	645	72
55	M3BP 280SMC 6	3GBP283230--L	992	94.1	94.3	93.8	0.86	99	7.5	528	2.8	3.0	2.57	725	71
75	M3BP 315SMB 6	3GBP313220--L	994	94.6	94.9	94.6	0.84	136	6.8	720	1.8	2.6	4.1	930	75
90	M3BP 315SMC 6	3GBP313230--L	994	94.9	95.1	94.7	0.84	164	7.2	864	2.0	3.0	4.6	1000	76
110	M3BP 315SMD 6	3GBP313240--L	994	95.1	95.3	95.0	0.83	200	7.3	1056	2.2	3.1	4.9	1040	75
132	M3BP 315MLB 6	3GBP313420--L	995	95.4	95.5	95.1	0.82	242	7.3	1266	2.3	3.2	6.3	1200	72
160	M3BP 355SMA 6	3GBP353210--L	993	95.6	95.8	95.6	0.82	292	6.7	1538	2.5	2.6	7.9	1520	75
200	M3BP 355SMB 6	3GBP353220--L	993	95.8	96.2	96.1	0.82	365	6.7	1923	2.6	2.5	9.7	1680	75
250	M3BP 355SMC 6	3GBP353230--L	993	95.8	96.1	95.8	0.81	465	7.7	2404	3.0	3.1	11.3	1820	75
315	M3BP 355MLB 6	3GBP353420--L	993	95.8	96.1	96.0	0.83	571	6.8	3029	2.6	3.2	13.5	2180	76
355	M3BP 355LKA 6	3GBP353810--L	993	95.8	96.0	95.9	0.81	653	7.5	3413	2.9	3.2	15.5	2500	76

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
1000 r/min = 6 poles														High-output design	
75	M3BP 280SMD 6	3GBP283240--L	991	94.6	94.9	94.5	0.85	135	7.6	723	2.8	3.0	3.0	740	73
160	M3BP 315LKA 6	3GBP313810--L	994	95.6	95.8	95.4	0.81	298	7.5	1535	2.2	3.1	7.3	1410	76
180	M3BP 315LKB 6	3GBP313820--L	994	95.8	95.9	95.4	0.82	331	7.6	1729	2.3	3.1	8.3	1520	76
200	M3BP 315LKC 6	3GBP313830--L	993	95.8	96.1	95.8	0.82	367	7.0	1923	2.2	2.8	9.2	1600	76

Technical data, 400 V 50 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1: 2014			Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_f/T_N	T_b/T_N	Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
				Full load 100%	3/4 load 75%	1/2 load 50%										
3000 r/min = 2 poles																
0.37	M3BP 71MA 2	3GBP071321---B	2785	69.5	70.8	67.8	0.79	0.91	4.6	1.26	2.5	2.8	0.0004	11	57	
0.55	M3BP 71MB 2	3GBP071322---B	2790	74.1	75.4	73.4	0.79	1.29	5.1	1.88	3.1	3.1	0.0005	11	57	
0.75	M3BP 80MB 2	3GBP081322---B	2895	80.6	79.6	75.6	0.74	1.8	7.7	2.4	4.2	4.2	0.001	16	57	
1.1	M3BP 80MC 2	3GBP081323---B	2870	81.8	81.7	78.9	0.80	2.44	7.5	3.63	3.7	4.6	0.0012	18	60	
1.5	M3BP 90SLB 2	3GBP091322---B	2900	82.2	82.9	81.3	0.87	3.26	7.5	4.9	2.5	2.6	0.00254	24	69	
2.2	M3BP 90SLC 2	3GBP091323---B	2885	83.2	85.5	84.3	0.88	4.2	6.8	7.2	1.9	2.5	0.0028	25	64	
3	M3BP 100LB 2	3GBP101322---B	2925	85.2	84.9	82.7	0.87	5.75	9.1	9.7	3.1	3.5	0.00528	36	68	
4	M3BP 112MB 2	3GBP111322---B	2895	86.1	87.0	86.6	0.89	7.52	8.1	13.1	2.9	3.2	0.00575	37	70	
5.5	M3BP 132SMB 2	3GBP131322---B	2865	87.7	88.4	87.7	0.86	10	7.0	18.3	2.5	2.7	0.0127	68	70	
7.5	M3BP 132SMC 2	3GBP131324---B	2890	88.2	88.8	87.6	0.89	13.7	7.3	24.9	2.5	3.6	0.0136	70	70	
11	M3BP 160MLA 2	3GBP161410---G	2938	90.6	91.5	91.1	0.90	19.2	7.5	35.7	2.4	3.1	0.044	127	69	
15	M3BP 160MLB 2	3GBP161420---G	2934	91.5	92.4	92.2	0.90	26	7.5	48.8	2.5	3.3	0.053	141	69	
18.5	M3BP 160MLC 2	3GBP161430---G	2923	90.9	92.1	92.1	0.92	31.5	7.5	60.2	2.5	2.9	0.063	170	69	
22	M3BP 180MLA 2	3GBP181410---G	2947	92.2	92.7	92.2	0.87	39.6	7.7	71.1	2.4	3.2	0.076	190	69	
30	M3BP 200MLA 2	3GBP201410---G	2956	93.1	93.5	92.8	0.90	51.6	7.7	96.9	2.7	3.1	0.178	283	72	
37	M3BP 200MLB 2	3GBP201420---G	2952	92.5	92.8	91.9	0.90	63.5	8.2	119	2.7	3.2	0.196	298	72	
45	M3BP 225SMA 2	3GBP221210---G	2961	93.6	93.9	93.1	0.88	78.8	6.7	145	2.5	2.5	0.244	347	74	
55	M3BP 250SMA 2	3GBP251210---G	2967	94.1	94.4	93.8	0.88	95.8	6.8	177	2.2	2.7	0.507	405	75	
75	¹⁾ M3BP 280SMA 2	3GBP281210---N	2972	93.8	94.0	93.4	0.89	128	7.8	241	2.5	3.0	0.61	540	77	
90	¹⁾ M3BP 280SMB 2	3GBP281220---N	2970	94.1	94.3	93.8	0.91	149	7.5	289	2.7	3.1	0.73	590	77	
110	¹⁾ M3BP 315SA 2	3GBP311110---N	2978	94.3	94.2	93.3	0.90	187	7.6	353	2.4	3.1	0.95	770	78	
132	¹⁾ M3BP 315SMA 2	3GBP311210---N	2976	94.6	94.6	93.8	0.90	223	7.3	423	2.5	3.0	1.1	865	78	
160	¹⁾ M3BP 315SMB 2	3GBP311220---N	2975	94.8	94.9	94.4	0.90	268	7.3	513	2.4	3.0	1.25	925	78	
200	¹⁾ M3BP 315MLA 2	3GBP311410---G	2980	95.7	95.7	94.9	0.90	335	7.7	640	2.6	3.0	2.1	1190	78	
250	¹⁾ M3BP 355SMA 2	3GBP351210---G	2984	95.7	95.5	94.5	0.89	423	7.7	800	2.1	3.3	3	1600	83	
315	¹⁾ M3BP 355SMB 2	3GBP351220---G	2980	95.7	95.6	94.9	0.89	531	7.0	1009	2.1	3.0	3.4	1680	83	
355	¹⁾ M3BP 355SMC 2	3GBP351230---G	2984	95.7	95.7	94.9	0.88	603	7.2	1136	2.2	3.0	3.6	1750	83	
400	¹⁾ M3BP 355MLA 2	3GBP351410---G	2982	96.5	96.3	95.6	0.88	677	7.1	1280	2.3	2.9	4.1	2000	83	
450	¹⁾ M3BP 355MLB 2	3GBP351420---G	2983	96.5	96.5	95.7	0.90	743	7.9	1440	2.2	2.9	4.3	2080	83	
500	¹⁾ M3BP 355LKA 2	3GBP351810---G	2982	96.5	96.5	96.0	0.90	827	7.5	1601	2.0	3.9	4.8	2320	83	
560	²⁾ M3BP 400LA 2	3GBP401510---G	2988	96.5	96.5	95.7	0.89	934	7.8	1789	2.5	3.7	7.9	2950	82	
560	¹⁾ M3BP 355LKB 2	3GBP351820---G	2983	97.0	97.0	96.5	0.90	925	8.0	1792	2.2	4.1	5.2	2460	83	
630	²⁾ M3BP 400LB 2	3GBP401520---G	2987	96.5	96.2	95.6	0.89	1049	7.6	2014	2.6	3.7	8.2	3050	82	
710	²⁾ M3BP 400LC 2	3GBP401530---G	2987	96.5	96.3	95.7	0.89	1178	7.2	2270	2.6	3.4	9.3	3300	82	
800	^{2) 3)} M3BP 450LA 2	3GBP451510---G	2990	96.5	96.2	95.4	0.87	1362	7.8	2555	1.3	3.4	12.2	4000	85	
900	^{2) 3)} M3BP 450LB 2	3GBP451520---G	2990	96.5	96.2	95.5	0.87	1534	7.6	2874	1.5	3.1	13.5	4200	85	
1000	^{2) 3) 8)} M3BP 450LC 2	3GBP451530---G	2990	96.5	96.3	95.5	0.88	974	7	3194	1.7	3	14.5	4400	85	

¹⁾ -3dB(A) sound pressure level reduction with unidirectional fan construction. Direction of rotation must be stated when ordering, see variant codes 044 and 045.

²⁾ Unidirectional fan construction as standard. Direction of rotation must be stated when ordering, see variant codes 044 and 045.

³⁾ Temperature rise class F

⁸⁾ Only available network voltage 690VDC

Technical data, 400 V 50 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
3000 r/min = 2 poles			400 V 50 Hz					High-output design								
22	M3BP 160MLD 2	3GBP161440--G	2933	91.7	92.8	92.8	0.90	38	8.1	71.6	3.2	3.6	0.063	170	69	
27	M3BP 160MLE 2	3GBP161450--G	2939	92.2	93.1	93.0	0.90	46.4	8.8	87.7	3.4	3.8	0.072	184	69	
30	M3BP 180MLB 2	3GBP181420--G	2950	92.7	93.5	93.3	0.88	53	7.9	97.1	2.8	3.3	0.092	208	69	
45	³⁾ M3BP 200MLC 2	3GBP201430--G	2957	93.3	93.8	93.2	0.88	79.1	7.9	145	3.1	3.3	0.196	298	72	
55	³⁾ M3BP 200MLD 2	3GBP201440--G	2953	93.8	94.4	94.3	0.89	95	7.8	177	2.9	3.3	0.217	314	72	
55	M3BP 225SMB 2	3GBP221220--G	2961	93.9	94.3	93.6	0.88	96	6.5	177	2.4	2.5	0.274	369	74	
75	³⁾ M3BP 225SMC 2	3GBP221230--G	2969	94.4	94.6	94.0	0.84	136	7.4	241	3.2	3.1	0.309	396	74	
75	M3BP 250SMB 2	3GBP251220--G	2970	94.5	94.8	94.4	0.89	128	7.6	241	2.8	3.1	0.583	451	75	
80	³⁾ M3BP 225SMD 2	3GBP221240--G	2964	94.4	94.8	94.3	0.87	140	7.3	257	3.0	2.8	0.329	410	74	
90	³⁾ M3BP 250SMC 2	3GBP251230--G	2971	94.9	95.2	94.8	0.89	153	7.6	289	2.5	3.1	0.644	487	75	
110	¹⁾ M3BP 280SMC 2	3GBP281230--G	2978	95.1	95.1	94.5	0.90	186	7.9	352	2.4	3.0	1.15	725	77	
132	¹⁾ M3BP 280MLA 2	3GBP281410--G	2977	95.3	95.3	94.8	0.90	221	7.5	423	2.5	3.0	1.4	840	81	
160	¹⁾ M3BP 280MLB 2	3GBP281420--G	2976	95.5	95.7	95.3	0.91	265	7.6	513	2.8	3.0	1.55	890	81	
250	¹⁾ M3BP 315LKA 2	3GBP311810--G	2980	95.7	95.7	95.2	0.89	423	7.6	801	2.8	2.9	2.65	1440	78	
315	^{1) 3)} M3BP 315LKC 2	3GBP311830--G	2981	95.7	95.7	95.4	0.89	533	8.8	1009	3.2	3.2	3.3	1630	78	

¹⁾ -3dB(A) sound pressure level reduction with unidirectional fan construction. Direction of rotation must be stated when ordering, see variant codes 044 and 045.

³⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1: 2014				Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
				Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
1500 r/min = 4 poles															
0.25	M3BP 71MA 4	3GBP072321--B	1430	68.5	66.8	59.9	0.67	0.76	4.7	1.67	2.2	3.0	0.0006	10	45
0.37 ^{⑥)}	M3BP 71MB 4	3GBP072322--B	1411	72.7	73.3	69.9	0.74	0.96	5.2	2.5	2.6	2.9	0.001	12	45
0.55 ^{⑥)}	M3BP 80MA 4	3GBP082321--B	1406	77.1	78.6	76.8	0.78	1.29	5.4	3.73	2.8	2.9	0.0022	18	50
0.75	M3BP 80MD 4	3GBP082324--B	1430	81.0	81.0	78.2	0.73	1.82	6.3	5	3.3	3.6	0.002	17	50
1.1	M3BP 90SLB 4	3GBP092322--B	1435	81.4	82.0	80.1	0.80	2.36	6.5	7.3	2.4	3.4	0.0044	25	50
1.5	M3BP 90SLD 4	3GBP092325--B	1430	84.3	85.1	83.9	0.83	3	6.3	10	2.7	3.4	0.0053	27	56
2.2	M3BP 100LC 4	3GBP102323--B	1450	85.9	85.1	83.4	0.78	4.6	7.7	14.5	2.7	4.1	0.0095	36	56
3	M3BP 100LD 4	3GBP102324--B	1450	86.8	86.9	85.3	0.79	6.1	7.7	19.8	2.9	3.6	0.011	38	58
4	M3BP 112MB 4	3GBP112322--B	1440	86.6	87.2	86.8	0.82	7.94	7.0	26.5	2.5	2.9	0.0125	44	59
5.5	M3BP 132SMB 4	3GBP132322--B	1460	89.0	89.8	88.9	0.80	10.8	7.1	36	2.2	3.1	0.0328	70	67
7.5	M3BP 132SMC 4	3GBP132323--B	1450	89.3	90.1	90.0	0.81	14.5	7.2	49.4	2.5	3.5	0.0366	73	64
11	M3BP 160MLA 4	3GBP162410--G	1466	90.4	91.6	91.3	0.84	20.9	6.8	71.6	2.2	2.8	0.081	135	62
15	M3BP 160MLB 4	3GBP162420--G	1470	91.4	92.3	92.2	0.83	28.5	7.1	97.4	2.6	3.0	0.099	165	62
18.5	M3BP 180MLA 4	3GBP182410--G	1477	91.9	92.8	92.6	0.84	34.5	7.2	119	2.6	2.9	0.166	205	62
22	M3BP 180MLB 4	3GBP182420--G	1475	92.3	93.3	93.2	0.84	40.9	7.3	142	2.6	3.0	0.195	222	62
30	M3BP 200MLA 4	3GBP202410--G	1480	93.2	94.0	93.7	0.84	55.3	7.4	193	2.8	3.0	0.309	291	63
37	M3BP 225SMA 4	3GBP222210--G	1474	93.4	93.9	93.4	0.84	68	7.1	238	2.6	2.7	0.356	324	66
45	M3BP 225SMB 4	3GBP222220--G	1480	93.9	94.3	93.9	0.85	81.3	7.5	290	2.8	3.2	0.44	356	66
55	M3BP 250SMA 4	3GBP252210--G	1471	93.5	94.2	93.8	0.85	98.9	7.0	354	2.0	3.1	0.765	414	67
75	M3BP 280SMA 4	3GBP282210--N	1481	94.0	94.3	93.8	0.83	137	7.7	483	3.3	3.4	0.91	540	70
90	M3BP 280SMB 4	3GBP282220--N	1481	94.2	94.2	94.3	0.85	161	7.5	580	2.9	3.3	1.13	610	70
110	M3BP 315SA 4	3GBP312110--N	1484	94.5	94.9	94.7	0.86	195	6.8	707	2.7	2.9	1.5	740	68
132	M3BP 315SMA 4	3GBP312210--N	1482	94.7	95.1	95.0	0.88	229	6.7	850	2.4	2.7	2	900	68
160	M3BP 315SMB 4	3GBP312220--N	1483	94.9	95.2	94.9	0.86	282	7.0	1030	2.6	2.9	2.2	940	68
200	M3BP 315MLA 4	3GBP312410--G	1486	95.6	95.6	95.3	0.86	351	7.2	1285	2.5	2.9	3.5	1160	70
250	M3BP 355SMA 4	3GBP352210--G	1488	95.9	96.0	95.5	0.85	442	7.1	1604	2.3	2.7	5.9	1610	74
315	M3BP 355SMB 4	3GBP352220--G	1488	95.9	96.2	95.8	0.86	550	7.3	2021	2.3	2.8	6.9	1780	74
355	M3BP 355SMC 4	3GBP352230--G	1487	95.9	96.2	95.9	0.87	614	6.8	2279	2.4	2.7	7.2	1820	78
400	M3BP 355MLA 4	3GBP352410--G	1489	96.0	96.0	95.5	0.85	705	6.8	2565	2.3	2.6	8.4	2140	78
450	M3BP 355MLB 4	3GBP352420--G	1490	96.0	96.1	95.6	0.86	780	6.9	2884	2.3	2.9	8.4	2140	78
500	M3BP 355LKA 4	3GBP352810--G	1490	96.7	96.7	96.1	0.86	865	6.8	3204	2.0	3.0	10	2500	78
560 ^{③)}	M3BP 355LKB 4	3GBP352820--G	1490	96.9	96.9	96.5	0.85	981	7.2	3588	2.6	2.7	10.6	2600	78
560 ^{③)}	M3BP 400LA 4	3GBP402510--G	1491	96.7	96.7	96.1	0.85	982	7.4	3586	2.4	2.8	15	3200	78
630	M3BP 400LB 4	3GBP402520--G	1491	96.7	96.7	96.1	0.87	1077	7.6	4034	2.2	2.9	16	3300	78
710 ^{③)}	M3BP 400LC 4	3GBP402530--G	1491	96.7	96.7	96.2	0.86	1227	7.6	4547	2.4	3.0	17	3400	78
800	M3BP 450LA 4	3GBP452510--G	1491	96.7	96.7	96.1	0.86	1396	7.0	5121	1.3	2.8	23	4050	85
900	M3BP 450LB 4	3GBP452520--G	1492	96.7	96.5	96.0	0.86	1573	7.0	5761	1.3	2.8	25	4350	85
1000 ^{③)}	M3BP 450LC 4	3GBP452530--G	1491	96.7	96.7	96.1	0.86	1724	6.8	6404	1.3	2.7	30	4700	85

^{③)} Temperature rise class F

^{⑥)} Efficiency class IE1

Technical data, 400 V 50 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				Load	Load	Load									
1500 r/min = 4 poles															
18.5	M3BP 160MLC 4	3GBP162430--G	1469	91.4	91.9	91.7	0.84	34.7	7.6	120	3.0	3.2	0.11	173	62
22	³⁾ M3BP 160MLD 4	3GBP162440--G	1466	91.6	92.4	92.5	0.86	40.8	6.9	143	2.5	2.9	0.125	187	62
30	³⁾ M3BP 180MLC 4	3GBP182430--G	1474	92.3	92.8	92.7	0.83	56.5	7.3	194	2.7	2.9	0.217	235	62
37	M3BP 200MLB 4	3GBP202420--G	1479	93.4	94.4	94.4	0.85	67.2	7.1	238	2.6	2.9	0.343	307	63
45	³⁾ M3BP 200MLC 4	3GBP202430--G	1479	93.6	94.4	94.2	0.83	83.6	7.5	290	2.9	3.2	0.366	319	63
55	M3BP 225SMC 4	3GBP222230--G	1478	94.0	94.6	94.4	0.85	99.3	7.4	355	2.9	3.1	0.474	370	66
64	M3BP 225SMD 4	3GBP222240--G	1480	94.2	94.6	94.1	0.85	115	8.0	412	3.3	3.3	0.542	399	66
75	³⁾ M3BP 250SMB 4	3GBP252220--G	1478	94.4	95.1	94.8	0.85	134	7.3	484	2.8	3.1	0.866	450	67
90	³⁾ M3BP 250SMC 4	3GBP252230--G	1478	94.6	95.3	95.0	0.84	163	7.4	581	3.1	3.3	0.941	478	67
110	M3BP 280SMC 4	3GBP282230--G	1485	95.1	95.4	95.1	0.86	193	7.6	707	3.0	3.0	1.85	725	68
132	M3BP 280MLA 4	3GBP282410--G	1483	95.3	95.5	95.1	0.86	232	7.0	849	2.7	2.8	2.3	840	75
160	M3BP 280MLB 4	3GBP282420--G	1484	95.6	95.9	95.7	0.85	284	7.4	1029	2.9	2.9	2.5	890	75
250	M3BP 315LKA 4	3GBP312810--G	1487	95.7	95.8	95.2	0.85	443	7.4	1605	2.5	2.9	4.4	1410	78
315	M3BP 315LKC 4	3GBP312830--G	1488	95.8	95.9	95.3	0.86	559	7.8	2021	2.6	3.2	5.5	1600	78

³⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				400 V 50 Hz	CENELEC-design										
1000 r/min = 6 poles															
0.18	M3BP 71MA 6	3GBP073321--B	900	56.6	56.0	49.8	0.73	0.58	3.1	1.91	1.9	1.9	0.0009	10	42
0.25	M3BP 71MB 6	3GBP073322--B	910	61.6	61.0	55.3	0.67	0.85	3.3	2.62	2.4	2.6	0.0011	12	42
0.37	M3BP 80MA 6	3GBP083321--B	923	67.6	67.5	62.6	0.73	1.04	4.4	3.82	2.6	2.8	0.0019	15	47
0.55	M3BP 80MB 6	3GBP083322--B	905	73.1	75.9	75.1	0.76	1.42	4.4	5.8	2.7	2.5	0.0034	20	47
0.75	M3BP 90SLC 6	3GBP093323--B	960	76.3	74.7	69.5	0.58	2.3	4.5	7.4	2.4	3.1	0.00491	25	44
1.1	M3BP 90SLE 6	3GBP093324--B	930	78.2	78.7	76.5	0.66	3	4.0	11.2	1.9	2.3	0.0054	28	44
1.5	M3BP 100L 6	3GBP103322--B	950	81.3	82.1	80.7	0.69	3.7	4.3	15	1.5	2.7	0.00873	37	49
2.2	M3BP 112MB 6	3GBP113322--B	950	82.5	83.7	81.6	0.69	5.5	4.4	22.1	1.7	2.3	0.0125	44	66
3	M3BP 132SMB 6	3GBP133321--B	975	85.3	84.2	81.2	0.63	8	5.5	29.4	3.0	3.9	0.0334	69	57
4	M3BP 132SMC 6	3GBP133322--B	960	84.9	85.4	83.9	0.68	10	5.0	39.7	2.0	2.6	0.0334	69	57
5.5	⁶⁾ M3BP 132SMF 6	3GBP133324--B	965	86.1	86.6	85.5	0.71	12.9	5.1	54.4	2.0	2.3	0.0487	86	57
7.5	M3BP 160MLA 6	3GBP163410--G	975	88.5	89.9	89.7	0.79	15.4	7.4	73.4	1.7	3.2	0.087	134	59
11	M3BP 160MLB 6	3GBP163420--G	972	89.3	90.6	90.5	0.79	22.5	7.5	108	1.9	2.9	0.114	172	59
15	M3BP 180MLA 6	3GBP183410--G	977	90.2	90.6	90.0	0.76	31.5	5.8	146	1.8	2.7	0.168	207	59
18.5	M3BP 200MLA 6	3GBP203410--G	988	91.6	92.2	91.7	0.80	36.4	6.7	178	2.3	2.9	0.382	269	63
22	M3BP 200MLB 6	3GBP203420--G	983	90.9	92.0	91.8	0.82	42	6.6	212	2.1	2.7	0.448	291	63
30	M3BP 225SMA 6	3GBP223210--G	986	92.6	93.3	92.8	0.83	56.2	7.0	290	2.6	2.9	0.663	349	63
37	M3BP 250SMA 6	3GBP253210--G	984	92.2	92.9	92.5	0.82	69.9	6.8	357	2.0	2.7	1.13	395	63
45	M3BP 280SMA 6	3GBP283210--N	989	92.7	93.0	92.4	0.82	85.2	6.8	434	2.6	2.7	1.36	525	64
55	M3BP 280SMB 6	3GBP283220--N	990	93.1	93.7	93.4	0.82	102	7.5	530	3.0	3.3	1.8	600	64
75	M3BP 315SA 6	3GBP313110--N	989	93.7	94.1	93.9	0.84	138	7.0	724	2.6	2.6	2.6	775	66
90	M3BP 315SMA 6	3GBP313210--N	990	94.0	94.3	93.7	0.82	169	7.0	868	2.7	2.9	2.8	855	70
110	M3BP 315SMB 6	3GBP313220--N	990	94.3	94.5	94.0	0.82	205	7.3	1061	2.9	3.0	3.5	960	70
132	M3BP 315MLA 6	3GBP313410--G	991	95.3	95.4	94.9	0.83	240	7.5	1271	2.7	3.0	5.8	1150	68
160	M3BP 355SMA 6	3GBP353210--G	993	95.4	95.6	95.2	0.83	291	7.0	1538	2.0	2.6	7.9	1520	75
200	M3BP 355SMB 6	3GBP353220--G	993	95.7	95.9	95.7	0.83	364	7.2	1923	2.6	2.7	9.7	1680	75
250	M3BP 355SMC 6	3GBP353230--G	993	95.7	95.8	95.4	0.82	460	7.4	2404	2.6	2.9	11.3	1820	75
315	M3BP 355MLB 6	3GBP353420--G	992	95.7	96.0	95.5	0.83	570	7.0	3032	2.5	2.7	13.5	2180	75
355	M3BP 355LKA 6	3GBP353810--G	992	95.7	95.9	95.4	0.81	658	7.6	3417	2.7	2.9	15.5	2500	75
400	M3BP 355LKB 6	3GBP353820--G	992	96.0	96.0	95.5	0.83	724	7.2	3850	2.6	2.6	16.5	2600	75
400	M3BP 400LA 6	3GBP403510--G	993	95.8	95.8	95.1	0.82	731	7.1	3846	2.3	2.7	17	2900	76
450	M3BP 400LB 6	3GBP403520--G	994	95.8	95.8	95.2	0.82	819	7.4	4323	2.4	2.8	20.5	3150	76
500	M3BP 400LC 6	3GBP403530--G	993	95.8	95.6	95.2	0.83	891	7.2	4809	2.5	2.7	22	3300	76
560	M3BP 400LD 6	3GBP403540--G	993	96.6	96.6	96.0	0.85	984	7.4	5386	2.4	2.8	24	3400	77
630	M3BP 450LA 6	3GBP453510--G	994	95.8	95.9	95.3	0.84	1127	6.5	6053	1.1	2.5	31	4150	81
710	M3BP 450LB 6	3GBP453520--G	995	96.6	96.7	96.1	0.85	1244	7.0	6814	1.3	2.5	37	4500	81
800	³⁾ M3BP 450LC 6	3GBP453530--G	995	96.6	96.6	96.0	0.84	1415	7.2	7677	1.3	2.7	41	4800	81

³⁾ Temperature rise class F

⁶⁾ Efficiency class IE1

Technical data, 400 V 50 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N					
				Load	Load	Load											
1000 r/min = 6 poles																	
15	M3BP 160MLC 6	3GBP163430--G	971	89.7	90.5	90.2	0.77	31.3	7.3	147	1.8	3.6	0.131	185	59		
18.5	M3BP 180MLB 6	3GBP183420--G	975	90.7	92.0	92.0	0.79	37.2	5.8	181	1.7	2.7	0.198	221	59		
30	³⁾ M3BP 200MLC 6	3GBP203430--G	985	92.0	93.1	92.8	0.83	56.7	6.9	290	2.3	2.8	0.531	318	63		
37	M3BP 225SMB 6	3GBP223220--G	985	93.1	94.0	94.0	0.83	69.1	6.6	358	2.3	2.6	0.821	393	63		
45	³⁾ M3BP 225SMC 6	3GBP223230--G	984	92.7	93.3	93.3	0.83	84.4	6.4	436	2.3	2.6	0.821	393	63		
45	M3BP 250SMB 6	3GBP253220--G	989	93.4	94.1	93.9	0.83	83.7	7.0	434	2.5	2.7	1.37	441	63		
55	M3BP 250SMC 6	3GBP253230--G	988	93.2	93.7	93.6	0.84	101	7.1	531	2.6	2.8	1.5	468	63		
75	M3BP 280SMC 6	3GBP283230--G	990	94.2	94.7	94.5	0.84	137	7.3	723	2.8	2.7	2.85	725	66		
90	M3BP 280MLA 6	3GBP283410--G	990	94.1	94.3	93.7	0.81	170	7.1	868	2.4	2.5	3.1	840	70		
110	M3BP 280MLB 6	3GBP283420--G	990	94.5	94.8	94.4	0.82	205	7.5	1061	2.7	2.6	4.1	890	70		
160	M3BP 315LKA 6	3GBP313810--G	992	95.3	95.3	94.7	0.83	291	7.5	1540	2.6	2.8	7.3	1410	74		
180	M3BP 315LKB 6	3GBP313820--G	992	95.3	95.4	94.8	0.83	328	7.4	1732	2.6	2.8	8.3	1520	74		
200	M3BP 315LKC 6	3GBP313830--G	989	95.4	95.6	95.3	0.85	360	6.8	1931	2.5	2.6	9.2	1600	74		

³⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1: 2014				Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
				Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
750 r/min = 8 poles															
0.09	M3BP 71MA 8	3GBP074101---B	660	49.4	46.4	39.7	0.60	0.44	2.7	1.3	2.0	2.5	0.00089	11	40
0.12	M3BP 71MB 8	3GBP074102---B	685	39.8	34.2	23.9	0.58	0.6	2.7	1.67	2.1	2.4	0.0011	12	43
0.18	M3BP 80MA 8	3GBP084101---B	680	45.9	45.4	38.6	0.61	0.7	3.0	2.52	2.0	2.4	0.0019	15	45
0.25	M3BP 80MB 8	3GBP084102---B	680	50.6	51.0	46.0	0.62	0.94	3.3	3.5	2.0	2.2	0.0024	17	50
0.37	M3BP 90SLB 8	3GBP094102---B	705	56.1	54.5	47.1	0.57	1.47	2.8	5	1.8	2.2	0.0044	24	50
0.55	M3BP 90SLC 8	3GBP094103---B	673	61.7	63.6	59.8	0.61	2.08	2.6	7.8	1.5	1.8	0.0049	25	53
0.75	M3BP 100LA 8	3GBP104101---B	710	74.0	72.3	67.1	0.61	2.48	3.7	10.1	1.8	2.6	0.0072	30	46
1.1	M3BP 100LB 8	3GBP104102---B	695	76.0	76.4	74.5	0.66	3.12	3.6	15.1	1.6	2.3	0.00871	30	53
1.5	M3BP 112M 8	3GBP114101---B	690	74.4	75.9	74.1	0.74	4.11	3.5	20.9	1.9	2.5	0.0106	39	55
2.2	M3BP 132SMA 8	3GBP134101---B	715	78.3	75.1	75.5	0.66	6.51	4.7	29.2	1.6	2.8	0.0334	70	56
3	M3BP 132SMB 8	3GBP134102---B	715	79.9	79.7	76.6	0.64	8.5	4.7	39.7	1.7	2.8	0.04	75	58
4	M3BP 160MLA 8	3GBP164410---G	728	84.0	85.1	83.6	0.67	10.2	5.4	52.4	1.5	2.6	0.068	120	59
5.5	M3BP 160MLB 8	3GBP164420---G	726	84.6	85.9	84.8	0.67	13.9	5.6	72.3	1.4	2.6	0.085	134	59
7.5	M3BP 160MLC 8	3GBP164430---G	727	86.0	87.3	86.5	0.65	19.3	4.7	98.5	1.5	2.8	0.132	184	59
11	M3BP 180MLA 8	3GBP184410---G	731	86.9	87.6	86.7	0.67	27.3	4.4	143	1.8	2.6	0.214	233	59
15	M3BP 200MLA 8	3GBP204410---G	737	89.5	90.8	90.3	0.74	32.4	5.3	194	2.0	2.4	0.45	290	60
18.5	M3BP 225SMA 8	3GBP224210---G	739	90.0	91.1	90.6	0.73	40.1	5.2	239	2.0	2.3	0.669	350	63
22	M3BP 225SMB 8	3GBP224220---G	738	90.5	91.4	91.0	0.74	46.8	5.5	284	2.0	2.3	0.722	363	63
30	M3BP 250SMA 8	3GBP254210---G	742	91.2	91.8	91.1	0.71	66	5.8	386	2.6	2.4	1.4	440	63
37	M3BP 280SMA 8	3GBP284210---G	741	91.7	92.0	91.2	0.79	72.6	7.3	476	1.7	3.0	1.85	605	65
45	M3BP 280SMB 8	3GBP284220---G	741	92.1	92.3	91.7	0.78	89.2	7.6	579	1.8	3.1	2.2	645	65
55	M3BP 315SMA 8	3GBP314210---G	742	92.4	93.0	92.4	0.79	106	7.1	707	1.6	2.7	3.2	830	62
75	M3BP 315SMB 8	3GBP314220---G	741	93.0	93.2	93.0	0.82	146	7.1	966	1.7	2.7	4.1	930	62
90	M3BP 315SMC 8	3GBP314230---G	741	93.3	93.7	93.3	0.82	170	7.4	1159	1.8	2.7	4.9	1000	64
110	M3BP 315MLA 8	3GBP314410---G	740	93.6	93.9	94.0	0.83	211	7.3	1419	1.8	2.7	5.8	1150	72
132	M3BP 355SMA 8	3GBP354210---G	744	93.9	93.8	93.3	0.80	256	7.5	1694	1.5	2.6	7.9	1520	69
160	M3BP 355SMB 8	3GBP354220---G	744	94.2	94.2	93.7	0.77	293	7.6	2053	1.6	2.6	9.7	1680	69
200	M3BP 355SMC 8	3GBP354230---G	742	94.5	95.0	94.8	0.79	385	7.4	2576	1.6	2.6	11.3	1820	69
250	M3BP 355MLB 8	3GBP354420---G	743	94.5	94.7	94.1	0.80	472	7.5	3213	1.6	2.7	13.5	2180	72
315	M3BP 400LA 8	3GBP404510---G	744	96.1	96.0	95.6	0.81	592	7.0	4043	1.2	2.6	17	2900	71
315	³⁾ M3BP 355LKB 8	3GBP354820---G	742	95.5	95.7	95.2	0.80	595	7.9	4053	1.7	2.7	16.5	2600	75
355	M3BP 400LB 8	3GBP404520---G	743	95.8	96.0	95.8	0.83	641	6.8	4562	1.2	2.5	21	3200	71
400	M3BP 400LC 8	3GBP404530---G	744	96.0	96.3	95.8	0.82	735	6.0	5134	1.3	2.7	24	3400	71
450	M3BP 450LA 8	3GBP454510---G	744	96.2	96.5	96.2	0.83	813	6.0	5775	1.0	2.5	26	3750	80
500	M3BP 450LB 8	3GBP454520---G	744	96.3	96.4	96.2	0.83	902	6.4	6417	1.0	2.6	29	4000	80
560	M3BP 450LC 8	3GBP454530---G	744	96.4	96.5	96.1	0.82	1038	7.0	7188	1.2	2.9	35	4350	80
630	³⁾ M3BP 450LD 8	3GBP454540---G	745	96.6	96.7	96.2	0.81	1162	7.6	8075	1.3	3.2	41	4800	80

³⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
750 r/min = 8 poles																High-output design
18.5	M3BP 200MLB 8	3GBP204420--G	739	90.0	90.8	90.2	0.74	40	5.4	239	2.1	2.3	0.53	318	60	
30	M3BP 225SMC 8	3GBP224230--G	737	91.2	92.3	92.1	0.73	64.7	5.6	388	2.3	2.4	0.828	393	63	
37	M3BP 250SMB 8	3GBP254220--G	740	91.7	92.8	92.5	0.73	78.9	5.4	477	2.6	2.3	1.5	468	63	
45 ³⁾	M3BP 250SMC 8	3GBP254230--G	738	92.1	93.3	93.3	0.74	95.1	5.6	582	2.3	2.4	1.5	468	63	
55	M3BP 280SMC 8	3GBP284230--G	741	92.4	92.8	92.7	0.80	107	7.9	708	1.9	3.1	2.85	725	65	
75	M3BP 280MLB 8	3GBP284420--G	739	93.7	93.9	93.3	0.80	144	6.7	969	1.7	2.6	4.1	890	72	
132	M3BP 315LKA 8	3GBP314810--G	740	94.1	94.4	94.2	0.83	243	7.3	1703	1.8	2.6	7.3	1410	74	
160 ³⁾	M3BP 315LKC 8	3GBP314830--G	739	94.2	94.7	94.7	0.83	297	7.7	2068	1.9	2.8	9.2	1600	74	

³⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
600 r/min = 10 poles			400 V 50 Hz					CENELEC-design								
37	M3BP 280SMB 10	3GBP285220--G	593	92.5	92.3	90.9	0.73	79	6.6	595	1.6	3.0	2.2	645	60	
45	M3BP 280SMC 10	3GBP285230--G	592	93.0	92.9	91.7	0.75	93.1	6.7	725	1.6	2.8	2.85	725	60	
55	M3BP 315SMB 10	3GBP315220--G	594	93.8	93.8	92.9	0.78	108	6.7	884	1.6	2.7	4.1	930	70	
75	M3BP 315SMC 10	3GBP315230--G	593	93.6	93.7	92.8	0.78	148	6.6	1207	1.5	2.8	4.9	1000	70	
90	M3BP 315MLA 10	3GBP315410--G	593	93.7	93.8	93.0	0.78	177	6.6	1449	1.7	2.7	5.8	1150	70	
110	M3BP 355SMA 10	3GBP355210--G	595	94.5	94.5	93.6	0.76	221	6.6	1765	1.3	2.5	7.9	1520	73	
132	M3BP 355SMB 10	3GBP355220--G	594	94.8	94.9	94.2	0.79	254	6.6	2122	1.3	2.4	9.7	1680	73	
160	M3BP 355SMC 10	3GBP355230--G	594	94.5	94.7	93.9	0.77	316	6.9	2572	1.4	2.5	11.3	1820	76	
200	M3BP 355MLB 10	3GBP355420--G	594	95.0	95.1	94.5	0.78	389	6.5	3215	1.4	2.4	13.5	2180	77	
250	³⁾ M3BP 355LKB 10	3GBP355820--G	593	95.1	95.3	94.8	0.78	486	6.3	4025	1.4	2.3	16.5	2600	79	
250	M3BP 400LB 10	3GBP405520--G	595	95.3	95.3	94.5	0.74	511	6.2	4012	1.3	2.3	20	3100	79	
315	M3BP 400LC 10	3GBP405530--G	595	95.4	95.4	94.7	0.74	644	6.2	5055	1.3	2.3	24	3400	79	
355	M3BP 450LA 10	3GBP455510--G	596	95.9	95.9	95.2	0.72	742	5.8	5687	1.1	2.2	31	4050	82	
400	M3BP 450LB 10	3GBP455520--G	596	95.9	95.9	95.1	0.72	836	5.7	6408	1.0	2.1	34	4250	82	
450	M3BP 450LC 10	3GBP455530--G	596	96.1	96.1	95.4	0.73	925	5.8	7210	1.0	2.1	38	4550	82	
500	³⁾ M3BP 450LD 10	3GBP455540--G	596	96.1	96.1	95.4	0.71	1057	5.9	8011	1.1	2.2	42	4800	82	

³⁾ Temperature rise class F

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
500 r/min = 12 poles			400 V 50 Hz					CENELEC-design								
30	M3BP 280SMB 12	3GBP286220--G	493	90.2	89.5	86.9	0.59	81.3	5.8	581	1.9	3.0	2.2	645	71	
37	M3BP 280SMC 12	3GBP286230--G	493	90.2	89.3	86.5	0.55	107	6.1	716	2.1	3.2	2.85	725	71	
45	M3BP 315SMB 12	3GBP316220--G	494	92.8	92.9	92.0	0.76	92	6.5	869	1.6	2.6	4.1	930	71	
55	M3BP 315SMC 12	3GBP316230--G	493	93.0	93.2	92.4	0.77	110	6.5	1065	1.6	2.6	4.9	1000	71	
75	M3BP 315MLA 12	3GBP316410--G	493	93.2	93.4	92.8	0.76	152	6.3	1452	1.5	2.5	5.8	1150	71	
90	M3BP 355SMA 12	3GBP356210--G	495	93.5	93.5	92.5	0.72	192	5.7	1736	1.3	2.4	7.9	1520	75	
110	M3BP 355SMB 12	3GBP356220--G	495	93.8	93.8	92.7	0.71	238	6.0	2122	1.4	2.5	9.7	1680	75	
132	M3BP 355SMC 12	3GBP356230--G	495	93.9	93.9	92.9	0.71	285	6.0	2546	1.4	2.5	11.3	1820	77	
160	M3BP 355MLB 12	3GBP356420--G	494	93.8	94.0	93.3	0.74	332	5.7	3092	1.3	2.4	13.5	2180	77	
200	³⁾ M3BP 355LKB 12	3GBP356820--G	494	93.9	94.1	93.4	0.73	421	5.8	3866	1.4	2.4	16.5	2600	79	
200	M3BP 400LB 12	3GBP406520--G	495	95.0	95.0	94.3	0.79	384	5.4	3858	1.1	2.2	20	3100	82	
315	M3BP 450LB 12	3GBP456520--G	496	95.6	95.6	94.8	0.76	625	5.5	6064	1.0	2.1	34	4300	82	
400	³⁾ M3BP 450LD 12	3GBP456540--G	495	95.7	95.8	95.2	0.77	783	5.3	7716	1.0	2.0	42	4800	82	

³⁾ Temperature rise class F

Technical data, 460 V 60 Hz

IE4 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE4 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014						Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N						
				460 V 60 Hz	CENELEC-design													
3600 r/min = 2 poles																		
3	M3BP 100LKA 2	3GBP101810--M	3518	89.5	89.6	88.1	0.89	4.9	11.3	8.4	2.8	4.9	0.0087	57	57			
4	M3BP 112MB 2	3GBP111320--M	3492	89.5	90.3	89.9	0.90	6.2	10.3	11.7	2.5	4.6	0.0134	66	66			
5.5	M3BP 132SMB 2	3GBP131220--M	3540	90.2	90.5	89.4	0.93	8.1	8.6	14.8	1.6	4.0	0.0158	85	67			
7.5	M3BP 132SMC 2	3GBP131230--M	3537	91.7	92.2	91.5	0.92	12	10.3	21.6	2.7	5.1	0.0177	90	67			
11	M3BP 160MLA 2	3GBP161410--M	3558	92.4	92.4	91.1	0.90	16.6	9.9	29.5	3.1	4.5	0.0514	141	73			
15	M3BP 160MLB 2	3GBP161420--M	3559	92.4	92.3	91.1	0.90	22.5	10.8	40.2	3.6	4.8	0.0612	170	73			
18.5	M3BP 160MLC 2	3GBP161430--M	3555	93.0	93.2	92.6	0.89	27.9	9.7	50.4	4.0	4.8	0.079	179	71			
22	M3BP 180MLA 2	3GBP181410--M	3564	93.0	93.0	92.0	0.87	33.4	9.5	59.3	3.7	4.4	0.126	224	71			
30	M3BP 200MLA 2	3GBP201410--M	3562	93.6	93.8	93.4	0.91	43.9	8.3	80.4	2.3	3.3	0.196	289	76			
37	M3BP 200MLB 2	3GBP201420--M	3560	94.1	94.2	93.6	0.89	55.1	8.5	99.2	3.1	4.5	0.217	309	76			
45	M3BP 225SMA 2	3GBP221210--M	3575	94.5	94.1	92.9	0.87	67.7	9.2	120	3.7	4.1	0.323	395	78			
55	M3BP 250SMA 2	3GBP251210--M	3579	94.5	94.3	93.2	0.89	82.5	9.2	148	3.7	4.0	0.634	483	79			
75	M3BP 280SMB 2	3GBP281220--M	3582	95.0	94.6	93.3	0.87	113	8.2	200	2.5	3.2	0.9	665	80			
90	M3BP 280SMC 2	3GBP281230--M	3582	95.4	95.0	93.8	0.88	133	9	240	3.4	3.4	1.15	725	80			
110	M3BP 315SMB 2	3GBP311220--M	3598	95.4	94.9	93.5	0.88	165	7.5	293	1.9	2.9	1.4	940	80			
132	M3BP 315SMC 2	3GBP311230--M	3586	95.8	95.4	94.2	0.88	197	8.9	351	2.4	3.3	1.7	1025	80			
160	M3BP 315MLA 2	3GBP311410--M	3584	95.8	95.6	94.8	0.89	233	8.2	426	2.2	3	2.1	1190	80			
200	M3BP 315MLB 2	3GBP311420--M	3584	96.2	96.2	95.5	0.90	290	7.7	533	2.0	2.9	2.2	1220	80			
250	M3BP 355SMB 2	3GBP351220--M	3585	96.2	95.8	94.8	0.90	363	8.5	666	2.3	3.3	3.4	1680	86			
315	M3BP 355SMC 2	3GBP351230--M	3586	96.2	95.8	94.8	0.89	466	8.7	839	2.3	3.1	3.6	1750	86			
355	M3BP 355MLA 2	3GBP351410--M	3583	96.2	95.9	94.9	0.90	518	8.5	944	2.3	2.9	4.1	2000	86			
400	M3BP 355MLB 2	3GBP351420--M	3582	96.2	95.6	94.3	0.88	589	8.3	1066	2.3	3.2	4.1	2000	88			
450	³⁾ M3BP 355MLC 2	3GBP351430--M	3585	96.2	95.8	94.8	0.90	650	8.9	1199	2.2	3.2	4.3	2080	88			
500	M3BP 355LKA 2	3GBP351810--M	3584	96.2	95.9	95.0	0.90	722	9	1332.26	2.4	4.3	4.8	2320	88			
560	²⁾ M3BP 400LA 2	3GBP401510--M	3588	96.2	95.8	94.5	0.89	818	9	1490	2.3	3.8	7.9	2950	86			
560	³⁾ M3BP 355LKA 2	3GBP351810--M	3582	96.2	96.0	95.2	0.90	798	7.7	1492	1.9	3.8	4.8	2320	88			
630	²⁾ M3BP 400LB 2	3GBP401520--M	3588	96.2	96.0	95.9	0.89	916	8.6	1676	3.0	4.5	8.2	2950	86			
710	²⁾ M3BP 400LC 2	3GBP401530--M	3588	96.2	96.0	95.2	0.90	1026	8.4	1890	2.9	4.0	9.3	3050	86			
800	²⁾³⁾ M3BP 450LA 2	3GBP451510--M	3591	96.2	95.9	94.7	0.87	1188	8	2127	1.3	3.5	12.2	4000	90			
900	²⁾³⁾ M3BP 450LB 2	3GBP451520--M	3591	96.2	95.9	95.1	0.85	1366	7.8	2393	1.5	3.4	13.5	4000	90			

²⁾ Unidirectional fan construction as standard. Direction of rotation must be stated when ordering, see variant codes 044 and 045.

³⁾ Temperature rise class F

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014						Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N						
				460 V 60 Hz	High-output design													
3600 r/min = 2 poles																		
110	M3BP 280SMD 2	3GBP281240--M	3582	95.4	95.0	93.8	0.85	167	9.2	293.2	3.2	4.2	1.15	725	81			
132	M3BP 280MLA 2	3GBP281410--M	3582	95.8	94.0	92.9	0.87	196	9	351	3.4	4.0	1.4	840	84			
160	M3BP 280MLB 2	3GBP281420--M	3573	95.8	95.9	95.3	0.90	230	7.5	427	2.8	3.0	1.55	890	84			
250	M3BP 315LKB 2	3GBP311820--M	3583	96.2	95.8	91.9	0.91	359	9	666	2.6	3.0	2.9	1540	80			

Technical data, 460 V 60 Hz

IE4 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE4 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
1800 r/min = 4 poles			460 V 60 Hz					CENELEC-design								
2.2	M3BP 100LKA 4	3GBP102810--M	1764	91.0	90.5	88.9	0.79	3.9	8.2	11.91	2.7	4.5	0.0233	57	58	
3	M3BP 100LKB 4	3GBP102820--M	1765	91.0	91.0	89.8	0.76	5.42	9.5	16.4	3.3	4.5	0.0266	62	58	
4	M3BP 112MB 4	3GBP112320--M	1768	91.0	91.3	90.1	0.75	7.3	9	21.8	3.5	4.8	0.0244	70	59	
5.5	M3BP 132SMB 4	3GBP132220--M	1771	92.4	92.4	91.4	0.80	9.4	8.2	29.7	2.7	4.2	0.0425	93	64	
7.5	M3BP 132SMC 4	3GBP132230--M	1769	93.6	93.7	92.9	0.75	13.6	9.4	40.7	3.4	4.4	0.0488	101	64	
11	M3BP 160MLA 4	3GBP162410--M	1780	93.6	93.5	92.5	0.77	19.2	8.6	59	3.0	4.2	0.123	188	66	
15	M3BP 160MLB 4	3GBP162420--M	1782	94.1	93.9	92.6	0.75	27	9.5	81.7	3.8	4.6	0.127	175	66	
18.5	M3BP 180MLA 4	3GBP182410--M	1781	94.5	94.7	93.9	0.82	29.9	9.2	100.1	3.2	4.3	0.191	226	66	
22	M3BP 180MLC 4	3GBP182430--M	1787	94.5	94.5	93.8	0.82	35.9	10.7	141.46	3.6	4.4	0.22	247	66	
30	M3BP 200MLA 4	3GBP202410--M	1789	95.0	94.7	93.7	0.74	53.3	9.5	160.4	4.3	4.9	0.369	304	67	
37	M3BP 225SMA 4	3GBP222210--M	1784	95.4	95.5	95.1	0.83	58.3	8.6	198	3.4	3.5	0.536	383	70	
45	M3BP 225SMB 4	3GBP222220--M	1782	95.4	95.7	95.5	0.83	71.1	8.4	241	2.8	3.2	0.536	403	72	
55	M3BP 250SMA 4	3GBP252210--M	1785	95.8	95.0	94.1	0.81	88.3	7.9	294	3.8	4.0	0.933	467	71	
75	M3BP 280SMC 4	3GBP282230--M	1787	96.2	96.1	95.3	0.84	116	8.9	400	3.0	3.2	1.85	725	72	
90	M3BP 280MLA 4	3GBP282410--M	1790	96.2	96.2	95.4	0.84	136	9.8	481	3.6	3.5	2.3	840	75	
110	M3BP 315SMC 4	3GBP312230--M	1792	96.2	96.0	95.3	0.83	172	8.8	586	2.6	3.4	2.9	1000	71	
132	M3BP 315SMD 4	3GBP312240--M	1791	96.5	96.3	95.6	0.84	206	9	704	2.8	3.6	3.2	1065	71	
160	M3BP 315MLB 4	3GBP312420--M	1791	96.5	96.5	95.9	0.86	241	9	853	2.9	3.3	3.9	1220	71	
200	M3BP 355SMA 4	3GBP352210--M	1792	96.5	96.2	95.4	0.87	301	8.3	1065	2.2	3.0	5.9	1610	77	
250	M3BP 355SMB 4	3GBP352220--M	1792	96.8	96.6	96.0	0.86	381	8.8	1332	2.7	3.2	6.9	1780	77	
315	M3BP 355SMC 4	3GBP352230--M	1791	96.8	96.6	96.1	0.85	479	8.5	1679	3.1	3.2	7.2	1820	77	
355	M3BP 355MLA 4	3GBP352410--M	1792	96.8	96.6	96.0	0.86	542	9	1890	2.9	3.2	8.4	2140	81	
400	M3BP 355MLB 4	3GBP352420--M	1791	96.8	96.7	96.1	0.85	609	8.5	2132	2.6	3.2	8.4	2140	82	
450	M3BP 355MLC 4	3GBP352430--M	1791	96.8	96.7	96.2	0.85	685	8.2	2399	2.5	3.1	8.4	2140	82	
500	M3BP 355LKA 4	3GBP352810--M	1791	96.8	96.3	95.2	0.85	763	8	2666	2.4	3.4	10	2500	83	
560	M3BP 400LA 4	3GBP402510--M	1792	96.2	96.0	95.3	0.84	863	7.8	2985	2.7	3.1	15	3200	83	
630	M3BP 400LB 4	3GBP402520--M	1793	96.8	96.6	95.9	0.85	960	8.9	3355	2.2	3.3	16	3300	83	
710 ³⁾	M3BP 400LC 4	3GBP402530--M	1792	96.8	96.6	96.0	0.84	1091	7.9	3784	2.5	3.3	17	3300	83	
800	M3BP 450LA 4	3GBP452510--M	1792	96.7	96.5	96.0	0.85	1222	6.5	4263	1.3	3.1	23	4050	89	
900	M3BP 450LB 4	3GBP452520--M	1792	96.8	96.3	96.0	0.85	1373	7.9	4794	1.3	3.1	25	4050	89	
1000 ³⁾	M3BP 450LC 4	3GBP452530--M	1792	96.8	96.6	95.8	0.86	1505	7.2	5329	1.4	2.8	30	4350	89	

³⁾ Temperature rise class F

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
1800 r/min = 4 poles			460 V 60 Hz					High-output design								
110	M3BP 280MLB 4	3GBP282420--M	1790	96.2	95.9	95.1	0.80	180	10.8	586.8	4.4	4.4	2.5	890	78	
132	M3BP 280MLC 4	3GBP282430--M	1790	96.5	96.2	95.4	0.79	216	9.3	704	4.1	4.4	2.5	890	78	

Technical data, 460 V 60 Hz

IE4 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE4 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1: 2014				Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
				Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N					
1200 r/min = 6 poles			460 V 60 Hz	CENELEC-design													
1.5	M3BP 100LKB 6	3GBP103820--M	1175	89.5	88.8	87.1	0.70	3.1	7	12.2	2.2	4.0	0.0159	51	53		
2.2	M3BP 112MB 6	3GBP113320--M	1173	90.2	89.9	88.3	0.68	4.5	7.1	21.4	2.4	3.9	0.0198	63	57		
3	M3BP 132SMB 6	3GBP133220--M	1181	90.2	89.9	88.1	0.79	5.2	6.4	24.3	1.6	3.2	0.0347	85	67		
4	M3BP 132SMC 6	3GBP133230--M	1180	90.2	90.1	88.5	0.79	6.95	6.3	32.4	1.6	3.2	0.0385	90	66		
5.5	M3BP 132SMD 6	3GBP133240--M	1176	91.7	92.1	91.2	0.73	10.3	6.4	45	1.8	3.2	0.0422	97	66		
7.5 ⁴⁾	M3BP 160MLA 6	3GBP163410--M	1186	91.3	90.6	88.3	0.73	14.1	7.8	60.4	1.9	4.0	0.133	187	63		
11	M3BP 160MLB 6	3GBP163420--M	1184	93.0	93.5	92.8	0.77	19.2	7.1	88.8	1.7	3.5	0.133	189	63		
11	M3BP 160MLB 6	3GBP163420--M	1184	93.0	93.7	93.1	0.74	20.1	8	90	2.0	3.9	0.133	189	63		
15	M3BP 180MLA 6	3GBP183410--M	1186	93.0	92.7	91.1	0.79	29.1	7.9	122	2.9	4.4	0.254	240	63		
18.5	M3BP 200MLA 6	3GBP203410--M	1192	94.1	94.1	93.4	0.80	31	8.8	148.3	2.7	4.0	0.448	291	67		
22	M3BP 200MLB 6	3GBP203420--M	1189	94.1	93.8	93.4	0.80	37.1	8.1	178.6	3.0	3.5	0.531	306	67		
30	M3BP 225SMA 6	3GBP223210--M	1190	95.0	94.9	94.1	0.75	52.6	7.7	242.6	1.5	1.8	0.813	369	67		
37	M3BP 250SMA 6	3GBP253210--M	1193	95.0	94.6	94.4	0.74	65.8	9.2	297	4.1	4.5	1.49	457	67		
45 ⁴⁾	M3BP 280SMB 6	3GBP283220--M	1193	95.3	95.2	94.3	0.85	70.6	7.9	361	2.6	2.9	2.2	680	68		
55 ⁴⁾	M3BP 280SMC 6	3GBP283230--M	1190	95.3	95.3	94.5	0.85	86.2	7.8	420	2.6	2.9	2.85	725	68		
90	M3BP 315SMD 6	3GBP313240--M	1195	95.8	95.6	94.9	0.80	149	8.2	719	2.7	3.2	4.9	1040	70		
110	M3BP 315MLB 6	3GBP313420--M	1194	96.2	96.0	95.4	0.81	177	7.9	880	2.6	3.0	6.3	1200	71		
132	M3BP 315LKA 6	3GBP313810--M	1194	96.2	96.0	95.5	0.81	215	7.9	1055	2.7	3.0	7.3	1410	71		
160	M3BP 355SMB 6	3GBP353220--M	1195	96.2	96.0	95.3	0.81	260	7.9	1278	2.3	3.0	9.7	1680	76		
200	M3BP 355SMC 6	3GBP353230--M	1196	96.2	95.7	95.0	0.82	320	8.3	1598	2.5	3.1	11.3	1820	76		
250	M3BP 355MLB 6	3GBP353420--M	1195	96.5	96.5	95.8	0.82	401	9.2	1997	2.3	3.0	13.5	2180	76		
315	M3BP 355LKA 6	3GBP353810--M	1195	96.5	96.5	95.9	0.83	500	7.9	2516	2.6	2.9	15.5	2500	79		
355	M3BP 355LKB 6	3GBP353820--M	1195	96.5	96.2	95.4	0.80	584	8.8	2835	3.0	3.2	16.5	2600	79		
400	M3BP 400LA 6	3GBP403510--M	1194	96.5	96.4	95.9	0.81	642	8.1	3199	2.5	2.9	17	2900	79		
450	M3BP 400LB 6	3GBP403520--M	1194	96.5	96.5	95.8	0.82	713	7.7	3599	2.4	2.7	18.6	2990	79		
500 ⁴⁾	M3BP 400LC 6	3GBP403530--M	1195	96.4	96.0	95.1	0.82	793	8.8	3995	2.6	3.7	22	3300	79		
560 ⁴⁾	M3BP 400LD 6	3GBP403540--M	1194	96.4	96.3	95.7	0.85	856	7.8	4481	2.4	3.2	24	3400	79		
630 ³⁾	M3BP 400LD 6	3GBP403540--M	1193	96.5	96.5	95.9	0.86	952	7.5	5042	2.3	2.8	24	3400	79		
630	M3BP 450LA 6	3GBP453510--M	1196	96.3	96.0	95.1	0.81	1014	7.9	5030	1.6	3.7	31	4150	85		
710	M3BP 450LB 6	3GBP453520--M	1196	96.5	96.2	95.5	0.85	1085	8.2	5671	1.4	2.9	37	4500	85		
800	M3BP 450LC 6	3GBP453530--M	1195	96.5	96.4	95.7	0.83	1254	8.4	6393	1.4	3.3	41	4800	85		

³⁾ Temperature rise class F

⁴⁾ Efficiency class IE3

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1: 2014				Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
				Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N					
1200 r/min = 6 poles			460 V 60 Hz	High-output design													
160	M3BP 315LKC 6	3GBP313830--M	1195	96.2	96.0	95.3	0.81	259	8.4	1279	3.0	3.2	9.2	1600	71		

Technical data, 460 V 60 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				Load	Load	Load									
3600 r/min = 2 poles															
0.55	M3BP 71ME 2	3GBP071350--K	3386	76.8	76.7	74.0	0.81	1.1	8.4	1.55	3.3	3.9	0.00045	11	59
0.75	M3BP 80MD 2	3GBP081340--K	3502	77.0	75.2	70.0	0.72	1.56	8.9	2	4.3	5.2	0.0008	18	61
1.1	M3BP 80MG 2	3GBP081370--K	3500	84.0	83.0	80.2	0.78	2	9.9	3	3.6	5.3	0.001	19	60
1.5	M3BP 90LB 2	3GBP091520--K	3522	85.5	85.3	84.0	0.88	2.4	9.6	4	3.2	4.8	0.0027	31	65
2.2	M3BP 90LC 2	3GBP091530--K	3517	86.5	87.1	85.8	0.88	3.5	9.9	5.9	3.1	4.2	0.0032	35	65
3	M3BP 100LKA 2	3GBP101810--K	3512	88.5	88.7	87.3	0.89	4.7	9.9	8.1	3.5	4.6	0.0057	50	65
4	M3BP 112MG 2	3GBP111370--K	3500	88.5	88.9	87.9	0.90	6.2	10	10.9	3.6	4.8	0.0104	56	71
5.5	M3BP 132SMF 2	3GBP131260--K	3519	89.5	89.4	88.7	0.90	8.4	9.1	14.9	2.5	3.9	0.0154	77	74
7.5	M3BP 132SMG 2	3GBP131270--K	3524	90.2	90.7	90.0	0.90	11.4	9.6	20.3	3.1	4.5	0.0173	77	73
11	M3BP 160MLA 2	3GBP161410--K	3549	91.0	91.1	89.9	0.91	16.6	8.7	29.54	2.7	3.9	0.057	141	75
15	M3BP 160MLB 2	3GBP161420--K	3554	91.0	90.4	89.6	0.89	22.7	8.5	40.27	3.8	4.8	0.063	170	74
18.5	M3BP 160MLC 2	3GBP161430--K	3555	93.5	93.6	92.7	0.89	27.9	10.5	49.64	3.8	4.7	0.076	183	75
22	M3BP 180MLA 2	3GBP181410--K	3560	91.7	91.7	90.4	0.89	33	9.2	59.0	4.1	4.7	0.11	234	77
30	M3BP 200MLA 2	3GBP201410--K	3567	92.4	92.2	91.0	0.87	46.1	9	80.3	3.2	4.0	0.159	289	76
37	M3BP 200MLB 2	3GBP201420--K	3564	93.0	92.8	91.1	0.89	55.8	9.2	99.1	3.1	3.7	0.196	314	76
45	M3BP 225SMA 2	3GBP221210--K	3570	93.6	93.1	91.5	0.89	67.4	7.8	120	2.8	3.7	0.296	409	79
55	M3BP 250SMA 2	3GBP251210--K	3569	93.6	93.1	91.6	0.90	82.7	7.9	147	2.3	3.3	0.426	452	81
75	M3BP 280SMB 2	3GBP281220--K	3579	94.1	93.4	91.6	0.87	115	7.9	200	2.7	3.4	0.9	665	74
90	M3BP 280SMC 2	3GBP281230--K	3582	95.3	94.9	93.7	0.88	133	9	240	3.4	3.4	1.15	725	80
110	M3BP 315SMB 2	3GBP311220--K	3598	95.3	94.9	93.5	0.88	165	7.5	293	1.9	2.9	1.4	940	80
132	M3BP 315SMC 2	3GBP311230--K	3586	95.7	95.4	94.2	0.88	197	8.9	351	2.4	3.3	1.7	1025	80
160	M3BP 315MLA 2	3GBP311410--K	3585	95.4	94.9	93.6	0.87	242	8.3	426	2.2	3.1	1.7	1190	81
200	M3BP 355SMA 2	3GBP351210--K	3586	96.1	95.8	94.8	0.88	295	8.5	533	2.0	3.4	3	1600	86
250	M3BP 355SMB 2	3GBP351220--K	3585	95.8	95.3	94.0	0.89	370	8.6	665	1.8	3.7	3	1680	86
315	M3BP 355SMC 2	3GBP351230--K	3582	95.8	95.5	94.3	0.89	466	7.8	839	2.2	3.3	3.4	1750	86
355	M3BP 355MLA 2	3GBP351410--K	3586	95.8	95.3	94.2	0.88	528	8.1	945	2.2	3.3	3.6	2000	88
400	M3BP 355MLB 2	3GBP351420--K	3582	95.8	95.2	93.8	0.88	589	8.3	1066	2.3	3.2	4.1	2000	88
450	³⁾ M3BP 355MLC 2	3GBP351430--K	3585	95.8	95.4	94.3	0.90	650	8.9	1199	2.2	3.2	4.3	2080	88
500	M3BP 355LKA 2	3GBP351810--K	3584	95.8	95.5	94.5	0.90	722	9	1332	2.4	4.3	4.8	2320	88
560	²⁾ M3BP 400LA 2	3GBP401510--K	3588	95.8	95.4	94.0	0.89	818	9	1490	2.3	3.8	7.9	2950	86
560	M3BP 355LKB 2	3GBP351820--K	3584	95.8	95.5	94.5	0.90	808	9.6	1492	2.8	4.5	5.2	2460	88
630	²⁾ M3BP 400LB 2	3GBP401520--K	3588	95.8	95.7	95.5	0.89	916	8.6	1676	3.0	4.5	8.2	3050	86
710	²⁾ M3BP 400LC 2	3GBP401530--K	3588	95.8	95.7	94.8	0.90	1026	8.4	1890	2.9	4.0	9.3	3300	86
800	²⁾³⁾ M3BP 450LA 2	3GBP451510--K	3591	95.8	95.5	94.2	0.87	1188	8	2127	1.3	3.5	12.2	4000	90
900	²⁾³⁾ M3BP 450LB 2	3GBP451520--K	3591	95.8	95.5	94.6	0.85	1366	7.8	2393	1.5	3.4	13.5	4200	90

²⁾ Unidirectional fan construction as standard. Direction of rotation must be stated when ordering, see variant codes 044 and 045.

³⁾ Temperature rise class F

Technical data, 460 V 60 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
3600 r/min = 2 poles			460 V 60 Hz					High-output design							
22	M3BP 160MLD 2	3GBP161440--K	3552	91.7	92.0	91.2	0.90	32.9	9.7	59.2	3.5	4.2	0.071	174	78
30	M3BP 180MLB 2	3GBP181420--K	3563	93.3	93.5	92.9	0.88	45.7	10	80.4	3.3	4.3	0.104	215	78
37	M3BP 180MLC 2	3GBP181430--K	3564	93.0	93.2	92.7	0.86	57	9.7	99.1	3.8	4.7	0.117	229	77
45	M3BP 200MLC 2	3GBP201430--K	3563	93.6	93.9	93.7	0.89	66.8	8.7	121	3.2	3.7	0.216	305	80
55	M3BP 225SMB 2	3GBP221220--K	3572	93.6	93.5	92.5	0.90	80.6	9.6	147	3.1	3.2		355	80
75	M3BP 225SMC 2	3GBP221230--K	3571	94.1	94.1	93.4	0.88	112	10.2	201	3.7	3.4		408	80
75	M3BP 250SMB 2	3GBP251220--K	3575	94.1	94.1	93.1	0.90	110	9	200	3.0	3.6	0.644	479	85
90	³⁾ M3BP 250SMC 2	3GBP251230--K	3578	95.0	94.9	94.1	0.89	132	11.3	240	3.5	4.1		495	85
200	M3BP 315MLB 2	3GBP311420--K	3585	95.8	95.6	94.6	0.88	298	8.7	533	2.5	3.4	2.1	1220	84
250	M3BP 315LKB 2	3GBP311820--K	3583	96.1	96.1	95.8	0.91	359	9	666	2.6	3.0	2.9	1540	80

³⁾ Temperature rise class F

Technical data, 460 V 60 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1: 2014				Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
				Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
1800 r/min = 4 poles												CENELEC-design			
0.25	M3BP 71MD 4	3GBP072340--K	1727	73.4	73.4	70.4	0.77	0.53	5.8	1.38	2.4	3.2	0.0009	11	48
0.37	M3BP 71MLE 4	3GBP072450--K	1740	78.2	77.5	74.4	0.73	0.81	6.9	2.02	3.1	4.0	0.00122	15	48
0.55	M3BP 80MLD 4	3GBP082440--K	1747	83.9	84.0	82.1	0.79	1.03	7.6	3	3.1	4.0	0.0028	20	48
0.75	M3BP 90L 4	3GBP092500--K	1754	85.4	84.3	81.0	0.76	1.45	9.3	4.1	4.2	5.2	0.0056	30	56
0.75	M3BP 80MLG 4	3GBP082470--K	1748	83.5	82.2	79.0	0.74	1.48	9.5	4	3.8	4.5	0.0027	22	57
1.1	M3BP 90LC 4	3GBP092530--K	1749	86.5	85.4	82.5	0.77	2	8.4	6	3.7	4.6	0.0055	33	56
1.5	M3BP 90LD 4	3GBP092540--K	1748	86.5	85.1	82.0	0.75	2.9	9.5	8.1	4.0	5.0	0.0055	34	58
2.2	M3BP 100LKA 4	3GBP102810--K	1760	89.5	89.2	87.4	0.81	3.8	10.2	11.9	3.3	4.7	0.0144	49	57
3	M3BP 100LKB 4	3GBP102820--K	1759	89.5	89.3	87.4	0.81	5.2	10.4	16.3	3.8	4.9	0.0144	49	57
4	M3BP 112MG 4	3GBP112370--K	1755	90.1	90.5	89.5	0.75	7.43	9.3	21.74	3.5	4.9	0.018	52	67
5.5	M3BP 132SMF 4	3GBP132260--K	1767	91.7	91.1	89.6	0.73	10.4	8.7	29.81	3.0	4.5	0.0295	81	73
7.5	M3BP 132SMG 4	3GBP132270--K	1766	91.7	91.6	90.8	0.79	13	8.7	40.5	2.6	3.9	0.0414	81	69
11	M3BP 160MLA 4	3GBP162410--K	1780	92.4	92.2	90.9	0.80	18.9	8.7	59.1	3.4	3.7	0.11	188	68
15	M3BP 160MLB 4	3GBP162420--K	1780	93.0	92.7	91.4	0.82	24.7	9.5	80.5	3.3	4.1	0.135	187	67
18.5	M3BP 180MLA 4	3GBP182410--K	1783	93.6	93.7	93.1	0.82	30.3	8.4	99.0	3.1	3.5	0.219	235	68
22	M3BP 180MLB 4	3GBP182420--K	1783	93.8	94.2	93.7	0.82	35.8	9.3	117	3.0	3.4	0.217	235	66
30	M3BP 200MLA 4	3GBP202410--K	1785	94.1	94.1	93.1	0.84	47.7	8.2	161	2.8	3.9	0.385	319	69
37	M3BP 225SMA 4	3GBP222210--K	1786	94.5	94.4	93.5	0.81	61.2	8.4	195	3.8	4.0	0.433	398	70
45	M3BP 225SMB 4	3GBP222220--K	1784	95.0	94.9	95.0	0.83	71.8	8.8	241	2.9	4.7	0.525	398	72
55	M3BP 250SMA 4	3GBP252210--K	1787	95.7	95.8	95.2	0.84	85.8	9.1	293	3.3	3.7	0.933	476	71
75	M3BP 280SMB 4	3GBP282220--K	1785	95.4	95.2	94.1	0.84	117	7.4	401	2.5	3.1	1.38	665	75
90	M3BP 280SMC 4	3GBP282230--K	1786	95.4	95.2	94.2	0.85	139	8.2	481	2.7	3.2	1.73	725	75
110	M3BP 315SMC 4	3GBP312230--K	1792	96.1	96.0	95.3	0.84	172	8.8	586	2.6	3.4	2.9	1000	71
132	M3BP 315SMD 4	3GBP312240--K	1791	96.4	96.3	95.6	0.84	206	9	704	2.8	3.6	3.2	1065	71
160	M3BP 315MLB 4	3GBP312420--K	1791	96.4	96.4	95.9	0.86	241	9	853	2.9	3.3	3.9	1220	71
200	M3BP 355SMA 4	3GBP352210--K	1792	96.4	96.2	95.4	0.87	301	8.3	1065	2.2	3.0	5.9	1610	77
250	M3BP 355SMB 4	3GBP352220--K	1792	96.2	95.9	95.0	0.85	380	7.3	1333	2.2	3.2	5.9	1780	81
315	M3BP 355SMC 4	3GBP352230--K	1793	96.2	96.0	95.1	0.86	478	7.6	1679	2.5	3.5	6.9	1820	81
355	M3BP 355MLA 4	3GBP352410--K	1791	96.2	96.0	95.2	0.86	541	7.2	1893	2.4	3.1	7.2	2140	81
400	M3BP 355MLB 4	3GBP352420--K	1791	96.2	96.1	95.3	0.86	615	7.8	2132	2.5	2.9	8.4	2140	83
450	M3BP 355MLC 4	3GBP352430--K	1791	96.2	95.9	95.1	0.85	688	7.8	2401	2.5	2.8	8.4	2140	83
500	M3BP 355LKA 4	3GBP352810--K	1791	96.2	95.7	94.4	0.85	763	8	2666	2.4	3.4	10	2500	83
560	³⁾ M3BP 355LKB 4	3GBP352820--K	1791	96.2	95.9	95.3	0.85	858	8.5	2988	2.8	2.9	10.6	2600	83
560	M3BP 400LA 4	3GBP402510--K	1792	96.2	96.1	95.3	0.84	863	7.8	2985	2.7	3.1	15	3200	83
630	M3BP 400LB 4	3GBP402520--K	1792	96.2	96.1	95.4	0.85	959	8.9	3358	2.2	3.3	16	3300	83
710	³⁾ M3BP 400LC 4	3GBP402530--K	1792	96.2	96.1	95.3	0.84	1091	7.9	3784	2.5	3.3	17	3400	83
800	M3BP 450LA 4	3GBP452510--K	1792	96.2	96.0	95.4	0.86	1256	6.5	4263	1.3	3.1	23	4050	89
900	M3BP 450LB 4	3GBP452520--K	1792	96.2	95.7	95.3	0.85	1373	7.9	4794	1.3	3.1	25	4350	89
1000	³⁾ M3BP 450LC 4	3GBP452530--K	1792	96.2	96.1	95.1	0.86	1505	7.2	5329	1.4	2.8	30	4700	89

³⁾ Temperature rise class F

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N	$GD^2 \text{kgm}^2$		
1800 r/min = 4 poles			460 V 60 Hz					High-output design							
18.5	M3BP 160MLC 4	3GBP162430--K	1778	93.6	93.6	92.7	0.76	32.4	8.2	99.3	3.8	4.0	0.12	180	70
30	M3BP 180MLC 4	3GBP182430--K	1784	94.1	93.9	92.8	0.79	50.8	9.2	160.59	3.1	3.8	0.191	235	65
37	M3BP 200MLB 4	3GBP202420--K	1785	94.5	94.3	93.4	0.81	60.5	9.1	198	3.5	3.6	0.362	305	70
49	M3BP 225SMC 4	3GBP222230--K	1787	95	94.8	93.8	0.82	78.9	10.7	261.84	3.8	4.1	0.532	391	74
200	M3BP 315LKB 4	3GBP312820--K	1788	96.2	96.2	95.6	0.86	305	7.8	1068	2.6	3.3	3.9	1480	77
250	M3BP 315LKC 4	3GBP312830--K	1791	96.8	96.8	96.4	0.86	376	8.9	1332	2.5	3.3	5.5	1600	77

Technical data, 460 V 60 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1; 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				Load	Load	Load									
1200 r/min = 6 poles															
0.37	M3BP 80MD 6	3GBP083340--K	1138	78.4	78.0	74.9	0.68	0.84	4	3.07	1.7	2.4	0.0028	16	50
0.75	M3BP 90LG 6	3GBP093570--K	1146	83.4	83.4	81.2	0.72	1.6	5.5	6.3	2.6	3.2	0.0072	34	47
1.1 ⁶⁾ ⁷⁾	M3BP 90LH 6	3GBP093580--K	1152	75.0	76.2	74.4	0.73	2.5	5.5	9.09	2.3	3.3	0.0068	33	47
1.1 ⁷⁾	M3BP 100LKG 6	3GBP103870--K	1171	88.0	88.0	86.4	0.66	2.3	4.6	9	1.3	2.7	0.0025	47	52
1.5	M3BP 100LKH 6	3GBP103880--K	1171	88.5	87.1	83.6	0.61	3.47	7.7	12.25	3.5	4.7	0.0138	47	60
1.5 ⁷⁾	M3BP 112MH 6	3GBP113380--K	1174	89.4	89.0	87.1	0.62	3.4	7.5	12.2	3.0	5.2	0.0196	53	69
2.2 ⁷⁾	M3BP 132SMC 6	3GBP133230--K	1180	90.1	89.6	87.6	0.68	4.5	6.5	17.8	2.1	3.3	0.0416	81	60
2.2	M3BP 112MJ 6	3GBP113390--K	1172	89.5	89.6	88.4	0.66	4.6	7.3	17.9	2.5	4.0	0.0187	53	71
3	M3BP 132SMD 6	3GBP133240--K	1179	90.1	89.7	87.9	0.68	6.1	6.5	24	1.4	3.1	0.0416	82	60
4	M3BP 132SMG 6	3GBP133270--K	1177	90.1	90.0	88.6	0.68	8.1	6.3	32	2.3	3.2	0.0416	82	60
5.5	M3BP 132SMH 6	3GBP133280--K	1169	91.0	91.2	90.3	0.72	10.6	5.7	44.7	2.0	3.1	0.0654	79	60
7.5	M3BP 160MLA 6	3GBP163410--K	1182	91.4	91.5	90.3	0.76	13.5	8.6	60.5	1.8	3.7	0.114	172	63
11	M3BP 160MLB 6	3GBP163420--K	1183	91.7	91.8	90.5	0.73	20.6	9.4	88.7	2.3	4.4	0.131	199	63
15	M3BP 180MLA 6	3GBP183410--K	1183	92.3	92.0	90.5	0.75	27.1	6	121	1.8	3.1	0.225	234	63
18.5	M3BP 200MLA 6	3GBP203410--K	1191	93.3	93.2	92.1	0.77	32.3	8.6	148	2.9	3.6	0.448	291	67
22	M3BP 200MLB 6	3GBP203420--K	1191	93.8	93.8	92.8	0.78	37.7	8.8	176	2.9	3.6	0.531	318	67
30	M3BP 225SMA 6	3GBP223210--K	1191	94.2	94.3	93.6	0.80	49.9	8.9	240	3.2	3.5	0.813	392	67
37	M3BP 250SMA 6	3GBP253210--K	1192	94.5	94.7	94.1	0.82	59.9	8.6	296	3.0	3.2	1.49	467	67
45	M3BP 280SMB 6	3GBP283220--K	1193	95.3	95.2	94.3	0.85	70.6	7.9	361	2.6	2.9	2.2	680	68
55	M3BP 280SMC 6	3GBP283230--K	1190	95.3	95.3	94.5	0.85	86.2	7.8	420	2.6	2.9	2.85	725	68
75	M3BP 315SMC 6	3GBP313230--K	1195	95.7	95.5	94.7	0.82	121	7.9	600	2.5	3.1	4.9	1000	70
90	M3BP 315SMD 6	3GBP313240--K	1195	95.7	95.6	94.9	0.80	149	8.2	719	2.7	3.2	4.9	1040	70
110	M3BP 315MLB 6	3GBP313420--K	1194	96.1	96.0	95.4	0.81	177	7.9	880	2.6	3.0	6.3	1200	71
132	M3BP 315LKA 6	3GBP313810--K	1194	96.1	96.0	95.5	0.81	215	7.9	1055	2.7	3.0	7.3	1410	71
160	M3BP 355SMB 6	3GBP353220--K	1195	96.1	96.0	95.3	0.81	260	7.9	1278	2.3	3.0	9.7	1680	76
200	M3BP 355SMC 6	3GBP353230--K	1196	96.1	95.7	95.0	0.82	320	8.3	1598	2.5	3.1	11.3	1820	76
250	M3BP 355MLB 6	3GBP353420--K	1195	96.4	96.4	95.8	0.82	401	9.2	1997	2.3	3.0	13.5	2180	76
315	M3BP 355LKA 6	3GBP353810--K	1195	96.4	96.4	95.8	0.83	500	7.9	2516	2.6	2.9	15.5	2500	79
355	M3BP 355LKB 6	3GBP353820--K	1195	96.4	96.1	95.3	0.80	584	8.8	2835	3.0	3.2	16.5	2600	79
400	M3BP 400LA 6	3GBP403510--K	1194	95.8	95.6	94.8	0.82	637	8.2	3200	2.4	3.0	17	2900	79
400	M3BP 355LKC 6	3GBP353830--K	1193	95.8	95.5	94.6	0.82	639	7.5	3204	2.7	2.7	16.5	2600	80
450	M3BP 400LB 6	3GBP403520--K	1194	95.8	95.6	94.7	0.82	713	7.9	3598	2.5	3.1	20.5	3150	79
500	M3BP 400LC 6	3GBP403530--K	1194	95.8	95.6	94.9	0.84	777	8.1	4000	2.6	3.0	22	3300	79
560	M3BP 400LD 6	3GBP403540--K	1194	95.8	95.6	94.8	0.85	856	7.8	4481	2.4	3.2	24	3400	79
630	M3BP 450LA 6	3GBP453510--K	1195	95.8	95.6	94.8	0.84	978	6.8	5036	1.1	2.9	31	4150	85
710	M3BP 450LB 6	3GBP453520--K	1196	95.8	95.7	94.9	0.85	1085	8.2	5671	1.4	2.9	37	4500	85
800 ³⁾	M3BP 450LC 6	3GBP453530--K	1195	95.8	98.4	94.7	0.84	1235	8.4	6389	1.3	3.1	41	4800	85

³⁾ Temperature rise class F

⁶⁾ Efficiency class IE1

⁷⁾ Non-cenelec frame size

Technical data, 460 V 60 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1; 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
1200 r/min = 6 poles										460 V 60 Hz					High-output design	
18.5	M3BP 180MLB 6	3GBP183420--K	1183	93.0	93.0	92.1	0.69	36.1	8.2	149	2.5	3.7	0.197	219	68	
37	M3BP 225SMB 6	3GBP223220--K	1188	94.1	94.4	93.8	0.80	61.8	8	297	3.0	3.3	0.813	382	72	
45	M3BP 250SMB 6	3GBP253220--K	1193	94.5	94.4	93.4	0.77	77.5	8.3	362	3.4	3.9	1.33	465	72	
160	M3BP 315LKC 6	3GBP313830--K	1195	96.1	96.0	95.3	0.81	259	8.4	1279	3.0	3.2	9.2	1600	71	

Technical data, 460 V 60 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				Load	Load	Load									
900 r/min = 8 poles															
0.12 ⁵⁾	M3BP 71ME 8	3GBP074350---K	819	40.1	35.9	26	0.61	0.61	2.9	1.37	2.3	2.7	0.00107	11	46
0.18	M3BP 80MF 8	3GBP084360---K	834	64	61.6	55.5	0.5	0.67	2.5	2.13	1.5	2.3	0.0035	18	48
0.25	M3BP 80MLG 8	3GBP084470---K	814	68	66.2	61.2	0.54	0.84	2.6	2.86	1.4	2.3	0.0044	21	53
0.37	M3BP 90SLF 8	3GBP094060---K	866	72.0	69.6	63.7	0.50	1.3	3.7	4.07	2.5	3.9	0.0056	28	53
0.55	M3BP 90LG 8	3GBP094570---K	866	74.0	72.2	67.0	0.49	1.8	4.6	6.32	2.7	3.8	0.0072	32	56
2.2	M3BP 132SMA 8	3GBP134210---K	879	85.5	84.9	82.2	0.60	5.2	5.7	23.9	2.1	3.4	0.0291	66	61
3	M3BP 132SMG 8	3GBP134270---K	877	86.5	86.3	84.1	0.63	6.7	5.4	32.6	1.9	3.2	0.0375	76	61
4	M3BP 160MLA 8	3GBP164410---K	886	86.5	86.1	83.5	0.63	9.19	5	43.1	2.1	2.7	0.091	130	63
5.5	M3BP 160MLB 8	3GBP164420---K	886	86.5	86.5	84.6	0.67	11.4	5.6	59.2	2.3	2.6	0.091	132	63
7.5	M3BP 160MLC 8	3GBP164430---K	887	89.5	89.6	88.2	0.67	15.5	5.8	80.7	2.4	2.7	0.12	167	63
11	M3BP 180MLA 8	3GBP184410---K	885	89.5	89.5	87.8	0.68	22.2	5.7	119	2.3	2.4	0.2	219	63
15	M3BP 200MLA 8	3GBP204410---K	889	90.2	90.5	89.5	0.72	28.6	6	161	2.4	2.9	0.45	290	64
18.5	M3BP 225SMA 8	3GBP224210---K	890	90.2	90.3	89.0	0.72	35.1	5.9	198	2.2	2.5	0.669	350	67
22	M3BP 225SMB 8	3GBP224220---K	889	91.7	92.2	91.6	0.71	41.7	6	236	2.6	2.8	0.722	363	67
30	M3BP 250SMA 8	3GBP254210---K	892	91.7	91.8	90.5	0.68	59.4	6.3	321	3.1	3.0	1.4	440	67
37	M3BP 280SMA 8	3GBP284210---K	893	92.4	92.1	90.5	0.78	64.2	8.1	396	1.8	3.4	1.85	605	68
45	M3BP 280SMB 8	3GBP284220---K	892	92.4	92.1	90.5	0.77	78.8	8.5	482	1.9	3.5	2.2	645	69
55	M3BP 315SMA 8	3GBP314210---K	893	93.6	93.3	92.0	0.80	92.8	8	589	1.9	3.0	3.2	830	65
75	M3BP 315SMB 8	3GBP314220---K	892	93.6	93.6	92.6	0.81	129	7.9	803	1.8	3.0	4.1	930	65
90	M3BP 315SMC 8	3GBP314230---K	890	94.1	94.1	93.1	0.81	149	8.3	964	1.9	3.0	4.9	1000	67
110	M3BP 315MLA 8	3GBP314410---K	892	94.1	94.2	93.5	0.81	182	8.2	1178	1.9	3.0	5.8	1150	75
132	M3BP 355SMA 8	3GBP354210---K	895	94.5	94.2	92.9	0.76	230	8.3	1409	1.5	2.9	7.9	1520	72
160	M3BP 355SMB 8	3GBP354220---K	895	94.5	94.3	93.0	0.78	274	8.4	1703	1.6	2.8	9.7	1680	72
200	M3BP 355SMC 8	3GBP354230---K	893	95.0	94.9	94.0	0.79	335	8.2	2143	1.6	2.9	11.3	1820	72
250	M3BP 355MLB 8	3GBP354420---K	893	95.0	94.9	94.0	0.79	417	8.3	2672	1.6	2.9	13.5	2180	75
315	M3BP 400LA 8	3GBP404510---K	894	95.0	95.0	94.3	0.80	520	7	3362	1.2	2.9	17	2900	73
315 ³⁾	M3BP 355LKB 8	3GBP354820---K	893	95.0	95.0	94.1	0.79	524	8.8	3369	1.8	2.9	16.5	2600	78
355	M3BP 400LB 8	3GBP404520---K	894	95.0	95.1	94.5	0.82	564	8.4	3793	1.2	2.8	21	3200	73
400	M3BP 400LC 8	3GBP404530---K	895	95.0	95.1	94.2	0.81	647	6.4	4273	1.3	3.0	24	3400	73
450	M3BP 450LA 8	3GBP454510---K	895	95.0	95.1	94.6	0.82	709	6.9	4803	1.1	2.7	26	3750	80
500	M3BP 450LB 8	3GBP454520---K	895	95.0	95.0	94.4	0.82	787	7.3	5336	1.1	2.8	29	4000	80
560	M3BP 450LC 8	3GBP454530---K	894	95.0	95.0	94.2	0.81	907	6.5	5979	1.4	3.1	35	4350	80
630 ³⁾	M3BP 450LD 8	3GBP454540---K	896	95.0	94.8	93.7	0.81	1013	8.6	6717	1.5	3.4	41	4800	80

³⁾ Temperature rise class F

⁵⁾ Efficiency class IE2

Technical data, 460 V 60 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
3600 r/min = 2 poles			460 V 60 Hz					CENELEC-design								
75	^{⑥)} M3BP 280SMB 2	3GBP281220--L	3579	93.0	92.4	90.5	0.87	116	8.5	199	2.1	3.3	0.8	665	77	
90	^{⑥)} M3BP 280SMC 2	3GBP281230--L	3578	93.7	93.2	91.7	0.89	135	8.3	239	2.2	3.2	0.9	690	82	
110	M3BP 315SMB 2	3GBP311220--L	3584	95.0	94.3	92.7	0.87	168	7.8	293	1.8	3.0	1.3	910	81	
132	^{⑤)} M3BP 315SMC 2	3GBP311230--L	3584	94.1	93.5	91.7	0.88	200	8.3	351	2.2	3.3	1.4	965	83	
160	M3BP 315SMD 2	3GBP311240--L	3585	95.4	94.9	93.6	0.87	242	8.3	426	2.2	3.1	1.7	1025	81	
200	M3BP 315MLA 2	3GBP311410--L	3585	95.8	95.6	94.6	0.88	298	8.7	533	2.5	3.4	2.1	1190	84	
250	M3BP 355SMA 2	3GBP351210--L	3586	95.8	95.2	93.5	0.89	373	8.6	666	2.1	3.7	3	1600	86	
315	M3BP 355SMB 2	3GBP351220--L	3583	95.8	95.4	94.2	0.89	465	7.9	840	2.2	3.3	3.4	1680	86	
355	M3BP 355SMC 2	3GBP351230--L	3585	95.8	95.4	94.2	0.88	527	8.1	946	2.2	3.3	3.6	1750	86	

^{⑤)} Efficiency class IE2

^{⑥)} Efficiency class IE1

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
3600 r/min = 2 poles			460 V 60 Hz					High-output design								
110	M3BP 280SMD 2	3GBP281240--L	3580	95.0	94.7	93.4	0.88	166	8.5	293	2.5	3.4	1.15	725	78	
250	M3BP 315LKB 2	3GBP311820--L	3585	95.8	95.6	94.7	0.90	364	8.8	666	2.6	3.7	2.9	1540	84	

Technical data, 460 V 60 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				1800 r/min = 4 poles	460 V 60 Hz	CENELEC-design									
75	⁵⁾ M3BP 280SMB 4	3GBP282220--L	1785	94.5	94.2	93.0	0.84	117	7.4	401	2.5	3.1	1.38	645	77
90	M3BP 280SMC 4	3GBP282230--L	1786	95.4	95.2	94.2	0.85	139	8.2	481	2.7	3.2	1.73	700	78
110	M3BP 315SMB 4	3GBP312220--L	1791	95.8	95.5	94.4	0.84	172	7.9	587	2.2	3.3	2.43	930	74
132	⁵⁾ M3BP 315SMC 4	3GBP312230--L	1790	95.0	94.9	94.1	0.85	204	7.6	705	2.4	3.2	2.9	1000	74
160	⁵⁾ M3BP 315SMD 4	3GBP312240--L	1790	95.0	94.8	93.8	0.85	246	7.8	854	2.4	3.3	3.2	1065	74
200	M3BP 315MLB 4	3GBP312420--L	1788	96.2	96.2	95.6	0.86	305	7.8	1068	2.6	3.3	3.9	1220	77
250	M3BP 355SMA 4	3GBP352210--L	1792	96.2	95.9	95.0	0.85	380	7.3	1333	2.2	3.2	5.9	1610	81
315	M3BP 355SMB 4	3GBP352220--L	1792	96.2	96.0	95.1	0.87	494	7.5	1679	2.2	3.5	6.9	1780	81
355	M3BP 355SMC 4	3GBP352230--L	1791	96.2	96.0	95.2	0.86	541	7.2	1893	2.4	3.1	7.2	1820	81

⁵⁾ Efficiency class IE2

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				1800 r/min = 4 poles	460 V 60 Hz	High-output design									
110	M3BP 280SMD 4	3GBP282240--L	1788	95.8	95.9	95.3	0.84	171	8.4	588	2.9	3.3	1.95	750	80
132	⁵⁾ M3BP 280MLA 4	3GBP282410--L	1785	95.7	95.7	95.4	0.86	202	8.1	705	2.9	3.1	2.3	840	78
160	⁵⁾ M3BP 280MLB 4	3GBP282420--L	1786	96.0	96.0	95.4	0.86	242	9.1	855	3.1	3.2	2.5	890	78
250	M3BP 315LKA 4	3GBP312810--L	1790	96.2	96.2	95.5	0.85	385	7.9	1335	2.7	3.6	4.4	1410	81
315	⁵⁾ M3BP 315LKC 4	3GBP312830--L	1790	96.1	96.2	95.1	0.83	493	8.7	1681	3.2	3.8	4.4	1600	81

⁵⁾ Efficiency class IE2

Technical data, 460 V 60 Hz

IE3 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
1200 r/min = 6 poles																
45	M3BP 280SMB 6	3GBP283220--L	1192	94.5	94.3	93.1	0.83	72	8.4	360	2.9	3.3	1.87	645	75	
55	M3BP 280SMC 6	3GBP283230--L	1193	94.5	94.5	93.5	0.84	87	8.6	441	3.0	3.3	2.57	725	74	
75	M3BP 315SMB 6	3GBP313220--L	1195	95.0	94.7	93.6	0.84	118	7.7	600	2.0	2.9	4.1	930	78	
90	M3BP 315SMC 6	3GBP313230--L	1195	95.0	94.9	93.8	0.84	143	8.2	720	2.2	3.3	4.6	1000	79	
110 ⁵⁾	M3BP 315SMD 6	3GBP313240--L	1194	95.0	94.8	93.7	0.83	175	8.3	880	2.4	3.4	4.9	1040	78	
132	M3BP 315MLB 6	3GBP313420--L	1196	95.8	95.5	94.4	0.82	211	8.3	1055	2.5	3.5	6.3	1200	72	
160	M3BP 355SMA 6	3GBP353210--L	1193	95.8	95.8	95.1	0.82	257	7.6	1281	2.6	2.8	7.9	1520	78	
200	M3BP 355SMB 6	3GBP353220--L	1193	95.8	95.8	95.2	0.82	320	7.7	1600	2.8	2.7	9.7	1680	78	
250	M3BP 355SMC 6	3GBP353230--L	1194	95.8	95.8	95.1	0.81	408	8.8	2000	3.2	3.4	11.3	1820	78	
315	M3BP 355MLB 6	3GBP353420--L	1194	95.8	95.8	95.1	0.83	495	7.9	2521	2.8	3.5	13.5	2180	79	
355	M3BP 355LKA 6	3GBP353810--L	1194	95.8	95.7	94.9	0.80	579	8.6	2840	3.2	3.5	15.5	2500	76	

⁵⁾ Efficiency class IE2

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
1200 r/min = 6 poles																
75 ⁵⁾	M3BP 280SMD 6	3GBP283240--L	1192	94.8	94.7	93.8	0.85	116	8.7	601	3.1	3.3	3	740	76	
160	M3BP 315LKA 6	3GBP313810--L	1195	95.8	95.6	94.6	0.81	259	8.5	1279	2.5	3.5	7.3	1410	79	
180	M3BP 315LKB 6	3GBP313820--L	1195	95.8	95.6	94.8	0.82	287	8.7	1438	2.6	3.4	8.3	1520	79	
200	M3BP 315LKC 6	3GBP313830--L	1194	96.1	96.1	95.5	0.81	322	8.0	1599	2.5	3.1	9.2	1600	79	

⁵⁾ Efficiency class IE2

Technical data, 460 V 60 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				Load 100%	Load 75%	Load 50%									
3600 r/min = 2 poles												CENELEC-design			
0.37	M3BP 71MA 2	3GBP071321---B	3425	72.0	71.4	66.6	0.75	0.8	5.8	1.03	3.0	3.5	0.0004	11	60
0.55	M3BP 71MB 2	3GBP071322---B	3431	74.0	73.6	69.2	0.76	1.13	6.2	1.53	3.6	3.8	0.0005	11	60
0.75	M3BP 80MB 2	3GBP081322---B	3510	80.3	78.3	73.6	0.72	1.62	9.1	2.04	4.9	5.2	0.001	16	60
1.1	M3BP 80MC 2	3GBP081323---B	3490	82.9	81.8	78.4	0.80	2.12	7.5	3.0	4.3	5.5	0.0012	18	63
1.5	M3BP 90SLB 2	3GBP091322---B	3505	84.4	84.0	81.6	0.87	2.57	7.5	4.07	2.8	3.1	0.00254	24	72
2.2	M3BP 90SLC 2	3GBP091323---B	3500	85.5	85.5	83.5	0.88	3.58	7.9	5.98	1.7	2.9	0.0028	25	67
3	⁶⁾ M3BP 100LB 2	3GBP101322---B	3530	87.0	85.7	82.4	0.87	5.1	9.1	8.0	3.4	4.2	0.00528	36	71
4	⁶⁾ M3BP 112MB 2	3GBP111322---B	3510	85.0	84.4	82.1	0.89	6.6	9.5	10.84	3.2	3.8	0.00575	37	73
5.5	⁶⁾ M3BP 132SMB 2	3GBP131322---B	3485	86.0	85.3	82.8	0.87	8.6	7.9	15.01	2.6	3.1	0.0128	68	73
7.5	⁶⁾ M3BP 132SMC 2	3GBP131324---B	3505	89.5	89.1	86.8	0.88	12.1	8.3	20.48	2.5	4.4	0.0136	70	73
11	M3BP 160MLA 2	3GBP161410---G	3547	90.9	91.0	89.8	0.90	16.7	8.6	29.6	2.6	3.5	0.044	127	73
15	M3BP 160MLB 2	3GBP161420---G	3545	90.9	91.2	90.0	0.90	22.4	8.7	40.4	2.7	3.8	0.053	141	73
18.5	M3BP 160MLC 2	3GBP161430---G	3543	91.6	92.1	91.3	0.92	27.2	8.7	49.8	3.1	3.8	0.063	170	73
22	M3BP 180MLA 2	3GBP181410---G	3559	91.6	91.6	90.3	0.87	34.3	8.8	59	3.0	3.8	0.076	190	73
30	M3BP 200MLA 2	3GBP201410---G	3562	92.3	92.0	90.4	0.90	44.9	8.7	80.4	2.8	3.4	0.178	283	76
37	M3BP 200MLB 2	3GBP201420---G	3564	92.9	92.7	91.0	0.89	55.8	9.2	99.1	3.1	3.7	0.196	298	76
45	M3BP 225SMA 2	3GBP221210---G	3566	93.5	93.2	91.7	0.88	68.6	7.7	120	2.6	2.7	0.244	347	78
55	M3BP 250SMA 2	3GBP251210---G	3571	93.5	93.2	91.7	0.88	83.2	7.7	147	2.3	3.0	0.507	405	79
75	M3BP 280SMA 2	3GBP281210---N	3575	93.6	93.2	91.5	0.89	112	8.9	200	2.7	3.2	0.61	540	81
90	M3BP 280SMB 2	3GBP281220---N	3574	94.5	94.3	93.3	0.90	132	8.6	240	3.0	3.5	0.73	590	81
110	M3BP 315SA 2	3GBP311110---N	3581	94.5	94.1	92.6	0.90	163	8.4	293	2.7	3.4	0.95	770	82
132	M3BP 315SMA 2	3GBP311210---N	3579	95.0	94.6	93.3	0.90	194	8.2	352	2.8	3.3	1.1	865	82
160	M3BP 315SMB 2	3GBP312220---N	3579	95.0	94.8	93.9	0.91	233	8.3	426	2.7	3.4	1.25	925	82
200	⁶⁾ M3BP 315MLA 2	3GBP311410---G	3582	95.1	94.7	93.5	0.90	293	8.7	532	2.7	3.3	2.1	1190	83
250	M3BP 355SMA 2	3GBP351210---G	3585	95.5	95.0	93.6	0.89	370	8.6	665	1.8	3.7	3	1600	86
315	M3BP 355SMB 2	3GBP351220---G	3582	95.6	95.3	94.1	0.89	466	7.8	839	2.2	3.3	3.4	1680	86
355	M3BP 355SMC 2	3GBP351230---G	3586	95.7	95.3	94.2	0.88	528	8.1	945	2.2	3.3	3.6	1750	88
400	M3BP 355MLA 2	3GBP351410---G	3582	96.4	95.9	94.7	0.88	589	8.3	1066	2.3	3.2	4.1	2000	88
450	²⁾ M3BP 355MLB 2	3GBP351420---G	3585	96.2	95.8	94.8	0.90	650	8.9	1199	2.2	3.2	4.3	2080	88
500	M3BP 355LKA 2	3GBP351810---G	3584	96.2	95.9	95.0	0.90	722	9.0	1332	2.4	4.3	4.8	2320	88
560	²⁾ M3BP 400LA 2	3GBP401510---G	3588	96.2	95.8	94.5	0.89	818	9.0	1490	2.3	3.8	7.9	2950	86
560	M3BP 355LKB 2	3GBP351820---G	3584	96.8	96.6	95.9	0.9	808	9.6	1492	2.8	4.5	5.2	2460	88
630	²⁾ M3BP 400LB 2	3GBP401520---G	3588	96.2	96.0	95.9	0.89	916	8.6	1676	3.0	4.5	8.2	3050	86
710	²⁾ M3BP 400LC 2	3GBP401530---G	3588	96.2	96.0	95.2	0.90	1026	8.4	1890	2.9	4.0	9.3	3300	86
800	^{2) 3)} M3BP 450LA 2	3GBP451510---G	3591	96.2	95.9	94.7	0.87	1188	8.0	2127	1.3	3.5	12.2	4000	
900	^{2) 3)} M3BP 450LB 2	3GBP451520---G	3591	96.2	95.9	95.1	0.85	1366	7.8	2393	1.5	3.4	13.5	4200	

²⁾ Unidirectional fan construction as standard. Direction of rotation must be stated when ordering, see variant codes 044 and 045.

³⁾ Temperature rise class F

⁶⁾ Efficiency class IE1

Technical data, 460 V 60 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ GD^2kgm^2	Weight kg	Sound pressure Level L_{PA} dB			
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_r/T_N	T_b/T_N							
3600 r/min = 2 poles										High-output design									
22	M3BP 160MLD 2	3GBP161440--G	3546	91.6	92.1	91.2	0.91	32.8	9.3	59.2	3.4	4.1	0.063	170	73				
27	M3BP 160MLE 2	3GBP161450--G	3546	92.3	92.8	92.1	0.90	40.4	9.1	72.8	3.3	3.9	0.072	184	73				
30	M3BP 160MLE 2	3GBP161450--G	3539	92.3	93.0	92.5	0.91	44.6	9.1	80.9	3.3	3.9	0.072	184	73				
30	M3BP 180MLB 2	3GBP181420--G	3558	92.3	92.4	91.7	0.89	45.4	9.2	80.5	3.1	3.8	0.092	208	73				
45	M3BP 200MLC 2	3GBP201430--G	3563	93.4	93.3	92.2	0.88	68.7	9.2	120	3.2	3.7	0.196	298	76				
55	M3BP 200MLD 2	3GBP201440--G	3560	93.5	93.7	92.6	0.89	82.2	9.0	147	3.1	3.7	0.217	314	76				
55	M3BP 225SMB 2	3GBP221220--G	3567	93.5	93.3	91.8	0.89	82.6	7.5	147	2.5	2.8	0.274	369	78				
75	M3BP 225SMC 2	3GBP221230--G	3573	94.0	93.8	92.7	0.86	116	8.7	200	3.3	3.4	0.309	396	78				
75	M3BP 250SMB 2	3GBP251220--G	3575	94.0	93.9	92.8	0.89	111	8.6	200	2.9	3.4	0.583	451	79				
80	M3BP 225SMD 2	3GBP221240--G	3570	94.0	93.8	92.7	0.88	120	8.4	213	3.1	3.2	0.329	410	78				
90	M3BP 250SMC 2	3GBP251230--G	3575	94.9	94.8	93.6	0.89	133	8.6	240	2.7	3.4	0.644	487	79				
110	M3BP 280SMC 2	3GBP281230--G	3580	94.0	93.6	92.3	0.90	163	8.9	292	2.5	3.3	1.15	725	82				
132	M3BP 280MLA 2	3GBP281410--G	3579	95.0	94.8	93.7	0.90	193	8.5	351	2.6	3.3	1.4	840	83				
160	M3BP 280MLB 2	3GBP281420--G	3578	95.0	94.9	93.9	0.91	230	8.6	426	2.9	3.3	1.55	890	83				
185	M3BP 280MLB 2	3GBP281420--G	3574	95.6	95.6	94.9	0.91	266	7.5	494	2.4	2.8	1.55	890	83				
250	^{3) 6)} M3BP 315LKA 2	3GBP311810--G	3582	95.2	94.9	93.8	0.89	371	8.7	666	2.9	3.2	2.65	1440	83				
315	^{3) 6)} M3BP 315LKC 2	3GBP311830--G	3583	95.2	95.0	94.1	0.89	467	10.1	839	3.4	3.5	3.3	1630	83				
335	³⁾ M3BP 315LKC 2	3GBP311830--G	3582	95.7	95.6	94.8	0.90	488	9.8	893	3.3	3.4	3.3	1630	83				

³⁾ Temperature rise class F

⁶⁾ Efficiency class IE1

Technical data, 460 V 60 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1: 2014				Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
				Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				460 V 60 Hz						CENELEC-design					
1800 r/min = 4 poles				460 V 60 Hz				CENELEC-design							
0.25	M3BP 71MA 4	3GBP072321--B	1743	70.0	67.4	60.1	0.61	0.7	5.4	1.39	2.6	3.8	0.0006	10	48
0.37	M3BP 71MB 4	3GBP072322--B	1725	72.0	71.2	66.2	0.70	0.86	6.1	2.04	3.0	3.5	0.001	12	48
0.55	M3BP 80MA 4	3GBP082321--B	1721	75.5	75.6	72.2	0.74	1.15	6.5	3.05	3.1	3.5	0.0022	18	53
0.75	M3BP 80MD 4	3GBP082324--B	1740	82.5	81.7	78.5	0.69	1.64	7.4	4.12	3.6	3.9	0.002	17	53
1.1	M3BP 90SLB 4	3GBP092322--B	1740	84.0	83.6	81.0	0.77	2.11	7.5	6.0	2.7	4.0	0.0044	25	53
1.5	M3BP 90SLD 4	3GBP092325--B	1740	86.1	86.0	84.0	0.81	2.74	7.8	8.2	3.0	4.1	0.0053	27	59
2.2	M3BP 100LC 4	3GBP102323--B	1755	87.5	86.7	84.3	0.78	4.08	9.0	12	3.0	4.8	0.00948	36	59
3	M3BP 100LD 4	3GBP102324--B	1755	87.6	87.2	85.0	0.78	5.42	9.1	16.35	3.2	4.1	0.011	38	61
4	M3BP 112MB 4	3GBP112322--B	1745	87.7	87.6	86.0	0.82	6.94	8.2	21.96	2.8	3.4	0.0125	44	62
5.5	M3BP 132SMB 4	3GBP132322--B	1765	89.9	89.6	87.5	0.79	9.64	7.6	29.8	2.4	3.6	0.0328	70	70
7.5	M3BP 132SMC 4	3GBP132323--B	1760	90.5	90.4	88.8	0.82	12.7	8.2	40.88	2.7	4.0	0.0366	73	67
11	M3BP 160MLA 4	3GBP162410--G	1772	91.3	91.6	90.5	0.83	18.2	7.7	59.2	2.4	3.2	0.081	135	66
15	M3BP 160MLB 4	3GBP162420--G	1775	92.2	92.3	91.5	0.83	24.6	8.0	80.6	2.7	3.3	0.099	165	66
18.5	M3BP 180MLA 4	3GBP182410--G	1781	92.5	92.8	92.0	0.83	30.2	8.2	99.1	2.8	3.2	0.166	205	66
22	M3BP 180MLB 4	3GBP182420--G	1780	93.1	93.4	92.5	0.83	35.7	8.3	118	2.8	3.3	0.195	222	66
30	M3BP 200MLA 4	3GBP202410--G	1783	93.8	94.0	93.1	0.83	48.3	8.4	160	3.0	3.3	0.309	291	67
37	M3BP 225SMA 4	3GBP222210--G	1782	93.6	93.5	92.4	0.84	59	8.1	198	2.8	3.2	0.356	324	70
45	M3BP 225SMB 4	3GBP222220--G	1784	94.2	94.1	93.0	0.85	70.5	8.6	240	2.7	3.3	0.44	356	70
55	M3BP 250SMA 4	3GBP252210--G	1782	95.0	95.2	94.7	0.84	86.3	8.0	294	2.8	3.3	0.765	414	71
75	M3BP 280SMA 4	3GBP282210--N	1786	94.5	94.4	93.4	0.83	119	8.9	401	3.8	3.7	0.91	540	74
90	M3BP 280SMB 4	3GBP282220--N	1784	94.5	94.5	93.8	0.84	141	8.7	482	3.3	3.8	1.13	610	74
110	M3BP 315SA 4	3GBP312110--N	1787	95.0	95.0	94.4	0.85	170	7.6	588	2.9	3.1	1.5	740	73
132	M3BP 315SMA 4	3GBP312210--N	1785	95.0	95.1	94.5	0.87	199	7.4	706	2.7	3.0	2	900	73
160	M3BP 315SMB 4	3GBP312220--N	1786	95.0	95.0	94.3	0.85	246	7.8	856	2.9	3.2	2.2	940	73
200	M3BP 315MLA 4	3GBP312410--G	1787	95.2	95.1	94.3	0.86	307	8.2	1068	2.7	3.2	3.5	1160	74
250	M3BP 355SMA 4	3GBP352210--G	1789	95.4	95.3	94.4	0.85	388	8.0	1334	2.4	3.0	5.9	1610	79
315	M3BP 355SMB 4	3GBP352220--G	1789	95.8	95.7	94.8	0.86	481	8.3	1680	2.4	3.1	6.9	1780	74
355	M3BP 355SMC 4	3GBP352230--G	1788	95.8	95.7	94.9	0.87	536	7.8	1894	2.5	3.0	7.2	1820	78
400	M3BP 355SMC 4	3GBP352230--G	1787	95.9	96.0	95.6	0.87	601	6.9	2137	2.2	2.7	7.2	1820	83
450	M3BP 355MLA 4	3GBP352410--G	1789	95.8	95.8	95.0	0.86	683	7.0	2402	2.2	2.6	8.4	2140	83
500	M3BP 355MLB 4	3GBP352420--G	1790	96.2	96.1	95.3	0.86	755	7.3	2667	2.3	3.0	8.4	2140	83
560	³⁾ M3BP 355LKB 4	3GBP352820--G	1791	96.4	96.2	95.6	0.85	858	8.5	2988	2.8	2.9	10.6	2600	83
560	M3BP 400LA 4	3GBP402510--G	1792	96.2	96.0	95.3	0.84	863	7.8	2985	2.7	3.1	15	3200	83
630	M3BP 400LB 4	3GBP402520--G	1792	96.2	96.0	95.4	0.85	959	8.9	3358	2.2	3.3	16	3300	83
710	³⁾ M3BP 400LC 4	3GBP402530--G	1792	96.8	96.6	96.0	0.84	1091	7.9	3784	2.5	3.3	17	3400	83
800	M3BP 450LA 4	3GBP452510--G	1792	96.2	95.9	95.3	0.86	1256	6.5	4263	1.3	3.1	23	4050	89
900	M3BP 450LB 4	3GBP452520--G	1792	96.8	96.3	96.0	0.85	1373	7.9	4794	1.3	3.1	25	4350	89
1000	³⁾ M3BP 450LC 4	3GBP452530--G	1792	96.8	96.6	95.8	0.86	1505	7.2	5329	1.4	2.8	30	4700	89

³⁾ Temperature rise class F

Technical data, 460 V 60 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
1800 r/min = 4 poles			460 V 60 Hz					High-output design								
18.5	M3BP 160MLC 4	3GBP162430--G	1774	92.4	92.7	92.1	0.83	30.2	8.7	99.5	3.3	3.6	0.11	173	66	
22	M3BP 160MLD 4	3GBP162440--G	1770	92.5	93.2	92.6	0.84	35.4	7.8	118	2.7	3.3	0.125	187	66	
30	M3BP 180MLC 4	3GBP182430--G	1777	93.2	93.6	93.0	0.83	48.6	8.3	161	2.9	3.3	0.217	235	66	
37	M3BP 200MLB 4	3GBP202420--G	1783	94.2	94.5	94.1	0.84	58.6	8.5	198	2.8	3.3	0.343	307	67	
45	M3BP 200MLC 4	3GBP202430--G	1783	94.4	94.5	93.9	0.83	72	8.6	241	3.2	3.6	0.366	319	67	
55	M3BP 225SMC 4	3GBP222230--G	1782	94.4	94.5	93.8	0.85	86	8.5	294	3.1	3.4	0.474	370	70	
75	M3BP 250SMB 4	3GBP252220--G	1782	94.8	95.0	94.4	0.85	116	8.4	401	3.1	3.5	0.866	450	71	
90	M3BP 250SMC 4	3GBP252230--G	1776	95.2	95.3	94.6	0.84	141	8.6	483	3.5	3.7	0.941	478	71	
110	M3BP 280SMC 4	3GBP282230--G	1786	95.2	95.2	94.3	0.86	169	8.7	587	3.2	3.3	1.85	725	72	
132	M3BP 280MLA 4	3GBP282410--G	1785	95.3	95.3	94.4	0.86	202	8.1	705	2.9	3.1	2.3	840	77	
160	M3BP 280MLB 4	3GBP282420--G	1785	95.6	95.6	95.0	0.85	247	7.3	855	3.1	3.2	2.5	890	77	
250	⁶⁾ M3BP 315LKA 4	3GBP312810--G	1788	95.3	95.1	94.1	0.85	389	8.4	1334	2.7	3.2	4.4	1410	82	
315	⁶⁾ M3BP 315LKC 4	3GBP312830--G	1789	95.3	95.1	94.1	0.85	490	9.0	1680	2.9	3.6	5.5	1600	82	

⁶⁾ Efficiency class IE1

Technical data, 460 V 60 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				Load	Load	Load									
1200 r/min = 6 poles															
0.18	M3BP 71MA 6	3GBP073321--B	1120	55.0	51.7	43.0	0.67	0.53	3.8	1.53	2.5	2.7	0.0009	10	45
0.25	M3BP 71MB 6	3GBP073322--B	1125	59.5	57.8	50.9	0.61	0.78	3.8	2.12	2.9	3.1	0.0011	12	45
0.37	M3BP 80MA 6	3GBP083321--B	1136	64.0	62.0	54.9	0.68	0.93	5.1	3.11	3.0	3.3	0.0019	15	50
0.44	M3BP 80MA 6	3GBP083321--B	1118	64.0	63.8	58.5	0.73	1.02	4.7	3.75	2.5	2.7	0.0019	15	50
0.55	M3BP 80MB 6	3GBP083322--B	1123	68.0	69.2	66.0	0.71	1.24	5.3	4.67	3.2	3.2	0.0034	20	50
0.63	M3BP 80MB 6	3GBP083322--B	1105	68.0	70.5	68.8	0.75	1.36	4.8	5.44	2.7	2.7	0.0034	20	50
0.75	M3BP 90SLC 6	3GBP093323--B	1160	80.4	78.2	73.0	0.54	2.1	5.1	6.1	2.7	3.7	0.0049	25	46
1.1	^{⑥)} M3BP 90SLE 6	3GBP093324--B	1140	81.2	81.0	78.0	0.65	2.6	4.6	9.2	2.3	2.9	0.0054	28	47
1.5	^{⑥)} M3BP 100L 6	3GBP103322--B	1160	82.4	82.0	79.4	0.68	3.31	4.9	12.4	1.6	3.2	0.00873	37	52
2.2	^{⑥)} M3BP 112MB 6	3GBP113322--B	1160	84.8	84.4	81.9	0.68	4.89	5.0	18.19	1.8	2.7	0.0125	44	69
3	^{⑥)} M3BP 132SMB 6	3GBP133321--B	1180	86.3	84.8	81.0	0.62	7.24	6.2	24.36	3.1	3.4	0.0334	69	60
4	^{⑥)} M3BP 132SMC 6	3GBP133322--B	1165	86.8	86.3	84.0	0.70	8.58	5.6	32.81	2.3	3.0	0.0334	69	60
5.5	^{⑥)} M3BP 132SMF 6	3GBP133324--B	1165	87.4	86.8	84.5	0.70	11.2	5.7	44.97	2.1	2.6	0.0487	86	60
7.5	M3BP 160MLA 6	3GBP163410--G	1179	89.6	90.0	88.9	0.77	13.6	7.4	60.7	1.7	3.2	0.087	134	63
11	M3BP 160MLB 6	3GBP163420--G	1177	90.4	91.0	90.0	0.77	19.8	8.4	89.2	2.0	3.4	0.114	172	63
15	M3BP 180MLA 6	3GBP183410--G	1181	91.3	91.7	90.8	0.74	27.8	6.5	121	1.9	3.1	0.168	207	63
18.5	M3BP 200MLA 6	3GBP203410--G	1190	92.2	92.2	91.2	0.79	31.8	7.5	148	2.5	3.2	0.382	269	67
22	M3BP 200MLB 6	3GBP203420--G	1189	92.7	93.1	92.2	0.81	36.7	7.5	176	2.5	3.2	0.448	291	67
30	M3BP 225SMA 6	3GBP223210--G	1189	93.2	93.4	92.4	0.82	49.2	8.0	240	2.8	3.2	0.663	349	67
37	M3BP 250SMA 6	3GBP253210--G	1191	93.6	93.8	93.1	0.81	61.2	7.6	296	2.6	3.0	1.13	395	67
45	M3BP 280SMA 6	3GBP283210--N	1191	93.6	93.5	92.5	0.81	74.5	7.8	361	2.9	3.0	1.36	525	68
55	M3BP 280SMB 6	3GBP283220--N	1192	93.6	93.5	93.1	0.81	89.9	8.5	440	3.5	3.8	1.8	600	68
75	M3BP 315SA 6	3GBP313110--N	1191	94.1	94.2	93.5	0.83	121	7.8	601	2.9	2.9	2.6	775	70
90	M3BP 315SMA 6	3GBP313210--N	1191	94.1	94.1	93.0	0.82	146	7.7	721	3.0	3.3	2.8	855	76
110	M3BP 315SMB 6	3GBP313220--N	1191	95.0	94.9	94.1	0.82	178	8.3	882	3.0	3.2	3.5	960	76
132	M3BP 315MLA 6	3GBP313410--G	1192	95.1	95.1	94.3	0.82	211	8.6	1057	3.0	3.3	5.8	1150	72
160	M3BP 355SMA 6	3GBP353210--G	1194	95.0	94.9	93.9	0.83	255	7.9	1279	2.2	2.9	7.9	1520	80
200	M3BP 355SMB 6	3GBP353220--G	1194	95.0	94.9	94.0	0.83	319	8.2	1599	3.1	3.3	9.7	1680	80
250	M3BP 355SMC 6	3GBP353230--G	1194	95.3	95.2	94.3	0.82	403	8.5	1999	2.9	3.2	11.3	1820	80
315	M3BP 355MLB 6	3GBP353420--G	1193	95.9	95.7	94.8	0.82	499	8.0	2521	2.8	3.0	13.5	2180	80
355	M3BP 355LKA 6	3GBP353810--G	1193	95.8	95.5	94.6	0.80	579	8.7	2842	3.0	3.2	15.5	2500	80
400	M3BP 400LA 6	3GBP403510--G	1194	95.8	95.6	94.8	0.82	637	8.2	3200	2.4	3.0	17	2900	79
400	M3BP 355LKB 6	3GBP353820--G	1193	95.7	95.5	94.6	0.82	639	7.5	3204	2.7	2.7	16.5	2600	80
450	M3BP 400LB 6	3GBP403520--G	1194	95.8	95.5	94.7	0.82	713	7.9	3598	2.5	3.1	20.5	3150	79
500	M3BP 400LC 6	3GBP403530--G	1194	95.8	95.6	94.9	0.84	777	8.1	4000	2.6	3.0	22	3300	79
560	M3BP 400LD 6	3GBP403540--G	1194	95.8	95.6	94.9	0.85	856	7.8	4481	2.4	3.2	24	3400	79
630	M3BP 450LA 6	3GBP453510--G	1195	96.5	96.3	95.6	0.84	978	6.8	5036	1.1	2.9	31	4150	85
710	M3BP 450LB 6	3GBP453520--G	1196	96.5	96.3	95.7	0.85	1085	8.2	5671	1.4	2.9	37	4500	85
800	M3BP 450LB 6	3GBP453520--G	1194	96.5	96.5	95.8	0.85	1221	7.0	6398	1.2	2.5	37	4500	85
900	^{③)} M3BP 450LC 6	3GBP453530--G	1195	96.5	96.5	95.9	0.84	1392	7.2	7191	1.2	2.7	41	4800	85

^{③)} Temperature rise class F

^{⑥)} Efficiency class IE1

Technical data, 460 V 60 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
1200 r/min = 6 poles			460 V 60 Hz					High-output design								
15	M3BP 160MLC 6	3GBP163430---G	1176	90.7	91.3	90.5	0.75	27.6	8.1	121	1.9	4.1	0.131	185	63	
18.5	M3BP 180MLB 6	3GBP183420---G	1180	92.0	92.5	91.8	0.78	32.3	6.6	149	1.9	3.0	0.198	221	63	
30	M3BP 200MLC 6	3GBP203430---G	1188	93.0	93.3	92.5	0.83	48.7	8.0	241	2.6	3.2	0.531	318	67	
37	M3BP 225SMB 6	3GBP223220---G	1188	93.8	94.1	93.5	0.83	59.6	7.5	297	2.5	3.0	0.821	393	67	
45	M3BP 225SMC 6	3GBP223230---G	1187	93.6	94.1	93.6	0.82	73.5	7.3	362	2.5	2.9	0.821	393	67	
45	M3BP 250SMB 6	3GBP253220---G	1191	93.9	94.2	93.5	0.82	73.3	7.9	360	2.7	3.1	1.37	441	67	
55	M3BP 250SMC 6	3GBP253230---G	1189	94.0	94.3	93.7	0.83	88.4	8.1	441	2.9	3.1	1.5	468	67	
75	M3BP 280SMC 6	3GBP283230---G	1191	93.2	93.3	92.4	0.84	120	8.4	600	3.1	3.0	2.85	725	70	
90	M3BP 280MLA 6	3GBP283410---G	1191	93.6	93.5	92.4	0.81	148	8.2	721	2.6	2.8	3.1	840	76	
110	M3BP 280MLB 6	3GBP283420---G	1191	94.1	94.0	92.9	0.82	179	8.7	881	3.0	2.9	4.1	890	76	
160	M3BP 315LKA 6	3GBP313810---G	1193	95.0	94.9	93.9	0.82	257	8.6	1280	2.9	3.1	7.3	1410	78	
180	M3BP 315LKB 6	3GBP313820---G	1193	95.0	94.9	94.0	0.82	289	8.5	1440	2.9	3.1	8.3	1520	78	
200	M3BP 315LKC 6	3GBP313830---G	1189	95.2	95.3	94.6	0.83	316	7.8	1604	2.8	2.9	9.2	1600	78	

Technical data, 460 V 60 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				Load 100%	Load 75%	Load 50%									
900 r/min = 8 poles															
0.09	M3BP 71MA 8	3GBP074101---B	835	53.0	49.4	42.1	0.59	0.36	2.4	1.02	2.6	2.8	0.00089	11	43
0.12	M3BP 71MB 8	3GBP074102---B	845	40.0	34.6	24.0	0.50	0.57	2.7	1.35	2.6	3.0	0.0011	12	46
0.18	M3BP 80MA 8	3GBP084101---B	845	46.0	43.1	35.1	0.54	0.65	3.4	2.03	2.5	3.0	0.0019	15	48
0.25	M3BP 80MB 8	3GBP084102---B	845	52.0	50.2	42.8	0.55	0.85	3.5	2.85	2.3	2.8	0.0024	17	53
0.37	M3BP 90SLB 8	3GBP094102---B	860	58.0	54.5	45.4	0.51	1.38	3.1	4.1	2.0	2.6	0.0044	24	53
0.55	M3BP 90SLC 8	3GBP094103---B	841	62.0	61.4	55.3	0.54	1.83	3.1	6.24	1.6	2.2	0.0049	25	56
0.75	M3BP 100LA 8	3GBP104101---B	865	77.1	75.5	70.8	0.56	2.3	4.1	8.25	2.0	3.1	0.0072	30	49
1.1	M3BP 100LB 8	3GBP104102---B	855	79.7	79.0	75.5	0.61	2.84	4.0	12.2	1.8	2.8	0.00871	30	56
1.5 ^{⑥)}	M3BP 112M 8	3GBP114101---B	850	79.2	79.1	76.3	0.67	3.64	4.1	16.9	2.1	2.7	0.0106	39	58
2.2 ^{⑥)}	M3BP 132SMA 8	3GBP134101---B	870	80.8	79.6	76.1	0.63	5.93	5.2	24.1	1.7	3.2	0.0334	70	59
3 ^{⑥)}	M3BP 132SMB 8	3GBP134102---B	870	83.2	82.0	78.4	0.63	7.7	5.2	32.75	1.8	3.3	0.04	75	61
4	M3BP 160MLA 8	3GBP164410---G	882	85.8	85.7	83.4	0.64	9.1	5.9	43.3	1.6	3.0	0.068	120	63
5.5	M3BP 160MLB 8	3GBP164420---G	881	86.4	86.6	84.6	0.65	12.2	6.2	59.6	1.5	3.0	0.085	134	63
7.5	M3BP 160MLC 8	3GBP164430---G	882	87.7	87.8	86.2	0.63	17	5.1	81.2	1.5	3.2	0.132	184	63
11	M3BP 180MLA 8	3GBP184410---G	885	88.6	89.2	87.8	0.66	23.5	5.1	118	2.0	2.9	0.214	233	63
15	M3BP 200MLA 8	3GBP204410---G	890	90.1	90.5	89.4	0.71	28.5	5.9	160	2.3	2.7	0.45	290	64
18.5	M3BP 225SMA 8	3GBP224210---G	890	90.1	90.4	89.0	0.72	35	5.9	198	2.2	2.5	0.669	350	67
22	M3BP 225SMB 8	3GBP224220---G	890	91.6	91.9	90.8	0.73	40.8	6.3	236	2.2	2.6	0.722	363	67
30	M3BP 250SMA 8	3GBP254210---G	893	91.6	91.6	90.3	0.70	57.8	6.6	320	2.8	2.7	1.4	440	67
37	M3BP 280SMA 8	3GBP284210---G	893	92.3	92.1	90.6	0.78	64	8.1	395	1.8	3.4	1.85	605	68
45	M3BP 280SMB 8	3GBP284220---G	892	92.3	92.1	90.6	0.77	79	8.4	481	1.9	3.5	2.2	645	69
55	M3BP 315SMA 8	3GBP314210---G	893	93.0	92.8	91.6	0.79	93.9	7.8	587	1.7	3.0	3.2	830	62
75	M3BP 315SMB 8	3GBP314220---G	892	93.4	93.4	92.4	0.78	128	7.9	802	1.8	3.0	4.1	930	62
90	M3BP 315SMC 8	3GBP314230---G	892	93.9	93.9	93.0	0.80	149	8.2	962	1.9	3.0	4.9	1000	64
110	M3BP 315MLA 8	3GBP314410---G	891	93.6	93.7	93.0	0.79	186	8.1	1178	1.9	3.0	5.8	1150	76
132	M3BP 355SMA 8	3GBP354210---G	895	94.4	94.2	92.9	0.76	230	8.3	1409	1.5	2.9	7.9	1520	72
160	M3BP 355SMB 8	3GBP354220---G	895	94.4	94.2	92.9	0.77	274	8.4	1703	1.6	2.8	9.7	1680	72
200	M3BP 355SMC 8	3GBP354230---G	893	94.9	94.8	93.9	0.79	335	8.2	2143	1.6	2.9	11.3	1820	72
250	M3BP 355MLB 8	3GBP354420---G	893	94.9	94.8	94.0	0.79	417	8.3	2672	1.6	2.9	13.5	2180	75
315	M3BP 400LA 8	3GBP404510---G	894	95.5	95.5	94.9	0.80	520	7.0	3362	1.2	2.9	17	2900	73
315 ^{③)}	M3BP 355LKB 8	3GBP354820---G	893	95.5	95.5	94.7	0.79	524	8.8	3369	1.8	2.9	16.5	2600	78
355	M3BP 400LB 8	3GBP404520---G	894	96.3	96.4	95.9	0.82	564	8.4	3793	1.2	2.8	21	3200	73
400	M3BP 400LC 8	3GBP404530---G	895	95.9	96.0	95.3	0.81	647	6.4	4273	1.3	3.0	24	3400	73
450	M3BP 450LA 8	3GBP454510---G	895	96.6	96.7	96.3	0.82	709	6.9	4803	1.1	2.7	26	3750	80
500	M3BP 450LB 8	3GBP454520---G	895	96.7	96.7	96.3	0.82	787	7.3	5336	1.1	2.8	29	4000	80
560	M3BP 450LC 8	3GBP454530---G	894	96.1	96.1	95.5	0.81	907	6.5	5979	1.4	3.1	35	4350	80
630 ^{③)}	M3BP 450LD 8	3GBP454540---G	896	96.9	96.8	96.1	0.81	1013	8.6	6717	1.5	3.4	41	4800	80
710 ^{③)}	M3BP 450LD 8	3GBP454540---G	895	96.5	96.5	95.9	0.82	1126	7.7	7575	1.2	3.2	41	4800	80

^{③)} Temperature rise class F

^{⑥)} Efficiency class IE1

Technical data, 460 V 60 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
900 r/min = 8 poles			460 V 60 Hz					High-output design								
18.5	M3BP 200MLB 8	3GBP204420--G	891	90.1	90.4	89.0	0.72	35.3	6.1	198	2.3	2.6	0.53	318	64	
30	M3BP 225SMC 8	3GBP224230--G	889	91.6	91.9	91.1	0.72	56.3	6.4	322	2.6	2.7	0.828	393	67	
37	M3BP 250SMB 8	3GBP254220--G	891	92.3	92.7	92.0	0.72	68.9	6.1	396	2.8	2.6	1.5	468	67	
45	M3BP 250SMC 8	3GBP254230--G	891	92.3	92.9	92.3	0.74	81.7	6.4	482	2.5	2.7	1.5	468	67	
55	M3BP 280SMC 8	3GBP284230--G	892	93.2	93.1	92.0	0.78	95.2	8.8	588	2.0	3.5	2.85	725	69	
65	M3BP 280SMC 8	3GBP284230--G	890	93.5	93.8	93.0	0.81	109	7.5	697	1.6	2.9	2.85	725	69	
75	M3BP 280MLB 8	3GBP284420--G	890	93.4	93.4	92.4	0.79	126	7.4	804	1.8	2.9	4.1	890	75	
85	M3BP 280MLB 8	3GBP284420--G	887	93.8	93.9	93.0	0.81	140	6.7	915	1.5	2.5	4.1	890	75	
132	M3BP 315LKA 8	3GBP314810--G	891	94.1	94.2	93.6	0.82	214	8.1	1414	1.9	2.9	7.3	1410	78	
150	M3BP 315LKA 8	3GBP314810--G	890	94.1	94.4	93.9	0.84	238	7.4	1609	1.7	2.6	7.3	1410	78	
150 ³⁾	M3BP 315LKB 8	3GBP314820--G	892	94.1	94.1	93.6	0.82	244	8.6	1609	2.0	3.0	8.3	1520	78	
160	M3BP 315LKC 8	3GBP314830--G	890	93.9	94.0	93.3	0.82	261	8.5	1717	2.0	3.1	9.2	1600	78	

³⁾ Temperature rise class F

Technical data, 460 V 60 Hz

IE2 cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014						Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N	A	I_s/I_N	T_N	Nm	T_i/T_N	T_b/T_N			
900 r/min = 10 poles			460 V 60 Hz						CENELEC-design								
18	M3BP 200MLB 10	3GBP205420---G	705	88.6	88.8	87.5	0.73	34.9	5.2	244	1.6	2.3	0.54		305	61	
45	M3BP 280SMB 10	3GBP285220---G	712	92.9	92.7	91.4	0.75	81	6.4	603	1.4	2.8	2.2		645	64	
55	M3BP 280SMC 10	3GBP285230---G	712	93.3	93.2	92.1	0.77	96	6.4	737	1.4	2.6	2.85		725	64	
65	M3BP 315SMB 10	3GBP315220---G	714	93.6	93.6	92.7	0.79	110	6.4	869	1.4	2.6	4.1		930	75	
86	M3BP 315SMC 10	3GBP315230---G	713	93.4	93.3	92.3	0.79	146	6.6	1151	1.3	2.8	4.9		1000	75	
155	M3BP 355SMB 10	3GBP355220---G	714	94.8	94.9	94.1	0.80	256	6.2	2073	1.1	2.3	9.7		1680	76	
185	M3BP 355SMC 10	3GBP355230---G	714	94.6	94.5	93.7	0.79	309	6.6	2474	1.3	2.5	11.3		1820	79	
230	M3BP 355MLB 10	3GBP355420---G	713	95.2	95.2	94.5	0.79	383	6.3	3080	1.2	2.4	13.5		2180	80	
275	³⁾ M3BP 355LKB 10	3GBP355820---G	713	95.4	95.4	94.7	0.78	463	6.4	3683	1.2	2.4	16.5		2600	82	
360	M3BP 400LC 10	3GBP405530---G	715	95.1	95.1	94.4	0.76	625	6.2	4808	1.2	2.3	24		3400	82	
400	M3BP 450LA 10	3GBP455510---G	716	95.7	95.6	94.7	0.73	718	5.8	5334	1.0	2.1	31		4050	84	
500	M3BP 450LC 10	3GBP455530---G	716	95.8	95.7	95.0	0.74	885	5.8	6668	1.0	2.0	38		4550	84	
560	³⁾ M3BP 450LD 10	3GBP455540---G	716	95.9	95.8	94.9	0.72	1017	6.0	7468	1.0	2.1	42		4800	84	

³⁾ Temperature rise class F

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014						Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N	A	I_s/I_N	T_N	Nm	T_i/T_N	T_b/T_N			
900 r/min = 12 poles			460 V 60 Hz						CENELEC-design								
37	M3BP 280SMB 12	3GBP286220---G	592	91.7	91.0	88.9	0.63	80.3	5.8	596	1.6	2.7	2.2		645	74	
45	M3BP 280SMC 12	3GBP286230---G	592	91.6	90.7	88.1	0.60	103	6.1	725	1.7	2.9	2.85		725	74	
52	M3BP 315SMB 12	3GBP316220---G	594	93.1	93.0	92.0	0.78	89.8	6.6	835	1.4	2.6	4.1		930	74	
65	M3BP 315SMC 12	3GBP316230---G	593	93.3	93.4	92.5	0.78	112	6.3	1046	1.4	2.5	4.9		1000	74	
86	M3BP 315MLA 12	3GBP316410---G	593	93.6	93.7	92.9	0.78	147	6.4	1384	1.4	2.5	5.8		1150	74	
150	M3BP 355SMC 12	3GBP356230---G	595	93.4	93.4	92.4	0.73	276	6.1	2407	1.3	2.5	11.3		1820	80	
180	M3BP 355MLB 12	3GBP356420---G	594	93.4	93.6	92.8	0.75	322	5.7	2893	1.2	2.4	13.5		2180	80	
225	³⁾ M3BP 355LKB 12	3GBP356820---G	594	93.5	93.7	92.9	0.74	408	5.9	3617	1.3	2.4	16.5		2600	82	
400	M3BP 450LC 12	3GBP456530---G	595	95.4	95.4	94.6	0.77	683	5.3	6419	0.9	1.9	38		4550	87	
450	³⁾ M3BP 450LD 12	3GBP456540---G	595	95.5	95.5	94.8	0.78	758	5.3	7222	0.9	2.0	42		4800	87	

³⁾ Temperature rise class F

Variant codes

Cast iron motors

Variant codes specify additional options and features to the standard motor. The desired features are listed as three-digit variant codes in the motor order. Note also that there are variants that cannot be used together.

Most of the variant codes apply to IE2, IE3, and IE4 motors. However, confirm the availability of variants for different IE classes with your ABB sales office before making an order.

Code/Variants	Frame size														
	71	80	90	100	112	132	160	180	200	225	250	280	315	355	400
Administration															
529 Customer witnessed visual inspection of complete order line.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
530 Two-year extension on standard warranty.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
531 Sea freight packing.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
533 Wooden sea freight packing.	-	-	-	-	-	-	-	-	-	-	●	●	●	-	-
590 Mounting of customer supplied part other than coupling.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●
648 Rating plate in special language.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
683 Prepared for ABB Ability Smart Sensor.	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●
684 ABB Ability Smart sensor mounted.	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●
Balancing															
417 Vibration acc. to Grade B (IEC 60034-14).	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
423 Balanced without key.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
424 Full-key balancing.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Bearings and Lubrication															
036 Transport lock for bearings.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
037 Roller bearing at D-end.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
039 Cold-resistant grease.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
040 Heat-resistant grease.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
041 Bearings regreasable via grease nipples.	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○
043 SPM compatible nipples for vibration measurement.	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○
057 2RS bearings at both ends.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
058 Angular contact bearing at D-end, shaft force away from bearing.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●
059 Angular contact bearing at N-end, shaft force towards bearing.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
060 Angular contact bearing at D-end, shaft force towards bearing.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
061 Angular contact bearing at N-end, shaft force away from bearing.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
107 Pt100 2-wire in bearings.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●
128 Double PT100, 2-wire in bearings.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●
129 Double PT100, 3-wire in bearings.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●
130 Pt100 3-wire in bearings.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●
188 63-series bearing in D-end.	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○
194 ZZ bearings greased for life at both ends.	○	○	○	○	○	○	●	●	●	●	●	●	●	●	●
420 Bearing mounted PTC thermistors.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
433 Outlet grease collector.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
506 Nipples for vibration measurement : SKF Marlin Quick Connect stud CMSS-2600-3.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●
593 Bearings grease suitable for food and beverage industry.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
654 Provision for vibration sensors (M8x1).	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
795 Lubrication information plate.	-	-	-	-	-	-	●	●	●	●	●	○	○	○	○
796 Grease nipples JIS B 1575 PT 1/8 Type A.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●
797 Stainless steel SPM nipples.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
798 Stainless steel grease nipples.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●
799 Grease nipples flat type DIN 3404, thread M10x1.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●
800 Grease nipples JIS B 1575 PT 1/8" pin type.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●
Brakes															
517 KFB holding brake.	-	-	-	-	-	-	-	-	-	-	●	●	●	-	-
518 SFB-SH holding brake.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
Branch standard designs															
142 Manilla connection.	-	-	●	●	●	●	●	●	●	●	●	●	●	-	-

○ = Included as standard | ● = Available as option | - = Not applicable

Code/Variants	Frame size														
	71	80	90	100	112	132	160	180	200	225	250	280	315	355	400
172 Smoke venting specification, 300 °C, 1 hour, DOL use, class F300 according to EN 12101-3.	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•
173 Smoke venting specification, 200 °C, 2 hours, DOL use, class F200 according to EN 12101-3.	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•
174 Smoke venting specification, 400 °C, 2 hours, DOL use, class F400 according to EN 12101-3.	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•
176 Smoke Venting specification, 300°C, 2 hours, DOL use, Class F300(120) according to EN 12101-3.	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•
177 Design for high ambient applications.	-	-	-	-	-	-	-	•	•	•	•	-	-	-	-
178 Stainless steel / acid proof bolts.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
204 Jacking bolts for foot mounted motors.	-	-	-	-	-	-	-	•	•	•	•	•	○	○	○
209 Non-standard voltage or frequency, (special winding).	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
386 Smoke venting specification, 200 °C, 2 hours, VSD use, Class F200 according to EN 12101-3.	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•
387 Smoke venting specification, 300 °C, 1 hour, VSD use, Class F300 according to EN 12101-3	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•
389 Smoke Venting specification, 400 °C, 2 hours, VSD use, Class F400 according to EN 12101-3	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•
392 Smoke Venting specification, 250 °C, 2 hours, DOL use, Class T250.	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•
393 Smoke venting specification, 250 °C, 2 hours, VSD use, Class T250.	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•
396 Motor designed for minimum ambient temperature -20 °C to -40 °C, with space heaters (code 450/451 must be added).	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
397 Motor designed for minimum ambient temperature -40 °C to -55 °C, with space heaters (code 450/451 must be added).	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•
398 Motor designed for minimum ambient temperature -20 °C to -40 °C.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
399 Motor designed for minimum ambient temperature -40 °C to -55 °C.	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•
425 Corrosion protected stator and rotor core.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
524 Special run-out tolerances on flange and shaft for close coupled pump applications.	-	-	-	-	-	-	-	-	-	-	•	•	-	-	-
625 Design for mining applications.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
786 Special design shaft upwards (V3, V36, V6) for outdoor mounting.	-	•	•	•	•	•	•	•	•	•	•	-	-	-	-
877 Design for high ambient applications, motor without fan and fan cover.	-	-	-	-	-	-	-	•	•	•	•	-	-	-	-
Cooling system															
044 Unidirectional fan for reduced noise level. Rotation clockwise seen from D-end. Available only for 2-pole motors.	-	-	-	-	-	-	-	-	-	-	-	-	-	•	•
045 Unidirectional fan for reduced noise level. Rotation counter clockwise seen from D-end. Available only for 2-pole motors.	-	-	-	-	-	-	-	-	-	-	-	-	-	•	•
068 Light alloy metal fan.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
075 Cooling method IC418 (without fan).	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
183 Separate motor cooling (fan axial, N-end).	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
206 Steel fan.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
422 Separate motor cooling (on top) with integrated fan motor.	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•
514 Separate motor cooling (fan on top).	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•
791 Stainless steel fan cover.	-	-	-	-	-	-	-	-	-	•	•	•	•	•	•
Coupling															
035 Assembly of customer supplied coupling-half.	-	-	-	-	-	-	-	-	-	•	•	•	•	•	•
Documentation															
141 Binding 2D main dimension drawing.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
370 Motor model drawing in 3D.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
374 Binding 2D motor detailed drawing.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
536 Photos of manufactured motors.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
537 Advanced data sheet.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
722 Rotor dimension drawing (incl. torsional stiffness).	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
777 Premium documentation package.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Drain holes															
065 Plugged existing drain holes.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
448 Draining holes with metal plugs.	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•
Earthing Bolt															
067 External earthing bolt.	•	•	•	•	•	•	•	○	○	○	○	○	○	○	○
525 External earthing bolts on motor feet.	-	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Heating elements															
450 Heating element, 100-120 V.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
451 Heating element, 200 - 240 V.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

○ = Included as standard | • = Available as option | - = Not applicable

Code/Variants	Frame size														
	71	80	90	100	112	132	160	180	200	225	250	280	315	355	400
Insulation system															
014 Winding insulation class H.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
405 Special winding insulation for frequency converter supply.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
406 Winding insulation for supply > 690 <= 1000 volts.	-	-	-	-	-	-	-	-	•	•	•	•	•	•	•
Marine															
024 Fulfilling Bureau Veritas (BV) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
025 Fulfilling Det Norske Veritas (DNV) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
026 Fulfilling Lloyds Register of Shipping (LR) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
027 Fulfilling American Bureau of Shipping (ABS) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
049 Fulfilling Germanischer Lloyd (GL) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
050 Fulfilling Registro Italiano Navale (RINA) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
051 Fulfilling Russian Maritime Register of Shipping (RS) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
096 Fulfilling Lloyds Register of Shipping (LR) requirements, without certificate (non-essential duty only).	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
186 Fulfilling Det Norske Veritas (DNV) requirements, without certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
481 Fulfilling Nippon Kaiji Kyokai (NK) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
483 Fulfilling China Classification Societies (CCS) requirements (Beijing), with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
484 Fulfilling Korea Register of Shipping (KR) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
491 Fulfilling Nippon Kaiji Kyokai (NK) requirements, without certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
492 Fulfilling Registro Italiano Navale (RINA) requirements, without certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
493 Fulfilling China Classification Societies (CCS) requirements (Beijing), without certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
494 Fulfilling Korea Register of Shipping (KR) requirements, without certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
496 Fulfilling Bureau Veritas (BV) requirements, without certificate (non-essential duty only).	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
497 Fulfilling Russian Maritime Register of Shipping (RS) requirements, without certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•	-	-
675 Fulfilling American Bureau of Shipping (ABS) requirements, without certificate (non-essential duty only).	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
676 Fulfilling Germanischer Lloyd (GL) requirements, without certificate (non-essential duty only).	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Mounting arrangements															
008 IM 2101 foot/flange mounted, IEC flange, from IM 1001 (B34 from B3).	•	•	•	•	•	•	-	-	-	-	-	-	-	-	-
009 IM 2001 foot/flange mounted, IEC flange, from IM 1001 (B35 from B3).	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
047 IM 3601 flange mounted, IEC flange, from IM 3001 (B14 from B5).	•	•	•	•	•	•	•	-	-	-	-	-	-	-	-
066 Modified for specified mounting position differing from IM B3 (1001), IM B5 (3001), B14 (3601), IM B35 (2001), IM B34 (2101).	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
305 Additional lifting lugs.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•
Noise reduction															
055 Noise reduction cover for foot mounted motor.	-	-	-	-	-	-	-	-	-	•	•	•	•	•	•
Painting															
105 Paint thickness report.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
114 Special paint color, standard grade.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
115 Painting system C4M acc. to ISO 12944-2: 2007.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
168 Primer paint only.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
179 Special paint specification.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
303 Painted insulation layer on inside of the terminal boxes.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
710 Thermally sprayed zinc metallizing with acrylic top coat	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
711 Painting system C5-M very high, acc. to ISO 12944-5:2007.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
712 Painting system C5-M according to Petrobras specification.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
713 Painting system according Total Egina specification.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•
754 Painting system C5M acc. to ISO 12944-2:1998.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
755 Norsok M-501 revision 6, Coating system no. 1	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•
Protection															
005 Protective roof.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
072 Radial seal at D-end. Not possible for 2-pole , 280 and 315 frames	•	•	•	•	•	•	•	•	•	•	•	-	-	-	-

○ = Included as standard | • = Available as option | - = Not applicable

		Frame size															
Code/Variants		71	80	90	100	112	132	160	180	200	225	250	280	315	355	400	450
073	Sealed against oil at D-end.	-	-	-	-	-	-	●	●	●	●	-	-	●	●	●	
158	Degree of protection IP65.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
211	Weather protected, IP xx W.	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	
250	Degree of protection IP66.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
401	Protective roof, horizontal motor.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●	
403	Degree of protection IP56.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
404	Degree of protection IP56, without fan and fan cover.	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	
434	Degree of protection IP56, open deck.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●	
520	Motor protection cover made of glass fiber. Vertical motor, shaft down.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●	
783	Labyrinth sealing at D-end.	-	-	-	-	-	-	●	●	●	●	●	○	○	○	○	
784	Gamma-seal at D-end.	○	○	○	○	○	○	○	○	○	○	-	-	-	-	-	
Rating & instruction plates																	
002	Restamping voltage, frequency and output, continuous duty.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
004	Additional text on std rating plate (max 12 digits on free text line).	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
095	Restamping output (maintained voltage, frequency), intermittent duty.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
126	Tag plate.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
135	Mounting of additional identification plate, stainless.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
139	Additional identification plate delivered loose.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
159	Additional plate with text "Made in"	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
160	Additional rating plate affixed.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
161	Additional rating plate delivered loose.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
163	Frequency converter rating plate. Rating data according to quotation.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
181	Rating plate with ABB standard loadability values for VSD operation. Other auxiliaries for VSD operation to be selected as necessary.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
333	Not for use in the USA.	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	
528	Rating plate sticker.	-	●	●	●	●	●	●	-	-	-	●	●	●	●	●	
818	Restamping as generator.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●	
Shaft & rotor																	
069	Two shaft extensions according to catalog drawings.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
070	Special shaft extension at D-End, standard shaft material.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
131	Motor delivered with half key (key not exceeding shaft diameter).	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	
155	Cylindrical shaft extension, D-end, without key-way.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
164	Shaft extension with closed keyway.	○	○	○	○	○	○	○	○	○	○	○	●	●	●	-	
165	Shaft extension with open keyway.	-	-	-	-	-	-	●	●	●	●	●	○	○	○	○	
410	Shaft material stainless steel.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
591	Special shaft extension according to customer specification.	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
600	Special shaft extension at N-end, standard shaft material.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
630	Shaft material certificate 3.1/3.2 according to EN10204:2004.	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●	
Standards and Regulations																	
208	Fulfilling Underwriters Laboratories (UL), listed requirements.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
331	Motor not for sale for use in EU.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
421	VIK design (Verband der Industriellen Energie- und Kraftwirtschaft e.V.).	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	
500	Fulfilling Korean MEPS efficiency regulations.	-	●	●	●	●	●	●	●	●	●	●	●	●	-	-	
509	Fulfilling US Integral Horsepower Motor Rule (IHP).	-	●	●	●	●	●	●	●	●	●	●	●	●	-	-	
535	NBR IR3 design.	-	●	●	●	●	●	●	●	●	●	●	●	●	-	-	
540	China energy label.	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	
544	Australian HE MEPS.	-	●	●	●	●	●	●	●	●	●	●	●	●	-	-	
548	Certificate of conformity according TR-CU 004/2011 for customs union RU, KZ, BY, AM, KG.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
549	Product data info for Turkey.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
552	BIS licence for India.	-	●	●	●	●	●	●	●	●	●	●	●	●	-	-	
558	Saudi Arabian MEPS (SASO).	-	●	●	●	●	●	●	●	●	●	●	●	●	-	-	
564	Singapore MEPS.	-	●	●	●	●	●	●	●	●	●	●	●	●	-	-	
585	Safety certificate for Morocco.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
598	Universal motor.	-	●	●	●	●	●	●	●	●	●	●	●	●	-	-	
687	Fulfilling energy efficiency requirements for Canada.	-	●	●	●	●	●	●	●	●	●	●	●	●	-	-	
822	WIMES 3.03i6 Compliant Design for DOL operation.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
823	WIMES 3.03i6 Compliant Design for VSD operation.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Stator winding temperature sensors																	

○ = Included as standard | ● = Available as option | - = Not applicable

Code/Variants	Frame size														
	71	80	90	100	112	132	160	180	200	225	250	280	315	355	400
120 KTY 84-130 (1 per phase) in stator winding.	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●
121 Bimetal detectors, break type (NCC), (3 in series), 130 °C, in stator winding	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
122 Bimetal detectors, break type (NCC), (3 in series), 150 °C, in stator winding	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
123 Bimetal detectors, break type (NCC), (3 in series), 170 °C, in stator winding.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
124 Bimetal detectors, break type (NCC), (3 in series), 140 °C, in stator winding.	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●
125 Bimetal detectors, break type (NCC), (2x3 in series), 150 °C, in stator winding.	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●
127 Bimetal detectors, break type (NCC), (3 in series, 130 °C & 3 in series, 150 °C), in stator winding.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
435 PTC - thermistors (3 in series), 130 °C, in stator winding.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
437 PTC - thermistors (3 in series), 170 °C, in stator winding.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
438 PTC - thermistors (3 in series), 190 °C, in stator winding.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
439 PTC - thermistors (2x3 in series), 150 °C, in stator winding.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
441 PTC - thermistors (3 in series, 130 °C & 3 in series, 150 °C), in stator winding.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
442 PTC - thermistors (3 in series, 150 °C & 3 in series, 170 °C), in stator winding.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
445 Pt100 2-wire in stator winding, 1 per phase.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
446 Pt100 2-wire in stator winding, 2 per phase.	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●
502 Pt100 3-wire in stator winding, 1 per phase.	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●
503 Pt100 3-wire in stator winding, 2 per phase.	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●
511 PTC thermistors (2 x 3 in series), 130 °C, in stator winding.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
515 Pt100 3-wire in stator winding, 3 per phase.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
Terminal box															
015 Motor supplied in D connection.	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-
017 Motor supplied in Y connection.	●	●	●	●	●	●	●	-	-	-	-	-	-	-	-
019 Larger than standard terminal box.	●	●	●	●	●	●	●	-	-	-	●	●	●	●	-
020 Detached terminal box.	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●
021 Terminal box LHS (seen from D-end).	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-
022 Cable entry LHS (seen from D-end).	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
157 Terminal box degree of protection IP65.	-	-	-	-	-	-	-	●	●	●	●	●	●	●	-
180 Terminal box RHS (seen from D-end).	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-
230 Standard metal cable gland.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-
277 Cable sealing end unit, size small for C-opening.	-	-	-	-	-	-	-	-	-	-	●	-	-	-	-
278 Cable sealing end unit, size medium for D-opening.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
279 Cable sealing end unit, size large for D-opening.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
292 Adapter C-C.	-	-	-	-	-	-	-	-	-	-	●	-	-	-	-
293 Adapter D-D.	-	-	-	-	-	-	-	-	-	-	●	●	-	-	-
294 Adapter E-D.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
295 Adapter E-2D.	-	-	-	-	-	-	-	-	-	-	●	●	○	○	○
296 Adapter E-3D.	-	-	-	-	-	-	-	-	-	-	-	-	●	●	●
351 Terminal block turned according to cable entry.	-	-	-	-	-	-	-	-	-	-	●	●	-	●	●
375 Standard plastic cable gland.	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-
380 Separate terminal box for temperature detectors, std. material	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●
400 4 x 90 degr turnable terminal box.	●	●	●	●	●	●	●	○	○	○	○	○	○	○	-
413 Extended cable connection, no terminal box.	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●
418 Separate terminal box for auxiliaries, standard material.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
444 Adapter E-2E.	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
447 Top mounted separate terminal box for monitoring equipment.	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●
466 Terminal box at N-end.	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●
468 Cable entry from D-end.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-
469 Cable entry from N-end.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-
526 Existing cable entries plugged.	○	○	○	○	○	○	○	○	○	○	○	○	○	○	-
553 Terminal box degree of protection IP66.	-	●	●	●	●	●	●	●	●	●	●	●	●	●	-
554 Cast iron flange for cable glands drilled and tapped according to order.	-	-	-	-	-	-	-	●	●	●	●	●	●	●	-
557 Nickel plated cable glands mounted according to order.	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●
565 Adapter for terminal box on the side (RHS).	-	-	-	-	-	-	-	-	-	●	●	●	●	●	-
566 Adapter for terminal box on the side (LHS).	-	-	-	-	-	-	-	-	-	●	●	●	●	●	-
567 Separate terminal box material: cast Iron.	-	-	-	-	-	-	-	○	○	○	○	●	●	●	●

○ = Included as standard | ● = Available as option | - = Not applicable

	Frame size															
Code/Variants	71	80	90	100	112	132	160	180	200	225	250	280	315	355	400	450
568 Separate terminal box for heating elements, std. Material.	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•	
569 Separate terminal box for brakes.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
624 Prepared for inch cable glands according to BSPP standard.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
727 Stainless steel flange for cable glands drilled and tapped according to order.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
730 Prepared for NPT cable glands.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
731 Two standard metal cable glands.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
742 Protective cover for accessory terminal block in main terminal box.	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•	
743 Non-drilled cast iron flange for cable glands.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
744 Stainless steel non-drilled flange for cable glands.	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•	
745 Painted steel flange equipped with nickel plated brass cable glands.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
746 Stainless steel cable flange equipped with standard nickel plated brass cable glands.	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•	
Testing																
145 Type test report from a catalogue motor, 400V 50Hz.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
146 Type test with report for one motor from specific delivery batch.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
148 Routine test report.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
149 Test according to separate test specification.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
150 Customer witnessed testing. Specify test procedure with other codes.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
222 Torque/speed test, type test and multi-point load test with report for one motor from specific delivery batch.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
560 Shaft voltage test, for one motor from specific delivery batch.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
561 Overspeed test, for one motor from specific delivery batch	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
562 Overvoltage test, for one motor from specific delivery batch.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
760 Vibration level test.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
761 Vibration spectrum test for one motor from specific delivery batch.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
762 Noise level test for one motor from specific delivery batch.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
763 Noise spectrum test for one motor from specific delivery batch.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
764 Test for one motor from specific delivery batch with ABB frequency converter available at ABB test field. ABB standard test procedure.	-	-	-	-	-	-	-	-	-	•	•	•	•	•	•	
Variable speed drives																
429 Separate motor cooling (fan top, N-end) and 1024 pulse tacho (Leine & Linde 861) mounted.	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•	
470 Prepared for hollow shaft pulse tacho (L&L equivalent).	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
472 1024 pulse tacho (L&L 861007455-1024).	-	-	-	-	•	•	•	•	•	•	•	•	•	•	•	
473 2048 pulse tacho (L&L 861007455-2048).	-	-	-	-	•	•	•	•	•	•	•	•	•	•	•	
474 Separate motor cooling (axial fan, N-end) and prepared for hollow shaft tacho (L&L equivalent).	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
476 Separate motor cooling (axial fan, N-end) and 1024 pulse tacho (L&L 861007455-1024).	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
477 Separate motor cooling (axial fan, N-end) and 2048 pulse tacho (L&L 861007455-2048).	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
478 Separate motor cooling (fan on top, N-end) and prepared for hollow shaft tacho (L&L equivalent)	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•	
479 Mounting of other type of pulse tacho with shaft extension, tacho not included.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
486 Separate motor cooling (fan top, N-end) and prepared for DC-tacho.	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•	
510 Separate motor cooling (fan top, N-end) and 2048 pulse tacho (Leine & Linde 861) mounted.	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•	
570 Prepared for hollow shaft pulse tacho (L&L 503).	-	•	•	•	•	•	•	-	-	-	-	-	-	-	-	
572 1024 pulse tacho (L&L 503).	-	•	•	•	•	•	•	-	-	-	-	-	-	-	-	
573 2048 pulse tacho (L&L 503).	-	•	•	•	•	•	•	-	-	-	-	-	-	-	-	
582 1024 pulse tacho, GHK912-GBR-1024, BEI IDEACOD.	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•	
583 2048 pulse tacho, GHK912-GBR-2048, BEI IDEACOD.	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•	
588 Shaft grounding device.	-	-	-	-	-	•	•	•	•	•	•	•	-	-	-	
658 Special tacho mounted, price category 1.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
659 Special tacho mounted, price category 2.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
660 Special tacho mounted, price category 3.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
701 Insulated bearing at N-end.	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	
702 Insulated bearings at both ends.	•	•	•	•	•	•	•	•	•	•	•	•	-	-	-	
704 EMC cable entry.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Y/D starting																
117 Terminals for Y/D start at both speeds (two speed windings).	-	-	-	-	-	-	•	•	•	•	•	•	•	-	-	
118 Terminals for Y/D start at high speed (two speed windings).	-	-	-	-	-	-	-	-	-	-	•	•	-	-	-	

○ = Included as standard | • = Available as option | - = Not applicable

Code/Variants	Frame size															
	71	80	90	100	112	132	160	180	200	225	250	280	315	355	400	450
119 Terminals for Y/D start at low speed (two speed windings).	-	-	-	-	-	-	-	-	-	-	-	•	•	-	-	-

○ = Included as standard | • = Available as option | - = Not applicable

Mechanical design

Motor frame and drain holes

—
01 As standard, motor sizes 71 - 450 are delivered with drain holes and closable plugs.

Motor frame



The motor frame, end shields and main terminal box are made of cast iron. Feet are integrated with the frame, except for sizes 160-250 with side mounted terminal box, which have detachable feet.

Motors can be supplied for foot mounting, flange mounting, and combinations of these.

Drain holes

Motors are provided with drain holes fitted with closable plugs as standard. The plugs are made of plastic material and are delivered in open position.

When mounting arrangement differs from foot mounted IM B3, mention variant code 066 when ordering to ensure the drain plug is mounted in the lowest position.

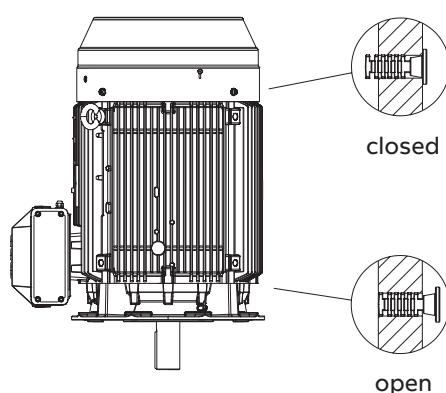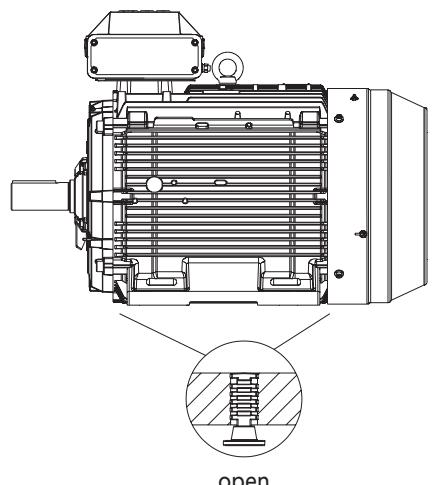

Lifting lugs

The motors are provided as standard with lifting lugs according to the table below. For improved lifting possibilities can variant code 305 be added, please refer to the variant code section for information about availability.

Frame size	Type of lugs	Foot mounted motors	Flange mounted motors
71, 80	No lugs, weight of motors is less than 25kg	-	-
90-132	Detachable eye bolt	2 pcs on top of motor diagonally placed, size M8	2 pcs on top of motor diagonally placed, size M8
160-200	Integrated in casting / detachable eye bolt	2 pcs on top of motor diagonally placed, integrated in frame casting	Locations for eye bolts: 4 pcs at N-end and 4 pcs at D-end. 2 pcs eye bolts size M12 delivered with each motor
225-250	Integrated in casting / detachable eye bolt	2 pcs on top of motor diagonally placed, integrated in frame casting	Locations for eye bolts: 4 pcs at N-end and 4 pcs at D-end. 2 pcs eye bolts size M16 delivered with each motor
280, 315	Detachable eye bolt	1 pcs close to terminal box on top, size M24	Locations for eye bolts: 4 pcs at N-end and 4 pcs at D-end, one location on top close to terminal box. 2 pcs eye bolts size M24 delivered with each motor
355	Detachable eye bolt	1 pcs close to terminal box on top, size M30	Locations for eye bolts: 4 pcs at N-end and 4 pcs at D-end, one location on top close to terminal box. 2 pcs eye bolts size M30 delivered with each motor
400	Detachable eye bolt	1 pcs close to terminal box on top, size M36	Locations for eye bolts: 4 pcs at N-end and 4 pcs at D-end, one location on top close to terminal box. 2 pcs eye bolts size M36 delivered with each motor
450	Detachable eye bolt	Locations for eye bolts: 4 pcs at N-end and 4 pcs at D-end, one location on top close to terminal box. 3 pcs eye bolts size M42 delivered with each motor	Locations for eye bolts: 4 pcs at N-end and 4 pcs at D-end, one location on top close to terminal box. 2 pcs eye bolts size M42 delivered with each motor

Mechanical design

Heating elements

Heating elements are installed into windings to keep them free of corrosion in humid conditions. The required power of heating elements is shown in the table. You can order heating elements with variant code 450 or 451.

Motor size	71	80	90	100	112	132	160	180
Power (W)	25	25	25	25	25	25	25	25

Motor size	200	225	250	280	315	355	400	450
Power (W)	25	60	60	60	2x60	2x60	2x60	2x100

Mechanical design

Bearings

Process performance motors are normally fitted with single-row deep-groove ball bearings, as shown in the table below.

If the bearing at the D-end is replaced with a roller bearing (NU- or NJ-), higher radial forces can be handled. Roller bearings are suitable for belt-drive applications and can be ordered with variant code 037.

When high axial forces are involved, angular-contact ball bearings should be used. When ordering a motor with an angular-contact ball bearing, also specify the method of mounting and the direction and magnitude of axial force to ensure that the optimal bearing system design is selected.

The variant codes for ordering angular-contact ball bearings at D-end are 058 and 060.

Standard and alternative designs

Shaft height	Product design code	Pole number	Standard design		Alternative designs	
			Deep groove ball bearings		Roller bearings (037)	Angular contact ball bearings (058, 060)
Drive end	Non-drive end	Drive end	Drive end			
71	B, K	2-8	6203-2Z/C3	6202-2Z/C3	NU 203 ECP/C3	7203 B
80	B, K	2-8	6204-2Z/C3	6203-2Z/C3	NU 204 ECP/C3	7204 B
90	B, K	2-8	6205-2Z/C3	6204-2Z/C3	NU 205 ECP/C3	7205 B
100	B, K	2-8	6206-2Z/C3	6205-2Z/C3	NU 206 ECP/C3	7206 B
100	M	2-8	6206-2Z/C3	6206-2Z/C3	NU 206 ECP/C3	7206 B
112	B	2-8	6206-2Z/C3	6205-2Z/C3	NU 206 ECP/C3	7206 B
112	K, M	2-8	6206-2Z/C3	6206-2Z/C3	NU 206 ECP/C3	7206 B
132	B, K, M	2-8	6208-2Z/C3	6208-2Z/C3	NU 208 ECP/C3	7208 B
160	G, K, M	2-12	6309/C3	6209/C3	NU 309 ECP/C3	7309 B
180	G, K, M	2-12	6310/C3	6209/C3	NU 310 ECP/C3	7310 B
200	G, K, M	2-12	6312/C3	6210/C3	NU 312 ECP/C3	7312 B
225	G, K, M	2-12	6313/C3	6212/C3	NU 313 ECP/C3	7313 B
250	G, K, M	2-12	6315/C3	6213/C3	NU 315 ECP/C3	7315 B
280	G, L, K, M, N	2	6316/C3	6316/C3	On request	7316 B
280	G, L, K, M, N	4-12	6316/C3	6316/C3	NU 316 ECP/C3	7316 B
315	G, L, K, M, N	2	6316/C3	6316/C3	On request	7316 B
315	G, L, K, M, N	4-12	6319/C3	6316/C3	NU 319 ECP/C3	7319 B
355	G, L, K, M	2	6316M/C3	6316M/C3	On request	7316 B
355	G, L, K, M	4-12	6322/C3	6316/C3	NU 322 ECP/C3	7322 B
400	G, M	2	6317M/C3	6317M/C3	On request	7317 B
400	G, M	4-12	6324/C3	6319/C3	NU 324 ECP/C3	7324 B
450	G, M	2	6317M/C3	6317M/C3	On request	7317 B
450	G, M	4-12	6326M/C3	6322/C3	NU 326 ECP/C3	7326 B

Bearing life and lubrication

Bearing life

The nominal life L_{10h} of a bearing is defined according to ISO 281 as the number of operating hours achieved or exceeded by 90 % of identical bearings in a large test series under specified conditions. 50 % of bearings achieve at least five times this lifetime.

The calculated bearing life L_{10h} for power transmission by means of coupling is for horizontally mounted motors in sizes up to 315 $\geq 100,000$ hours.

Lubrication

On delivery, motors in frame size 160 and above are prelubricated with high-quality grease. Before the first start-up, read the instructions for relubrication and recommended grease in the Manual for low voltage motors delivered together with the motor, or see the lubrication plate on the motor.

Motors with bearings greased for life

Motors in frame sizes 71 - 132 are equipped with bearings greased for life, while this is also available as an option for frame sizes 160 - 250. Bearings are lubricated with high-quality, high-temperature grease. Bearing types are stated on the rating plate.

Lubrication intervals in duty hours for ball bearings

Frame size	Amount of grease g/bearing	Amount of grease g/N-end	Output kW	Speed 3600 r/min	Speed 3000 r/min	Output kW	Speed 1800 r/min	Speed 1500 r/min	Output kW	Speed 1000 r/min	Output kW	Speed 500-900 r/min
Ball bearings												
Lubrication intervals in duty hours												
160												
160												
180												
180												
200												
200												
225												
250												
250												
250												
280												
280												
315												
315												
355												
355												
400												
400												
450												
450												

The approximate lifetime of bearings in four-pole motors is about 40 000 duty hours. Lifetime is subject to the load conditions of the application run by the motor.

Motors with relubrication nipples

In frame sizes 160 - 450, the bearing system is provided with valve discs to ease lubrication. Motors are lubricated while running.

The grease outlet opening has closing valves at both ends. These should be opened before greasing and closed 1 - 2 hours after regreasing. This ensures that the construction is tight and bearings remain dust- and dirt-free.

A grease-collection method can be used optionally.

The following tables show lubrication intervals according to the L1 principle for various nominal speeds at a 25°C ambient temperature. These values apply to horizontally mounted motors (B3) with an 80°C bearing temperature and high-quality grease containing lithium-complex soap and mineral or PAO-oil.

Lubrication intervals in duty hours for roller bearings

Frame size	Amount of grease g/bearing	Amount of grease g/N-end	Output kW	Speed 3600 r/min	Speed 3000 r/min	Output kW	Speed 1800 r/min	Speed 1500 r/min	Output kW	Speed 1000 r/min	Output kW	Speed 500-900 r/min
Roller bearings												
Lubrication intervals in duty hours												
160	13	13	≤ 18.5	4500	6000	≤ 15	9000	10 500	≤ 11	12 000	all	12 000
160	13	13	> 18.5	3500	5000	> 15	7500	9000	> 11	11 000	all	12 000
180	15	15	≤ 22	3500	4500	≤ 22	7500	9000	≤ 15	12 000	all	12 000
180	15	15	> 22	3000	4000	> 22	7000	8500	> 15	10500	all	12 000
200	20	15	≤ 37	2750	4000	≤ 30	7000	8500	≤ 22	11 500	all	12 000
200	20	15	> 37	1500	2500	> 30	5000	6000	> 22	8000	all	10 000
225	23	20	≤ 45	2000	3000	≤ 45	6500	8000	≤ 30	11 000	all	12 000
225	23	20	> 45	750	1250	> 45	2500	3000	> 30	4000	all	5000
250	30	23	≤ 55	1000	2000	≤ 55	4500	5500	≤ 37	7500	all	9000
250	30	23	> 55	500	750	> 55	1500	2000	> 37	3000	all	3500
280	35	35	all	900	1600	-	-	-	-	-	-	-
280	40	40	-	-	all	4000	5300	all	7000	all	8500	
315	35	35	all	900	1600	-	-	-	-	-	-	-
315	55	40	-	-	all	2900	3800	all	5900	all	6500	
355	35	35	all	900	1600	-	-	-	-	-	-	-
355	70	40	-	-	all	2000	2800	all	4800	all	5400	
400	40	40	all	-	1300	-	-	-	-	-	-	-
400	85	55	-	-	all	1600	2400	all	4300	all	4800	
450	40	40	all	-	1300	-	-	-	-	-	-	-
450	95	70	-	-	all	1300	2000	all	3800	all	4400	

Axially-locked bearings

All motors with deep groove ball bearings are equipped with an axially locked bearing at the D-end, as a standard feature.

Transport locking


Motors with roller bearings or an angular-contact ball bearing are fitted with a transport lock before dispatch to prevent damage to the bearings during transport. A warning sign is attached to motors when transport locking is used.

Locking may also be fitted in other cases if severe transport conditions are expected.

Bearing seals

Motor size	Efficiency class	Product design code	Pole	Standard design		Alternative designs	
				D-end	N-end	Labyrinth seal at D-end (variant code 783)	Radial seal at D-end (variant code 072)
71	all	all	2-8	Gamma seal	Gamma seal	NA	Radial seal
80	all	all	2-8	Gamma seal	Gamma seal	NA	Radial seal
90	all	all	2-8	Gamma seal	Gamma seal	NA	Radial seal
100	all	all	2-8	Gamma seal	Gamma seal	NA	Radial seal
112	all	all	2-8	Gamma seal	Gamma seal	NA	Radial seal
132	all	all	2-8	Gamma seal	Gamma seal	NA	Radial seal
160	all	all	2-12	Gamma seal	Gamma seal	Labyrinth seal	Radial seal
180	all	all	2-12	Gamma seal	Gamma seal	Labyrinth seal	Radial seal
200	all	all	2-12	Gamma seal	Gamma seal	Labyrinth seal	Radial seal
225	all	all	2-12	Gamma seal	Gamma seal	Labyrinth seal	Radial seal
250	all	all	2-12	Gamma seal	Gamma seal	Labyrinth seal	Radial seal
280	IE2	G, N	2	Labyrinth seal	V ring	Standard	NA
280	IE3, IE4	L, K, M	2	Labyrinth seal	Labyrinth seal	Standard	NA
280	IE2	G, N	4-12	V ring	V ring	Labyrinth seal	NA
280	IE3, IE4	L, K, M	4-12	Labyrinth seal	Labyrinth seal	Standard	NA
315	IE2	G, N	2	Labyrinth seal	V ring	Standard	NA
315	IE3, IE4	L, K, M	2	Labyrinth seal	Labyrinth seal	Standard	NA
315	IE2	G, N	4-12	V ring	V ring	Labyrinth seal	NA
315	IE3, IE4	L, K, M	4-12	Labyrinth seal	Labyrinth seal	Standard	NA
315LK_	IE2	G	2-12	Labyrinth seal	V ring	Standard	NA
315LK_	IE3, IE4	L, K, M	2-12	Labyrinth seal	Labyrinth seal	Standard	NA
355	IE2	G	2-12	Labyrinth seal	V ring	Standard	NA
355	IE3, IE4	L, K, M	2-12	Labyrinth seal	Labyrinth seal	Standard	NA
400	all	G,K,M	2	Labyrinth seal	Labyrinth seal	Standard	NA
400	IE2	G	4-12	Labyrinth seal	V ring	Standard	NA
400	IE3, IE4	K,M	4-12	Labyrinth seal	Labyrinth seal	Standard	NA
450	all	G,K,M	2-12	Labyrinth seal	Labyrinth seal	Standard	NA

Standard design

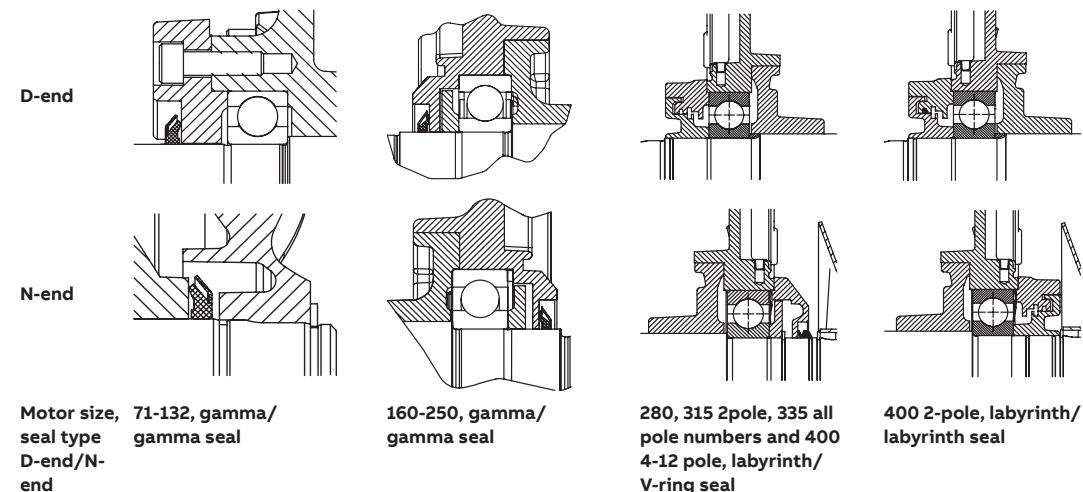

Mechanical design

Radial forces

Permissible loading on the shaft

The following table shows permissible radial forces on the shaft in Newtons, assuming zero axial force, a 25 °C ambient temperature, and normal conditions. The values are given for a calculated bearing life of 20 000 and 40 000 hours per motor size.

These calculated values further assume mounting position IM B3 (foot-mounted), with force directed sideways. In some cases, the strength of the shaft affects permissible forces.


Permissible loads of simultaneous radial and axial forces can be supplied on request.

If the radial force is applied between points X0 and Xmax, the permissible force FR can be calculated with the following formula:

$$F_R = F_{x0} - \frac{X}{E} (F_{x0} - F_{xmax})$$

Where:

E: length of the shaft extension in the standard version

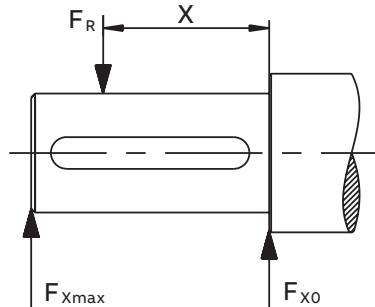

Permissible radial forces

Motor size	Poles	Length of shaft extension E (mm)	Basic design with deep groove ball bearings				Roller bearings			
			Mounting arrangement IM B3				Mounting arrangement IM B3			
			20,000 h		40,000 h		20,000 h		40,000 h	
71	2	30	540	460	420	360	1285	650	1040	650
	4	30	700	605	555	480	1615	650	1310	650
	6	30	780	665	620	530	1640	650	1450	650
	8	30	860	730	685	580	1640	600	1580	600
80	2	40	710	600	385	350	1910	865	1555	865
	4	40	940	810	725	625	2335	865	1945	865
	6	40	1060	895	840	710	2335	865	2160	865
	8	40	1185	1020	940	810	2335	865	2335	865
90	2	50	820	690	650	545	2205	1330	1790	1330
	4	50	1035	870	820	690	2715	1330	2205	1330
	6	50	1185	995	940	790	3065	1330	2490	1330
	8	50	1300	1095	1035	870	3340	1330	2715	1330
100	2	60	1130	925	900	735	2905	1900	2360	1900
	4	60	1425	1165	1135	925	3575	1900	2905	1900
	6	60	1635	1335	1295	1060	4040	1900	3280	1900
	8	60	1820	1520	1445	1205	4460	1900	3620	1900
112	2	60	1170	980	925	775	3000	1970	2435	1970
	4	60	1475	1235	1170	980	3695	1970	3000	1970
	6	60	1690	1310	1340	1120	4170	1970	3390	1970
	8	60	1860	1310	1475	1235	4550	1970	3695	1970
132	2	80	1840	1500	1460	1190	4255	3465	3455	2815
	4	80	2320	1890	1840	1500	5240	4265	4255	3465
	6	80	2660	2165	2110	1715	5915	3680	4805	3680
	8	80	2925	2380	2320	1890	6450	3680	5240	3680

Permissible radial forces

Motor size	Poles	Length of shaft extension E (mm)	Ball bearings				Roller bearings			
			20,000 h		40,000 h		20,000 h		40,000 h	
			F _{x0} (N)	F _{xmax} (N)						
160 MLA	2	110	3540	2740	2955	2285	7100	4300	6140	4300
	4	110	4000	3100	3325	2570	8000	4300	6870	4300
	6	110	4170	3200	3440	2655	8600	4300	7270	4300
	8	110	4600	3585	3855	2985	9300	4300	7955	4300
160 MLB	2	110	3540	2740	2955	2270	7085	4300	6070	4300
	4	110	4085	3300	3370	2725	8300	4300	7055	4300
	6	110	4100	3355	3400	2755	8600	4300	7300	4300
	8	110	4200	3270	3455	2670	9000	4300	7570	4300
160 MLC	2	110	3400	2600	2855	2200	6800	4300	5885	4300
	4	110	3700	3000	3070	2485	7800	4300	6640	4300
	6	110	3600	2900	2870	2325	8000	4300	6700	4300
	8	110	4170	3370	3370	2725	9000	4300	7585	4300
160 MLD	2	110	3585	2900	3000	2440	7100	4300	6140	4300
	4	110	3400	2755	2755	2240	7600	4300	6370	4300
160 MLE	2	110	3185	2570	2640	2140	6785	4300	5770	4300
	2	110	4100	3385	3455	2825	8125	5500	7025	5500
	4	110	4270	3485	3525	2885	8600	5500	7300	5500
	6	110	4700	3800	3855	3155	9400	5500	7900	5500
180 MLB	2	110	4785	3900	3870	3170	9800	5500	8255	5500
	4	110	4170	3400	3470	2825	7900	5500	6770	5500
	6	110	4370	3570	3525	2885	9000	5500	7600	5500
180 MLC	4	110	3700	3055	3010	2470	7900	5500	6655	5440
200 MLA	2	110	5600	4685	4700	3925	10900	9100	9470	7900
	4	110	6285	5200	5240	4370	12500	9550	10700	8900
	6	110	6800	5700	5700	4770	13600	9550	11670	9550
	8	110	6800	5700	5600	4685	14100	9550	12000	9550
200 MLB	2	110	5670	4700	4700	3925	11000	9200	9500	7900
	4	110	5700	4700	4700	3925	12000	9550	10185	8500
	6	110	6400	5370	5300	4425	13200	9550	11200	9385
200 MLC	2	110	5000	4185	4185	3500	10400	8700	8900	7455
	4	110	5400	4500	4425	3685	11600	9550	9800	8200
	6	110	5800	4885	4740	3955	12500	9550	10600	8800
200 MLD	2	110	4985	4170	4170	3485	10400	8700	8900	7400
225 SMA	2	110	6400	5400	5355	4500	13300	10700	11500	9700
	4	140	7300	5900	6155	4970	15400	10250	13200	10250
	6	140	7600	6200	6370	5140	16400	10250	14000	10250
	8	140	8500	6900	7100	5725	17900	10250	15300	10250
225 SMB	2	110	6100	5185	5155	4340	13000	10700	11200	9455
	4	140	7085	5700	5885	4755	15100	10250	12900	10250
	6	140	7100	5700	5840	4700	16000	10250	13500	10250
	8	140	8000	6485	6600	5340	17300	10250	14700	10250
225 SMC	2	110	5600	4700	4685	3940	12600	10600	10770	9070
	4	140	6400	5200	5300	4285	14500	10250	12385	10000
225 SMD	2	110	5500	4640	4600	3880	12420	10460	10640	8960
	4	140	5800	4700	4725	3800	13500	10250	11400	9270
250 SMA	2	140	7700	6285	6500	5285	17100	10900	14900	10900
	4	140	8700	7000	7300	5900	19800	13800	17000	13785
	6	140	9400	7600	7800	6355	21600	13800	18400	13800
	8	140	9600	7800	7900	6400	22700	13800	19300	13800
250 SMB	2	140	7100	5800	6000	4885	16700	10900	14400	10900
	4	140	7800	6300	6470	5240	18900	13800	16200	13100
	6	140	8900	7200	7355	5955	21200	13800	18000	13800
250 SMC	2	140	6800	5500	5670	4600	16300	10900	14000	10900
	4	140	7400	6000	6055	4900	18100	13800	15400	12485
	6	140	8200	6600	6670	5400	20300	13800	17200	13800

Permissible radial forces

Motor size	Poles	Length of shaft extension E (mm)	Ball bearings				Roller bearings			
			20,000 h		40,000 h		20,000 h		40,000 h	
			F _{x0} (N)	F _{xmax} (N)						
280 SM_	2	140	7300	6000	5800	4900	20400	6000	16500	6000
	4	140	9200	7800	7300	6200	25100	9200	20300	9200
	6	140	10600	8900	8400	7000	28300	9200	23000	9200
	8	140	11700	9200	9200	7800	30900	9200	25100	9200
280 ML_	2	140	7400	6200	5800	5000	20600	6200	16700	6200
	4	140	9200	7900	7300	6200	25000	9500	20300	9500
	6	140	10500	9000	8300	7100	28300	9400	22900	9400
	8	140	11600	9500	9200	7900	30800	9500	25000	9500
315 SM_	2	140	7300	6000	5800	4950	20300	6000	16500	6000
	4	170	11400	9400	9000	7450	32500	9600	26600	9600
	6	170	13000	9600	10300	8500	37000	9600	30000	9600
	8	170	14400	9600	11400	9400	40300	9600	32700	9600
315 ML_	2	140	7400	6400	5850	5050	20600	5850	16700	5850
	4	170	11500	9700	9100	7650	32700	13600	26500	13600
	6	170	13200	11100	10400	8800	36900	13600	29900	13600
	8	170	14500	12200	11500	9700	40200	13600	32600	13600
315 LK_	2	140	7400	6550	5800	5150	20800	5550	16800	5550
	4	170	11500	10000	9100	7850	33100	13350	26800	13350
	6	170	13200	11400	10450	9050	37300	13350	30300	13350
	8	170	14600	12600	11550	10000	40800	13350	33100	13350
355 SM_	2	140	7350	6450	5750	5050	20600	7200	16700	7200
	4	210	15200	12600	12000	9950	45500	14000	36900	14000
	6	210	17500	14000	13800	11400	51400	14000	41700	14000
	8	210	19300	14000	15250	12600	56000	14000	45500	14000
355 ML_	2	140	7350	6550	5750	5100	20800	6750	16800	6750
	4	210	15300	12900	12000	10100	45900	13600	37200	13600
	6	210	17600	13600	13900	11600	51500	13600	42100	13600
	8	210	19400	13600	15300	12900	56000	13600	45900	13600
355 LK_	2	140	7350	6650	5650	5100	21000	6550	17000	6550
	4	210	15200	13000	11850	10200	46000	13000	37300	13000
	6	210	17500	13000	13700	11900	52000	13000	42000	13000
	8	210	19400	13000	15200	13000	56500	13000	46000	13000
400 L_	2	170	7650	6850	4400	3900	23900	9050	19350	9050
	4	210	15600	13550	12150	10550	52500	16000	43300	16000
	6	210	17800	15450	13850	12000	60000	16000	48800	16000
	8	210	19700	16000	15350	13350	65700	16000	53200	16000
400 LK_	2	170	7650	6850	4400	3900	23900	9050	19350	9050
	4	210	15600	11500	12150	10550	52500	11500	43300	11500
	6	210	17800	11500	13850	11500	60000	11500	48800	11500
	8	210	19700	11500	15350	11500	65700	11500	53200	11500
450 L_	2	170	7400	6700	3500	3300	24000	7500	19000	7500
	4	210	17000	15200	13000	11600	62000	25000	50000	25000
	6	210	19000	17000	14000	13000	70000	24000	56000	24000
	8	210	21300	19000	16500	14600	76000	23000	62000	23000

Mechanical design

Axial forces


—
01 Mounting arrangement IM B3.

02 Mounting arrangement IM V1.

The following tables present permissible axial forces on the shaft in Newtons, assuming zero radial force, a 25 °C ambient temperature, and normal conditions. The values are given for a calculated bearing life of 20,000 and 40,000 hours per motor size.

At 60 Hz, the values must be reduced by 10 percent, and for two-speed motors, the higher speed determines permissible axial force. Permissible loads of simultaneous radial and axial forces can be supplied on request.

For axial force F_{AD} , it is assumed that the D-bearing is locked with a locking ring.

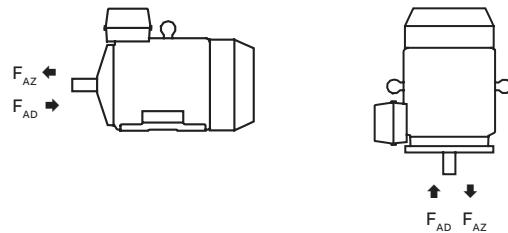

—
01

—
02

Permissible axial forces

Motor size	Poles	Length of shaft extension E (mm)	Mounting arrangement IM B3				Mounting arrangement IM V1			
			Deep groove ball bearings		Deep groove ball bearings		Deep groove ball bearings		Deep groove ball bearings	
			20,000 h	40,000 h	20,000 h	40,000 h	20,000 h	40,000 h	20,000 h	40,000 h
71	2	30	615	285	505	175	630	275	520	165
	4	30	760	430	615	285	790	410	645	265
	6	30	870	540	695	365	890	525	720	355
	8	30	960	630	765	435	985	615	785	415
80	2	40	880	300	735	155	915	280	770	135
	4	40	1075	495	880	300	1130	455	935	260
	6	40	1215	635	985	405	1270	600	1040	370
	8	40	1330	750	1070	490	1400	705	1140	450
90	2	50	780	500	620	340	840	455	680	300
	4	50	985	705	775	495	1070	650	860	440
	6	50	1140	860	890	610	1225	800	975	555
	8	50	1265	985	985	705	1355	925	1075	645
100	2	60	925	570	735	350	1285	510	1060	290
	4	60	1480	860	1190	570	1600	780	1305	490
	6	60	1690	1070	1350	730	1815	995	1470	650
	8	60	1865	1245	1480	860	1995	1160	1610	775

Permissible axial forces

Motor size	Poles	Length of shaft extension E (mm)	Mounting arrangement IM B3				Mounting arrangement IM V1			
			Deep groove ball bearings				Deep groove ball bearings			
			20,000 h		40,000 h		20,000 h		40,000 h	
			F _{AD} (N)	F _{AZ} (N)	F _{AD} (N)	F _{AZ} (N)	F _{AD} (N)	F _{AZ} (N)	F _{AD} (N)	F _{AZ} (N)
112	2	60	1155	595	935	375	1290	505	1070	280
	4	60	1445	885	1155	595	1595	785	1300	495
	6	60	1655	1095	1315	755	1810	995	1465	650
	8	60	1830	1270	1445	885	1985	1170	1600	780
132	2	80	1765	965	1420	620	1925	855	1580	510
	4	80	2210	1410	1755	955	2420	1270	1965	815
	6	80	2535	1735	2000	1200	2770	1580	2235	1045
	8	80	2800	2000	2205	1405	3055	1835	2455	1235
160 MLA	2	110	2850	2850	2325	2325	3100	2578	2570	2048
	4	110	3450	3450	2775	2775	3820	3150	3120	2450
	6	110	3690	3690	2970	2970	4100	3410	3325	2635
	8	110	4155	4155	3315	3315	4440	3845	3640	3045
160 MLB	2	110	2850	2850	2325	2325	3120	2570	2580	2030
	4	110	3435	3435	2760	2760	3880	3085	3180	2385
	6	110	3600	3600	2880	2880	4120	3240	3360	2480
	8	110	3750	3750	2970	2970	4140	3450	3340	2650
160 MLC	2	110	2775	2775	2280	2280	3080	2500	2560	1980
	4	110	3150	3150	2535	2535	3620	2770	2985	2135
	6	110	3135	3135	2490	2490	3680	2700	3005	2025
	8	110	3675	3675	2910	2910	4240	3260	3445	2465
160 MLD	2	110	2865	2865	2330	2330	3220	2540	2665	1985
	4	110	2900	2900	2320	2320	3420	2470	2820	1870
160 MLE	2	110	2500	2500	2025	2025	2900	2150	2420	1670
	4	110	3300	3300	2700	2700	3660	2940	3060	2340
180 MLA	2	110	3600	3600	2920	2920	4160	3150	3460	2450
	4	110	4140	4140	3320	3320	4800	3675	3940	2815
	6	110	4220	4220	3360	3360	4960	3740	4040	2820
	8	110	3340	3340	2725	2725	3760	2960	3125	2320
180 MLB	2	110	3580	3580	2900	2900	4220	3095	3500	2375
	4	110	3800	3800	3040	3040	4500	3285	3700	2485
	6	110	3220	3220	2560	2560	3880	2660	3220	2000
180 MLC	2	110	4460	4460	3640	3640	5000	3965	4200	3125
	4	110	5000	5260	4260	4260	5000	4680	5000	3640
	6	110	5000	5480	4720	4720	5000	5265	5000	4065
	8	110	5880	4700	4700	5000	5000	5195	5000	3955
200 MLB	2	110	4440	4440	3620	3620	5000	3905	4220	3085
	4	110	4720	4720	3840	3840	5000	4060	4700	3120
	6	110	5000	5480	4420	4420	5000	4800	5000	3660
200 MLC	2	110	3940	3940	3180	3180	4600	3385	3880	2665
	4	110	4480	4480	3620	3620	5000	3775	4520	2875
	6	110	4980	4980	3980	3980	5000	4165	5000	3105
200 MLD	2	110	3940	3940	3200	3200	4660	3370	3925	2635

Permissible axial forces

Motor size	Poles	Length of shaft extension E (mm)	Mounting arrangement IM B3				Mounting arrangement IM V1			
			Deep groove ball bearings				Deep groove ball bearings			
			20,000 h		40,000 h		20,000 h		40,000 h	
			F _{AD} (N)	F _{AZ} (N)	F _{AD} (N)	F _{AZ} (N)	F _{AD} (N)	F _{AZ} (N)	F _{AD} (N)	F _{AZ} (N)
225 SMA	2	110	4980	4980	4060	4060	5000	4375	4780	3455
	4	140	5000	6080	4920	4920	5000	5445	5000	4225
	6	140	5000	6520	5000	5260	5000	5735	5000	4395
	8	140	5000	7420	5000	5960	5000	6535	5000	5095
225 SMB	2	110	4860	4860	3960	3960	5000	4245	4780	3345
	4	140	5000	5880	4780	4780	5000	5175	5000	3995
	6	140	5000	6020	4840	4840	5000	5155	5000	3915
	8	140	5000	6940	5000	5560	5000	6055	5000	4635
225 SMC	2	110	4380	4380	3540	3540	5000	3670	4440	2900
	4	140	5000	5240	4260	4260	5000	4445	5000	3425
225 SMD	2	110	4320	4320	3480	3480	5000	3590	4400	2790
	4	140	4800	4800	3820	3820	5000	3895	5000	2935
250 SMA	2	140	6000	6080	4920	4920	6000	5345	5840	4225
	4	140	6000	7140	5820	5820	6000	6300	6000	4920
	6	140	6000	7880	6000	6380	6000	6950	6000	5350
	8	140	6000	8200	6000	6600	6000	7125	6000	5385
250 SMB	2	140	5620	5620	4540	4540	6000	4830	5640	3810
	4	140	6000	6320	5100	5100	6000	5325	6000	4085
	6	140	6000	7480	6000	6040	6000	6370	6000	4830
250 SMC	2	140	5260	5260	4220	4220	6000	4395	5400	3415
	4	140	5960	5960	4760	4760	6000	4900	6000	3700
	6	140	6000	6860	5520	5520	6000	5575	6000	4135
280 SM_	2	140	6200	4250	4900	2900	7550	3150	6200	1800
	4	140	8000	6000	6250	4250	9600	4550	7800	2750
	6	140	7250	9250	7150	5150	11150	5500	9000	3350
	8	140	10300	8300	7950	5950	12200	7000	9850	4700
280 ML_	2	140	6100	4100	4800	2800	8150	2750	6800	1400
	4	140	7800	5800	6000	4000	10450	4050	8650	2250
	6	140	8950	6950	6900	4900	12350	4750	10250	2600
	8	140	10000	8000	7700	5700	13450	5800	11050	3450
315 SM_	2	140	6180	4200	4850	2850	7950	2600	6600	1300
	4	170	9400	7400	7250	5250	11750	5500	9550	3300
	6	170	10900	8900	8350	6350	13600	6300	11050	3750
	8	170	12000	10000	9200	7000	15350	7900	12450	5000
315 ML_	2	140	6050	4050	4750	2750	8650	2300	7300	1)
	4	170	9250	7250	7100	5100	12500	5050	10300	2900
	6	170	10650	8650	8100	6100	14900	5800	12350	3250
	8	170	11500	9900	8900	6800	15400	6300	13600	3400
315 LK_	2	140	6000	3950	4650	2650	9100	1350	7750	1)
	4	170	9100	7150	7000	5000	13100	3850	10900	1700
	6	170	10500	8500	7950	5950	15700	4100	13100	1550
	8	170	11750	9750	8900	6900	16900	6300	14100	3450

Permissible axial forces

Motor size	Poles	Length of shaft extension E (mm)	Mounting arrangement IM B3				Mounting arrangement IM V1			
			Deep groove ball bearings				Deep groove ball bearings			
			20,000 h		40,000 h		20,000 h		40,000 h	
355 SM_	2	140	3050	6850	1750	5550	6350	4250	4950	2900
	4	210	8600	12400	5900	9700	13250	8600	10450	5850
	6	210	10550	14350	7300	11100	15650	9580	12350	6270
	8	210	12200	16000	8550	12350	17350	12500	13600	8900
355 ML_	2	140	2900	6700	1600	5400	7100	3700	5750	2350
	4	210	8360	12150	5650	9450	14600	7950	11850	5150
	6	210	10100	13900	6900	10700	18050	8600	14700	5300
	8	210	12000	15800	7300	11000	21100	11650	17000	7600
355 LK_	2	140	2650	6450	1350	5150	8250	2650	6900	1300
	4	210	8200	12000	5450	9250	15650	6600	12850	3800
	6	210	9900	13700	6700	10500	19100	7050	15800	3750
	8	210	11450	15250	7800	11600	21200	8700	17500	5000
400 L, LK_	2	170	2150	7150	¹⁾	5800	8650	2150	7220	¹⁾
	4	210	7100	13100	4300	10300	16050	6400	13150	3400
	6	210	8850	14850	5500	11500	18450	6750	15100	3400
	8	210	10450	16450	6750	12750	20100	8350	16450	4700
450 L_	2	170	1800	6800	¹⁾	5500	11500	¹⁾	10000	¹⁾
	4	210	7600	13500	4500	10500	20000	4400	17700	1200
	6	210	9000	15000	5600	11500	26000	3700	22200	¹⁾
	8	210	10800	16800	7000	12900	27800	5500	23700	1350

¹⁾ On request.

Terminal box

Standard terminal box

Degree of protection and mounting options

The degree of protection for the standard terminal box is IP 55. By default, terminal boxes are mounted on top of the motor at the D-end. In motor sizes 71 - 132, the terminal box is integrated in the motor frame. On request, the terminal box can also be mounted on the left or right side regardless of the motor size (see Mounting options).

Turnability

The standard terminal boxes for motor sizes 160-315 can be turned 4*90°, and in sizes 355-450, 2*180° after delivery. For sizes 355-450, it is also possible to mount a terminal box with an opening towards the D or N-end, using the relevant variant codes when ordering, this is needed to get the terminal block turned in the right position. For motors in size 71-132, a 4*90° turnable terminal box is optional- this can be ordered with variant code 400.

Cable entries

The terminal box is provided with tapped holes for cable glands. No cable glands are included as standard, the entry holes are closed with blanking plugs made of plastic. Very large motors have an angle adapter between the terminal box and the cable gland. Please refer to the table on the next page for further information about the amount and size of threaded holes, plugs and cable sealing units provided as standard.

Different types of cable glands are available as an option. Please refer to the terminal box alternatives section for more details.

Cable type and terminations If no cable type is specified in the order, it will be a PVC-insulated non-armored cable, and its termination parts are determined as shown in the following table.

Terminations are suitable for copper and aluminum cables. Cables are connected to terminals by cable lugs, which are not included in the delivery.

Ordering

To ensure the delivery of desired terminations for the motor, state the cable type, quantity, size, and outer diameter when ordering. Non-standard designs of terminal boxes, such as non-standard size or higher degree of protection, are available as options.

See section Variant codes for all available options.

Standard delivery

Standard delivery if no other information is provided.

Shaft height	Product design code	Voltage code	Pole number	Terminal box type	Size of gland plate opening in the terminal box	45° angle adapter	Amount and size of threaded plugged holes	Max. connectable core cross section mm ² /phase	Number and size of terminal bolts	Earthing in the main terminal box
71	B	S, D, E	2-8	integrated	-	-	2xM16x1.5	1x2.5	6xM4	M4
80	B, K	S, D, E	2-8	integrated	-	-	2xM25x1.5	1x4	6xM4	M4
90	B, K	S, D, E	2-8	integrated	-	-	2xM25x1.5	1x6	6xM5	M4
100	B, K	S, D, E	2-8	integrated	-	-	2x M32x1.5	1x10	6xM5	M4
100	M	S, D, E	2-8	integrated	-	-	2x M32x1.5	1x10	6xM5	M5
112	B, K, M	S, D, E	2-8	integrated	-	-	2x M32x1.5	1x10	6xM5	M5
132	B, K, M	S, D, E	2-8	integrated	-	-	2x M32x1.5	1x10	6xM5	M5
160	G, K, M	S, D, E	2-8	63	B	-	2xM40x1.5	1x35	6xM6	M6
180	G, K, M	S, D, E	2-8	63	B	-	2xM40x1.5	1x35	6xM6	M6
200 - 250	G, K, M	S, D, E	2-8	160	C	-	2xM63x1.5	1x70	6xM10	M6
280	G, L, K, M, N	S, D, E	2-8	210	C	-	2xM63x1.5	2x150	6xM12	2 x M10
280ML_	G, L, K, M, N	D, E	2-4	370	D	-	2xM63x1.5	2x240	6xM12	2 x M10
315SM_, ML_	G, L, K, M, N	D, E	2-8	370	D	-	2xM63x1.5	2x240	6xM12	2 x M10
315LKA, LKB	G, L, K, M, N	D, E	2-4	370	D	-	2xM63x1.5	2x240	6xM12	2 x M10
315LKC	G, L, K, M, N	D, E	2-4	750	E	-	2xM75x1.5	4x240	6xM12	2 x M10
315LK_	G, L, K, M, N	D, E	6-8	370	D	-	2xM63x1.5	2x240	6xM12	2 x M10
355SMA - SMC	G, L, K, M	D	2-4	750	E	-	2xM75x1.5	4x240	6xM12	2 x M10
355SMA	G, L, K, M	E	2-4	370	D	-	2xM63x1.5	2x240	6xM12	2 x M10
355SMA, SMB	G, L, K, M	D, E	6-8	370	D	-	2xM63x1.5	2x240	6xM12	2 x M10
355SMC	G, L, K, M	D	6	750	E	-	2xM75x1.5	4x240	6xM12	2 x M10
355SMC	G, L, K, M	E	6	370	D	-	2xM63x1.5	2x240	6xM12	2 x M10
355SMC	G, L, K, M	D, E	8	370	D	-	2xM63x1.5	2x240	6xM12	2 x M10
355MLA, MLB	G, L, K, M	D, E	2-6	750	E	-	2xM75x1.5	4x240	6xM12	2 x M10
355MLA, MLB	G, L, K, M	D	8	750	E	E-2D	4xM75x1.5	4x240	6xM12	2 x M10
355MLA, MLB	G, L, K, M	E	8	370	D	-	2xM63x1.5	2x240	6xM12	2 x M10
355LK_	G, L, K, M	D, E	2-8	750	E	-	2xM75x1.5	4x240	6xM12	2 x M10
400	G, M	D, E	2-6	750	E	E-2D	4xM75x1.5	4x240	6xM12	2 x M10
400LA, LB	G, M	D, E	8	750	E	E-2D	4xM75x1.5	4x240	6xM12	2 x M10
400LC	G, M	D, E	8	750	E	E-2D	4xM75x1.5	4x240	6xM12	2 x M10
450 LA	G, M	D	2-4	1200	E	E-2D	4xM75x1.5	6x240	6xM12	4 x M12
450 LA	G, M	D	6-8	750	E	E-2D	4xM75x1.5	4x240	6xM12	2 x M10
450 LA	G, M	E	2-8	750	E	E-2D	4xM75x1.5	4x240	6xM12	2 x M10
450 LB, LC	G, M	D, E	2-4	1200	E	E-2D	4xM75x1.5	6x240	6xM12	4 x M12
450 LB, LC	G, M	D	6	1200	E	E-2D	4xM75x1.5	6x240	6xM12	4 x M12
450 LB, LC	G, M	D, E	8	750	E	E-2D	4xM75x1.5	4x240	6xM12	2 x M10

Auxiliary cable entries	Pole number	Amount and size of threaded plugged holes	Max. connectable core cross section mm ² /phase
71-132	all	-	-
160-450	all	2x M20x1.5	1x 2.5

Shaft height	Product design code	Earthing on frame
71-100	B, K, M	M4
112	B	M4
112	K, M	M5
132	all	M5
160-250	all	M6 (with clamp)
280-400	all	M10
450	all	M10

Terminal box

Terminal box dimensions

—
01 Terminal box type 63
and 160.


02 Terminal box types 210
and 370.

03 Terminal box type 750
+ adapter.


04 Terminal box type
1200 + adapter.

For motor sizes 71 to 132 the terminal box is integrated in motor frame and the dimensions for terminal boxes can be found in the motor dimension drawings in ABB Library.


To match the correct terminal box with motor sizes 160 - 450, find the motor type and correspondent terminal box type on the previous page. The box types and their dimensions are presented on this page.

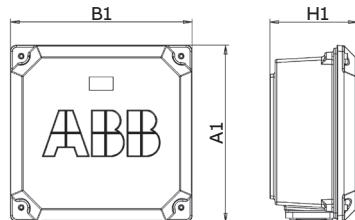


—
01

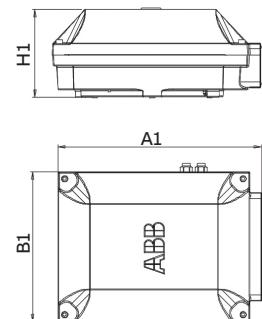

—
02

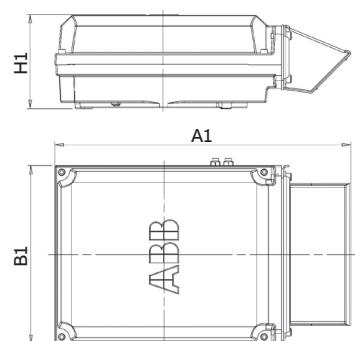


—
03

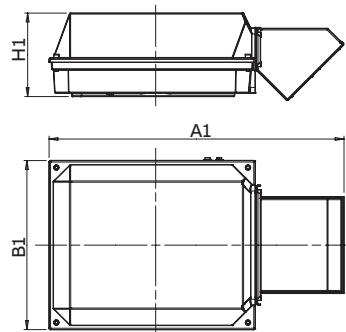

—
04

Terminal box types	A1	B1	H1	Gland plate opening
63	248	248	109	B
160	291	302	154	C
210	416	306	177	C
370	451	347	200	D
750 with E-D adapter	686	413	219	D
750 without E-D	523	413	219	E
750 with E-2D adapter	826	413	219	2xD
1200 with E-2D adapter	1000	578	285	2xD
1200 without E-2D adapter	697	578	285	E
1200 with E-E2 adapter	1195	578	285	2xE
1200 with E-3D adapter	1250	578	285	3xD

Dimensions for terminal box inlets
Corresponds to motor sizes 160 and above

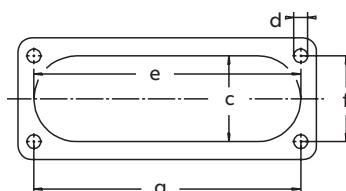

Flange opening	c mm	e mm	f mm	g mm	d thread type
B	31	120	30	120	M6
C *)	71	194	62	193	M6
C **)	67	193	62	193	M8
D	100	300	80	292	M10
E	115	370	100	360	M12

Note! The C flange is different depending on frame size

*) for frame sizes 200-225

**) for frame size 280

Terminal box

Cable glands

The motors are delivered as standard with plugged cable entries or cable sealing units as described in the previous section. There is available a broad selection of different type of cable glands, which are suitable for different types of cable and outer diameter ranges.

Size of threaded opening for cable gland	Cable gland(s) nickel plated brass, variant code 230 or 731	EMC Cable gland(s) nickel plated brass, variant code 704	Cable gland(s) plastic, variant code 375 or 376
	Cable outer diameter, mm	Cable outer diameter, mm	Cable outer diameter, mm
M16 x 1.5	4-12	4-8	4-12
M20 x 1.5	4-12	4-12	4-12
M25 x 1.5	10-18	10-18	10-18
M32 x 1.5	14-24	14-24	14-24
M40 x 1.5	22-32	22-32	22-32
M50 x 1.5	26-35	26-35	26-35
M63 x 1.5 ")	35-45	35-45	35-45
M75 x 1.5	46-62	46-62	not available

Gland plates with threaded openings for cable glands of nonstandard size

If the standard size of threaded openings for cable glands is not suitable then nonstandard size openings are also available, either by fitting the reducers to make the openings smaller or by increasing the amount or size of holes. The maximum possible size and amount for each gland plate size is listed below. Threaded openings of non-standard size can be ordered by using variant codes 554 and 727.

Gland plate size	Maximum amount and size of threaded holes
B	2 x M40
C	2 x M63
D	2 x M90 or 3 x M75
E	2 x M90 or 4 x M75

Threaded openings for cable glands with NPT thread (variant code 730)

The standard delivery for the motors are provided with openings for cable glands with metric threads as listed in the section describing the standard terminal box. If NPT threads will be needed, the variant code 730 is to be ordered. If nothing else is stated on the order, the sizes in tables below will be delivered.

Motor frame size	Main cable entries	NPT plug
80-112	1 x ¾"	-
132	2 x ¾"	1 x ¾"
160-180	2 x 1 ¼"	1 x 1 ¼"
200-250	2 x 1 ½"	1 x 1 ½"
280	2 x 2"	1 x 2"
315-450	2 x 3"	1 x 3"

Motor frame size	Cable entries for auxiliaries	NPT plug
80-112	2 x ¾"	2 x ¾"
132	1 x ¾"	1 x ¾"
160-450	2 x ¾"	2 x ¾"

Terminal box

Terminal boxes and boards

—
01 Integrated terminal box for motor sizes 71 - 132. Tapped holes for cable entries.

02 Terminal board for motor sizes 71 - 80.

03 Terminal board for motor sizes 90 - 112, IE2, and 90 - 100, IE3.

04 Terminal board for motor sizes 132, IE2, and motor sizes 112 - 132, IE3.

05 Terminal box for motor sizes 160 - 250. Connection flanges with tapped cable entries.


06 Terminal board for motor sizes 160 - 250.

The pictures below show standard terminal boxes and the corresponding terminal boards for various motor sizes.


Motor sizes 71 - 132




—
01

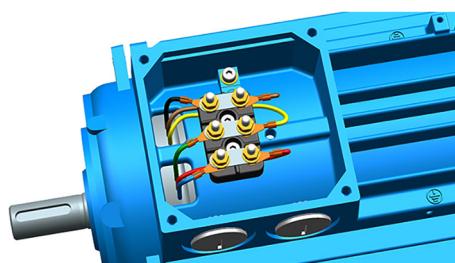

—
02

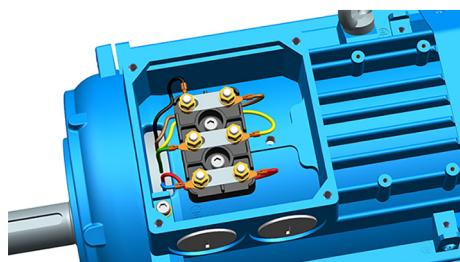


—
03

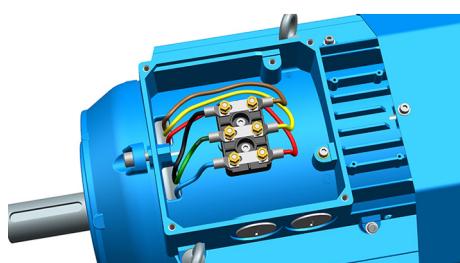

—
04

Motor sizes 160 - 250

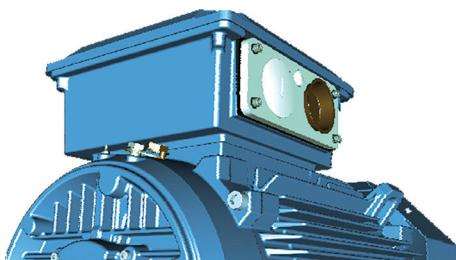

—
05




—
06

—
07 Terminal box for motor sizes 280 - 400, except LKC. Connection flange with tapped cable entries.

Motor sizes 280 - 400

08 Terminal board for motor sizes 280 - 315, except LKC.

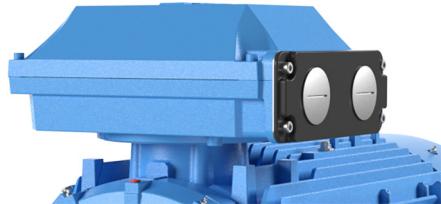

09 Terminal box for motor sizes 315LKC, 355 and 400. Sizes 400 and 355ML 2-4 poles have a 45° adapter as shown in picture 11.

—
07


10 Terminal board for motor sizes 355-400 and 315 LKC.

Motor size 450




—
11

11 Terminal box for motor sizes 450, with an adapter.

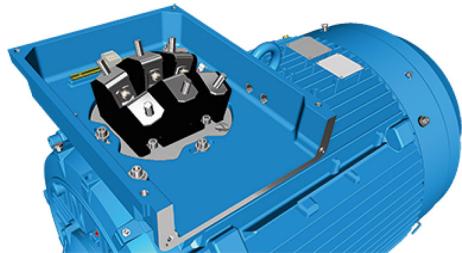

—
08


12 Terminal board for motor sizes 450.

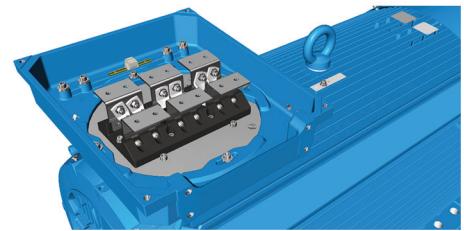

—
12



—
09

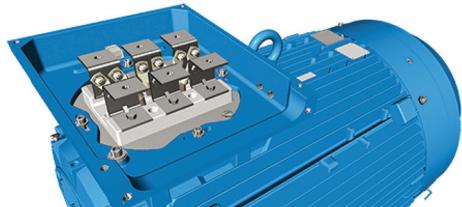

—
10

Terminal box

Terminal box alternatives

—
01 Main terminal box.

02 Adapters, Flange with glands; cable sealing end units.



01



02

Optional adapters

There is a broad selection of cable termination accessories available to allow termination of one or several cables. The most common ones are explained below.

How to order?

- Check first that the terminal box itself allows mounting of the desired cable and cores (refer to motor type and terminal box type cross reference on previous page)
- If very large cables are used it might be necessary to use a larger terminal box than standard. Select the right cable gland(s) or cable sealing end unit(s) that match outer diameter of the cable(s)
- Select appropriate adapter or flange
- Note that turning the terminal box to a non-standard position might limit the use of some adapters.

Main terminal box and maximum single core cross-section

You can select one size larger than standard terminal box if a larger single cross-section is needed. The standard sizes of the main terminal box are listed in the following table. The terminal box is named according to its current-carrying capacity, from 120 to 1200. Check also the capacity of the cable entry to make sure that the cables fit. A larger terminal box can be ordered with variant code 019.

Standard terminal box	Large terminal box	Size of opening, large box	Max single cross-section mm ² /phase
120	210	B	1 x 70
210	370	C	2 x 240
370	750	D	2 x 300
750	1200	E	4 x 500
1200	-	-	-

Ordering example

Motor Cables	200 kW, 4 pole, 400 V 50 Hz 2 pieces, outer diameter 58 mm, single core cross section 185 mm ² , clamping device needed, cables coming from below
Needed one terminal box for anticondensation heaters and another for temperature detectors, material must be cast iron.	
Motor	M3BP 315 MLA 4-pole, B3
Adapter	D-D - variant code 293
Cable sealing end unit	Variant code 278
Clamping	Variant code 231
Auxiliaries	Variant codes 380, 567, 568

Optional adapters

To allow easy termination of cables entering the terminal box from above or below, an angle adapter is recommended. These are available for motor sizes 280 and above and can also be used to allow the mounting of several cable sealing end units or gland plates. For exact suitability on a certain motor size, refer to the 'terminal box opening' column in section Standard terminal box.


Adapter						
Variant code	292	293	294	295	296	444
Suited for motor sizes	280 with gland plate opening C in the terminal box.	280-355 with gland plate opening D in the terminal box.	315-450 with gland plate opening E in the terminal box.	315-450 with gland plate opening E in the terminal box.	450 with gland plate opening E in the terminal box and terminal box type 1200.	450 with gland plate opening E in the terminal box and terminal box type 1200.
Opening to terminal box	C	D	E	E	E	E
Flange or opening for end unit	C	D	D	2 x D	3 x D	2 x E
Material	Cast iron	Cast iron	Cast iron	Steel	Steel	Steel
Notes				Included as standard delivery for frame sizes 400-450 and 355MLA, MLB 8.	Only possible on type 1200 terminal box.	Only possible on type 1200 terminal box.

Cable sealing end units

As an alternative to flanges and cable glands, cable sealing end units can be used. These allow more space for spreading the cores for easy termination.

Cable sealing end units have rubber-sealed entries for one of two main cables. In addition, there are two plugged M20 holes for auxiliary cables.

Please note that the table below is only for guidance. Due to the large amount of combinations possible between terminal box sizes, end units and adapters, not all possible combinations can be described. Please contact your ABB sales office for more detailed information.

	Small	Medium	Large
End unit			
Variant code	277	278	279
Suited for motor sizes(motor sizes vary depending on terminal box size and/or selected adapter)	280	315-450	315-450
Opening to terminal box or to adapter	C	D	D
Cable outer diameter	1 - 2 cables, 48 - 60 mm	1 - 2 cables, 48 - 60 mm	1 - 2 cables, 60 - 80 mm
Cable entry for auxiliary cable	2 x M20 plugged holes	2 x M20 plugged holes	2 x M20 plugged holes
Additional optional variants	EMC cable gland (704)	EMC cable gland (704)	EMC cable gland (704)

Auxiliary terminal box

You can equip motors from frame size 160 upward with one or several auxiliary terminal boxes for connection of auxiliaries like heaters or temperature detectors. The standard auxiliary terminal box material for motor sizes 280 - 450 is aluminum and for 160 - 250 cast iron. For 280 - 450, cast iron as box material is also available as an option.

Connection terminals are of spring-loaded type for quick and easy connection. These are suitable for up to 2.5 mm² wires.

Auxiliary terminal boxes for 280 - 450 are equipped with an earthing terminal. The first auxiliary terminal box is located on the right-hand side at D-end as standard.


The standard cable entry size is M20 for the aluminum box and for the cast iron box M16 in sizes up 71 - 132 and M20 for sizes 160 - 450. The number of entries depends on the terminal box type and the number of selected auxiliaries.

Related variant codes

380	Separate terminal box for temperature detectors, standard material
418	Separate terminal box for auxiliaries, standard material
567	Separate terminal box material: cast iron
568	Separate terminal box for heating elements, standard material
569	Separate terminal box for brake



Small auxiliary aluminum terminal box for motor sizes 280 - 450
(variant codes 418, 568, 380, 569)
The size of terminal box ordered with these codes depends on the number of accessories ordered.
80 x 125 mm, max 12 strips. Earthing size M4

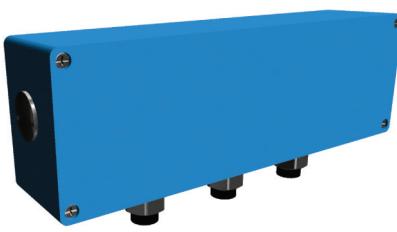

Large auxiliary aluminum terminal box for motor sizes 280 - 450.
The size of terminal box ordered with these codes depends on the number of accessories ordered.
80 x 250 mm, max 30 strips. Earthing size M4



Auxiliary cast iron terminal box
Frame size for motor sizes 160 - 250
(variant code 418):
111 x 162 mm, max. 18 strips. No earthing.




Frame size for motor sizes 280 - 450
(variant code 567):
208 x 180 mm, max 30 strips. Earthing size M6






Small auxiliary aluminum terminal box for motor sizes 71-132 (variant code: 418) 80 x 75 mm, max 8 strips. Earthing size M4

Dimension drawings



Process performance IE4 cast iron motors




Foot-mounted motor IM 1001, IM B3

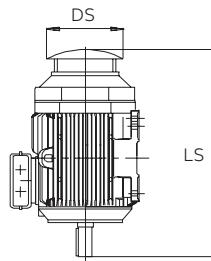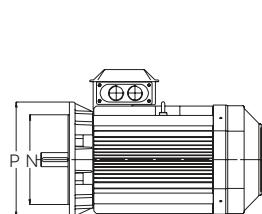


Flange-mounted motor IM 3001, IM B5



Sizes 80 to 200



Sizes 225 to 450

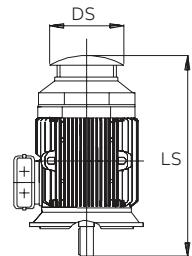

Protective roof, variant code 005

Motor size	IM1001, IMB3 and IM3001, IMB5								IM1001, IMB3						IM B5 (IM3001)						
	D 2	4-8 2	GA 2	4-8 2	F 2	4-8 2	E 2	4-8 2	L max 2	4-8 2	A	B	B1	C	HD ¹⁾	HD ²⁾	K	M	N	P	S
100 2-6	28		31		8		60		524		160	140	160	63	251		12	215	180	250	15
112 2-6	28		31		8		60		513		190	140	-	70	263		12	215	180	250	14.5
132 2-6	38		41		10		80		624		216	140	178	89	303		12	265	230	300	15
160 MLA 2	42	-	45	45	12	12	110	110	584	584	254	210	254	108	421	-	14.5	300	250	350	19
160 MLA 4-6, MLB 2-4	42	42	45	45	12	12	110	110	681	681	254	210	254	108	421	-	14.5	300	250	350	19
160 MLB 6 pole	-	42	45	45	12	12	110	110	721	721	254	210	254	108	421	-	14.5	300	250	350	19
180 2-4 pole	48	48	51.5	51.5	14	14	110	110	726	726	279	241	279	121	461	-	14.5	300	250	350	19
180 MLA 6	-	48	51.5	51.5	14	14	110	110	766	766	279	241	279	121	461	-	14.5	300	250	350	19
200	55	55	59	59	16	16	110	110	822	822	318	267	305	133	528	-	18.5	350	300	400	19
225	55	60	59	64	16	18	110	140	849	879	356	286	311	149	574	-	18.5	400	350	450	19
250	60	65	64	69	18	18	140	140	884	884	406	311	349	168	626	-	24	500	450	550	19
280 SM_	65	75	69	79.5	18	20	140	140	1088	1088	457	368	419	190	762	-	24	500	450	550	18
280 MLA	-	75	-	79.5	-	20	-	140	-	1189	457	419	457	190	-	785	24	500	450	550	15
315 SM_	65	80	69	85	18	22	140	170	1174	1204	508	406	457	216	-	-	28	600	550	660	23
315 LK_	65	90	69	95	18	25	140	170	1491	1521	508	508	560	216	-	880	28	600	550	660	23
355 SM_	70	100	74.5	106	20	28	140	210	1409	1479	610	500	560	254	958	-	35	740	680	800	23
355 ML_	70	100	74.5	106	20	20	140	210	1514	1584	610	560	630	254	944	958	35	740	680	800	23
355 LK_	70	100	74.5	106	20	28	140	210	1764	1834	610	710	900	254	958	-	35	740	680	800	23
400 L_	80	110	85	126	22	28	170	210	1851	1891	710	900	1000	224	1045	-	35	940	880	1000	28
400 LK_	80	100	85	106	22	28	170	210	1851	1891	686	710	800	280	1045	-	35	740	680	800	24
450	80	120	85	127	22	32	170	210	2147	2187	800	1000	1120	250	1293	-	42	1080	1000	1150	28

¹⁾ Terminal box 370

²⁾ Terminal box 750

Tolerances	Tolerances	
A, B	± 0.8	F ISO h9
C, CA	± 0.8	H + 0 -0.5
D	ISO k6 < Ø 50 mm	N ISO j6
	ISO m6 > Ø 50 mm	


IMB14 (IM3601)

Motor size	M	N	P	S	T
100	130	110	160	8	3.5
112	130	110	160	8	3.5
132	165	130	200	10	3.5




The table gives the main dimension in mm. For detailed drawings please see our web pages www.abb.com/motors&generators.

Dimension drawings



Process performance IE3 cast iron motors




Foot-mounted motor IM 1001, IM B3

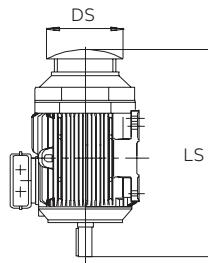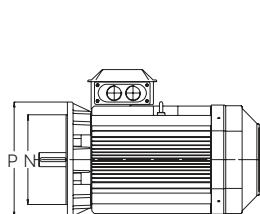


Flange-mounted motor IM 3001, IM B5



Sizes 80 to 200



Sizes 225 to 450

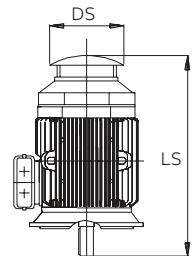

Protective roof, variant code 005

Motor size	IM1001, IMB3 and IM3001, IMB5								IM1001, IMB3						IM B5 (IM3001)					
	D 2	4-8 2	GA 2	F 2	E 2	4-8 2	L max 2	4-8 2	A	B	B1	C	HD max	K	M	N	P	S		
71	14	14	16	16	5	5	30	30	295	294	112	90	-	45	178	7	130	110	160	10
80	19	19	21.5	21.5	6	6	40	40	363	363	125	100	-	50	194	10	165	130	200	12
90SL_	24	24	27	27	8	8	50	50	356	356	140	100	125	56	218	10	165	130	200	12
90L_	24	24	27	27	8	8	50	50	390	390	140	100	125	56	218	10	165	130	200	12
100L_	28	28	31	31	8	8	60	60	381	381	160	140	-	63	247	12	215	180	250	15
100ML_	28	28	31	31	8	8	60	60	403	403	160	140	-	63	247	12	215	180	250	15
100LK_	28	28	31	31	8	8	60	60	435	435	160	140	-	63	247	12	215	180	250	15
112	28	28	31	31	8	8	60	60	442	442	190	140	-	70	258	12	215	180	250	15
132	38	38	41	41	10	10	80	80	532	532	216	140	178	89	300	12	265	230	300	15
160 1)	42	42	45	45	12	12	110	110	584	584	254	210	254	108	421	14.5	300	250	350	19
160 2)	42	42	45	45	12	12	110	110	681	681	254	210	254	108	421	14.5	300	250	350	19
180	48	48	51.5	51.5	14	14	110	110	726	726	279	241	279	121	461	14.5	300	250	350	19
200	55	55	59	59	16	16	110	110	821	821	318	267	305	133	528	18.5	350	300	400	19
225	55	60	59	64	16	18	110	140	849	879	356	286	311	149	573	18.5	400	350	450	19
250	60	65	64	69	18	18	140	140	884	884	406	311	349	168	626	24	500	450	550	19
280SM_	65	75	69	79.5	18	20	140	140	1088	1088	457	368	419	190	762	24	500	450	550	18
280ML_	65	75	69	79.5	18	20	140	140	1189	1189	457	368	419	190	785	24	500	450	550	18
315 SM_	65	80	69	85	18	22	140	170	1174	1204	508	406	457	216	852	30	600	550	660	23
315 ML_	65	90	69	95	18	25	140	170	1285	1315	508	457	508	216	852	30	600	550	660	23
315 LK_	65	90	69	95	18	25	140	170	1491	1521	508	457	508	216	880	30	600	550	660	23
355 SM_	70	100	74.5	106	20	28	140	210	1409	1479	610	500	560	254	958	35	740	680	800	23
355 ML_	70	100	74.5	106	20	28	140	210	1514	1584	610	560	630	254	958	35	740	680	800	23
355 LK_	70	100	74.5	106	20	28	140	210	1764	1834	610	710	900	254	958	35	740	680	800	23
400 L_	80	110	85	126	22	28	170	210	1851	1891	710	900	1000	224	1045	35	940	880	1000	28
400 LK_	80	100	85	106	22	28	170	210	1851	1891	686	710	800	280	1045	35	740	680	800	24
450	80	120	85	127	22	32	170	210	2147	2187	800	1000	1120	250	1293	42	1080	1000	1150	28

¹⁾ MLA 2

²⁾ Other except MLA 2


IMB14 (IM3601)

Motor size	M	N	P	S	T
71	85	70	105	6	2.5
80	100	80	120	6	3
90	115	95	140	8	3
100	130	110	160	8	3.5
112	130	110	160	8	3.5
132	165	130	200	10	3.5

The table gives the main dimension in mm. For detailed drawings please see our web pages www.abb.com/motors&generators.

Dimension drawings

Process performance IE2 cast iron motors

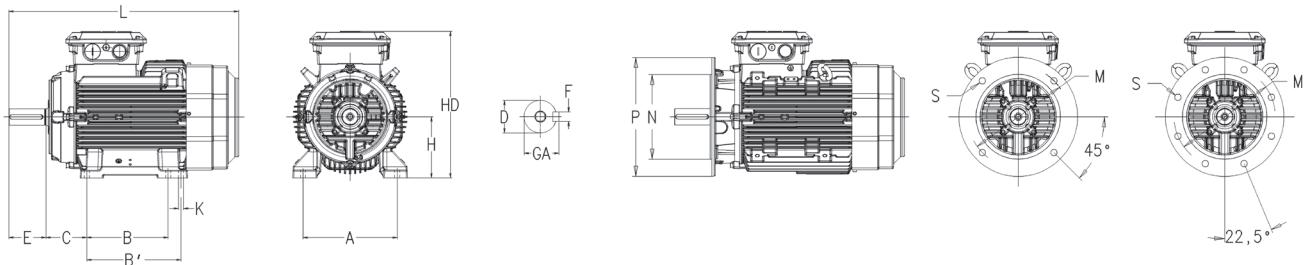

Motor size	IM1001, IMB3 and IM3001, IMB5								IM1001, IMB3						IM B5 (IM3001)					
	D 2	4-8	GA 2	4-8	F 2	4-8	E 2	4-8	L max 2	4-8	A	B	B1	C	HD max	K	M	N	P	S
71	14	14	16	16	5	5	30	30	295	294	112	90	-	45	178	7	130	110	160	10
80	19	19	21.5	21.5	6	6	40	40	363	363	125	100	-	50	194	10	165	130	200	12
90SL_	24	24	27	27	8	8	50	50	356	356	140	100	125	56	218	10	165	130	200	12
90L_	24	24	27	27	8	8	50	50	390	390	140	100	125	56	218	10	165	130	200	12
100L_	28	28	31	31	8	8	60	60	381	381	160	140	-	63	247	12	215	180	250	15
100ML_	28	28	31	31	8	8	60	60	403	403	160	140	-	63	247	12	215	180	250	15
100LK_	28	28	31	31	8	8	60	60	435	435	160	140	-	63	247	12	215	180	250	15
112	28	28	31	31	8	8	60	60	403	403	190	140	-	70	259	12	215	180	250	15
132	38	38	41	41	10	10	80	80	532	532	216	140	178	89	300	12	265	230	300	15
160 ¹⁾	42	42	45	45	12	12	110	110	584	584	254	210	254	108	421	14.5	300	250	350	19
160 ²⁾	42	42	45	45	12	12	110	110	681	681	254	210	254	108	421	14.5	300	250	350	19
180	48	48	51.5	51.5	14	14	110	110	726	726	279	241	279	121	461	14.5	300	250	350	19
200	55	55	59	59	16	16	110	110	821	821	318	267	305	133	528	18.5	350	300	400	19
225	55	60	59	64	16	18	110	140	849	879	356	286	311	149	573	18.5	400	350	450	19
250	60	65	64	69	18	18	140	140	884	884	406	311	349	168	626	24	500	450	550	19
280SM_	75	75	79.5	79.5	20	20	140	140	1053	1054	457	368	419	190	733	24	500	450	550	18.5
280ML_	65	75	69	79.5	18	20	140	140	1189	1189	457	368	419	190	785	24	500	450	550	18.5
315 SA	65	80	69	85	18	22	140	170	1088	1118	508	406	-	216	845	28	600	550	660	23
315 SM_	65	80	69	85	18	22	140	170	1190	1220	508	406	457	216	845	28	600	550	660	23
315 ML_	65	90	69	95	18	25	140	170	1285	1315	508	457	508	216	852	30	600	550	660	23
315 LK_	65	90	69	95	18	25	140	170	1491	1521	508	457	508	216	880	30	600	550	660	23
355 SM_	70	100	74.5	106	20	28	140	210	1409	1479	610	500	560	254	958	35	740	680	800	23
355 ML_	70	100	74.5	106	20	28	140	210	1514	1584	610	560	630	254	958	35	740	680	800	23
355 LK_	70	100	74.5	106	20	28	140	210	1764	1834	610	710	900	254	958	35	740	680	800	23
400 L_	80	110	85	126	22	28	170	210	1851	1891	710	900	1000	224	1045	35	940	880	1000	28
400 LK_	80	100	85	106	22	28	170	210	1851	1891	686	710	800	280	1045	35	740	680	800	24
450	80	120	85	127	22	32	170	210	2147	2187	800	1000	1120	250	1293	42	1080	1000	1150	28

¹⁾ MLA, MLB 2, MLB 8, MLC 2

²⁾ MLB 4-6, M3C 4-8, MLD, ML3

IMB14 (IM3601)

Motor size	M	N	P	S	T
71	85	70	105	6	2.5
80	100	80	120	6	3
90	115	95	140	8	3
100	130	110	160	8	3.5
112	130	110	160	8	3.5
132	165	130	200	10	3.5

Accessories


Built-in brake (variant code 412)

Brake design

Electromagnetic disc brakes are applied by the action of a set of springs and are released when voltage is applied to the brake coil.

This means that the motor will brake automatically in case of any voltage failure, as significant safety feature. The brake is always functional, irrespective of the mounting position of the brake motor.

Detailed view

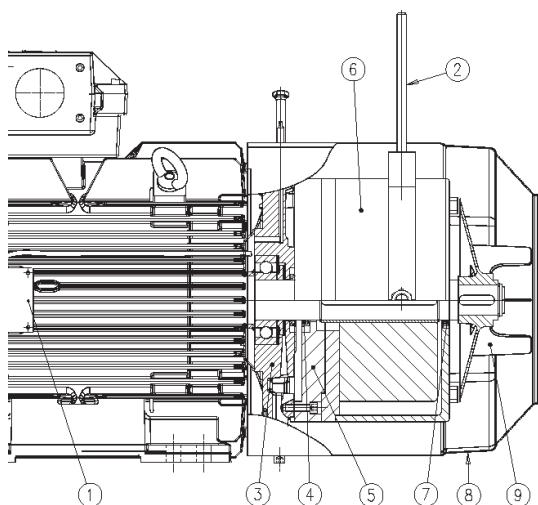

- 1 Connection box, (with rectifier, optional)
- 2 Manual release (optional)
- 3 Modified N-end shield
- 4 V-ring seal
- 5 Adapter flange for brake
- 6 Brake
- 7 V-ring seal
- 8 Fan cover
- 9 Fan

Brake disc

The brake linings are made of asbestos-free material. The linings are highly resistant to wear and have excellent thermal conductivity, providing consistent performance also in high temperatures.

The brake disc withstands a large number of braking instances and is insensitive to dust and moisture.

Note that changing from a used to a new disc will result in a different braking torque.

Replacing the brake disc

The brake disc must be replaced when the minimum permissible lining thickness has been reached. For minimum lining thickness, refer to the brake manufacturer's catalog.

Rectifier

Rectifier is a device for DC brake applications. It is highly resistant to temperature changes as well as to voltage peaks and has additional protection for the auxiliary contact of the contactor. Thanks to its compact design, it can be placed inside the motor's terminal box. Rectifier is an optional element.

Torque adjustment

Reducing the torque of the brake is possible with most brake types. Refer to the brake manufacturer's catalog or contact ABB for more information.

Manual release

Manual release bolts are provided as standard. A manual release handle is an optional element. Manual release overrides the action of brake springs as long as it is applied.

Though the manual release handle is optionally available for all motor sizes, it cannot be used in combination with the Pintsch Bamag brake type SFB.

Brake rating plates

The brake comes with two rating plates, one attached to the brake itself and another delivered loose, together with the motor. Variant code 412 is marked on the motor's rating plate (if it is listed among the five first codes on the motor order).

—
01 Foot-mounted: IM B3 (IM1001), IM B6 (IM 1051), IM B7 (IM1061), IM B8 (IM 1071), IM V5 (IM 1011), IM V6 (IM 1031).

02 Flange-mounted: IM B5 (IM 3001), IM V1 (IM 3011), IM V3 (IM 3031), IM B14 (IM 3601), IM V18 (IM 3611), IM V19 (IM 3631).

03 Foot- and flange-mounted: IM B35 (IM 2001), IM V15 (IM 2011), IM V36 (IM 2031).

Available brake types

Motors can be fitted with recommended brakes from either Pintsch Bamag or Stromag, as seen in the tables below. Other brakes can be provided on request.

Brake type	Brake torque	For motor size
Nm		
KFB 10	100	160
KFB 16	160	160 - 180
KFB 25	250	180 - 225
KFB 40	400	200 - 250
KFB 63	630	225 - 280
KFB 1000	1000	280 - 315
KFB 1600	1600	315 - 355
On request		355 - 450

Pintsch & Bamag, type KFB, IP 67, 110 V DC Electromagnetic Double-Disc Spring-Applied Brake

Brake type	Brake torque	For motor size
Nm		
SFB 16	160	200 - 225
SFB 25	250	200 - 225
SFB 40	400	225 - 250
SFB 63	630	250
SFB 100	1000	280 - 315
SFB 160	1600	315 - 355
SFB 250	2500	355 - 400
SFB 400	4000	400
On request		450


Pintsch & Bamag, type SFB, IP 67, 110 V DC Electromagnetic Double-Disc Spring-Applied Brake

Brake type	Brake torque	For motor size
Nm		
NFF 10	100	160
NFF 16	160	160 - 180
NFF 25	250	180 - 225
NFF 40	400	200 - 250
NFF 63	630	225 - 250


For sizes 280-450 on request

Stromag, type NFF, 110 V DC, IP66


Dimensions of brake motor

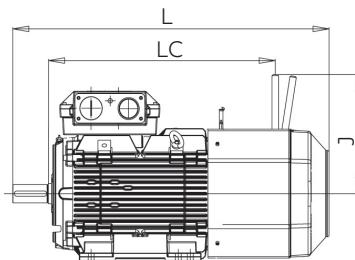

—
01

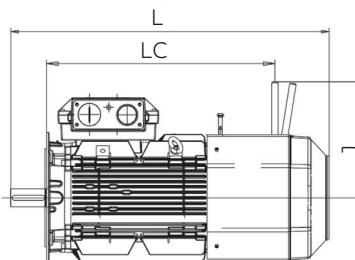

—
02

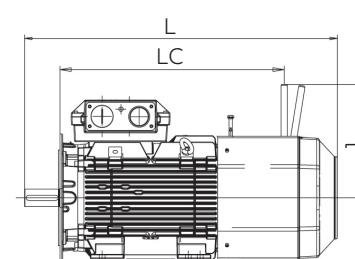

—
03

Options for the brake

On new manufacture only

- Hand release (not possible for Pintsch Bamag brake type SFB)
- Rectifier
- Micro switch
- Proximity switch (not possible for Stromag brake)
- Standstill heater

On request

- Special brake voltage
- Raised brake torque
- Combination with brake, separate cooling fan and/or tacho
- For other variants, please contact ABB

Motor size	Poles	Foot-mounted			Flange-mounted			Foot- and flange-mounted		
		L	LC	J	L	LC	J	L	LC	J
160 ¹⁾	2-8	773	511	372	773	511	372	773	511	372
160 ²⁾	2-8	871	608	372	871	608	372	871	608	372
180	2-8	935	687	372	935	687	372	935	687	372
200	2-8	1011	695	460	1011	695	460	1011	695	460
225	2	1085	729	460	1085	729	460	1085	729	460
225	4-8	1115	729	460	1105	729	460	1115	729	460
250	2-8	1119	755	460	1119	755	460	1119	755	460

¹⁾MLA-2, MLB-2, MLC-2, MLA-4, MLA-6, MLA-8 and MLB-8 -poles

²⁾MLD-2, MLE-2, MLB-4, MLC-4, MLD-4, MLB-6, MLC-6 and MLC-8 -poles

Motor sizes 280 to 450 on request. Other dimensions same as Process performance cast iron motors sizes 180 to 250


Accessories

Separate cooling

Axial fan, N-end

Fan motors with an axial fan are available for motor sizes 71-450 and can be ordered can be ordered with variant code 183.

The values here are given for 400 V, but technical data for other voltages can be found in MotSize.

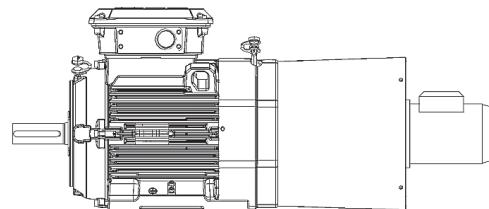

Axial fan, N-end, for motor sizes 71 - 132

Main motor	Fan motor type	Voltage range at 50 Hz, V	Voltage range at 60 Hz, V	Power W	Current A
M3BP 71	Wistro 132	380 - 500	380 - 575	29	0,06
		220 - 290	220 - 332	28	0,1
M3BP 80	Wistro 156	380 - 500	380 - 575	34	0,06
		220 - 290	220 - 332	34	0,1
M3BP 90	Wistro 169	380 - 500	380 - 575	75	0,19
		220 - 290	220 - 332	78	0,33
M3BP 100	Wistro 187	380 - 500	380 - 575	94	0,17
		220 - 290	220 - 332	87	0,31
M3BP 112	Wistro 210	380 - 500	380 - 575	99	0,17
		220 - 290	220 - 332	103	0,31
M3BP 132	Wistro 250	380 - 500	380 - 575	148	0,25
		220 - 290	220 - 332	146	0,45

Axial fan, N-end, for motor sizes 160 - 450, IE2

Main motor	Fan motor type (at 50 Hz)	Voltage V at 50 Hz	Power kW	Current A
M3BP 160 - 250	M3BP 71MA 4 B14	400	0.25	0.64
M3BP 280 - 315 ML	M3BP 80MD 4 B14	400	0.75	1.83
M3BP 315 LK - 355 SM	M3BP 90SLD 4 B14	400	1.5	3.0
M3BP 355 ML - 450 L	M3BP 100LD 4 B14	400	3.0	6.3

Axial fan, N-end, for motor sizes 160 - 450, IE3

Main motor	Fan motor type (at 50 Hz)	Voltage V at 50 Hz	Power kW	Current A
M3BP 160 - 250	M3BP 71MA 4 B14	400	0.25	0.64
M3BP 280 - 315 ML	M3BP 80MLE 4 B14	400	0.75	1.7
M3BP 315 LK - 355 SM	M3BP 90LB 4 B14	400	1.5	3.3
M3BP 355 ML, LK	M3BP 100MLB 4 B14	400	3.0	6.1

Fan on top, N-end

The non-axial fan available for motor sizes 280 and above is a Ziehl-Abegg fan with an integrated motor. This cooling option is suited for 400 V, 50 Hz networks and can be ordered with variant code 422.

MV at 50 Hz	Main motor	Fan motor type	Volt-age V	Freq. Hz	Power kW	Current A
M3BP 280	Ziehl-Abegg RH35	400 VY	50	0.35	0.83	
		460 VY	60	0.5	0.9	
M3BP 315	Ziehl-Abegg RH40	400 VY	50	0.50	1.0	
		460 VY	60	0.8	1.4	
M3BP 355	Ziehl-Abegg RH45	400 VY	50	0.90	1.8	
		460 VY	60	1.4	2.2	
M3BP 400	Ziehl-Abegg RH50	400 VY	50	1.55	3.3	
		460 VY	60	2.5	4.3	
M3BP 450	Ziehl-Abegg RH56	400 VY	50	2.30	4.5	
		460 VY	60	2.5	4.3	

Special motor and fan on top, N-end

A special ABB fan motor type is available for motor sizes 280 and above. It is suited for environments where IP 65 is the required IP class or where the input voltage must be other than 360 – 420 V (50 Hz).

The values here are given for 400 V, but technical data for other voltages can be found in MotSize.


The centrifugal impeller used in the fan is a Ziehl-Abegg impeller. This type of cooling can be ordered with variant code 514.

Special motor and fan on top, N-end, for motor sizes 280 - 450

Main motor	Fan motor type	Voltage V at 50 Hz	Power kW	Current A
M3BP 280 - 315	M3BP 80 MD 4 B34	400	0.75	1.83
M3BP 355	M3BP 90 SLD 4 B34	400	1.5	3.0
M3BP 400	M3BP 100 LD 4 B34	400	3.0	6.3
M3BP 450	M3BP 112 MB 4 B34	400	4.0	8.2

Accessories

Silencer for motor sizes 280 - 450

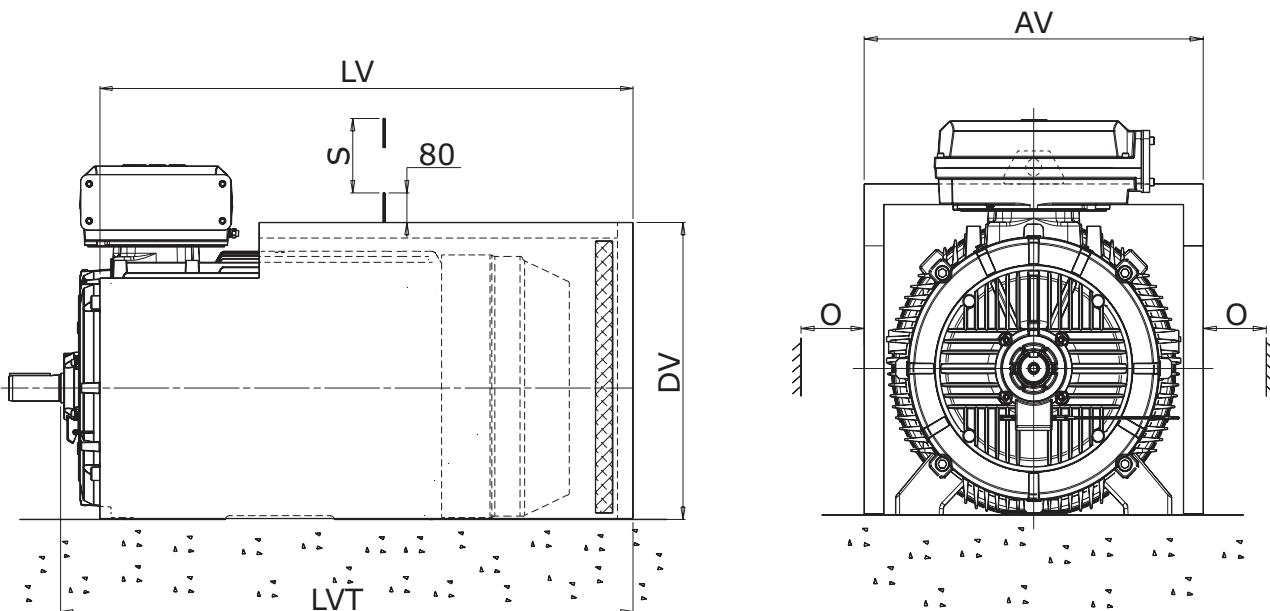

Both foot-mounted and flange-mounted motors can be fitted with a silencer to reduce noise level by about 5 - 6 dB(A). The silencer is painted blue and made of 2 mm steel sheet. The sound absorbing material is 40 mm thick polyurethane foam. On the rim there is a rubber strip for sealing on the floor. The silencer fits loosely over the motor.

The variant code for ordering a silencer is 055.

Motor size	AV	LV	LVT	DV	O ¹⁾	S ²⁾	Weight kg
280 SM_	681	1010	1090	616	50	762	38
315 SM_	760	1094	1191	697	60	852	47
315 ML_	760	1205	1302	697	60	852	51
315 LK_	760	1411	1508	697	60	852	58
355 SM_	850	1335	1441	777	65	958	62
355 ML_	850	1440	1546	777	65	958	67
355 LK_	850	1690	1796	777	65	958	77
400 L_	938	1750	1873	866	75	1045	88
400 LK_	938	1750	1873	866	75	1045	88
450 L_	1050	2110	2230	990	80	1045	120


¹⁾ Clearance for motor cooling.

²⁾ Clearance for removal of silencer.

Note: The dimensions are only valid for standard foot-mounted motors.

Accessories

Slide rails for motor sizes 160 - 250

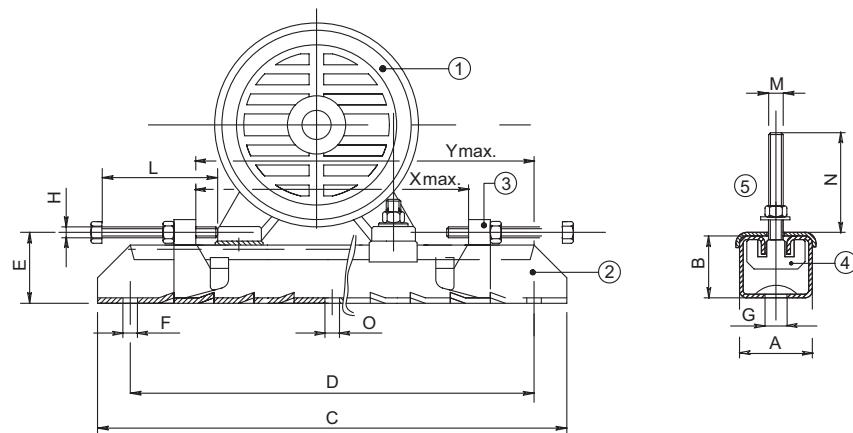


1 Motor | 2 Rail | 3 Movable adjusting bolt | 4 Fixing bolt, motor | 5 Plate

A set of slide rails includes two complete rails with screws for mounting the motor on the rails. Screws for mounting the rails on the foundation are not included. Slide rails have unmachined lower surfaces and should, before tightening down, be supported in a suitable manner. Slide rails can be ordered with article numbers shown in the table.

Motor size	Type	Article no. 3GZV103001-	Weight/														
			A	B	C	D	E	F	G	H	L	M	N	O	Xmax	Ymax	rail kg
Frame sizes 71 to 132 on request																	
160 - 180	TT180/12	-14	75	42	700	630	57	17	26	M12	120	M12	50	-	520	580	12.0
200 - 225	TT225/16	-15	82	50	864	800	68	17	27	M16	140	M16	65	17	670	740	20.4
250	TT280/20	-16	116	70	1072	1000	90	20	27	M18	150	M20	80	20	870	940	43.0

Accessories

Slide rails for motor sizes 280 - 400

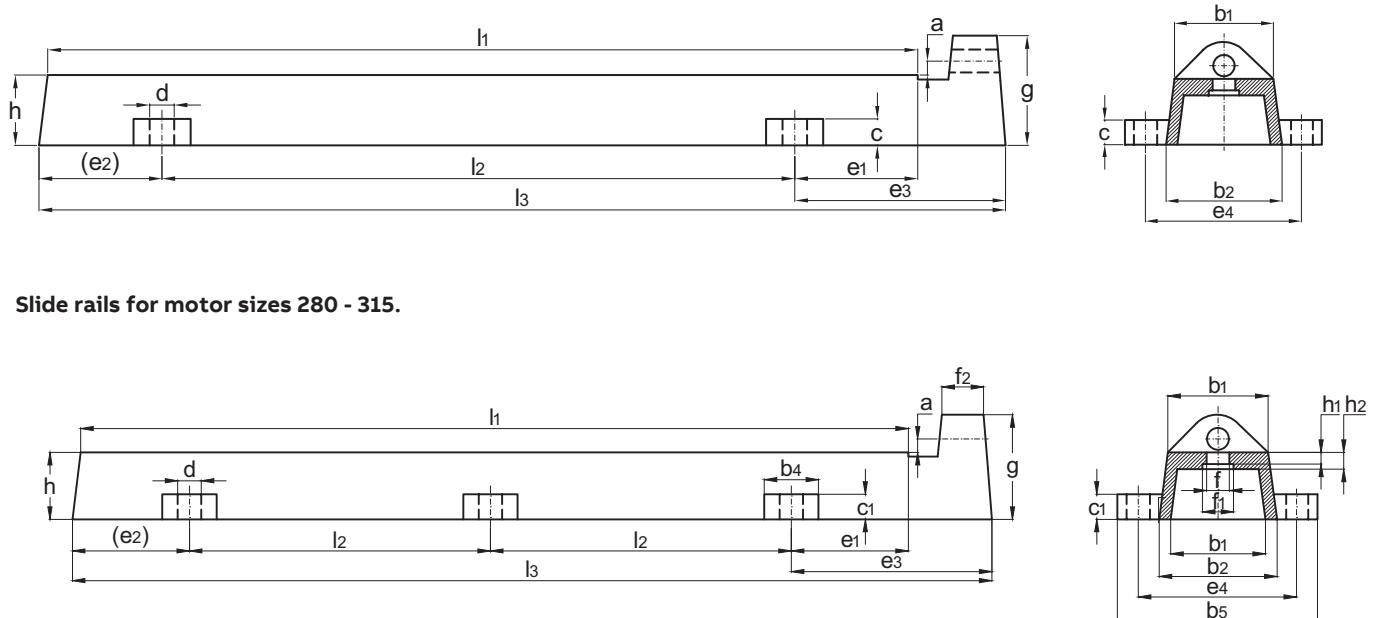

Slide rails for motor sizes 280 - 315.

Slide rails for motor sizes 355 - 400.

Note: Slide rails that do not fulfill the DIN standard are available for motor size 450 on request.

A set of slide rails includes two complete rails with screws for mounting the motor on the rails. Screws for mounting the rails on the foundation are not included. Slide rails have unmachined lower surfaces and should be supported in a suitable manner before tightening down.

Slide rails can be ordered with article numbers shown in the table.

Motor															Bolts	Horizontal	Weight
size	Article no.	l1	l2	l3	a	h	b1	b2	c	d	e1	e2	e3	e4	to feet	bolts	kg/2 pc
280	3GZF334730-55	800	600	900	16	75	100	120	35	28	100	100	200	165	M20x90	M24x300	50
315	3GZF334730-56	1000	720	1100	16	80	120	140	40	28	140	140	240	190	M24x100	M24x300	80
355 - 400	3GZF334730-57	1250	485	1350	16	80	120	140	35	28	140	140	240	190	M24x100	M24x300	90

Motors in brief

Cast iron motors, sizes 71 - 132

Motor size		71	80	90	100	112	132						
Stator and end shields	Material	Cast iron											
	Paint color shade	Munsell blue 8B 4.5/3.25											
	Corrosion class	C3											
Feet	Integrated cast iron feet												
Bearings	D-end	6203-2Z/C3	6204-2Z/C3	6205-2Z/C3	6206-2Z/C3	6206-2Z/C3	6208-2Z/C3						
	N-end	6202-2Z/C3	6203-2Z/C3	6204-2Z/C3	6205-2Z/C3 ¹⁾	6206-2Z/C3 ¹⁾	6208-2Z/C3						
Axially locked bearings	Locked at D-end												
Bearing seals	D-end	Gamma seal											
	N-end	Gamma seal											
Lubrication	Permanently lubricated shielded bearings												
Measuring nipples for condition monitoring of the bearings	Not included												
Rating plate	Material	Stainless steel											
Terminal box	Frame and cover	Cast iron											
	Corrosion class	C3											
	Cover screws	Zinc-electroplated steel											
Connections	Threaded openings	2xM16	2xM25	2xM25	2xM25	2xM32							
	Terminals	6 terminals for connection with cable lugs (not included)											
	Cable glands	Glands as option											
Fan	Material	Glass-fiber reinforced polypropylene											
Fan cover	Material	Steel											
	Paint color shade	Munsell blue 8B 4.5/3.25											
	Corrosion class	C3											
Stator winding	Material	Copper											
	Insulation	Insulation class F. Temperature rise class B unless otherwise stated.											
	Winding protection	3 PTC thermistors, 150 °C											
Rotor	Material	Pressure die-cast aluminum											
Balancing method	Half-key balancing as standard												
Keyway	Closed keyway												
Drain holes	Drain holes with closable plastic plugs, open on delivery												
Enclosure	IP 55												
Cooling method	IC 411												

¹⁾ 6206-2Z/C3 in IE4

¹⁾ 6205-2Z/C3 in IE2

Motors in brief

Cast iron motors, sizes 160 - 250

Motor size		160	180	200	225	250					
Stator and end shields	Material	Cast iron									
	Paint color shade	Munsell blue 8B 4.5/3.25									
	Corrosion class	C3									
Feet	Integrated cast iron feet, bolted feet when terminal box on LHS/RHS										
Bearings	D-end	6309/C3	6310/C3	6312/C3	6313/C3	6315/C3					
	N-end	6209/C3	6209/C3	6210/C3	6212/C3	6213/C3					
Axially locked bearings	Locked at D-end										
Bearing seals	D-end	Gamma seal									
	N-end	Gamma seal									
Lubrication	Regreasable bearings, regreasing nipples M6x1										
Measuring nipples for condition monitoring of the bearings	Included										
Rating plate	Material	Stainless steel									
Terminal box	Frame and cover	Cast iron									
	Corrosion class	C3									
	Cover screws	Zinc-electroplated steel									
Connections	Threaded openings	2xM40 + 2xM20		2xM63 + 2xM20							
	Terminals	6 terminals for connection with cable lugs (not included)									
	Cable glands	Cable flange included, glands as option									
Fan	Material	Glass-fiber reinforced polypropylene									
Fan cover	Material	Steel									
	Paint color shade	Munsell blue 8B 4.5/3.25									
	Corrosion class	C3									
Stator winding	Material	Copper									
	Insulation	Insulation class F. Temperature rise class B unless otherwise stated.									
	Winding protection	3 PTC thermistors, 150 °C									
Rotor	Material	Pressure die-cast aluminum									
Balancing method	Half-key balancing as standard										
Keyway	Closed keyway										
Drain holes	Drain holes with closable plastic plugs, open on delivery										
Enclosure	IP 55										
Cooling method	IC 411										


Motors in brief

Cast iron motors, sizes 280 - 450

Motor size		280	315	355	400	450		
Stator and end shields	Material	Cast iron						
	Paint color shade	Munsell blue 8B 4.5/3.25						
	Corrosion class	C3						
Bearings	D-end	2-pole	6316/C3	6316/C3	6316M/C3	6317M/C3		
		4-12 pole	6316/C3	6319/C3	6322/C3	6324/C3		
	N-end	2-pole	6316/C3	6316/C3	6316M/C3	6317M/C3		
		4-12 pole	6316/C3	6316/C3	6316/C3	6319/C3		
Axially locked bearings		Locked at D-end						
Bearing seals	D-end		V-ring or labyrinth seal					
	N-end		V-ring or labyrinth seal					
Lubrication		Regreasable bearings, regreasing nipples M10x1						
Measuring nipples for condition monitoring of the bearings		Included						
Rating plate	Material	Stainless steel						
Terminal box	Frame and cover	Cast iron			Cast iron frame, steel cover			
	Corrosion class	C3						
	Cover screws	Zinc-electroplated steel						
Connections	Threaded openings	2xM63 + 2xM20 2xM75 + 2xM20 4xM75 + 2xM20	2xM63 + 2xM20 2xM75 + 2xM20	2xM63 + 2xM20 2xM75 + 2xM20	2xM75 + 2xM20 4xM75 + 2xM20	4xM75 + 2xM20		
	Terminals	See section Standard terminal box for detailed information.						
	Cable glands	6 terminals for connection with cable lugs (not included)						
		Cable flange included, glands as option						
Fan	Material	Glass-fiber reinforced polypropylene						
Fan cover	Material	Steel						
	Paint color shade	Munsell blue 8B 4.5/3.25						
	Corrosion class	C3						
Stator winding	Material	Copper						
	Insulation	Insulation class F. Temperature rise class B unless otherwise stated.						
	Winding protection	3 PTC thermistors, 155 °C						
Rotor	Material	Pressure die-cast aluminum						
Balancing method		Half-key balancing						
Keyway		Open keyway						
Drain holes		Drain holes with closable plastic plugs, open on delivery						
Enclosure		IP 55						
Cooling method		IC 411						

Motor construction

Exploded view, frame size 315

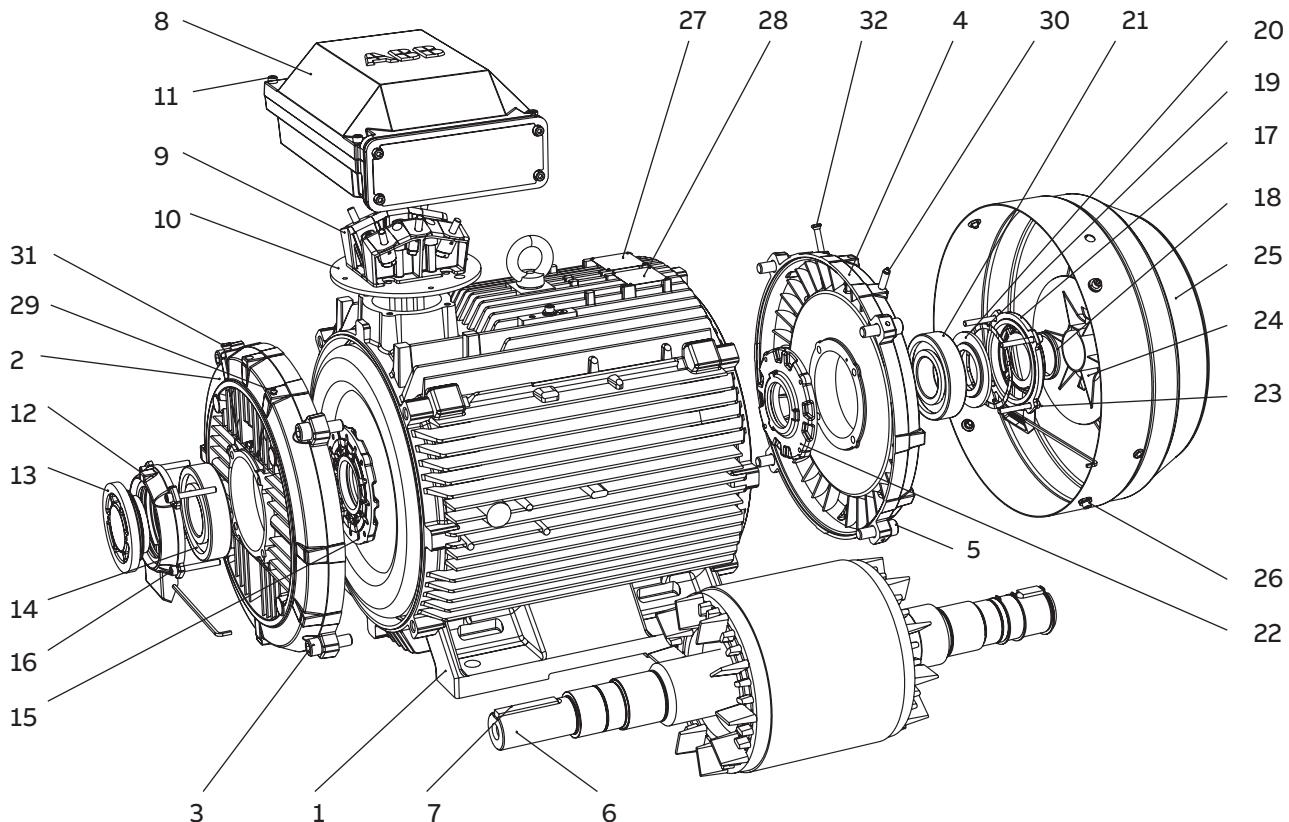

1 Stator frame
2 End shield, D-end
3 Screws for end shield, D-end
4 End shield, N-end
5 Screws for end shield, N-end
6 Rotor with shaft
7 Key, D-end
8 Terminal box
9 Terminal board
10 Intermediate flange
11 Screws for terminal box cover
12 Outer bearing cover, D-end

13 Valve disc with labyrinth seal,
D-end; standard in 2-pole motors,
V-ring in 4-8 pole motors
14 Bearing, D-end
15 Inner bearing cover, D-end
16 Screws for bearing cover
17 Outer bearing cover, N-end
18 Seal, N-end
19 Wave spring
20 Valve disc, N-end
21 Bearing, N-end
22 Inner bearing cover, N-end

23 Screws for bearing cover
24 Fan
25 Fan cover
26 Screws for fan cover
27 Rating plate
28 Lubrication plate
29 Grease nipple, D-end
30 Grease nipple, N-end
31 SPM nipple, D-end
32 SPM nipple, N-end

Low voltage

Process performance aluminum motors

Sizes 56 to 280, 0.09 to 90 kW

114	Ordering information
115	Rating plates
116	Technical data 400 V 50 Hz
116	IE3 aluminum motors
120	IE2 aluminum motors
126	Technical data 460 V 60 Hz
126	IE3 aluminum motors
130	IE2 aluminum motors
136	Variant codes
141	Mechanical design
141	Motor frame and drain holes
142	Bearings
152	Terminal box
155	Dimension drawings
155	IE3 aluminum motors
156	IE2 aluminum motors
157	Accessories
157	Slide rails
158	Aluminum motors in brief
158	Motor sizes 56 - 132
159	Motor sizes 160 - 280

Ordering information

Explanation of the product code

Motor type	Motor size	Product code	Code for mounting arrangement, Voltage and frequency code, Generation code followed by variant codes
M3AA	112MB	3GAA 111 320 - ADE, 122, 003 etc.	1 2 3 4 5 6 7 8 9 10 11 12 13 14...

Positions 1 to 4

3GAA: Totally enclosed motor with aluminum stator frame

Positions 5 and 6

IEC size	IEC size
05:	56
06:	63
07:	71
08:	80
09:	90
10:	100
11:	112
	13: 132
	16: 160
	18: 180
	20: 200
	22: 225
	25: 250
	28: 280

Position 7

Pole pairs

1:	2 poles
2:	4 poles
3:	6 poles
4:	8 poles
5:	10 poles
6:	12 poles
7:	> 12 poles
8:	Two-speed motors
9:	Multi-speed motors

Positions 8 to 10

Running number

Position 11

- (dash)

Position 12 (marked with black dot in data tables)

Mounting arrangement

A:	Foot-mounted motor
B:	Flange-mounted motor. Large flange with clearance holes.
C:	Flange-mounted motor. Small flange with tapped holes.
F:	Foot- and flange-mounted motor. Special flange.
H:	Foot- and flange-mounted motor. Large flange with clearance holes.
J:	Foot- and flange-mounted motor. Small flange with tapped holes.
N:	Flange-mounted (CI ring flange FF)

Position 12 (marked with black dot in data tables)

P:	Foot-and flange-mounted motor (CI ring flange FF)
V:	Flange-mounted motor. Special flange.

Position 13 (marked with black dot in data tables)

Voltage and frequency code	
Single-speed motors	
B:	380 VΔ 50 Hz
D:	400 VΔ, 415 VΔ, 690 VY 50 Hz
E:	500 VΔ 50 Hz
F:	500 VY 50 Hz
S:	230 VΔ, 400 VY, 415 VY 50 Hz
T:	660 VΔ 50 Hz
U:	690 VΔ 50 Hz
X:	Other rated voltage, connection or frequency, 690 V maximum
Two-speed motors	
A:	220 V 50 Hz
B:	380 V 50 Hz
D:	400 V 50 Hz
E:	500 V 50 Hz
S:	230 V 50 Hz
X:	Other rated voltage, connection or frequency, 690 V maximum

Remark: For voltage code X the variant code "209 Non-standard voltage or frequency (special winding)" must be ordered.

Position 14

Version

A, B, C...:Generation code followed by variant codes

Efficiency values are given according to IEC 60034-2-1; 2014


For detailed dimension drawings please see our web-pages 'www.abb.com/motors&generators' or contact ABB.

Rating plates


—
01 Rating plate example,
motor size 160, IE2.

02 Rating plate example,
motor size 225, IE3.

The motor's main rating plate shows the motor's performance values with various connections at nominal speed. The rating plate also shows the efficiency level (IE2, IE3, or IE4), year of manufacture, and the lowest nominal efficiency at 100, 75, and 50 % nominal load. The material of the rating plate is aluminum as standard.

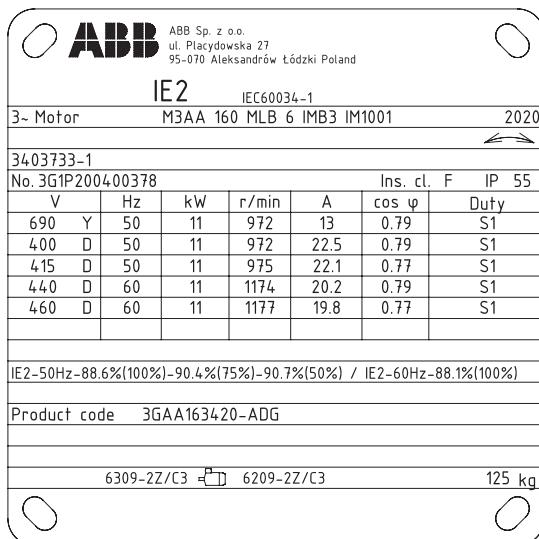

—
01

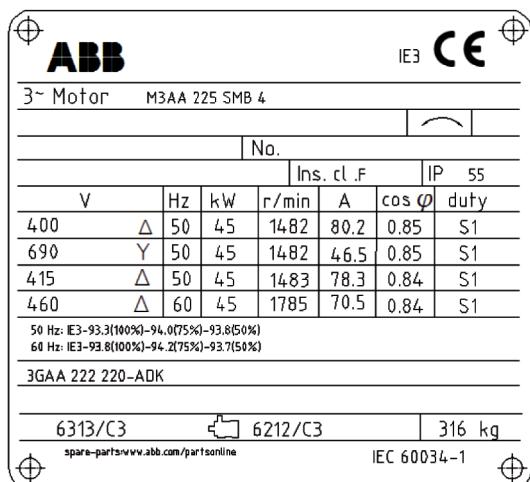

—
02

Technical data, 400 V 50 Hz

IE3 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB		
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
				400 V 50 Hz	CENELEC-design											
3000 r/min = 2 poles																
0.75	M3AA 80MB 2	3GAA081320--K	2894	83.1	82.8	80.0	0.74	1.74	7.9	2.4	3.7	4.2	0.0008	9.5	57	
1.1	M3AA 80MC 2	3GAA081330--K	2883	83.9	83.6	82.0	0.81	2.3	7.9	3.6	3.7	4.2	0.001	10.5	56	
1.5	M3AA 90LB 2	3GAA091520--K	2906	86.1	86.6	86.5	0.89	2.8	7.9	4.9	2.3	3.3	0.0027	17	60	
2.2	M3AA 90LC 2	3GAA091530--K	2900	87.4	88.8	88.9	0.89	4	8.3	7.2	2.9	3.5	0.0032	20	60	
3	M3AA 100LC 2	3GAA101530--K	2896	87.9	88.9	88.7	0.90	5.4	8.4	9.8	3.2	3.9	0.0057	28	62	
4	M3AA 112MB 2	3GAA111320--K	2888	88.5	89.8	90.0	0.91	7.1	8.4	13.2	3.2	4.0	0.0104	38	68	
5.5	M3AA 132SB 2	3GAA131120--K	2901	89.3	90.0	90.2	0.91	9.7	7.9	18.1	2.3	3.4	0.0154	58	68	
7.5	M3AA 132SC 2	3GAA131130--K	2909	90.7	91.8	92.0	0.90	13.1	8.3	24.6	3.0	3.9	0.0173	63	70	
11	M3AA 160MLA 2	3GAA161410--K	2943	91.2	92.0	91.6	0.91	19.1	7.2	35.57	2.6	3.6	0.057	106	69	
15	M3AA 160MLB 2	3GAA161420--K	2947	91.9	92.2	91.8	0.88	26.7	8.2	48.6	3.2	4.2	0.063	123	69	
18.5	M3AA 160MLC 2	3GAA161430--K	2949	92.4	93.0	92.6	0.90	32.1	9.0	59.9	3.3	3.9	0.076	137	73	
22	M3AA 180MLA 2	3GAA181410--K	2956	92.7	93.1	92.7	0.90	37.7	7.8	71.0	3.0	3.8	0.11	176	73	
30	M3AA 200MLA 2	3GAA201410--K	2962	93.3	93.5	92.8	0.87	53.2	7.6	96.8	3.1	3.8	0.159	225	72	
37	M3AA 200MLB 2	3GAA201420--K	2961	93.7	94.1	93.8	0.88	64.4	8.2	119	3.0	3.3	0.196	241	72	
45	M3AA 225SMA 2	3GAA221210--K	2968	94.0	94.0	93.0	0.87	79.6	7.3	145	3.2	3.1	0.296	326	76	
55	M3AA 250SMA 2	3GAA251210--K	2968	94.3	93.7	93.6	0.89	94.8	6.8	177	2.4	3.0	0.426	351	76	
75	M3AA 280SMA 2	3GAA281210--K	2971	94.7	95.1	94.8	0.90	127	7.9	241.06	2.8	3.3	0.644	412	81	
90	M3AA 280SMB 2	3GAA281220--K	2975	95	95.2	94.6	0.87	156	8.5	288.6	2.91	3.6	0.514	420.0	81.0	

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB		
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
				400 V 50 Hz	High-output design											
3000 r/min = 2 poles																
2.75	M3AA 90LD 2	3GAA091540--K	2872	87.1	88.2	88.0	0.83	5.4	7.5	9.1	4.4	5.0	0.00407	20	65	
4	M3AA 100LD 2	3GAA101540--K	2910	88.1	89.7	89.7	0.91	7.12	8.6	13.1	3.9	4.8	0.00787	40	67	
5.5	M3AA 112MC 2	3GAA111330--K	2909	89.2	90.6	90.8	0.91	9.67	8.6	18.1	4.3	5.5	0.0132	48	73	
9.2	M3AA 132SD 2	3GAA131140--K	2910	90.7	91.7	91.7	0.90	15.9	8.2	29.9	3.4	4.3	0.0168	71	75	
11	M3AA 132SME 2	3GAA131250--K	2922	91.2	91.8	91.5	0.90	19.8	10.6	36.0	4.5	5.4	0.0231	90	75	
15	M3AA 132SMF 2	3GAA131260--K	2908	91.9	93.2	93.5	0.91	25.8	9.8	49.3	4.4	5.5	0.023	90	75	
22	M3AA 160MLD 2	3GAA161440--K	2944	92.7	93.5	93.4	0.90	38	8.4	71.4	3.2	3.7	0.071	131	74	
30	M3AA 180MLB 2	3GAA181420--K	2957	93.3	94.0	93.9	0.88	52.7	8.7	96.9	3.0	3.8	0.104	162	74	
37	¹⁾ M3AA 180MLC 2	3GAA181430--K	2950	93.7	94.2	94.2	0.86	66	8.4	119.5	3.4	4.4	0.117	176	74	
45	M3AA 200MLC 2	3GAA201430--K	2956	94.0	94.6	94.8	0.89	77.2	7.8	145.2	2.9	3.3	0.216	250	77	
55	M3AA 225SMB 2	3GAA221220--K	2964	94.3	94.4	93.9	0.86	97.4	7.2	177.3	3.14	3.22	0.299	288	79	
75	¹⁾ M3AA 225SMC 2	3GAA221230--K	2966	94.7	95	94.7	0.86	132	7.5	241.7	3.08	3.06	0.361	328	79	
75	¹⁾ M3AA 250SMB 2	3GAA251220--K	2971	94.7	95.1	94.8	0.90	127	7.9	241.1	2.8	3.3	0.644	405	81	
90	¹⁾ M3AA 250SMC 2	3GAA251230--K	2975	95	95.2	94.6	0.87	156	8.5	288.6	2.91	3.6	0.514	414	81	

¹⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE3 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
1500 r/min = 4 poles														CENELEC-design	
0.75	M3AA 80ME 4	3GAA082350--K	1440	84.0	83.9	81.9	0.76	1.68	7.9	4.9	3.3	3.7	0.0027	13.5	54
1.1	M3AA 90LC 4	3GAA092530--K	1442	85.6	85.1	83.4	0.80	2.3	7.9	7.2	3.3	3.9	0.0055	19	56
1.5	M3AA 90LD 4	3GAA092540--K	1439	85.3	84.7	82.8	0.78	3.2	8.2	9.9	3.5	4.0	0.0055	19	51
2.2	M3AA 100LE 4	3GAA102550--K	1454	89.1	89.5	88.6	0.83	4.3	8.9	14.5	3.1	4.1	0.0144	36	54
3	M3AA 100LF 4	3GAA102560--K	1452	88.8	89.2	88.3	0.83	5.9	9.0	19.7	3.5	4.2	0.0144	36	54
4	M3AA 112MB 4	3GAA112320--K	1451	88.6	89.4	89.0	0.77	8.6	7.6	26.3	3.1	4.1	0.018	44	59
5.5	M3AA 132MB 4	3GAA132320--K	1464	89.6	90.2	89.5	0.78	11.4	7.0	35.9	2.8	3.9	0.0295	68	70
7.5	M3AA 132MC 4	3GAA132330--K	1464	90.6	91.0	90.9	0.81	14.7	7.7	48.9	2.5	3.6	0.0414	68	64
11	M3AA 160MLA 4	3GAA162410--K	1477	91.4	91.8	91.1	0.82	21.1	7.6	71.3	2.6	3.3	0.11	126	61
15	M3AA 160MLB 4	3GAA162420--K	1474	92.1	92.2	91.3	0.81	29	7.8	97.2	3.0	3.6	0.135	140	61
18.5	M3AA 180MLA 4	3GAA182410--K	1481	92.6	93.2	92.9	0.83	34.9	7.2	119.3	2.8	3.0	0.219	177	60
22	M3AA 180MLB 4	3GAA182420--K	1480	93.3	94.1	94.1	0.82	41.5	8.2	141.0	2.8	3.1	0.217	176	62
30	M3AA 200MLA 4	3GAA202410--K	1481	93.6	93.9	93.4	0.84	55	7.5	193.4	2.7	3.2	0.385	246	63
37	M3AA 225SMA 4	3GAA222210--K	1481	93.9	94.1	93.4	0.82	69.8	8.0	235.4	3.3	3.5	0.433	315	67
45	M3AA 225SMB 4	3GAA222220--K	1482	94.2	94.4	94.0	0.84	82.3	8.0	290.0	3.1	3.5	0.525	316	66
55	M3AA 250SMA 4	3GAA252210--K	1485	95.4	95.7	0.85	97.8	7.9	353.0	3.0	3.3	0.933	376	67	
75	M3AA 280SMA 4	3GAA282210--K	1483	95	95.3	95	0.82	139	7.8	485.8	3.28	3.46	0.796	409	73

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
1500 r/min = 4 poles														High-output design	
5.5	M3AA 112MC 4	3GAA112330--K	1454	89.6	90.0	88.6	0.78	11.2	8.0	39.2	3.9	4.3	0.0234	50	64
9.2	M3AA 132MD 4	3GAA132340--K	1464	91.0	91.7	91.3	0.80	18	8.5	60	3.0	4.0	0.0392	65	75
11	M3AA 132SME 4	3GAA132250--K	1464	91.4	92.0	91.6	0.79	21.8	8.2	71.56	3.1	4.1	0.0468	88	75
15	M3AA 132SMF 4	3GAA132260--K	1464	92.1	92.6	92.1	0.79	29.7	9.0	97.52	3.4	4.5	0.0545	88	75
18.5	M3AA 160MLC 4	3GAA162430--K	1476	92.6	93.1	92.7	0.77	37.2	8.3	119.9	3.3	3.6	0.12	135	67
28	M3AA 180MLC 4	3GAA182430--K	1482	93.4	93.3	93.3	0.77	56.5	8.2	180.4	3.0	3.6	0.191	176	62
37	¹⁾ M3AA 200MLB 4	3GAA202420--K	1482	93.9	94.1	93.7	0.82	69.3	7.8	237.9	3.1	3.3	0.362	244	68
53	M3AA 225SMC 4	3GAA222230--K	1483	94.5	94.7	94.2	0.83	97	8.7	341.34	3.15	3.41	0.532	318	71
75	M3AA 250SMB 4	3GAA252220--K	1483	95	95.3	95	0.82	139	7.8	485.8	3.28	3.46	0.796	389	73

¹⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE3 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N					
				400 V 50 Hz		CENELEC-design											
1000 r/min = 6 poles																	
0.75	M3AA 90LD 6	3GAA093540--K	937	80.3	80.5	79.5	0.76	1.78	4.6	7.6	2.1	2.3	0.0055	19	55		
1.1	M3AA 100LE 6	3GAA103550--K	963	84.0	85.0	84.0	0.69	2.6	5.6	10.9	2.3	3.1	0.0138	35	49		
1.5	M3AA 100LF 6	3GAA103560--K	969	85.7	85.9	84.2	0.65	3.7	7.0	14.7	3.3	4.1	0.0138	35	49		
2.2	M3AA 112MC 6	3GAA113330--K	967	87.2	87.9	87.1	0.69	5.2	6.5	21.7	2.4	3.5	0.0187	43	68		
3	M3AA 132MC 6	3GAA133330--K	978	88.5	88.8	87.7	0.69	7	6.2	29.2	2.0	3.0	0.0402	66	61		
4	M3AA 132MD 6	3GAA133340--K	973	88.5	89.3	89.1	0.72	9.1	5.6	39.2	1.9	2.7	0.0402	67	61		
5.5	M3AA 132ME 6	3GAA133350--K	973	89.5	90.2	89.6	0.74	12	5.8	53.9	2.0	2.9	0.039	63	61		
7.5	M3AA 160MLA 6	3GAA163410--K	980	90.8	91.5	91.0	0.78	15.2	7.9	73.0	1.7	3.3	0.114	125	59		
11	M3AA 160MLB 6	3GAA163420--K	979	91.2	91.8	91.1	0.74	23.5	8.5	107.0	2.2	3.9	0.131	139	59		
15	M3AA 180MLA 6	3GAA183410--K	987	92.2	92.5	91.5	0.77	30.4	5.5	146.0	1.7	2.7	0.225	175	59		
18.5	M3AA 200MLA 6	3GAA203410--K	990	92.8	93.2	92.6	0.77	37.3	7.5	178.0	2.6	3.2	0.448	218	63		
22	M3AA 200MLB 6	3GAA203420--K	990	93.3	93.7	93.1	0.79	43	7.8	212.0	2.6	3.2	0.531	245	63		
30	M3AA 225SMA 6	3GAA223210--K	989	94.1	94.7	94.5	0.81	56.8	7.9	289.0	2.8	3.1	0.813	310	63		
37	M3AA 250SMA 6	3GAA253210--K	991	94.4	94.9	94.7	0.83	68	7.7	356.0	2.7	2.9	1.49	367	63		
45	M3AA 280SMA 6	3GAA283210--K	991	93.7	93.8	93.1	0.79	87.3	8.0	433.2	3.1	3.2	1.33	398	68		

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N					
				400 V 50 Hz		High-output design											
1000 r/min = 6 poles																	
18.5	M3AA 180MLB 6	3GAA183420--K	980	91.7	92.1	91.5	0.72	40.3	6.8	180	2.3	3.2	0.191	168	65		
37	M3AA 225SMB 6	3GAA223220--K	985	93.3	93.8	93.5	0.80	71.5	7.0	358.7	2.7	3.0	0.813	307	68		
45	M3AA 250SMB 6	3GAA253220--K	991	93.7	93.8	93.1	0.79	87.3	8.0	433.2	3.1	3.2	1.33	389	68		
55	M3AA 250SMC 6	3GAA253230--K	989	94.1	94.8	94.6	0.80	105	7.1	531.1	3.0	3.1	1.49	390	68		

Technical data, 400V 50Hz

IE3 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
750 r/min = 8 poles																
1.1	M3AA 100LD 8	3GAA104540--K	703	77.7	77.7	74.7	0.65	3.08	4.4	15	2.7	2.9	0.0128	33	53	
1.5	M3AA 112MC 8	3GAA114330--K	717	79.7	80.1	78.8	0.62	4.12	4.3	20	1.8	2.6	0.0194	43	55	
2.2	M3AA 132SA 8	3GAA134110--K	725	81.9	82.3	80.2	0.64	5.8	5.2	29	2.0	3.0	0.0291	51	57	
3	M3AA 132MA 8	3GAA134310--K	723	83.5	84.1	82.8	0.66	7.5	4.8	40	1.8	2.8	0.0375	60	57	
4	M3AA 160MLA 8	3GAA164410--K	734	84.8	85.1	83.2	0.65	10.3	4.5	52	1.8	2.3	0.091	94	59	
5.5	M3AA 160MLB 8	3GAA164420--K	732	86.2	87.1	86.1	0.69	13	5.0	72	2.0	2.4	0.091	96	59	
7.5	M3AA 160MLC 8	3GAA164430--K	733	87.3	88.2	87.2	0.69	17.6	5.1	98	2.0	2.4	0.12	120	59	
11	M3AA 180MLA 8	3GAA184410--K	731	88.6	89.2	88.4	0.70	25.3	5.0	144	2.1	2.1	0.2	161	59	
15	M3AA 200MLA 8	3GAA204410--K	737	89.6	90.5	90.1	0.74	32.5	5.2	194	2.1	2.4	0.45	217	60	
18.5	M3AA 225SMA 8	3GAA224210--K	736	90.1	90.8	90.2	0.74	39.8	5.2	240	2.0	2.3	0.669	266	63	
22	M3AA 225SMB 8	3GAA224220--K	736	90.6	91.6	91.5	0.73	47.5	5.3	285	2.3	2.5	0.722	279	63	
30	M3AA 250SMA 8	3GAA254210--K	741	91.3	91.7	91.0	0.71	67	5.6	386	2.7	2.7	1.4	340	63	

Technical data, 400 V 50 Hz

IE2 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N					
				400 V 50 Hz	CENELEC-design												
3000 r/min = 2 poles																	
0.09	M3AA 56A 2	3GAA051311--F	2800	55.6	50.8	38.7	0.67	0.35	3.5	0.29	2.4	2.6	0.0001	2.8	56		
0.12	M3AA 56B 2	3GAA051312--F	2830	53.6	49.3	37.2	0.68	0.41	4.3	0.4	2.5	2.8	0.00013	2.9	57		
0.18	M3AA 63A 2	3GAA061311--F	2790	60.4	57.8	49.5	0.75	0.51	4.5	0.61	2.4	2.6	0.00015	3.7	60		
0.25	M3AA 63B 2	3GAA061312--F	2790	64.8	63.2	56.7	0.76	0.66	4.8	0.86	2.8	2.7	0.00017	4.1	61		
0.37	M3AA 71A 2	3GAA071311--E	2785	69.5	70.8	67.8	0.79	0.91	4.6	1.26	2.5	2.8	0.0004	4.9	58		
0.55	M3AA 71B 2	3GAA071312--E	2790	74.1	75.4	73.4	0.79	1.29	5.1	1.88	3.1	3.1	0.0005	5.9	58		
0.75	M3AA 80B 2	3GAA081312--E	2895	80.6	80.4	77.3	0.79	1.7	8.1	2.4	3.7	3.9	0.0009	10.5	60		
1.1	M3AA 80C 2	3GAA081313--E	2875	80.6	80.4	77.9	0.80	2.4	7.8	3.6	3.6	3.5	0.0012	11	60		
1.5	M3AA 90L 2	3GAA091500--E	2900	84.1	85.0	83.5	0.86	2.9	7.6	4.9	2.5	3.3	0.0024	16	60		
2.2	M3AA 90LB 2	3GAA091520--E	2870	84.6	85.7	85.0	0.86	4.4	6.9	7.3	2.8	3.2	0.0027	18	63		
3	M3AA 100LB 2	3GAA101520--E	2920	86.4	86.1	84.0	0.86	5.8	9.3	9.8	3.3	3.9	0.005	25	62		
4	M3AA 112MB 2	3GAA111320--E	2885	86.1	87.0	88.0	0.88	7.6	7.6	13.2	2.5	2.8	0.0062	30	68		
5.5	M3AA 132SB 2	3GAA131120--E	2915	88.0	88.2	86.9	0.82	11	7.9	18	2.6	3.6	0.016	52	73		
7.5	M3AA 132SC 2	3GAA131130--E	2915	88.5	89.2	88.6	0.88	13.6	7.6	24.5	2.2	3.2	0.022	52	73		
11	M3AA 160MLA 2	3GAA161410--G	2938	90.6	91.5	91.1	0.90	19.2	7.5	35.7	2.4	3.1	0.044	91	69		
15	M3AA 160MLB 2	3GAA161420--G	2934	91.5	92.5	92.2	0.90	26	7.5	48.8	2.5	3.3	0.053	105	69		
18.5	M3AA 160MLC 2	3GAA161430--G	2932	92.0	93.1	93.1	0.92	31.5	7.5	60.2	2.9	3.4	0.063	123	69		
22	M3AA 180MLA 2	3GAA181410--G	2952	92.2	92.8	92.2	0.87	39.5	7.7	71.1	2.8	3.3	0.076	132	69		
30 ²⁾	M3AA 200MLA 2	3GAA201410--G	2956	93.1	93.5	92.8	0.90	51.4	7.7	96.9	2.7	3.1	0.178	210	72		
37	M3AA 200MLB 2	3GAA201420--G	2959	93.4	93.7	92.9	0.90	63.5	8.2	119	3.0	3.3	0.196	225	72		
45	M3AA 225SMA 2	3GAA221210--G	2961	93.6	93.9	93.1	0.88	78.8	6.7	145	2.5	2.5	0.244	263	74		
55	M3AA 250SMA 2	3GAA251210--G	2967	94.1	94.4	93.8	0.88	95.8	6.8	177	2.2	2.7	0.507	304	75		
75 ²⁾	M3AA 280SMA 2	3GAA281210--G	2968	94.4	94.7	94.2	0.89	128	7.1	241	2.5	2.8	0.583	389	75		
90 ²⁾	M3AA 280SMB 2	3GAA281220--G	2971	94.9	95.2	94.7	0.89	153	7.8	289	2.6	3.2	0.644	425	75		

²⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE2 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
3000 r/min = 2 poles			400 V 50 Hz					High-output design							
0.37	M3AA 63C 2	3GAA061313---F	2750	69.5	68.8	63.2	0.78	0.96	4.7	1.28	2.8	2.6	0.0002	4.6	59
0.75	M3AA 71C 2	3GAA071003---E	2780	75.7	78.7	77.8	0.79	1.81	5.3	2.5	3.0	2.7	0.00056	6.5	58
1.5	M3AA 80C 2	3GAA081003---E	2830	80.7	82.0	80.0	0.83	3.2	5.8	5	2.6	3.0	0.0011	11	60
2.2 ²⁾	M3AA 90LB 2	3GAA091003---E	2840	81.0	83.2	83.5	0.86	5.5	6.4	9	2.4	2.7	0.0027	18	68
4	M3AA100LF 2	3GAA101560---E	2880	84.3	86.1	85.7	0.86	7.9	8.0	13.2	3.0	3.3	0.005	25	68
5.5 ²⁾	M3AA 112MF 2	3GAA111360---E	2850	87.0	88.9	89.4	0.90	10.1	7.2	18.4	3.4	3.4	0.0062	30	68
9.2 ²⁾	M3AA 132SF 2	3GAA131160---E	2885	88.1	90.2	90.7	0.91	16.5	6.9	30.4	2.0	2.7	0.018	52	68
11	M3AA 132SMF 2	3GAA131260---E	2900	90.3	90.5	89.4	0.87	20.2	8.5	36.2	2.7	3.7	0.0186	77	68
15	M3AA 132SMG 2	3GAA131270---E	2905	90.4	90.8	90.0	0.84	28.5	9.1	49.3	3.3	4.0	0.02	81	69
18.5	M3AA 132SMJ 2	3GAA131290---E	2895	91.1	92.0	92.1	0.89	32.9	9.7	61	3.2	4.3	0.0256	93	68
22	M3AA 160MLD 2	3GAA161440---G	2933	91.7	92.8	92.8	0.90	38	8.1	71.6	3.2	3.6	0.063	123	69
27	M3AA 160MLE 2	3GAA161450---G	2939	92.2	93.1	93.1	0.90	46.4	8.8	87.7	3.4	3.8	0.072	145	69
30 ²⁾	M3AA 180MLB 2	3GAA181420---G	2950	92.7	93.5	93.3	0.88	53	7.9	97.1	2.8	3.3	0.092	149	69
45 ²⁾	M3AA 200MLC 2	3GAA201430---G	2957	93.3	93.8	93.2	0.90	78.2	8.1	145	3.1	3.3	0.196	225	72
55 ²⁾	M3AA 200MLD 2	3GAA201440---G	2953	93.8	94.5	94.3	0.89	95	7.8	177	2.9	3.3	0.217	241	72
55	M3AA 225SMB 2	3GAA221220---G	2961	93.9	94.3	93.6	0.88	96	6.5	177	2.4	2.5	0.274	286	74
75 ²⁾	M3AA 225SMC 2	3GAA221230---G	2969	94.4	94.6	94.0	0.84	136	7.4	241	3.2	3.1	0.309	312	74
75 ²⁾	M3AA 225SMD 2	3GAA221240---G	2967	94.4	94.6	94.0	0.87	131	7.7	241	3.2	3.0	0.329	317	74
75 ²⁾	M3AA 250SMB 2	3GAA251220---G	2970	94.5	94.8	94.3	0.89	128	7.6	241	2.8	3.1	0.583	351	75
80 ²⁾	M3AA 225SMD 2	3GAA221240---G	2964	94.4	94.8	94.3	0.87	140	7.3	257	3.0	2.8	0.329	317	74
90 ²⁾	M3AA 250SMC 2	3GAA251230---G	2971	95.0	95.3	94.9	0.89	153	7.6	289	2.5	3.1	0.644	386	75

²⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE2 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N					
				400 V 50 Hz	CENELEC-design												
1500 r/min = 4 poles																	
0.06	M3AA 56A 4	3GAA052311--F	1390	52.8	49.6	40.8	0.54	0.3	3.2	0.41	3.2	3.3	0.00019	2.9	47		
0.09	M3AA 56B 4	3GAA052312--F	1400	56.2	52.6	44.8	0.59	0.39	3.1	0.62	2.3	2.8	0.00024	3.2	48		
0.12	M3AA 63A 4	3GAA062311--F	1403	59.1	55.8	47.1	0.63	0.41	2.9	0.82	2.2	2.4	0.0003	3.7	51		
0.18	M3AA 63B 4	3GAA062312--F	1380	64.7	62.8	55.9	0.68	0.58	3.6	1.25	2.0	2.4	0.00034	4.4	54		
0.25	M3AA 71A 4	3GAA072311--E	1430	68.5	66.8	59.9	0.67	0.76	4.7	1.67	2.2	3.0	0.0006	5.2	45		
0.37	M3AA 71B 4	3GAA072312--E	1375	69.7	71.9	71.1	0.79	0.96	3.8	2.5	2.0	2.2	0.0008	5.9	45		
0.55	M3AA 80A 4	3GAA082311--E	1406	77.1	78.6	76.8	0.78	1.29	6.4	3.73	2.8	2.9	0.0022	8.5	50		
0.75	M3AA 80E 4	3GAA082315--E	1425	79.8	80.4	77.9	0.72	1.88	6.6	5	3.5	3.6	0.002	15	54		
1.1	M3AA 90LB 4	3GAA092520--E	1435	83.7	83.7	81.7	0.78	2.4	6.6	7.3	2.9	3.2	0.0043	16	50		
1.5	M3AA 90LD 4	3GAA092540--E	1435	84.2	84.1	81.9	0.76	3.3	7.0	9.9	3.1	3.5	0.0048	17	50		
2.2	M3AA 100LC 4	3GAA102530--E	1450	86.4	86.2	84.1	0.79	4.6	7.3	14.4	2.8	3.4	0.009	25	54		
3	M3AA 100LD 4	3GAA102540--E	1445	85.7	86.1	85.1	0.79	6.3	7.0	19.8	2.4	3.0	0.011	28	63		
4	M3AA 112MB 4	3GAA112320--E	1445	86.7	86.5	85.2	0.75	8.8	7.3	26.4	3.1	3.4	0.0126	34	64		
5.5	M3AA 132M 4	3GAA132300--E	1465	89.0	89.5	88.6	0.79	10.9	6.3	36	1.9	2.6	0.038	48	66		
7.5	M3AA 132MA 4	3GAA132310--E	1460	88.7	89.5	89.0	0.79	14.7	6.4	49	1.8	2.6	0.048	59	63		
11	M3AA 160MLA 4	3GAA162410--G	1466	90.4	91.6	91.4	0.84	20.9	6.8	71.6	2.2	2.8	0.081	99	62		
15	M3AA 160MLB 4	3GAA162420--G	1470	91.4	92.4	92.2	0.83	28.5	7.1	97.4	2.6	3.0	0.099	118	62		
18.5	M3AA 180MLA 4	3GAA182410--G	1477	91.9	92.9	92.7	0.84	34.5	7.2	119	2.6	2.9	0.166	146	62		
22	M3AA 180MLB 4	3GAA182420--G	1475	92.3	93.3	93.2	0.84	40.9	7.3	142	2.6	3.0	0.195	163	62		
30	M3AA 200MLA 4	3GAA202410--G	1480	93.2	94.0	93.7	0.84	55.2	7.4	193	2.8	3.0	0.309	218	63		
37	M3AA 225SMA 4	3GAA222210--G	1479	93.4	93.9	93.4	0.84	68	7.1	238	2.6	2.9	0.356	240	66		
45	M3AA 225SMB 4	3GAA222220--G	1480	93.9	94.3	93.9	0.85	81.3	7.5	290	2.8	3.2	0.44	273	66		
55	M3AA 250SMA 4	3GAA252210--G	1480	94.4	94.9	94.6	0.85	98.9	7.0	354	2.6	2.9	0.765	314	67		
75	M3AA 280SMA 4	3GAA282210--G	1478	94.3	94.9	94.6	0.85	135	7.1	484	2.8	3.0	0.866	389	67		
90	²⁾ M3AA 280SMB 4	3GAA282220--G	1478	94.6	95.4	95.2	0.84	163	7.7	581	3.2	3.4	0.941	418	67		

²⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE2 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
1500 r/min = 4 poles			400 V 50 Hz					High-output design							
0.25	M3AA 63C 4	3GAA062313--F	1374	68.5	68.8	64.6	0.70	0.70	3.1	1.7	2.2	2.4	0.0004	5	55
0.55	M3AA 71C 4	3GAA072003--E	1355	67.5	71.5	70.0	0.75	1.56	4.1	3.8	2.3	2.2	0.0011	6.5	45
0.95	M3AA 80C 4	3GAA082003--E	1395	76.0	76.9	76.3	0.80	2.2	5.2	6.5	2.5	2.6	0.0023	10.5	50
1.1 ²⁾	M3AA 80C 4	3GAA082004--E	1370	73.3	75.6	74.5	0.81	2.7	5.0	7.7	2.4	2.6	0.0023	10.5	50
1.85	M3AA 90LE 4	3GAA092550--E	1410	79.7	82.0	80.9	0.76	4.4	5.3	12.5	2.6	2.7	0.0043	16	50
2.2	M3AA 90LF 4	3GAA092560--E	1390	80.0	83.1	83.1	0.83	4.7	5.3	15.1	2.3	2.6	0.0048	17	50
3.75	M3AA 100LG 4	3GAA102570--E	1415	84.0	85.9	85.2	0.74	8.7	5.7	25.3	2.0	2.4	0.009	25	60
4 ²⁾	M3AA 100LG 4	3GAA102570--E	1415	83.2	85.8	85.5	0.76	9.1	5.5	26.9	2.1	2.5	0.009	25	60
5.5 ²⁾	M3AA 112MF 4	3GAA112360--E	1410	82.5	84.0	83.4	0.81	11.8	6.2	37.3	2.9	3.4	0.0126	34	64
9.2	M3AA 132MF 4	3GAA132360--E	1460	89.8	90.8	90.2	0.79	18.7	7.3	60.1	2.2	3.4	0.048	59	59
11 ²⁾	M3AA 132ME 4	3GAA132350--E	1440	86.8	89.5	90.2	0.83	22	6.0	72.9	2.0	2.8	0.048	59	59
11	M3AA 132SMF 4	3GAA132260--E	1460	90.4	90.8	89.9	0.79	21.5	7.7	71.9	2.1	3.1	0.0433	83	65
15 ²⁾	M3AA 132SMH 4	3GAA132280--E	1455	90.6	91.0	90.3	0.77	29.8	7.1	98.4	2.4	2.9	0.0517	82	67
18.5	M3AA 160MLC 4	3GAA162430--G	1469	91.4	92.5	92.3	0.84	34.7	7.6	120	3.0	3.2	0.11	127	62
22 ²⁾	M3AA 160MLD 4	3GAA162440--G	1464	91.6		92.7	0.85	41.3	6.9	143	2.5	2.9	0.125	140	62
30 ²⁾	M3AA 180MLC 4	3GAA182430--G	1474	92.3	93.5	93.5	0.83	56.5	7.3	194	2.7	2.9	0.217	177	62
37	M3AA 200MLB 4	3GAA202420--G	1479	93.4	94.4	94.4	0.85	67.2	7.1	238	2.6	2.9	0.343	234	63
45 ²⁾	M3AA 200MLC 4	3GAA202430--G	1479	93.6	94.4	94.2	0.83	83.6	7.5	290	2.9	3.2	0.366	246	63
55 ²⁾	M3AA 225SMC 4	3GAA222230--G	1478	94.0	94.7	94.5	0.85	99.3	7.4	355	2.9	3.1	0.474	287	66
64	M3AA 225SMD 4	3GAA222240--G	1480	94.2	94.6	94.1	0.85	115	8.2	412	3.3	3.3	0.542	314	66
75 ²⁾	M3AA 250SMB 4	3GAA252220--G	1478	94.4	95.1	94.8	0.85	134	7.3	484	2.8	3.1	0.866	350	67
90 ²⁾	M3AA 250SMC 4	3GAA252230--G	1478	94.6	95.3	95.0	0.84	163	7.4	581	3.1	3.3	0.941	377	67

²⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE2 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014						Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N						
				400 V 50 Hz	CENELEC-design													
1000 r/min = 6 poles																		
0.09	M3AA 63A 6	3GAA063311--F	890	50.7	48.5	42.0	0.62	0.41	2.8	0.96	2.0	2.2	0.00042	4.2	48			
0.12	M3AA 63B 6	3GAA063312--F	890	50.6	46.8	39.3	0.60	0.55	3.0	1.29	2.2	2.4	0.00052	4.5	53			
0.18	M3AA 71A 6	3GAA073311--E	870	56.6	58.7	54.8	0.71	0.61	2.8	1.97	1.9	2.0	0.0009	5.5	42			
0.25	M3AA 71B 6	3GAA073312--E	890	61.6	61.8	56.7	0.68	0.84	3.1	2.68	2.3	2.4	0.0012	6.5	42			
0.37	M3AA 80A 6	3GAA083311--E	923	67.6	67.5	62.6	0.73	1.04	4.4	3.82	2.6	2.8	0.0019	9	47			
0.75	M3AA 90LB 6	3GAA093520--E	930	77.6	78.0	75.6	0.71	1.96	4.0	7.7	2.0	2.3	0.0048	18	44			
1.1	M3AA 90LD 6	3GAA093540--E	935	78.2	79.2	77.5	0.66	2.94	4.2	11.2	2.2	2.6	0.0056	20	44			
1.5	M3AA 100LC 6	3GAA103530--E	945	80.3	81.4	80.7	0.73	3.6	3.9	15.1	1.7	2.0	0.009	26	49			
2.2	M3AA 112MB 6	3GAA113320--E	955	81.9	81.8	79.2	0.72	5.3	5.2	21.9	1.8	2.2	0.01	34	56			
3	M3AA 132S 6	3GAA133100--E	960	83.3	82.9	80.5	0.65	7.69	4.3	29.8	1.6	2.3	0.031	46	57			
4	M3AA 132MB 6	3GAA133320--E	975	86.4	85.8	83.1	0.70	9.4	7.3	39.2	2.1	4.4	0.045	54	57			
5.5	M3AA 132MC 6	3GAA133330--E	965	86.1	85.6	83.0	0.67	13.3	6.2	54.3	2.5	2.8	0.049	59	61			
7.5	M3AA 160MLA 6	3GAA163410--G	975	88.5	89.8	89.7	0.79	15.4	7.4	73.4	1.7	3.2	0.087	98	59			
11	M3AA 160MLB 6	3GAA163420--G	972	89.3	90.6	90.5	0.79	22.5	7.5	108	1.9	2.9	0.114	125	59			
15	M3AA 180MLA 6	3GAA183410--G	977	90.5	91.5	91.0	0.77	31	5.8	146	1.8	2.7	0.168	148	59			
18.5	M3AA 200MLA 6	3GAA203410--G	988	91.6	92.3	91.7	0.80	36.4	6.7	178	2.3	2.9	0.382	196	63			
22	M3AA 200MLB 6	3GAA203420--G	987	92.0	92.9	92.8	0.82	42	6.6	212	2.2	2.8	0.448	218	63			
30	M3AA 225SMA 6	3GAA223210--G	986	92.6	93.3	92.8	0.83	56.2	7.0	290	2.6	2.9	0.663	266	63			
37	M3AA 250SMA 6	3GAA253210--G	989	93.1	93.8	93.4	0.82	69.9	6.8	357	2.4	2.7	1.13	294	63			
45	M3AA 280SMA 6	3GAA283210--G	988	93.2	94.0	93.9	0.84	82.9	6.8	434	2.4	2.6	1.37	378	63			
55	²⁾ M3AA 280SMB 6	3GAA283220--G	988	93.2	94.1	94.0	0.84	101	7.1	531	2.6	2.8	1.5	404	63			

²⁾ Temperature rise class F

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014						Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N						
				400 V 50 Hz	High-output design													
1000 r/min = 6 poles																		
0.18	M3AA 63C 6	3GAA063313--F	880	56.6	55.4	49.1	0.62	0.72	2.8	1.96	2.1	2.2	0.0006	5.3	45			
0.37	M3AA 71C 6	3GAA073003--E	895	63.6	64.1	59.3	0.66	1.27	3.7	3.9	2.4	2.6	0.0015	7	44			
1.3	²⁾ M3AA 90LB 6	3GAA093003--E	910	74.4	76.8	74.6	0.69	3.6	3.6	13.6	1.9	2.0	0.0048	18	44			
15	M3AA 160MLC 6	3GAA163430--G	971	89.7	91.2	91.2	0.77	31.3	7.3	147	1.8	3.6	0.131	138	59			
18.5	M3AA 180MLB 6	3GAA183420--G	975	90.7	92.0	92.0	0.79	37.2	5.8	181	1.7	2.7	0.198	162	59			
30	²⁾ M3AA 200MLC 6	3GAA203430--G	985	92.0	93.1	92.9	0.83	56.7	6.9	290	2.3	2.8	0.531	245	63			
37	M3AA 225SMB 6	3GAA223220--G	985	93.1	94.0	94.0	0.83	69.1	6.6	358	2.3	2.6	0.821	300	63			
45	²⁾ M3AA 225SMC 6	3GAA223230--G	984	92.6	93.9	94.0	0.83	84.4	6.4	436	2.3	2.6	0.821	300	63			
45	²⁾ M3AA 250SMB 6	3GAA253220--G	989	93.4	94.1	93.9	0.83	83.7	7.0	434	2.5	2.7	1.37	341	63			
55	²⁾ M3AA 250SMC 6	3GAA253230--G	988	93.2	94.1	94.0	0.84	101	7.1	531	2.6	2.8	1.5	367	63			

²⁾ Temperature rise class F

Technical data, 400 V 50 Hz

IE2 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
750 r/min = 8 poles														CENELEC-design	
0.055	M3AA 63B 8	3GAA064312--F	685	35.0	31.0	24.8	0.49	0.46	1.8	0.77	2.3	2.8	0.00045	4.5	37
0.09	M3AA 71A 8	3GAA074001--E	675	48.8	45.2	37.8	0.57	0.46	2.5	1.27	2.2	2.1	0.00092	5.5	40
0.12	M3AA 71B 8	3GAA074002--E	680	39.8	36.4	26.6	0.60	0.56	2.3	1.68	2.2	2.3	0.0012	6.5	43
0.25	M3AA 80B 8	3GAA084002--E	675	50.6	52.2	46.4	0.61	0.97	3.0	3.53	2.1	2.3	0.0024	9.5	50
0.37	M3AA 90S 8	3GAA094100--E	695	56.1	55.3	48.6	0.57	1.65	2.7	5.08	1.9	2.2	0.0032	13	52
0.55	M3AA 90L 8	3GAA094500--E	700	61.7	59.7	52.2	0.52	2.32	3.0	7.5	2.3	2.6	0.0043	16	52
0.75	M3AA 100LA 8	3GAA104510--E	720	70.7	67.1	59.9	0.47	3.2	3.9	9.9	2.5	3.3	0.0069	20	46
1.1	M3AA 100LB 8	3GAA104520--E	695	76.0	74.9	70.9	0.66	3.1	3.4	15.1	1.7	2.2	0.0082	23	53
1.5	M3AA 112M 8	3GAA114300--E	690	74.4	74.1	70.5	0.70	4.1	3.2	20.7	1.4	1.9	0.01	28	55
2.2	M3AA 132S 8	3GAA134100--E	715	77.7	79.2	77.6	0.65	6.2	3.4	29.3	1.3	1.9	0.031	46	56
3	M3AA 132M 8	3GAA134300--E	715	79.3	78.8	75.5	0.64	8.5	3.2	40	1.2	1.8	0.037	53	58
4	M3AA 160MLA 8	3GAA164410--G	728	84.0	85.1	83.6	0.67	10.2	5.4	52.4	1.5	2.6	0.068	84	59
5.5	M3AA 160MLB 8	3GAA164420--G	726	84.6	85.9	84.8	0.67	13.9	5.6	72.3	1.4	2.6	0.085	98	59
7.5	M3AA 160MLC 8	3GAA164430--G	727	86.0	87.3	86.5	0.65	19.3	4.7	98.5	1.5	2.8	0.132	137	59
11 ²⁾	M3AA 180MLA 8	3GAA184410--G	731	86.9	88.5	87.9	0.67	27.3	4.4	143	1.8	2.6	0.214	175	59
15	M3AA 200MLA 8	3GAA204410--G	737	89.5	90.8	90.3	0.74	32.4	5.3	194	2.0	2.4	0.45	217	60
18.5	M3AA 225SMA 8	3GAA224210--G	739	90.0	91.1	90.6	0.73	40.1	5.2	239	2.0	2.3	0.669	266	63
22	M3AA 225SMB 8	3GAA224220--G	738	90.5	91.4	91.0	0.74	46.8	5.5	284	2.0	2.3	0.722	279	63
30	M3AA 250SMA 8	3GAA254210--G	742	91.2	91.8	91.1	0.71	66	5.8	386	2.6	2.4	1.4	340	63
37	M3AA 280SMA 8	3GAA284210--G	740	92.2	93.0	92.6	0.74	78.1	5.6	477	2.4	2.3	1.5	403	67

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
750 r/min = 8 poles														High-output design	
0.18	M3AA 71C 8	3GAA074003--E	660	49.8	48.5	41.7	0.63	0.82	2.7	2.6	2.1	2.0	0.0015	7	40
0.75 ²⁾	M3AA 90LF 8	3GAA094560--E	635	58.5	57.8	51.2	0.60	3.1	2.7	10.5	1.7	2.0	0.0048	18	43
1.5 ²⁾	M3AA 100LG 8	3GAA104570--E	685	70.7	70.9	67.3	0.64	4.7	3.1	20.9	1.9	2.0	0.009	26	46
2 ²⁾	M3AA 112MF 8	3GAA114360--E	690	74.2	76.4	74.0	0.67	5.8	3.5	27.6	1.8	2.1	0.0126	32	52
3.8 ²⁾	M3AA 132MF 8	3GAA134360--E	710	76.7	79.3	78.1	0.68	10.5	3.7	51.1	1.4	2.5	0.049	54	68
18.5	M3AA 200MLB 8	3GAA204420--G	739	90.0	90.8	90.2	0.74	40	5.4	239	2.1	2.3	0.53	245	60
30 ²⁾	M3AA 225SMC 8	3GAA224230--G	737	91.2	92.3	92.1	0.73	64.7	5.6	388	2.3	2.4	0.828	300	63
37	M3AA 250SMB 8	3GAA254220--G	740	91.7	92.8	92.5	0.73	78.9	5.4	477	2.6	2.3	1.5	367	67
45	M3AA 250SMC 8	3GAA254230--G	738	92.1	93.4	93.4	0.74	95.1	5.6	582	2.3	2.4	1.5	367	67

²⁾ Temperature rise class F

Technical data, 460V 60Hz

IE3 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
3600 r/min = 2 poles			460 V 60 Hz					CENELEC-design							
0.75	M3AA 80MB 2	3GAA081320---K	3502	77.0	75.1	69.9	0.72	1.56	8.9	2.0	4.3	5.2	0.0008	9.5	61
1.1	M3AA 80MC 2	3GAA081330---K	3500	84.0	83.0	80.2	0.78	2.0	9.9	3.0	4.4	5.3	0.001	10.5	60
1.5	M3AA 90LB 2	3GAA091520---K	3522	85.5	85.3	84.0	0.88	2.4	9.6	4.0	4.0	4.6	0.0027	17	65
2.2	M3AA 90LC 2	3GAA091530---K	3517	86.5	87.1	85.8	0.88	3.5	9.9	5.9	3.1	4.2	0.0032	20	65
3	M3AA 100LC 2	3GAA101530---K	3512	88.5	88.7	87.2	0.89	4.7	9.9	8.1	3.5	4.6	0.0057	28	65
4	M3AA 112MB 2	3GAA111320---K	3500	88.5	88.9	87.9	0.90	6.2	10.0	10.9	3.6	4.8	0.0104	38	71
5.5	M3AA 132SB 2	3GAA131120---K	3519	89.5	89.4	88.7	0.90	8.4	9.1	14.9	2.5	3.9	0.0154	58	74
7.5	M3AA 132SC 2	3GAA131130---K	3524	90.2	90.7	90.0	0.90	11.4	9.6	20.3	3.1	4.5	0.0173	63	73
11	M3AA 160MLA 2	3GAA161410---K	3549	91.0	91.1	89.9	0.91	16.6	8.7	29.5	2.7	3.9	0.057	106	75
15	M3AA 160MLB 2	3GAA161420---K	3554	91.0	90.4	89.6	0.89	23.2	8.5	40.3	3.8	4.8	0.063	123	74
18.5	M3AA 160MLC 2	3GAA161430---K	3555	91.7	91.9	90.7	0.89	28.4	10.5	49.7	3.8	4.7	0.076	137	75
22	M3AA 180MLA 2	3GAA181410---K	3560	91.7	91.7	90.4	0.89	33	9.2	59.0	4.1	4.7	0.11	176	77
30	M3AA 200MLA 2	3GAA201410---K	3567	92.4	92.2	91.0	0.87	46.1	9.0	80.3	3.2	4.0	0.159	225	76
37	M3AA 200MLB 2	3GAA201420---K	3564	93.0	92.8	91.2	0.88	56.7	9.2	99.1	3.1	3.7	0.196	241	76
45	M3AA 225SMA 2	3GAA221210---K	3570	93.6	93.1	91.5	0.89	67.4	7.8	120	3.3	3.7	0.296	326	79
55	M3AA 250SMA 2	3GAA251210---K	3569	93.6	93.1	91.6	0.90	82.7	7.9	147	2.3	3.3	0.426	351	81
75	M3AA 280SMA 2	3GAA281210---K	3575	94.9	94.9	94.1	0.9	110	9	200.33	3	3.6	0.644	412	85
90	M3AA 280SMB 2	3GAA281220---K	3578	95.0	94.9	94.1	0.87	136	9.6	240	3.08	4.17	0.514	420	85
3600 r/min = 2 poles			460 V 60 Hz					High-output design							
Output kW	Motor type	Product code	Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N	Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB

Technical data, 460V 60Hz

IE3 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1; 2014				Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
				Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
1800 r/min = 4 poles				460 V 60 Hz				CENELEC-design							
0.75	M3AA 80ME 4	3GAA082350--K	1748	85.5	84.4	81.6	0.74	1.48	9.5	4.0	3.8	4.5	0.0027	13.5	57
1.1	M3AA 90LC 4	3GAA092530--K	1749	86.5	85.4	82.5	0.77	2.0	8.4	6.0	3.7	4.6	0.0055	19	56
1.5	M3AA 90LD 4	3GAA092540--K	1748	86.5	85.1	82.0	0.75	2.9	9.5	8.1	4.0	5.0	0.0055	19	57
2.2	M3AA 100LE 4	3GAA102550--K	1760	89.5	89.2	87.4	0.81	3.8	10.2	11.9	3.3	4.7	0.0144	36	57
3	M3AA 100LF 4	3GAA102560--K	1759	89.5	89.3	87.4	0.81	5.2	10.4	16.3	3.8	4.9	0.0144	36	57
4	M3AA 112MB 4	3GAA112320--K	1755	90.1	90.5	89.5	0.75	7.43	9.3	21.74	3.46	4.91	0.018	44	62
5.5	M3AA 132MB 4	3GAA132320--K	1769	91.7	91.7	90.5	0.75	10	8.0	29.7	3.0	4.5	0.0295	68	73
7.5	M3AA 132MC 4	3GAA132330--K	1766	91.7	91.6	90.8	0.79	13	8.7	40.5	2.6	3.9	0.0414	68	69
11	M3AA 160MLA 4	3GAA162410--K	1780	92.4	92.2	90.9	0.80	18.9	8.7	59.1	3.4	3.7	0.11	126	68
15	M3AA 160MLB 4	3GAA162420--K	1777	93.0	92.6	91.2	0.79	25.7	8.9	80.6	3.3	4.1	0.135	140	67
18.5	M3AA 180MLA 4	3GAA182410--K	1783	93.6	93.7	93.1	0.82	30.3	8.4	99.0	3.1	3.5	0.219	177	68
22	M3AA 180MLB 4	3GAA182420--K	1783	93.8	94.2	93.7	0.82	35.8	9.3	117.0	3.0	3.4	0.217	176	66
30	M3AA 200MLA 4	3GAA202410--K	1783	94.1	94.0	93.0	0.83	48.2	8.5	160.6	2.8	3.9	0.385	246	69
37	M3AA 225SMA 4	3GAA222210--K	1786	94.5	94.4	93.5	0.81	61.2	8.4	195.2	3.8	4.0	0.433	315	65
45	M3AA 225SMB 4	3GAA222220--K	1784	95.0	94.9	95.0	0.83	71.8	8.8	241.2	2.9	4.7	0.525	316	72
55	M3AA 250SMA 4	3GAA252210--K	1787	95.7	95.8	95.2	0.84	85.8	9.1	293.0	3.3	3.7	0.933	376	71
75	M3AA 280SMA 4	3GAA282210--K	1785	95.4	95.4	94.7	0.81	121	8.5	402.8	3.75	3.7	0.796	409	77

Output kW	Motor type	Product code	Speed r/min	Efficiency IEC 60034-30-1; 2014				Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
				Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
1800 r/min = 4 poles				460 V 60 Hz				High-output design							
5.5	M3AA 112MC 4	3GAA112330--K	1762	91.7	91.3	89.3	0.75	10	10.1	29.9	4.3	5.0	0.0234	50	66
9.2	M3AA 132MD 4	3GAA132340--K	1770	91.7	91.8	90.9	0.78	15.9	9.5	49.6	3.3	4.6	0.0392	65	77
11	M3AA 132SME 4	3GAA132250--K	1771	92.4	92.6	91.7	0.78	18.9	9.3	59.4	3.4	4.5	0.0468	88	77
15	M3AA 132SMF 4	3GAA132260--K	1769	93.0	93.2	92.2	0.78	25.8	9.9	80.9	3.7	5.2	0.0545	88	77
18.5	M3AA 160MLC 4	3GAA162430--K	1778	93.6	93.6	92.7	0.76	32.4	8.2	99.3	3.8	4.0	0.12	135	71
28	M3AA 180MLC 4	3GAA182430--K	1784	94.1	93.9	92.8	0.79	50.8	9.2	160.59	3.12	3.77	0.191	176	65
37	M3AA 200MLB 4	3GAA202420--K	1785	94.5	94.3	93.4	0.81	60.5	9.1	198.2	3.5	3.6	0.362	244	68
49	M3AA 225SMC 4	3GAA222230--K	1787	95	94.8	93.8	0.85	78.9	10.7	261.84	3.79	4.13	0.532	318	75
75	M3AA 250SMB 4	3GAA252220--K	1785	95.4	95.4	94.7	0.81	121	8.5	402.8	3.75	3.7	0.796	389	77

Technical data, 460V 60Hz

IE3 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
1200 r/min = 6 poles																
0.75	M3AA 90LD 6	3GAA093540--K	1148	82.5	81.9	79.6	0.73	1.56	5.1	6.2	2.2	2.8	0.0055	19	61	
1.1	M3AA 100LE 6	3GAA103550--K	1168	87.5	87.5	85.8	0.66	2.3	6.3	9.0	2.4	3.5	0.0138	35	52	
1.5	M3AA 100LF 6	3GAA103560--K	1174	88.5	88.0	85.8	0.62	3.3	7.7	12.2	3.5	4.7	0.0138	35	52	
2.2	M3AA 112MC 6	3GAA113330--K	1172	89.5	89.6	88.4	0.66	4.6	7.3	17.9	2.5	4.0	0.0187	43	71	
3	M3AA 132MC 6	3GAA133330--K	1181	89.5	89.4	88.1	0.67	6.3	7.0	24.2	2.2	3.5	0.0402	66	64	
4	M3AA 132MD 6	3GAA133340--K	1176	89.5	89.9	88.9	0.69	8.0	6.2	32.4	2.0	3.0	0.0402	67	64	
5.5	M3AA 132ME 6	3GAA133350--K	1177	91.0	91.3	90.4	0.72	10.4	6.6	44.6	2.1	3.3	0.039	63	64	
7.5	M3AA 160MLA 6	3GAA163410--K	1182	91.4	91.5	90.3	0.76	13.5	8.6	60.5	1.8	3.7	0.114	125	63	
11	M3AA 160MLB 6	3GAA163420--K	1183	91.7	91.8	90.5	0.73	20.6	9.4	88.7	2.3	4.4	0.131	139	63	
15	M3AA 180MLA 6	3GAA183410--K	1189	92.3	92.0	90.5	0.75	27.1	6.0	120.0	1.8	3.1	0.225	175	63	
18.5	M3AA 200MLA 6	3GAA203410--K	1191	93.3	93.2	92.1	0.77	32.3	8.6	148.0	2.9	3.6	0.448	218	67	
22	M3AA 200MLB 6	3GAA203420--K	1191	93.8	93.8	92.8	0.78	37.7	8.8	176.0	2.9	3.6	0.531	245	67	
30	M3AA 225SMA 6	3GAA223210--K	1191	94.2	94.3	93.6	0.80	49.9	8.9	240.0	3.2	3.5	0.813	310	67	
37	M3AA 250SMA 6	3GAA253210--K	1192	94.5	94.7	94.1	0.82	59.9	8.6	296.0	3.0	3.2	1.49	367	67	
45	M3AA 280SMA 6	3GAA283210--K	1193	94.5	94.4	93.4	0.77	77.5	8.3	361.7	3.4	3.9	1.33	398	72	

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
1200 r/min = 6 poles																
18.5	M3AA 180MLB 6	3GAA183420--K	1183	93.0	93.0	92.1	0.69	36.1	8.2	149	2.6	3.7	0.197	168	69	
37	M3AA 225SMB 6	3GAA223220--K	1188	94.1	94.4	93.8	0.80	61.8	8.0	297.4	3.0	3.3	0.813	307	72	
45	M3AA 250SMB 6	3GAA253220--K	1193	94.5	94.4	93.4	0.77	77.5	8.3	361.7	3.4	3.9	1.33	389	72	
55	M3AA 250SMC 6	3GAA253230--K	1191	94.5	94.7	94.0	0.81	90.1	8.2	441.0	3.3	3.5	1.49	390	72	

Technical data, 460V 60Hz

IE3 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				Load	Load	Load									
900 r/min = 8 poles															
0.75	M3AA 100LB 8	3GAA104520--K	866	75.5	73.9	68.5	0.61	1.93	4.9	8.27	2.6	3.2	0.00855	25	57
1.1	M3AA 100LD 8	3GAA104540--K	860	78.5	77.4	73.0	0.61	2.78	4.9	12.2	2.9	3.1	0.0128	33	57
1.5	M3AA 112MC 8	3GAA114330--K	872	84.0	83.6	81.3	0.58	3.7	4.7	16.4	1.9	3.0	0.0194	43	59
2.2	M3AA 132SA 8	3GAA134110--K	879	85.5	84.9	82.2	0.60	5.2	5.7	23.9	2.1	3.4	0.0291	51	61
3	M3AA 132MA 8	3GAA134310--K	877	86.5	86.3	84.1	0.63	6.7	5.4	32.6	1.9	3.2	0.0375	60	61
4	M3AA 160MLA 8	3GAA164410--K	886	86.5	86.1	83.5	0.63	9.19	5.0	43.1	2.1	2.7	0.091	94	63
5.5	M3AA 160MLB 8	3GAA164420--K	886	86.5	86.5	84.6	0.67	11.4	5.6	59.2	2.3	2.6	0.091	96	63
7.5	M3AA 160MLC 8	3GAA164430--K	887	89.5	89.6	88.2	0.67	15.5	5.8	80.7	2.4	2.7	0.12	120	63
11	M3AA 180MLA 8	3GAA184410--K	885	89.5	89.5	87.8	0.68	22.2	5.7	118.7	2.3	2.4	0.2	161	63
15	M3AA 200MLA 8	3GAA204410--K	889	90.2	90.5	89.5	0.72	28.6	6.0	161.0	2.4	2.9	0.45	217	64
18.5	M3AA 225SMA 8	3GAA224210--K	890	90.2	90.3	89.0	0.72	35.1	5.9	198.0	2.2	2.5	0.669	266	67
22	M3AA 225SMB 8	3GAA224220--K	889	91.7	92.2	91.6	0.71	41.7	6.0	236.0	2.6	2.8	0.722	279	67
30	M3AA 250SMA 8	3GAA254210--K	892	91.7	91.8	90.5	0.68	59.4	6.3	321.0	3.1	3.0	1.4	340	67

Technical data, 460 V 60 Hz

IE2 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				Load Type	Load Type	Load Type									
3600 r/min = 2 poles															
0.09	M3AA 56A 2	3GAA051311--F	3430	56.8	50.6	40.5	0.60	0.33	3.9	0.23	3.0	3.3	0.0001	2.8	56
0.12	M3AA 56B 2	3GAA051312--F	3460	59.5	54.0	44.0	0.63	0.38	4.8	0.33	2.9	3.6	0.00013	2.9	57
0.18	M3AA 63A 2	3GAA061311--F	3420	64.0	60.2	51.4	0.70	0.46	5.3	0.5	3.0	3.4	0.00015	3.7	60
0.25	M3AA 63B 2	3GAA061312--F	3420	68.0	65.4	57.8	0.71	0.59	5.7	0.69	3.6	3.5	0.00017	4.1	61
0.37	M3AA 71A 2	3GAA071311--E	3425	72.0	71.4	66.6	0.75	0.8	5.8	1.03	3.0	3.5	0.0004	4.9	61
0.55	M3AA 71B 2	3GAA071312--E	3431	74.0	73.6	69.2	0.76	1.13	6.2	1.53	3.6	3.8	0.0005	5.9	61
0.75	M3AA 80B 2	3GAA081312--E	3505	82.5	81.4	77.5	0.80	1.43	9.6	2.0	3.7	4.5	0.0009	10.5	63
1.1	M3AA 80C 2	3GAA081313--E	3490	82.6	81.9	78.7	0.78	2.1	9.1	3.0	3.9	4.2	0.0012	11	63
1.5	M3AA 90L 2	3GAA091500--E	3510	85.1	85.0	82.9	0.84	2.6	8.4	4.0	2.8	3.8	0.0024	16	63
2.2	M3AA 90LB 2	3GAA091520--E	3480	85.8	85.9	84.2	0.85	3.7	7.9	6.0	2.6	3.7	0.0027	18	66
3	M3AA 100LB 2	3GAA101520--E	3530	87.5	86.8	84.6	0.84	5.1	10.0	8.1	4.1	4.6	0.005	25	65
4	M3AA 112MB 2	3GAA111320--E	3490	87.6	88.4	87.8	0.91	6.2	8.1	10.9	2.7	3.0	0.0062	30	71
5.5	M3AA 132SB 2	3GAA131120--E	3515	88.5	87.8	85.3	0.86	9.0	8.5	14.9	2.5	4.1	0.016	52	76
7.5	M3AA 132SC 2	3GAA131130--E	3525	89.5	89.2	87.6	0.89	12	8.7	20.3	2.3	3.7	0.022	52	76
11	M3AA 160MLA 2	3GAA161410--G	3547	91.4	91.5	90.3	0.90	16.7	8.6	29.6	2.6	3.5	0.044	91	73
15	M3AA 160MLB 2	3GAA161420--G	3545	92.1	92.3	91.2	0.90	22.4	8.7	40.4	2.7	3.8	0.053	105	73
18.5	M3AA 160MLC 2	3GAA161430--G	3543	92.4	92.8	92.1	0.92	27.2	8.7	49.8	3.1	3.8	0.063	123	73
22	M3AA 180MLA 2	3GAA181410--G	3559	92.4	92.4	91.1	0.87	34.3	8.8	59	3.0	3.8	0.076	132	73
30	M3AA 200MLA 2	3GAA201410--G	3562	93.1	92.8	91.4	0.90	44.9	8.7	80.4	2.8	3.4	0.178	210	76
37	M3AA 200MLB 2	3GAA201420--G	3564	93.4	93.2	91.7	0.89	55.8	9.2	99.1	3.1	3.7	0.196	225	76
45	M3AA 225SMA 2	3GAA221210--G	3566	93.5	93.2	91.7	0.88	68.6	7.7	120	2.6	2.7	0.244	263	78
55	M3AA 250SMA 2	3GAA251210--G	3571	93.8	93.5	92.1	0.88	83.2	7.7	147	2.3	3.0	0.507	304	79
75	M3AA 280SMA 2	3GAA281210--G	3568	94.4	94.3	93.2	0.89	112	8.0	200	2.6	3.2	0.583	389	79
90	²⁾ M3AA 280SMB 2	3GAA281220--G	3575	94.9	94.7	93.7	0.89	133	8.9	240	2.8	3.5	0.644	425	79

²⁾ Temperature rise class F

Technical data, 460 V 60 Hz

IE2 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
3600 r/min = 2 poles			460 V 60 Hz					High-output design							
0.37	²⁾ M3AA 63C 2	3GAA061313---F	3535	72.0	70.2	63.9	0.72	0.85	5.6	1.0	3.5	3.5	0.0002	4.6	59
0.75	M3AA 71C 2	3GAA071003---E	3415	79.4	80.2	78.1	0.78	1.51	6.6	2	3.2	3.4	0.00056	6.5	61
1.5	M3AA 80C 2	3GAA081003---E	3460	83.4	84.0	82.9	0.81	2.79	7.2	4.1	3.1	3.8	0.0011	11	63
2.7	M3AA 90LB 2	3GAA091003---E	3470	84.8	86.3	85.7	0.84	4.7	7.7	7.4	2.4	3.2	0.0027	18	71
4	M3AA 100LB 2	3GAA101002---E	3500	86.3	86.9	85.5	0.87	6.6	9.5	10.9	3.1	4.0	0.005	25	71
5.5	²⁾ M3AA 112MF 2	3GAA111360---E	3490	88.2	88.7	87.6	0.87	8.9	9.2	15	3.2	4.2	0.0062	30	71
9.2	M3AA 132SF 2	3GAA131160---E	3500	89.4	90.3	89.8	0.91	14.1	7.9	25.1	2.0	3.2	0.018	52	0
11	M3AA 132SMF 2	3GAA131260---E	3504	90.9	90.3	88.3	0.94	17.2	9.0	30	2.8	4.3	0.0186	77	68
15	M3AA 132SMG 2	3GAA131270---E	3510	90.7	90.4	88.8	0.89	23.6	9.5	40.7	3.5	4.6	0.02	81	72
18.5	M3AA 132SMJ 2	3GAA131290---E	3500	91.6	91.8	90.9	0.91	28.2	10.5	50.3	3.3	5.3	0.0256	93	71
22	M3AA 160MLD 2	3GAA161440---G	3546	92.4	92.8	92.0	0.91	32.8	9.3	59.2	3.4	4.1	0.063	123	73
27	M3AA 160MLE 2	3GAA161450---G	3547	92.4	92.5	91.5	0.90	40.9	10.2	72.68	3.7	4.3	0.072	145	73
30	M3AA 180MLB 2	3GAA181420---G	3558	93.0	93.1	92.4	0.89	45.4	9.2	80.5	3.1	3.8	0.092	149	73
45	M3AA 200MLC 2	3GAA201430---G	3563	93.4	93.3	92.2	0.88	68.7	9.2	120	3.2	3.7	0.196	225	76
55	M3AA 200MLD 2	3GAA201440---G	3560	94.3	94.4	93.4	0.89	82.2	9.0	147	3.1	3.7	0.217	241	76
55	M3AA 225SMB 2	3GAA221220---G	3567	93.9	93.7	92.4	0.89	82.6	7.5	147	2.5	2.8	0.274	286	78
75	M3AA 225SMC 2	3GAA221230---G	3573	94.3	94.1	93.0	0.86	116	8.7	200	3.3	3.4	0.309	312	78
75	M3AA 250SMB 2	3GAA251220---G	3575	94.5	94.4	93.3	0.89	111	8.6	200	2.9	3.4	0.583	351	79
80	M3AA 225SMD 2	3GAA221240---G	3570	94.5	94.4	93.3	0.88	120	8.4	213	3.1	3.2	0.329	317	78
90	M3AA 250SMC 2	3GAA251230---G	3575	95.1	95.0	94.0	0.89	133	8.6	240	2.7	3.4	0.644	386	79

²⁾ Temperature rise class F

Technical data, 460 V 60 Hz

IE2 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$		Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				Load	Load	Load									
1800 r/min = 4 poles															
0.06	M3AA 56A 4	3GAA052311--F	1710	55.0	49.3	40.1	0.48	0.28	3.6	0.33	3.8	4.1	0.00019	2.9	47
0.09	M3AA 56B 4	3GAA052312--F	1720	58.6	53.5	44.8	0.52	0.37	3.3	0.5	3.0	3.6	0.00024	3.2	48
0.12	M3AA 63A 4	3GAA062311--F	1724	64.0	59.7	51.0	0.60	0.38	3.3	0.66	2.6	3.0	0.0003	3.7	51
0.18	M3AA 63B 4	3GAA062312--F	1700	68.0	65.4	57.7	0.62	0.53	3.5	1.0	2.5	3.0	0.00034	4.4	54
0.25 ¹⁾	M3AA 71A 4	3GAA072311--E	1685	69.3	68.7	64.0	0.68	0.66	4.8	1.41	2.3	2.7	0.00066	5.2	48
0.37	M3AA 71B 4	3GAA072312--E	1695	74.4	74.9	71.9	0.72	0.86	5.3	2.0	2.2	2.6	0.0008	5.9	48
0.55	M3AA 80A 4	3GAA082311--E	1695	77.7	78.7	76.6	0.74	1.2	5.5	3.0	2.0	2.8	0.0013	8.5	53
0.75	M3AA 80E 4	3GAA082315--E	1735	81.5	80.9	77.5	0.68	1.69	7.5	4.1	3.8	4.3	0.002	15	57
1.1	M3AA 90LB 4	3GAA092520--E	1740	84.6	83.7	80.7	0.76	2.1	7.6	6.0	3.1	3.9	0.0043	16	53
1.5	M3AA 90LD 4	3GAA092540--E	1750	85.4	84.1	80.6	0.72	3.0	8.2	8.1	3.8	4.6	0.0048	17	53
2.2	M3AA 100LC 4	3GAA102530--E	1760	87.5	86.9	84.2	0.75	4.2	9.1	11.9	3.4	4.5	0.009	25	57
3	M3AA 100LD 4	3GAA102540--E	1750	88.2	87.5	85.6	0.80	5.3	8.2	16.3	3.6	4.2	0.011	28	66
4	M3AA 112MB 4	3GAA112320--E	1745	87.6	87.5	85.7	0.77	7.4	8.2	21.8	3.3	3.7	0.0126	34	67
5.5	M3AA 132M 4	3GAA132300--E	1769	89.7	89.5	87.8	0.79	9.5	7.3	29.8	2.0	3.0	0.038	48	69
7.5	M3AA 132MA 4	3GAA132310--E	1764	89.5	89.6	88.3	0.81	12.8	7.5	40.6	1.9	3.0	0.048	59	66
11	M3AA 160MLA 4	3GAA162410--G	1772	91.3	91.6	90.5	0.83	18.2	7.7	59.2	2.4	3.2	0.081	99	66
15	M3AA 160MLB 4	3GAA162420--G	1775	92.2	92.4	91.5	0.83	24.6	8.0	80.6	2.7	3.3	0.099	118	66
18.5	M3AA 180MLA 4	3GAA182410--G	1781	92.5	92.8	91.9	0.83	30.2	8.2	99.1	2.8	3.2	0.166	146	66
22	M3AA 180MLB 4	3GAA182420--G	1780	93.1	93.4	92.5	0.83	35.7	8.3	118	2.8	3.3	0.195	163	66
30	M3AA 200MLA 4	3GAA202410--G	1783	93.8	94.0	93.1	0.83	48.2	8.4	160	3.0	3.3	0.309	218	67
37	M3AA 225SMA 4	3GAA222210--G	1782	93.6	93.5	92.5	0.84	59	8.1	198	2.8	3.2	0.356	240	70
45	M3AA 225SMB 4	3GAA222220--G	1784	94.2	94.1	93.1	0.85	70.5	8.6	240	2.7	3.3	0.44	273	70
55	M3AA 250SMA 4	3GAA252210--G	1782	95.2	95.4	94.9	0.84	86.3	8.0	294	2.8	3.3	0.765	314	71
75	M3AA 280SMA 4	3GAA282210--G	1782	94.7	94.8	94.1	0.85	116	8.2	401	3.0	3.3	0.866	389	71
90	M3AA 280SMB 4	3GAA282220--G	1782	94.9	95.0	94.3	0.84	141	9.0	482	3.6	3.8	0.941	418	71

¹⁾ Efficiency class IE1

Technical data, 460 V 60 Hz

IE2 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N				
1800 r/min = 4 poles			460 V 60 Hz					High-output design								
0.25	²⁾ M3AA 63C 4	3GAA062313--F	1697	70.0	66.4	62.7	0.67	0.63	4.6	1.41	2.6	2.7	0.00041	5	55	
0.55	M3AA 71C 4	3GAA072003--E	1685	72.3	73.4	70.5	0.71	1.34	5.1	3.1	2.6	2.8	0.0011	6.5	48	
1.85	M3AA 90L 4	3GAA092003--E	1695	83.7	84.3	82.3	0.74	3.7	5.4	10.4	2.2	2.6	0.0043	16	53	
1.85	M3AA 90LE 4	3GAA092550--E	1695	83.7	84.3	82.3	0.74	3.7	5.4	10.4	2.2	2.6	0.0043	16	53	
2.2	M3AA 90LF 4	3GAA092560--E	1710	83.9	85.1	84.0	0.77	4.2	6.3	12.2	2.5	3.2	0.0048	17	53	
4	M3AA 100LG 4	3GAA102570--E	1730	86.8	87.6	86.6	0.77	7.5	6.7	22	2.1	3.0	0.009	25	63	
5.5	M3AA 112MF 4	3GAA112360--E	1730	86.2	87.2	86.2	0.78	10.2	7.4	30.5	3.0	4.1	0.0126	34	67	
9.2	M3AA 132MF 4	3GAA132360--E	1765	91.3	91.5	90.2	0.79	16	8.3	49.7	2.3	2.9	0.048	59	63	
11	²⁾ M3AA 132ME 4	3GAA132350--E	1750	89.3	90.6	90.3	0.83	18.6	6.8	60	2.0	3.2	0.048	59	63	
11	M3AA 132SMF 4	3GAA132260--E	1765	91.5	91.2	89.6	0.80	18.7	8.8	59.5	2.2	3.5	0.0433	83	68	
15	M3AA 132SMH 4	3GAA132280--E	1760	91.7	91.5	90.2	0.78	26	8.2	81.54	2.6	3.4	0.0517	82	70	
18.5	M3AA 160MLC 4	3GAA162430--G	1774	92.4	92.7	92.0	0.83	30.2	8.7	99.5	3.3	3.6	0.11	127	66	
22	M3AA 160MLD 4	3GAA162440--G	1770	92.5	93.2	92.6	0.84	35.4	7.8	118	2.7	3.3	0.125	140	66	
30	M3AA 180MLC 4	3GAA182430--G	1777	93.2	93.6	93.0	0.83	48.6	8.3	161	2.9	3.3	0.217	177	66	
37	M3AA 200MLB 4	3GAA202420--G	1783	94.2	94.6	94.1	0.84	58.6	8.5	198	2.8	3.3	0.343	234	67	
45	M3AA 200MLC 4	3GAA202430--G	1783	94.4	94.5	93.9	0.83	72	8.6	241	3.2	3.6	0.366	246	67	
55	M3AA 225SMC 4	3GAA222230--G	1782	94.4	94.6	93.8	0.85	86	8.5	294	3.1	3.4	0.474	287	70	
64	M3AA 225SMD 4	3GAA222240--G	1783	94.4	94.4	93.4	0.85	100	9.4	342	3.5	3.7	0.542	314	70	
75	M3AA 250SMB 4	3GAA252220--G	1782	94.8	95.0	94.4	0.85	116	8.4	401	3.1	3.5	0.866	350	71	
90	M3AA 250SMC 4	3GAA252230--G	1776	95.2	95.3	94.6	0.84	141	8.6	483	3.5	3.7	0.941	377	71	

²⁾ Temperature rise class F

Technical data, 460 V 60 Hz

IE2 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N					
				460 V 60 Hz	CENELEC-design												
1200 r/min = 6 poles																	
0.09	M3AA 63A 6	3GAA063311--F	1110	53.4	48.9	40.6	0.55	0.38	3.2	0.76	2.4	2.8	0.00042	4.2	48		
0.12	M3AA 63B 6	3GAA063312--F	1110	50.5	45.5	36.3	0.53	0.51	3.4	1.02	2.6	3.0	0.00052	4.5	53		
0.18	M3AA 71A 6	3GAA073311--E	1100	55.0	54.6	48.2	0.64	0.54	3.4	1.56	2.3	2.4	0.0009	5.5	45		
0.25	M3AA 71B 6	3GAA073312--E	1120	59.5	57.5	49.9	0.60	0.77	3.8	2.13	2.8	3.0	0.0012	6.5	45		
0.37	M3AA 80A 6	3GAA083311--E	1125	73.4	73.5	69.8	0.69	0.91	4.3	3.1	1.8	2.6	0.002	9	47		
0.55	M3AA 80C 6	3GAA083313--E	1123	68.0	69.2	66.0	0.71	1.24	5.3	4.67	3.2	3.2	0.0034	15	50		
0.75	M3AA 90LB 6	3GAA093520--E	1140	79.6	79.2	75.4	0.67	1.71	4.5	6.2	2.1	2.7	0.0048	18	44		
1.1	M3AA 90LD 6	3GAA093540--E	1141	80.3	80.0	77.1	0.64	2.6	5.0	9.1	2.4	3.1	0.0056	20	47		
1.5	M3AA 100LC 6	3GAA103530--E	1150	83.3	83.3	81.4	0.70	3.2	4.4	12.4	1.8	2.4	0.009	26	49		
2.2	M3AA 112MB 6	3GAA113320--E	1160	84.4	83.8	80.6	0.65	5.0	5.9	18.1	2.5	3.3	0.01	34	56		
3	M3AA 132S 6	3GAA133100--E	1161	85.4	84.3	81.0	0.67	6.84	4.7	24.3	1.7	2.8	0.031	46	60		
4	M3AA 132MB 6	3GAA133320--E	1177	87.3	86.1	82.9	0.69	8.3	8.0	32.4	2.2	5.1	0.045	54	60		
5.5	M3AA 132MC 6	3GAA133330--E	1165	87.6	86.5	83.4	0.67	11.8	6.8	44.96	2.7	3.2	0.049	59	64		
7.5	M3AA 160MLA 6	3GAA163410--G	1179	89.6	90.1	88.9	0.77	13.6	7.4	60.7	1.7	3.2	0.087	98	63		
11	M3AA 160MLB 6	3GAA163420--G	1177	90.4	91.0	90.0	0.77	19.8	8.4	89.2	2.0	3.4	0.114	125	63		
15	M3AA 180MLA 6	3GAA183410--G	1181	91.6	91.9	91.1	0.75	27.4	6.5	121	1.9	3.1	0.168	148	63		
18.5	M3AA 200MLA 6	3GAA203410--G	1190	92.2	92.2	91.1	0.79	31.8	7.5	148	2.5	3.2	0.382	196	67		
22	M3AA 200MLB 6	3GAA203420--G	1189	92.7	93.1	92.2	0.81	36.7	7.5	176	2.5	3.2	0.448	218	67		
30	M3AA 225SMA 6	3GAA223210--G	1189	93.2	93.4	92.4	0.82	49.2	8.0	240	2.8	3.2	0.663	266	67		
37	M3AA 250SMA 6	3GAA253210--G	1191	93.6	93.8	93.1	0.81	61.2	7.6	296	2.6	3.0	1.13	294	67		
45	M3AA 280SMA 6	3GAA283210--G	1190	93.8	94.2	93.6	0.83	72.5	7.6	361	2.6	2.9	1.37	378	67		
55	M3AA 280SMB 6	3GAA283220--G	1190	94.0	94.3	93.7	0.83	88.4	8.1	441	2.9	3.1	1.5	404	67		

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\varphi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N					
				460 V 60 Hz	High-output design												
1200 r/min = 6 poles																	
0.18 ²⁾	M3AA 63C 6	3GAA063313--F	1110	68.1	51.6	43.3	0.56	0.66	3.7	1.56	2.6	2.8	0.0006	5.3	45		
0.37	M3AA 71C 6	3GAA073003--E	1115	68.1	66.3	60.4	0.61	1.11	4.5	3.1	2.8	3.2	0.0015	7	45		
1.3	M3AA 90LB 6	3GAA093003--E	1125	79.6	79.7	76.5	0.64	3.2	4.3	11	2.1	2.5	0.0048	18	47		
15	M3AA 160MLC 6	3GAA163430--G	1176	90.7	91.3	90.5	0.75	27.6	8.1	121	1.9	4.1	0.131	138	63		
18.5	M3AA 180MLB 6	3GAA183420--G	1180	92.0	92.5	91.8	0.78	32.3	6.6	149	1.9	3.0	0.198	162	63		
30	M3AA 200MLC 6	3GAA203430--G	1188	93.0	93.3	92.5	0.83	48.7	8.0	241	2.6	3.2	0.531	245	67		
37	M3AA 225SMB 6	3GAA223220--G	1188	93.8	94.1	93.5	0.83	59.6	7.5	297	2.5	3.0	0.821	300	67		
45	M3AA 225SMC 6	3GAA223230--G	1187	93.6	94.1	93.6	0.82	73.5	7.3	362	2.5	2.9	0.821	300	67		
45	M3AA 250SMB 6	3GAA253220--G	1191	93.9	94.2	93.5	0.82	73.3	7.9	360	2.7	3.1	1.37	341	67		
55	M3AA 250SMC 6	3GAA253230--G	1189	94.0	94.3	93.7	0.83	88.4	8.1	441	2.9	3.1	1.5	367	67		

²⁾ Temperature rise class F

Technical data, 460 V 60 Hz

IE2 Process performance aluminum motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1: 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				460 V 60 Hz	CENELEC-design										
900 r/min = 8 poles															
0.055	M3AA 63B 8	3GAA064312--F	850	36.9	31.7	24.3	0.42	0.45	2.0	0.62	2.7	3.2	0.00045	4.5	37
0.09	M3AA 71A 8	3GAA074001--E	840	50.8	46.2	38.3	0.50	0.44	2.9	1.02	2.7	2.7	0.00092	5.5	40
0.12	M3AA 71B 8	3GAA074002--E	840	40.0	35.9	25.5	0.52	0.53	2.9	1.36	2.7	3.0	0.0012	6.5	46
0.25	M3AA 80B 8	3GAA084002--E	850	52.0	50.6	43.3	0.54	0.91	3.4	2.8	2.5	2.9	0.0024	9.5	53
0.37	M3AA 90S 8	3GAA094100--E	851	58.0	55.6	47.7	0.50	1.56	3.0	4.15	2.2	2.7	0.0032	13	55
0.55	M3AA 90L 8	3GAA094500--E	860	62.0	58.9	50.4	0.46	2.16	3.3	6.1	2.6	3.2	0.0043	16	55
0.75	M3AA 100LA 8	3GAA104510--E	865	74.2	71.3	64.6	0.51	2.4	4.2	8.2	2.6	3.4	0.0069	20	46
1.1	M3AA 100LB 8	3GAA104520--E	860	77.4	75.9	71.0	0.57	3.1	4.0	12.2	2.2	2.9	0.0082	23	53
1.5	M3AA 112M 8	3GAA114300--E	855	78.6	77.5	73.2	0.61	3.9	4.2	16.7	2.1	2.8	0.01	28	55
2.2	M3AA 132S 8	3GAA134100--E	870	79.0	78.2	74.9	0.64	5.4	4.1	24.1	1.4	2.4	0.031	46	59
3	M3AA 132M 8	3GAA134300--E	865	81.0	81.8	79.8	0.68	6.8	3.2	33.1	1.2	2.0	0.037	53	61
4	M3AA 160MLA 8	3GAA164410--G	882	85.8	85.7	83.4	0.64	9.1	5.9	43.3	1.6	3.0	0.068	84	63
5.5	M3AA 160MLB 8	3GAA164420--G	881	86.4	86.6	84.6	0.65	12.2	6.2	59.6	1.5	3.0	0.085	98	63
7.5	M3AA 160MLC 8	3GAA164430--G	882	87.7	87.9	86.3	0.63	17	5.1	81.2	1.5	3.2	0.132	137	63
11	M3AA 180MLA 8	3GAA184410--G	885	88.6	89.2	87.8	0.66	23.5	5.1	118	2.0	2.9	0.214	175	63
15	M3AA 200MLA 8	3GAA204410--G	890	90.1	90.5	89.4	0.71	28.5	5.9	160	2.3	2.7	0.45	217	64
18.5	M3AA 225SMA 8	3GAA224210--G	890	90.1	90.4	89.1	0.72	35	5.9	198	2.2	2.5	0.669	266	67
22	M3AA 225SMB 8	3GAA224220--G	890	91.6	91.9	90.8	0.73	40.8	6.3	236	2.2	2.6	0.722	279	67
30	M3AA 250SMA 8	3GAA254210--G	893	91.6	91.6	90.3	0.70	57.8	6.6	320	2.8	2.7	1.4	340	67
37	M3AA 280SMA 8	3GAA284210--G	892	93.1	93.2	92.3	0.73	68.3	6.4	396	2.6	2.6	1.5	403	67

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD^2\text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor $\cos\phi$	I_N A	I_s/I_N	T_N Nm	T_i/T_N	T_b/T_N			
				460 V 60 Hz	High-output design										
900 r/min = 8 poles															
0.18	M3AA 71C 8	3GAA074003--E	830	53.5	50.1	42.4	0.56	0.75	3.1	2.0	2.5	2.6	0.0015	7	42
0.75	M3AA 90LF 8	3GAA094560--E	810	66.1	63.5	57.1	0.52	2.9	3.0	8.8	2.0	2.5	0.0048	18	46
1.5	M3AA 100LG 8	3GAA104570--E	845	76.6	75.6	71.7	0.60	4.0	3.7	16.9	2.1	2.5	0.009	26	49
2	M3AA 112MF 8	3GAA114360--E	850	79.1	79.1	75.7	0.63	5.0	4.0	22.4	1.9	2.6	0.0126	32	60
3.8	M3AA 132MF 8	3GAA134360--E	865	80.4	80.0	76.9	0.65	9.1	4.2	41.9	1.5	3.0	0.049	54	71
18.5	M3AA 200MLB 8	3GAA204420--G	891	90.1	90.4	89.0	0.72	35.3	6.1	198	2.3	2.6	0.53	245	64
30	M3AA 225SMC 8	3GAA224230--G	889	91.6	92.0	91.2	0.72	56.3	6.4	322	2.6	2.7	0.828	300	67
37	M3AA 250SMB 8	3GAA254220--G	891	92.3	92.7	92.0	0.72	68.9	6.1	396	2.8	2.6	1.5	367	67
45	M3AA 250SMC 8	3GAA254230--G	891	92.3	92.9	92.3	0.74	81.7	6.4	482	2.5	2.7	1.5	367	67

Variant codes

Aluminum motors

Variant codes specify additional options and features to the standard motor. The desired features are listed as three-digit variant codes in the motor order. Note also that there are variants that cannot be used together.

Most of the variant codes apply to IE2 and IE3 motors. However, confirm the availability of variants for IE3 motors with your ABB sales office before making an order.

Code/Variants	Frame size												
	56	63	71	80	90	100	112	132	160	180	200	225	250
Administration													
529 Customer witnessed visual inspection of complete order line.	-	-	-	-	●	●	●	●	●	●	●	●	●
531 Sea freight packing.	-	-	●	●	●	●	●	●	●	●	●	●	●
533 Wooden sea freight packing.	-	-	-	-	-	-	-	-	-	-	-	-	●
648 Rating plate in special language.	-	-	-	-	●	●	●	●	●	●	●	●	●
684 ABB Ability Smart sensor mounted.	-	-	-	-	-	-	-	-	●	●	●	●	●
Balancing													
417 Vibration acc. to Grade B (IEC 60034-14).	-	-	-	-	●	●	-	-	-	-	-	-	-
423 Balanced without key.	-	-	-	-	●	●	●	●	●	●	●	●	●
424 Full-key balancing.	-	-	-	-	●	●	●	●	●	●	●	●	●
Bearings and Lubrication													
036 Transport lock for bearings.	-	-	-	-	●	●	●	●	●	●	●	●	●
037 Roller bearing at D-end.	-	-	-	-	●	●	●	●	●	●	●	●	●
039 Cold-resistant grease.	-	●	●	●	●	●	●	●	○	○	○	○	○
040 Heat-resistant grease.	-	-	●	●	●	●	●	●	○	○	-	-	-
041 Bearings regreasable via grease nipples.	-	-	-	-	●	●	●	●	●	●	●	●	○
043 SPM compatible nipples for vibration measurement.	-	-	-	-	-	-	●	●	●	●	●	●	○
057 2RS bearings at both ends.	-	●	●	●	●	●	●	●	●	●	●	●	●
058 Angular contact bearing at D-end, shaft force away from bearing.	-	-	-	-	●	●	●	●	●	●	●	●	●
059 Angular contact bearing at N-end, shaft force towards bearing.	-	-	-	-	●	●	●	●	●	●	●	●	●
188 63-series bearing in D-end.	-	-	-	-	●	○	○	●	○	○	○	○	○
593 Bearings grease suitable for food and beverage industry.	-	-	●	●	●	●	●	●	●	●	●	●	●
691 Anti-creeping bearing at N-end.	-	●	●	●	●	●	●	-	-	-	-	-	-
795 Lubrication information plate.	-	-	-	-	-	-	-	-	●	●	●	●	●
796 Grease nipples JIS B 1575 PT 1/8 Type A.	-	-	-	-	-	-	●	●	●	●	●	●	●
797 Stainless steel SPM nipples.	-	-	-	-	-	●	●	●	●	●	●	●	●
798 Stainless steel grease nipples.	-	-	-	-	-	●	●	●	●	●	●	●	●
Brakes													
087 Brake with reduced torque, 50% of nominal torque.	-	-	-	-	●	●	●	●	●	●	-	-	-
088 Brake with mechanical release.	-	-	-	-	●	●	●	●	●	●	-	-	-
213 Brake with increased degree of protection.	-	-	-	-	-	-	-	-	●	●	-	-	-
285 Reconnection of brake for separate dc supply at 24V.	-	-	-	-	●	●	●	●	●	●	-	-	-
843 DC Brake.	-	-	●	●	●	●	●	●	●	●	-	-	-
Branch standard designs													
071 Cooling Tower duty.	-	-	-	-	-	●	●	●	●	●	●	●	●
079 Silumin-alloy rotor cage.	-	-	-	-	●	●	●	-	-	-	-	-	-
142 Manilla connection.	-	-	-	-	●	●	●	●	●	●	●	●	●
178 Stainless steel / acid proof bolts.	●	●	●	●	●	●	●	●	●	●	●	●	●
209 Non-standard voltage or frequency, (special winding).	-	-	-	-	●	●	●	●	●	●	●	●	●
217 Cast iron D-end shield (on aluminum motor).	-	-	-	-	●	●	●	●	○	○	○	○	○
385 Paint free motor.	-	-	-	-	●	●	●	●	-	-	-	-	-
425 Corrosion protected stator and rotor core.	-	-	●	●	●	●	●	●	●	●	●	●	●
983 Shock resistant design.	-	-	-	-	-	-	-	-	-	●	●	●	-
Cooling system													
053 Metal fan cover.	-	-	●	●	●	●	●	●	○	○	○	○	○
068 Light alloy metal fan.	-	-	●	●	●	●	●	●	●	●	●	●	●
075 Cooling method IC418 (without fan).	-	-	-	-	●	●	●	●	●	●	●	●	●
183 Separate motor cooling (fan axial, N-end).	-	-	●	●	●	●	●	●	●	●	●	●	●

○ = Included as standard | ● = Available as option | - = Not applicable

	Frame size													
Code/Variants	56	63	71	80	90	100	112	132	160	180	200	225	250	280
189 Separate motor cooling, IP44, 400V, 50Hz (fan axial, N-end).	-	-	-	-	-	-	-	-	•	•	•	•	•	
Documentation														
141 Binding 2D main dimension drawing.	-	•	•	•	•	•	•	•	•	•	•	•	•	
536 Photos of manufactured motors.	-	•	•	•	•	•	•	•	•	•	•	•	•	
537 Advanced data sheet.	-	-	-	-	•	•	•	•	•	•	•	•	•	
777 Premium documentation package.	-	-	-	-	•	•	•	•	•	•	•	•	•	
Drain holes														
065 Plugged existing drain holes.	-	-	•	•	•	•	•	•	•	•	•	•	•	
Earthing Bolt														
067 External earthing bolt.	-	•	•	•	•	•	•	•	•	•	•	•	•	
Hazardous Environments														
334 Ex t, Dust group III B T125C Db, IP6X (non-conductive dust) acc. IEC/ EN60079-31.	-	-	-	-	•	•	•	•	•	•	•	•	•	
335 Ex t, Dust group III B T125C Dc, IP5X (non-conductive dust) acc. IEC/ EN60079-31.	-	-	-	-	•	•	•	•	•	•	•	•	•	
336 Ex t, Dust group III C T125 Db, IP6X (conductive dust) acc. IEC/ EN60079-31.	-	-	-	-	•	•	•	•	•	•	•	•	•	
337 Ex t, Dust group III C T125 Dc, IP6X (conductive dust) acc. IEC/ EN60079-31.	-	-	-	-	•	•	•	•	•	•	•	•	•	
340 Ex t, Dust group III B T125C Dc (non-conductive dust) with manufacturers declaration.	-	-	•	•	•	•	•	•	•	•	-	-	-	
456 Ex ec IIC T3 Gc acc. IEC/EN 60079-7 with certificates.	-	-	-	-	•	•	•	•	•	•	•	•	•	
480 Ex ec II acc. to ATEX directive 2014/34/EU, temp. class T3.	-	-	•	•	•	•	•	•	-	-	-	-	-	
804 DIP/Ex tD, IEC 61241, T125 °C, IP55 (zone 22).	-	-	-	-	-	-	•	•	-	-	-	-	-	
805 DIP/Ex tD, IEC 61241, T125 °C, IP65 (zone 21).	-	-	-	-	-	-	•	•	-	-	-	-	-	
Heating elements														
450 Heating element, 100-120 V.	-	-	•	•	•	•	•	•	•	•	•	•	•	
451 Heating element, 200 - 240 V.	-	-	•	•	•	•	•	•	•	•	•	•	•	
Insulation system														
014 Winding insulation class H.	-	-	-	-	•	•	•	•	•	•	•	•	•	
405 Special winding insulation for frequency converter supply.	-	-	-	-	•	•	•	•	•	•	•	•	•	
406 Winding insulation for supply > 690 <= 1000 volts.	-	-	-	-	-	-	-	-	-	•	•	•	•	
Marine														
024 Fulfilling Bureau Veritas (BV) requirements, with certificate.	-	-	-	-	•	•	•	•	•	•	•	•	•	
025 Fulfilling Det Norske Veritas (DNV) requirements, with certificate.	-	-	-	-	•	•	•	•	•	•	•	•	•	
026 Fulfilling Lloyds Register of Shipping (LR) requirements, with certificate.	-	-	-	-	•	•	•	•	•	•	•	•	•	
027 Fulfilling American Bureau of Shipping (ABS) requirements, with certificate.	-	-	-	-	•	•	•	•	•	•	•	•	•	
049 Fulfilling Germanischer Lloyd (GL) requirements, with certificate.	-	-	-	-	•	•	•	•	•	•	•	•	•	
050 Fulfilling Registro Italiano Navale (RINA) requirements, with certificate.	-	-	-	-	•	•	•	•	•	•	•	•	•	
051 Fulfilling Russian Maritime Register of Shipping (RS) requirements, with certificate.	-	-	-	-	•	•	•	•	•	•	•	•	•	
096 Fulfilling Lloyds Register of Shipping (LR) requirements, without certificate (non-essential duty only).	-	-	•	•	•	•	•	•	•	•	•	•	•	
186 Fulfilling Det Norske Veritas (DNV) requirements, without certificate.	-	-	•	•	•	•	•	•	•	•	•	•	•	
481 Fulfilling Nippon Kaiji Kyokai (NK) requirements, with certificate.	-	-	-	-	•	•	•	•	•	•	•	•	•	
483 Fulfilling China Classification Societies (CCS) requirements (Beijing), with certificate.	-	-	-	-	•	•	•	•	•	•	•	•	•	
484 Fulfilling Korea Register of Shipping (KR) requirements, with certificate.	-	-	-	-	•	•	•	•	•	•	•	•	•	
491 Fulfilling Nippon Kaiji Kyokai (NK) requirements, without certificate.	-	-	•	•	•	•	•	•	•	•	•	•	•	
492 Fulfilling Registro Italiano Navale (RINA) requirements, without certificate.	-	-	•	•	•	•	•	•	•	•	•	•	•	
493 Fulfilling China Classification Societies (CCS) requirements (Beijing), without certificate.	-	-	•	•	•	•	•	•	•	•	•	•	•	
494 Fulfilling Korea Register of Shipping (KR) requirements, without certificate.	-	-	•	•	•	•	•	•	•	•	•	•	•	
496 Fulfilling Bureau Veritas (BV) requirements, without certificate (non-essential duty only).	-	•	•	•	•	•	•	•	•	•	•	•	•	
497 Fulfilling Russian Maritime Register of Shipping (RS) requirements, without certificate.	-	•	•	•	•	•	•	•	•	•	•	•	•	
675 Fulfilling American Bureau of Shipping (ABS) requirements, without certificate (non-essential duty only).	-	-	•	•	•	•	•	•	•	•	•	•	•	
676 Fulfilling Germanischer Lloyd (GL) requirements, without certificate (non-essential duty only).	-	-	•	•	•	•	•	•	•	•	•	•	•	

○ = Included as standard | • = Available as option | - = Not applicable

Code/Variants	Frame size													
	56	63	71	80	90	100	112	132	160	180	200	225	250	280
Mounting arrangements														
007 IM 3001 flange mounted, IEC flange, from IM 1001 (B5 from B3).	-	-	-	-	-	-	-	-	-	•	•	•	•	•
008 IM 2101 foot/flange mounted, IEC flange, from IM 1001 (B34 from B3).	•	•	•	•	•	•	•	•	-	-	-	-	-	-
009 IM 2001 foot/flange mounted, IEC flange, from IM 1001 (B35 from B3).	•	•	•	•	•	•	•	•	•	•	•	•	•	•
047 IM 3601 flange mounted, IEC flange, from IM 3001 (B14 from B5).	•	•	•	•	•	•	•	•	-	-	-	-	-	-
048 IM 3001 flange mounted, IEC flange, from IM 3601 (B5 from B14).	-	-	•	•	•	•	•	-	-	-	-	-	-	-
066 Modified for specified mounting position differing from IM B3 (1001), IM B5 (3001), B14 (3601), IM B35 (2001), IM B34 (2101).	•	•	•	•	•	•	•	•	•	•	•	•	•	•
080 (IM 3001) Flange mounted, DIN A-flange.	-	-	-	-	•	•	-	-	-	-	-	-	-	-
090 (IM 2101) foot/flange mounted, DIN C-flange, from IM 1001 (B34 from B3).	-	-	-	-	•	•	-	-	-	-	-	-	-	-
091 (IM 2001) foot/flange mounted, DIN A-flange, from IM 1001 (B35 from B3).	-	-	-	-	•	•	-	-	-	-	-	-	-	-
093 IM 3601 flange mounted, IEC flange, from IM 1001 (B14 from B3).	-	-	-	-	•	•	•	-	-	-	-	-	-	-
200 Flange ring holder.	-	-	•	•	•	•	•	•	-	-	-	-	-	-
218 Flange ring FT 85.	-	-	•	•	•	-	-	-	-	-	-	-	-	-
219 Flange ring FT 100.	-	-	•	•	•	-	-	-	-	-	-	-	-	-
220 Flange ring FF 100.	-	-	•	•	•	-	-	-	-	-	-	-	-	-
223 Flange ring FF 115.	-	-	•	•	•	-	-	-	-	-	-	-	-	-
224 Flange ring FT 115.	-	-	•	•	•	-	-	-	-	-	-	-	-	-
226 Flange ring FF 130.	-	-	•	•	•	•	•	•	-	-	-	-	-	-
227 Flange ring FT 130.	-	-	•	•	•	•	•	•	-	-	-	-	-	-
229 Flange FT 130.	-	-	-	-	•	•	•	-	-	-	-	-	-	-
233 Flange ring FF 165.	-	-	-	•	•	•	•	-	-	-	-	-	-	-
234 Flange ring FT 165.	-	-	•	•	•	•	•	-	-	-	-	-	-	-
235 Flange FF 165.	-	-	-	-	•	-	-	-	-	-	-	-	-	-
236 Flange FT 165.	-	-	-	-	-	-	-	•	-	-	-	-	-	-
243 Flange ring FF 215.	-	-	-	-	-	-	-	•	•	-	-	-	-	-
244 Flange ring FT 215.	-	-	-	-	-	•	•	•	-	-	-	-	-	-
245 Flange FF 215.	-	-	-	-	-	•	•	-	-	-	-	-	-	-
253 Flange ring FF 265.	-	-	-	-	-	-	-	•	-	-	-	-	-	-
254 Flange ring FT 265.	-	-	-	-	-	-	-	-	•	-	-	-	-	-
255 Flange FF 265.	-	-	-	-	-	-	-	-	•	-	-	-	-	-
260 Flange FT 115.	-	-	-	-	-	•	-	-	-	-	-	-	-	-
313 IM 3601 flange mounted, IEC flange, from IM 2101 (B14 from B34).	-	-	-	-	•	•	•	-	-	-	-	-	-	-
314 IM 3001 flange mounted, IEC flange, from IM 2101 (B5 from B34).	-	-	-	-	•	•	•	-	-	-	-	-	-	-
317 IM 3601 flange mounted, IEC flange, from IM 2001 (B14 from B35).	-	-	-	-	•	•	•	-	-	-	-	-	-	-
Painting														
114 Special paint color, standard grade.	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Protection														
005 Protective roof.	-	•	•	•	•	•	•	•	•	•	•	•	•	•
072 Radial seal at D-end. Not possible for 2-pole , 280 and 315 frames.	-	-	•	•	•	•	•	•	•	•	•	•	•	•
158 Degree of protection IP65.	-	-	•	•	•	•	•	•	•	•	•	•	•	•
211 Weather protected, IP xx W.	-	-	•	•	•	•	•	•	•	•	•	•	•	•
250 Degree of protection IP66.	-	-	•	•	•	•	•	•	•	•	•	•	•	•
403 Degree of protection IP56.	-	-	•	•	•	•	•	•	•	•	•	•	•	•
404 Degree of protection IP56, without fan and fan cover.	-	-	-	-	•	•	•	•	-	-	-	-	-	-
784 Gamma-seal at D-end.	-	-	-	-	•	•	•	•	•	•	•	•	•	•
Rating & instruction plates														
002 Restamping voltage, frequency and output, continuous duty.	•	•	•	•	•	•	•	•	•	•	•	•	•	•
004 Additional text on std rating plate (max 12 digits on free text line).	-	-	-	-	•	•	•	•	•	•	•	•	•	•
095 Restamping output (maintained voltage, frequency), intermittent duty.	•	•	•	•	•	•	•	•	•	•	•	•	•	•
098 Stainless rating plate.	-	-	•	•	•	•	•	•	•	•	•	•	•	•
126 Tag plate.	-	-	-	-	•	•	•	•	•	•	•	•	•	•
135 Mounting of additional identification plate, stainless.	-	-	•	•	•	•	•	•	•	•	•	•	•	•
138 Mounting of additional identification plate, aluminium.	-	•	•	•	•	•	•	•	•	•	•	•	•	•
139 Additional identification plate delivered loose.	-	-	•	•	•	•	•	•	•	•	•	•	•	•
159 Additional plate with text "Made in".	•	•	•	•	•	•	•	•	•	•	•	•	•	•
160 Additional rating plate affixed.	-	-	-	-	•	•	•	•	•	•	•	•	•	•
161 Additional rating plate delivered loose.	•	•	•	•	•	•	•	•	•	•	•	•	•	•
163 Frequency converter rating plate. Rating data according to quotation.	-	-	-	-	•	•	•	•	•	•	•	•	•	•
270 Additional rating plate with standard data, delivered loose.	-	-	•	•	•	•	•	•	•	•	•	•	•	•

○ = Included as standard | • = Available as option | - = Not applicable

	Frame size													
Code/Variants	56	63	71	80	90	100	112	132	160	180	200	225	250	280
332 Baldor Catalogue #.	•	•	•	•	•	•	•	•	•	•	•	•	•	
333 Not for use in the USA.	-	•	•	•	•	•	•	•	•	•	•	•	•	
818 Restamping as generator.	-	-	-	-	-	-	-	-	•	•	•	•	•	
Shaft & rotor														
069 Two shaft extensions according to catalog drawings.	-	-	-	-	•	•	•	•	•	•	•	•	•	
070 Special shaft extension at D-End, standard shaft material.	-	-	-	-	•	•	•	•	•	•	•	•	•	
131 Motor delivered with half key (key not exceeding shaft diameter).	-	-	-	-	•	•	•	•	•	•	•	•	•	
165 Shaft extension with open keyway.	-	-	-	-	•	•	•	•	•	•	•	•	•	
410 Shaft material stainless steel.	-	-	-	-	•	•	•	•	•	•	•	•	•	
591 Special shaft extension according to customer specification.	-	-	-	-	•	•	•	•	•	•	•	•	•	
600 Special shaft extension at N-end, standard shaft material.	-	-	-	-	•	•	•	-	-	-	-	-	-	
Standards and Regulations														
208 Fulfilling Underwriters Laboratories (UL), listed requirements.	-	-	-	•	•	•	•	•	•	•	•	•	•	
331 Motor not for sale for use in EU.	-	-	•	•	•	•	•	•	•	•	•	•	•	
540 China energy label.	-	-	-	-	-	-	-	-	-	-	-	-	•	
543 Australian MEPS.	-	-	-	•	•	•	•	•	•	•	•	•	•	
548 Certificate of conformity according TR-CU 004/2011 for customs union RU, KZ, BY, AM, KG.	-	-	-	•	•	•	•	•	•	•	•	•	•	
822 WIMES 3.03i6 Compliant Design for DOL operation.	-	-	-	•	•	•	•	•	•	•	•	•	•	
823 WIMES 3.03i6 Compliant Design for VSD operation.	-	-	-	•	•	•	•	•	•	•	•	•	•	
Stator winding temperature sensors														
120 KTY 84-130 (1 per phase) in stator winding.	-	-	-	-	-	-	-	-	•	•	•	•	•	
121 Bimetal detectors, break type (NCC), (3 in series), 130 °C, in stator winding.	-	•	•	•	•	•	•	•	•	•	•	•	•	
122 Bimetal detectors, break type (NCC), (3 in series), 150 °C, in stator winding.	-	-	•	•	•	•	•	•	•	•	•	•	•	
123 Bimetal detectors, break type (NCC), (3 in series), 170 °C, in stator winding.	-	•	•	•	•	•	•	•	•	•	•	•	•	
124 Bimetal detectors, break type (NCC), (3 in series), 140 °C, in stator winding.	-	-	-	-	-	-	-	-	•	•	•	•	•	
125 Bimetal detectors, break type (NCC), (2x3 in series), 150 °C, in stator winding.	-	-	-	•	•	•	•	•	•	•	•	•	•	
127 Bimetal detectors, break type (NCC), (3 in series, 130 °C & 3 in series, 150 °C), in stator winding.	-	•	•	•	•	•	•	•	•	•	•	•	•	
321 Bimetal detectors, closing type (NO), (3 in parallel), 130°C, in stator winding.	-	-	-	-	•	•	•	•	-	-	-	-	-	
322 Bimetal detectors, closing type (NO), (3 in parallel), 150°C, in stator winding.	-	-	-	-	•	•	•	•	-	-	-	-	-	
323 Bimetal detectors, closing type (NO), (3 in parallel), 170°C, in stator winding.	-	-	-	-	•	•	-	-	-	-	-	-	-	
325 Bimetal detectors, closing type (NO), (2x3 in parallel), 150°C, in stator winding.	-	-	-	-	•	•	•	•	-	-	-	-	-	
327 Bimetal detectors, closing type (NO), (3 in parallel, 130°C & 3 in parallel, 150°C), in stator winding.	-	-	-	-	•	•	•	•	-	-	-	-	-	
435 PTC - thermistors (3 in series), 130 °C, in stator winding.	•	•	•	•	•	•	•	•	•	•	•	•	•	
436 PTC - thermistors (3 in series), 150 °C, in stator winding.	•	•	•	•	•	•	•	•	○	○	○	○	○	
437 PTC - thermistors (3 in series), 170 °C, in stator winding.	-	-	-	-	•	•	•	•	•	•	•	•	•	
439 PTC - thermistors (2x3 in series), 150 °C, in stator winding.	-	•	•	•	•	•	•	•	•	•	•	•	•	
440 PTC - thermistors (3 in series, 110°C & 3 in series, 130°C), in stator winding.	-	-	-	-	•	•	•	•	-	-	-	-	-	
441 PTC - thermistors (3 in series, 130 °C & 3 in series, 150 °C), in stator winding.	-	•	•	•	•	•	•	•	•	•	•	•	•	
442 PTC - thermistors (3 in series, 150 °C & 3 in series, 170 °C), in stator winding.	-	-	-	-	•	•	•	•	•	•	•	•	•	
445 Pt100 2-wire in stator winding, 1 per phase.	-	-	-	-	•	•	•	•	•	•	•	•	•	
446 Pt100 2-wire in stator winding, 2 per phase.	-	-	-	-	-	-	-	-	•	•	•	•	•	
Terminal box														
015 Motor supplied in D connection.	-	-	•	•	•	•	•	•	•	•	•	•	•	
016 9 terminals in terminal box.	-	-	-	-	•	•	•	•	-	-	-	-	-	
017 Motor supplied in Y connection.	-	-	-	-	•	•	-	-	•	•	•	•	•	
019 Larger than standard terminal box.	-	-	-	-	-	-	-	-	-	-	•	•	○	
021 Terminal box LHS (seen from D-end).	-	-	-	-	-	-	-	-	-	-	•	•	•	
022 Cable entry LHS (seen from D-end).	-	-	-	-	-	-	-	-	○	○	•	•	•	
136 Extended cable connection, standard terminal box.	-	-	-	-	•	•	•	•	-	-	-	-	-	
137 Extended cable connection, low terminal box, "Flying leads".	-	-	-	-	•	•	•	•	-	-	-	-	-	

○ = Included as standard | • = Available as option | - = Not applicable

Code/Variants	Frame size												
	56	63	71	80	90	100	112	132	160	180	200	225	250
180 Terminal box RHS (seen from D-end).	-	-	-	-	-	-	-	-	-	-	●	●	●
230 Standard metal cable gland.	-	-	●	●	●	●	●	●	●	●	●	●	●
375 Standard plastic cable gland.	-	-	●	●	●	●	●	●	-	-	-	-	-
376 Two standard plastic cable glands.	-	-	-	-	●	●	●	●	-	-	-	-	-
418 Separate terminal box for auxiliaries, standard material.	-	-	-	-	-	-	●	●	●	●	●	●	●
466 Terminal box at N-end.	-	-	-	-	-	-	-	-	-	-	●	●	●
467 Lower than standard terminal box and rubber extended cable. Cable length 2 m.	-	-	-	-	-	-	●	●	●	●	●	●	●
731 Two standard metal cable glands.	-	-	●	●	●	●	●	●	●	●	●	●	●
739 Prepared for metric cable glands according to DIN 42925, draft aug. 1999.	-	-	-	-	-	-	●	●	-	-	-	-	-
740 Prepared for PG cable glands.	-	-	-	-	-	-	●	●	●	●	●	●	●
Testing													
145 Type test report from a catalogue motor, 400V 50Hz.	-	●	●	●	●	●	●	●	●	●	●	●	●
146 Type test with report for one motor from specific delivery batch.	-	-	-	-	●	●	●	●	●	●	●	●	●
147 Type test with report for motor from specific delivery batch, customer witnessed.	-	-	-	-	●	●	●	●	●	●	●	●	●
148 Routine test report.	●	●	●	●	●	●	●	●	●	●	●	●	●
150 Customer witnessed testing. Specify test procedure with other codes.	-	-	-	-	●	●	●	●	●	●	●	●	●
221 Type test and multi-point load test with report for one motor from specific delivery batch.	-	-	-	-	-	-	●	●	●	●	●	●	●
222 Torque/speed test, type test and multi-point load test with report for one motor from specific delivery batch.	-	-	-	-	●	●	●	●	●	●	●	●	●
760 Vibration level test.	-	-	-	-	●	●	●	●	●	●	●	●	●
762 Noise level test for one motor from specific delivery batch.	-	-	-	-	●	●	●	●	●	●	●	●	●
763 Noise spectrum test for one motor from specific delivery batch.	-	-	-	-	●	●	-	-	-	-	-	-	-
Variable speed drives													
470 Prepared for hollow shaft pulse tacho (L&L equivalent).	-	-	-	-	-	-	-	-	●	●	●	●	●
472 1024 pulse tacho (L&L 861007455-1024).	-	-	-	-	-	-	-	-	●	●	●	●	●
473 2048 pulse tacho (L&L 861007455-2048).	-	-	-	-	-	-	-	-	●	●	●	●	●
474 Separate motor cooling (axial fan, N-end) and prepared for hollow shaft tacho (L&L equivalent).	-	-	-	-	-	-	-	-	●	●	●	●	●
476 Separate motor cooling (axial fan, N-end) and 1024 pulse tacho (L&L 861007455-1024).	-	-	-	-	-	-	-	-	●	●	●	●	●
477 Separate motor cooling (axial fan, N-end) and 2048 pulse tacho (L&L 861007455-2048).	-	-	-	-	-	-	-	-	●	●	●	●	●
570 Prepared for hollow shaft pulse tacho (L&L 503).	-	-	-	-	-	-	-	-	●	●	●	●	●
572 1024 pulse tacho (L&L 503).	-	-	-	-	-	-	-	-	●	●	●	●	●
573 2048 pulse tacho (L&L 503).	-	-	-	-	-	-	-	-	●	●	●	●	●
574 Separate motor cooling (fan axial, N-end) and prepared for hollow shaft tacho (L&L 503).	-	-	-	-	-	-	-	-	●	●	●	●	●
576 Separate motor cooling (fan axial, N-end) and 1024 pulse tacho (L&L 503).	-	-	-	-	-	-	-	-	●	●	●	●	●
577 Separate motor cooling (fan axial, N-end) and 2048 pulse tacho (L&L 503).	-	-	-	-	-	-	-	-	●	●	●	●	●
580 Separate motor cooling, IP44, 400 V, 50Hz (axial fan, N-end) and 1024 pulse tacho (L&L 503).	-	-	-	-	-	-	-	-	●	●	●	●	●
581 Separate motor cooling, IP44, 400V, 50Hz (fan axial, N-end) and 2048 pulse tacho (L&L 503).	-	-	-	-	-	-	-	-	●	●	●	●	●
588 Shaft grounding device.	-	-	-	-	-	-	-	-	●	●	●	●	●
661 1024 Pulse tacho mounted, Hohner series 59, 11-30V.	-	-	-	-	●	●	●	●	-	-	-	-	-
662 2048 Pulse tacho mounted, Hohner series 59, 11-30V.	-	-	-	-	●	●	●	●	-	-	-	-	-
701 Insulated bearing at N-end.	-	-	-	-	-	-	-	-	●	●	●	●	●
702 Insulated bearings at both ends.	-	-	●	●	●	●	●	●	●	●	●	●	●
704 EMC cable entry.	-	-	-	-	●	●	●	●	●	●	●	●	●

○ = Included as standard | ● = Available as option | - = Not applicable

Mechanical design

Motor frame and drain holes

Motor frame

The motor frame is made of aluminum alloy. Frame sizes 56 to 180 have aluminum feet and sizes 200 to 280 have cast iron feet.

The bearing end shields of sizes 56 to 132 are made of aluminum, and those of 160 to 280 are made of cast iron.



Drain holes

Motors that will be operated in very humid or wet environments and especially under intermittent duty should be provided with drain holes. The IM designation, such as IM 3031, determines the intended mounting arrangement for the motor.

Motors are provided with closable plastic plugs in the drain holes. The plugs on delivery, when mounting the motors, ensure that the drainholes face downwards. In the case of vertical mounting, the upper plug must be hammered home completely. In very dusty environments both plugs should be hammered home.

Motors are supplied with drain holes both at the D-end and N-end.

When mounting arrangement differs from foot mounted IM B3, please use variant code 066 when ordering. See variant codes 065, 066 and 076 under the heading "Drain holes".

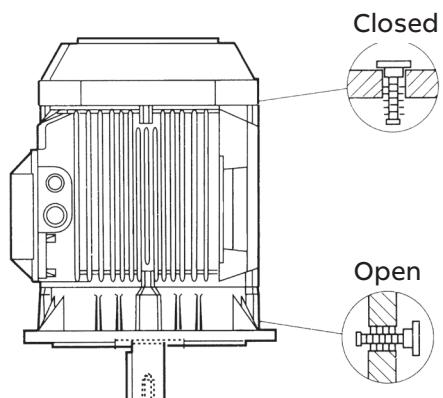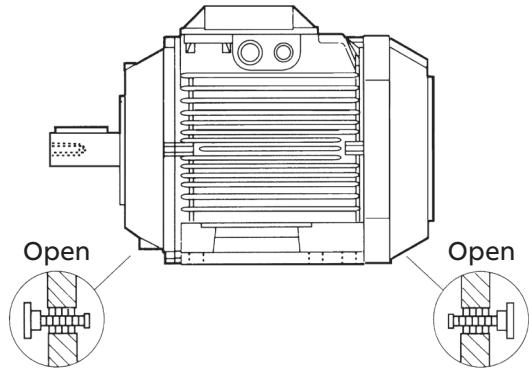

Mechanical design

Bearings

The motors are provided with bearings according to the tables below.

Greater axial forces can be tolerated if the motors are provided with angular contact ball bearings.

Standard design: deep groove ball bearings

Motor size	Number of poles	Standard design	
		Deep groove ball bearings	
		D-end	N-end
56	-	6201-2Z/C3	6201-2Z/C3
63	-	6201-2Z/C3	6201-2Z/C3
71	-	6203-2Z/C3	6202-2Z/C3
80	-	6204-2Z/C3	6203-2Z/C3
90	-	6205-2Z/C3	6204-2Z/C3
100	-	6306-2Z/C3	6205-2Z/C3
112	-	6306-2Z/C3	6205-2Z/C3
132 ¹⁾	-	6208-2Z/C3	6206-2Z/C3
132 ²⁾	-	6208-2Z/C3	6206-2Z/C3
132 ³⁾	-	E2.6208-2Z/C3	E2.6206-2Z/C3
132 ⁴⁾	-	E2.6308-2Z/C3	E2.6206-2Z/C3
160	-	6309-2Z/C3	6209-2Z/C3
180	-	6310-2Z/C3	6209-2Z/C3
200	-	6312-2Z/C3	6210-2Z/C3
225	-	6313-2Z/C3	6212-2Z/C3
250	-	6315-2Z/C3	6213-2Z/C3
280	2 pole	6315/C3	6213/C3
280	4-8 pole	6316/C3	6213/C3

¹⁾ all types except ³⁾ 2p 9,2kW (HO)

²⁾ SM_-

⁴⁾ 2p 15kW (HO)

Note that in such cases the axial force must only operate in one direction.

Motor versions with roller bearings tolerate greater radial forces.

Alternative design with roller bearings

It is recommended to use roller bearings in belt drives for motor sizes 160 to 280.

See variant code 037 under the heading "Bearings and lubrication".

Motor size	Number of poles	Alternative designs	
		Roller bearings (037)	
		D-end	N-end
56	-	-	-
63	-	-	6201-2Z/C3
71	-	-	6202-2Z/C3
80	-	-	6203-2Z/C3
90	-	NU 205	6204-2Z/C3

¹⁾ all types except ³⁾ 2p 9,2kW (HO)

²⁾ SM_-

⁴⁾ 2p 15kW (HO)

Motor size	Number of poles	Alternative designs	
		Roller bearings (037)	
		D-end	N-end
100	-	NU 306	6205-2Z/C3
112	-	NU 306	6205-2Z/C3
132 ¹⁾	-	NU 208	6206-2Z/C3
132 ²⁾	-	NU 308	6206-2Z/C3
132 ³⁾	-	-	-
132 ⁴⁾	-	-	-
160	-	NU 309 ECP	6209-2Z/C3
180	-	NU 310 ECP	6209-2Z/C3
200	-	NU 312 ECP	6210-2Z/C3
225	-	NU 313 ECP	6212-2Z/C3
250	-	NU 315 ECP	6213-2Z/C3
280	2 pole	NU 315 ECP	6213/C3
280	4-8 pole	NU 316 ECP	6213/C3

¹⁾ all types except ³⁾ 2p 9,2kW (HO)

²⁾ SM_-

⁴⁾ 2p 15kW (HO)

Alternative design: angular contact ball bearings

See variant codes 058 and 059 under the heading "Bearings and lubrication".

Motor size	Number of poles	Ang. contact ball bearings (058, 059)	
		Ang. contact ball bearings (058, 059)	
		D-end	N-end
56-80	-	-	-
90	-	7205 B	7204 B
100	-	7306 B	7205 B
112	-	7306 B	7205 B
132 ¹⁾	-	7208 B	7206 B
132 ²⁾	-	7308 B	7206 B
132 ³⁾	-	-	-
132 ⁴⁾	-	-	-
160	-	7309 BEP	7209 BEP
180	-	7310 BEP	7209 BEP
200	-	7312 BEP	7210 BEP
225	-	7313 BEP	7212 BEP
250	-	7315 BEP	7213 BEP
280	2 pole	7315 BEP	7213 BEP
280	4-8 pole	7316 BEP	7213 BEP

¹⁾ all types except ³⁾ 2p 9,2kW (HO)

²⁾ SM_-

⁴⁾ 2p 15kW (HO)

—
01 Motor sizes 71 - 132.

02 Motor sizes 160 - 250.

Transport locking

Motors provided with roller bearings or angular contact ball bearings are fitted with a transport lock to prevent damage to the bearings, due to vibration, during transport.

Axially locked bearings


The table below shows which of the motor's bearings are axially locked in the bearing seat. In motor size 63 the locking is done by an internal retaining ring, in motor sizes 71 to 280 by an inner bearing cover.

Motor size	Foot-mounted motors	Flange-mounted motors	
		Large flange	Small flange
56	N/A	N/A	N/A
63	N/A	N/A	N/A
71-132	D-end ¹⁾	D-end ¹⁾	D-end ¹⁾
160-280	D-end	D-end	-

¹⁾ A spring-washer at the N-end presses the rotor toward the D-end.

Bearing seals

Motor size	Number of poles	Standard design, axial seal		Alternative design Radial seal (Din3760) Variant code 073
		D-end	N-end	
56	2-4	V-ring	Labyrinth seal	
63	2-8	V-ring	Labyrinth seal	
71	2-12	V-16A	Labyrinth seal 17x28x7	
80	2-12	V-20A	Labyrinth seal 20x40x7	
90	2-12	V-25A	Labyrinth seal 25x42x7	
100	2-12	V-30A	Labyrinth seal 30x47x7	
112	2-12	V-30A	Labyrinth seal 30x47x7	
132	2-12	V-40A	Labyrinth seal 40x62x7	
160	2-12	V-45A	V-45A	45x65x8
180	2-12	V-50A	V-45A	50x72x8
200	2-12	V-60A	V-50A	60x80x8
225	2-12	V-65A	V-60A	65x85x8
250	2-12	V-75A	V-65A	75x95x8

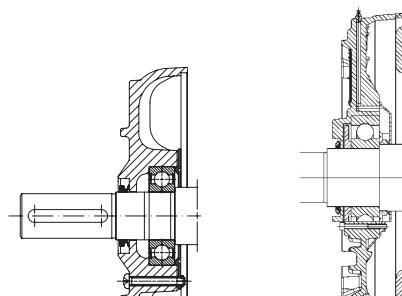

—
01

—
02

Bearing life and lubrication

Bearing life

The nominal life is defined as the number of hours that are attained or exceeded by 90 percent of identical bearings, in a large test series, under certain specified conditions. 50 percent of the bearings attain a life of as much as 5 times this figure.

The life of bearings is dependent on various factors such as bearing load, motor speed, operating temperature and the purity of the grease. The permissible radial and axial loading for different motor sizes is shown in the table on the following pages.

The table is valid for 50 Hz. For 60 Hz and/or some other bearing life than specified in the table the values are changed according to the table below.

The table values assume the occurrence of only radial or axial forces. In the case of simultaneous radial and axial forces information can be supplied on request. It is assumed that the radial force is applied at the end of the motor shaft.

Permissible force at changed bearing life or supply frequency

Bearing life in hours at		
50 Hz	60 Hz	
25 000	21 000	100 % of value for 25.000 hours
40 000	33 000	100 % of value for 40.000 hours
63 000	52 000	86 % of value for 40.000 hours
80 000	67 000	80 % of value for 40.000 hours

Lubrication

The motors are delivered with bearing grease for use at normal temperatures in dry or humid environments. The motors are lubricated for ambient temperatures 40°C and in other temperatures above 40°C, see table next page.

Motor sizes 63 to 250 are provided with shielded bearings. As an option, motor sizes 90 to 250 are provided with grease nipples for regreasing, see variant code 041 under the heading "Bearings and lubrications".

Motor size 280 is provided with grease nipples for re-greasing as standard.

The lubrication interval L_1 , suitable for relubricated bearings, is defined as the number of operating hours after which 99 percent of the bearings are adequately lubricated.

Lubrication intervals and grease quantities are specified on a plate on the motor as well as in the manual supplied with the motor.

The grease lifetime L_{10} , suitable for permanent lubricated bearings, is defined as the number of operating hours after which 90 percent of the bearings are adequately lubricated. 50 percent of the bearings achieve two times this figure. Maximum lifetime, however, should be regarded as 40,000 hours.

In case of high ambient temperatures the shaft loads must be reduced compared to permissible loadings in the table, please contact ABB.

Lubrication intervals

ABB follows the L_1 -principle in defining lubrication interval. That means that 99 percent of the motors are sure to make the interval time. The lubrication intervals can also be calculated according to the L_{10} -principle, which are normally doubled compared to L_1 -values. Values available from ABB at request.

The table below gives lubrication intervals according to the L_1 -principle for different speeds. The values are valid for horizontal mounted motors (B3), with about 80°C bearing temperature and using good quality grease with lithium complex soap and with mineral or PAO-oil.

For more information, see ABB's Low Voltage Motors Manual.

Lubrication intervals in duty hours for ball and roller bearings

Frame size	Amount of grease g/bearing	Amount of grease g/N-end	Speed 3600 r/min	Speed 3000 r/min	Speed 1800 r/min	Speed 1500 r/min	Speed 1000 r/min	Speed 500-900 r/min
Lubrication intervals in duty hours								
Ball bearings								
280	60		2 000	3 500	-	-	-	-
280	70		-	-	8 000	10 500	14 000	17 000
Roller bearings								
280	60		1 000	1750	-	-	-	-
280	70		-	-	4000	5250	7 000	8 500

Grease lifetime

In vertically mounted motors, the grease lifetime is half the figures as in following table. For applications corresponding to the empty cells in the table, please contact ABB. These applications can imply reduced lifetime for bearings and winding. Motors with roller bearings (optional) have considerably shorter grease life. For continuous operation regreasing nipples should be considered.

Grease lifetime

Ambient temperature and rated output

		25 °C		40 °C		50 °C		60 °C		70 °C		80 °C		
Motor	r/min	Basic	High											
56	3000	40 000	40 000	40 000	40 000	40 000	40 000	31 000	31 000	17 000	17 000	9000	9000	
	1500	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9 000	9 000	
	1000	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9 000	9 000	
	750	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9 000	9 000	
63	3000	40 000	40 000	40 000	40 000	40 000	40 000	31 000	31 000	17 000	17 000	9000	9000	
	1500	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
	1000	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
	750	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
71	3000	40 000	40 000	40 000	40 000	40 000	40 000	27 000	27 000	15 000	15 000	8000	8000	
	1500	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
	1000	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
	750	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
80	3000	40 000	40 000	40 000	40 000	39 000	39 000	23 000	23 000	13 000	13 000	7000	7000	
	1500	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
	1000	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
	750	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
90	3000	40 000	40 000	40 000	40 000	33 000	33 000	20 000	20 000	11 000	11 000	6000	6000	
	1500	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
	1000	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
	750	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
100	3000	40 000	40 000	39 000	39 000	25 000	25 000	15 000	15 000	8000	8000	4000	4000	
	1500	40 000	40 000	40 000	40 000	40 000	40 000	30 000	30 000	17 000	17 000	9000	9000	
	1000	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
	750	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
112 1)	3000	40 000	40 000	39 000	39 000	25 000	25 000	15 000	15 000	8000	8000	4000	4000	
	1500	40 000	40 000	40 000	40 000	40 000	40 000	30 000	30 000	17 000	17 000	9000	9000	
	1000	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
	750	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
132 1)	3000	40 000	40 000	33 000	33 000	21 000	21 000	13 000	13 000	7000	7000	4000	4000	
	1500	40 000	40 000	40 000	40 000	40 000	40 000	26 000	26 000	14 000	14 000	7000	7000	
	1000	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
	750	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
132 2)	3000	40 000	40 000	31 000	31 000	20 000	20 000	12 000	12 000	6000	6000	3000	3000	
	1500	40 000	40 000	40 000	40 000	40 000	40 000	24 000	24 000	13 000	13 000	7000	7000	
	1000	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
	750	40 000	40 000	40 000	40 000	40 000	40 000	33 000	33 000	18 000	18 000	9000	9000	
160	3000	40 000	40 000	40 000	36 000	40 000	19 000	26 000	9000	14 000	5000	8000	2000	
	1500	40 000	40 000	40 000	40 000	40 000	40 000	40 000	38 000	40 000	20 000	37000	10 000	
	1000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	24 000	40 000	12 000	
	750	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	
180	3000	38 000	38 000	38 000	38 000	38 000	38 000	38 000	38 000	23 000	23 000	12 000	13 000	7000
	1500	40 000	40 000	40 000	40 000	40 000	40 000	24 000	40 000	12 000	26 000	6000	13 000	3000
	1000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	24 000	29 000	12 000
	750	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	37 000	37 000	21 000	21 000	
200	3000	27 000	27 000	27 000	27 000	27 000	18 000	24 000	10 000	14 000	5000	8000	3000	
	1500	40 000	40 000	40 000	40 000	40 000	40 000	40 000	32 000	40 000	18 000	30 000	10 000	
	1000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	30 000	38 000	17 000
	750	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	

¹⁾ all types except

²⁾ SM_

Grease lifetime

Ambient temperature and rated output

Motor	r/min	25 °C		40 °C		50 °C		60 °C		70 °C		80 °C	
		Basic	High										
225	3000	23 000	23 000	23 000	18 000	23 000	10 000	20 000	6000	12 000	3000	7000	1000
	1500	40 000	40 000	40 000	40 000	40 000	23 000	40 000	12 000	40 000	6000	25 000	3000
	1000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	27 000
	750	40 000		40 000		40 000		40 000		40 000		40 000	
250	3000	16 000	16 000	16 000	13 000	16 000	7000	12 000	4000	7000	2000	4000	1000
	1500	40 000	40 000	40 000	39 000	40 000	21 000	40 000	11 000	33 000	6000	19 000	3000
	1000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	25 000	36 000	13 000
	750	40 000		40 000		40 000		40 000		40 000		40 000	

¹⁾all types except

²⁾SM_

Grease lifetime L_{10} in deep groove ball bearings of type 2Z in horizontally mounted motors in continuous running duty.

Mechanical design

Radial forces

Permissible loading on shaft

The tables give the permissible radial force in Newtons, assuming zero axial force, ambient temperature of 25°C.

Permissible loads of simultaneous radial and axial forces will be supplied on request.


The bearing life, L_{10} , is calculated according to SKF's theory on bearing life L_{10aah} , which also takes the purity of the grease into consideration. An adequate lubrication is a necessary prerequisite for the table at right.

If the radial force is applied between points X_0 and X_{max} , the permissible force F_R can be calculated from the following formula:

$$F_R = F_{x0} - \frac{X}{E} (F_{x0} - F_{xmax})$$

Where:

E: length of the shaft extension in the standard version

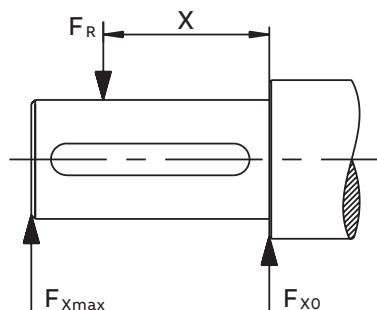

Permissible radial forces

Motor size	Poles	Length of shaft extension E (mm)	Basic design with deep groove ball bearings				Roller bearings			
			Mounting arrangement IM B3				Mounting arrangement IM B3			
			20,000 h		40,000 h		20,000 h		40,000 h	
Motor size	Poles	E (mm)	F _{x0} (N)	F _{xmax} (N)	F _{x0} (N)	F _{xmax} (N)	F _{x0} (N)	F _{xmax} (N)	F _{x0} (N)	F _{xmax} (N)
56	2	20	348	299	376	237				
	4	20	438	376	347	298				
63	2	23	355	306	281	242				
	4	23	447	385	354	305				
	6	23	512	441	405	349				
71	2-8	30	680	570	680	570				
80	2	40	630	750	930	750				
80	4-8	40	930	750	930	750				
90	2-8	50	1010	810	1010	810				
100	2-8	60	2280	1800	2280	1800				
112	2-8	60	2280	1800	2280	1800				
132 ¹⁾	2-8	80	2120	1610	2120	1610				
132 ²⁾	2-8	80	2600	2100	2600	2100				

¹⁾ 62-series bearings

²⁾ 63-series bearings

Motor size	Poles	Length of shaft extension E (mm)	Basic design with deep groove ball bearings				Roller bearings			
			Mounting arrangement IM B3				Mounting arrangement IM B3			
			20,000 h		40,000 h		20,000 h		40,000 h	
Motor size	Poles	E (mm)	F _{x0} (N)	F _{xmax} (N)	F _{x0} (N)	F _{xmax} (N)	F _{x0} (N)	F _{xmax} (N)	F _{x0} (N)	F _{xmax} (N)
160	2	110	4 760	3860	4100	3320	6580	4300	5620	4300
	4	110	5 180	4200	4380	3545	7340	4300	6180	4300
180	6	110	5 160	4180	4360	3540	7780	4300	6500	4300
	8	110	6 280	4300	5320	4300	8860	4300	7440	4300
	2	110	6 060	4960	5280 ¹⁾	4305 ¹⁾	7600	5500	6560	5500
200	4	110	4 800	3940	4020	3300	7280	5500	6140	5500
	6	110	6 280	5140	5280	4380	8680	5500	7280	5500
	8	110	6 960	5500	5880	4800	9440	5500	7920	5500
	2	110	7800	6500	6760 ²⁾	5640 ²⁾	10 360	8640	8880	7400
225	4	110	8 400	7020	7180	5980	11 560	9550	9800	8180
	6	110	8 960	7480	7600	6340	12 480	9550	10 520	8780
	8	110	10 480	8740	8940	7400	14 100	9550	11 920	9550
	2	110	8 520	7180	7360 ³⁾	6200 ³⁾	12 320	10 380	10 560	8900
250	4	140	8 380	6780	7200	5820	13 380	10 250	11 320	9160
	6	140	10 960	8860	9360	7560	15 860	10 250	13 420	10 250
	8	140	12 100	9780	10 340	8360	17 220	10 250	14 580	10 250
	2	140	10 480 ⁴⁾	8500 ⁴⁾	9080 ⁴⁾	7360 ⁴⁾	16 220	10 900	13 960	10 900
280	4	140	10 840	8780	9380	7600	18 020	13 800	15 320	13 800
	6	140	12 600	10 220	10 700	8680	20 240	13 800	17 140	13 800
	8	140	14 660	11 880	12 540	10 160	22 680	13 800	19 220	13 800
	2	140	6 780	5 500	5 680	4 600	16 280	13 200	14 000	11 360
315	4	140	8 060	6 540	6 640	5 380	19 480	15 780	16 540	13 400
	6	140	8 980	7 280	7 360	5 960	21 920	17 760	18 580	15 060
	8	140	9 180	7 460	7 460	6 060	22 240	18 020	18 860	15 300

¹⁾ The maximum lifetime of the grease is 38000 h

²⁾ The maximum lifetime of the grease is 27000 h

³⁾ The maximum lifetime of the grease is 23000 h

⁴⁾ The maximum lifetime of the grease is 16000 h

Mechanical design

Axial forces


—
01 Mounting arrangement IM B3.

02 Mounting arrangement IM V1.

The following tables present permissible axial forces on the shaft in Newtons, assuming zero radial force, a 25 °C ambient temperature, and normal conditions. The values are given for a calculated bearing life of 20,000 and 40,000 hours per motor size.

At 60 Hz, the values must be reduced by 10 percent, and for two-speed motors, the higher speed determines permissible axial force. Permissible loads of simultaneous radial and axial forces can be supplied on request.

For axial force F_{AD} , it is assumed that the D-bearing is locked with a locking ring.

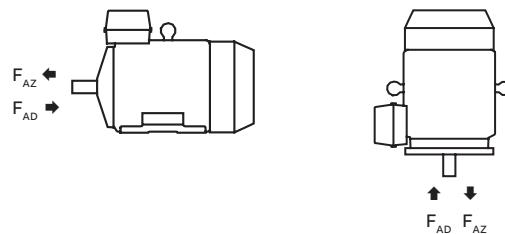

—
01

—
02

Permissible axial forces

Motor size	Poles	Mounting arrangement IM B3, deep groove ball bearings				Mounting arrangement IM V1, deep groove ball bearings			
		20,000 h		40,000 h		20,000 h		40,000 h	
		F_{AD} (N)	F_{AZ} (N)	F_{AD} (N)	F_{AZ} (N)	F_{AD} (N)	F_{AZ} (N)	F_{AD} (N)	F_{AZ} (N)
56	2	261	261	193	193	269	256	201	187
	4	355	355	260	260	366	378	272	253
63	2	260	260	192	192	272	253	204	185
	4	353	353	259	259	371	343	277	248
	6	423	423	310	310	443	412	330	298
	8								
71	2	625	325	515	215	640	315	530	200
	4	780	480	630	330	800	470	650	320
	6	890	590	710	410	925	570	745	390
	8	985	685	780	480	1020	665	815	455
80	2	810	470	650	315	845	450	690	290
	4	1015	675	810	470	1075	640	865	430
	6	1170	830	925	595	1225	795	980	550
	8	1300	960	1015	675	1350	925	1070	645
90	2	885	485	720	320	945	450	775	280
	4	1170	650	945	425	1245	600	1020	375
	6	1270	870	1005	605	1360	815	1095	550
	8	1410	1010	1110	710	1485	960	1185	660

Permissible axial forces

Motor size	Poles	Mounting arrangement IM B3, deep groove ball bearings				Mounting arrangement IM V1, deep groove ball bearings			
		20,000 h		40,000 h		20,000 h		40,000 h	
		F _{AD} (N)	F _{AZ} (N)	F _{AD} (N)	F _{AZ} (N)	F _{AD} (N)	F _{AZ} (N)	F _{AD} (N)	F _{AZ} (N)
100	2	1620	1120	1280	780	1710	1060	1370	715
	4	2065	1565	1615	1115	2180	1485	1735	1035
	6	2390	1890	1860	1360	2510	1815	1980	1285
	8	2660	2160	2065	1565	2780	2080	2185	1485
112 M, MB	2	1615	1115	1275	775	1725	1040	1385	700
	4	2060	1560	1610	1110	2210	1460	1110	1010
	6	2385	1885	1860	1360	2540	1785	2010	1260
	8	2655	2155	2060	1560	2790	2055	2195	1475
132 M, MA	4	2245	1645	1760	1160	2460	1505	1970	1015
	6	2595	1980	2025	1425	2815	1850	2245	1280
	8	2875	2270	2240	1640	3130	2115	2490	1470
	6	2580	1980	2010	1410	2885	1780	2315	1210
132 MBA	4	2235	1635	1750	1150	2495	1465	2010	980
132 S	6	2600	2000	2030	1435	2780	1885	2210	1315
	8	2885	2285	2245	1645	3100	2145	2460	1505
132 SB	2	1760	1160	1400	800	1910	1075	1540	705
132 SBB, SC	2	1760	1160	1395	795	1945	1045	1575	670
132 SMB, SMC	2	2210	1610	1740	1140	2435	1470	1950	985
	4	2840	2240	2205	1605	3150	2035	2515	1400
132 SMD	4	2830	2200	2230	1595	3195	1995	2560	1355
132 SME	2	2210	1610	1730	1130	2490	1425	2005	940
160	2	4160	4160	3425	3425	4560	3810	3860	3110
	4	4740	4740	3920	3920	5260	4310	4440	3490
	6	4840	4840	4000	4000	5400	4420	4540	3560
	8	5980	5980	4920	4920	6560	5580	5460	4480
180	2	5480	5480	4600 ¹⁾	4600 ¹⁾	5920	5115	5060 ¹⁾	4255 ¹⁾
	4	4360	4360	3540	3540	5080	3860	4240	3020
	6	5980	5980	4940	4630	6000	5445	5600	4385
	8	6000	6620	5460	5460	6000	6120	6000	4900
200	2	5000	6880	5000 ²⁾	5700 ²⁾	5000	6350	5000 ²⁾	5230 ²⁾
	4	5000	7660	5000	6340	5000	6950	5000	5650
	6	5000	8300	5000	6880	5000	7505	5000	6025
	8	5000	9880	5000	8160	5000	9215	5000	7435
225	2	5000	7380	5000 ³⁾	6120 ³⁾	5000	6770	5000 ³⁾	5490 ³⁾
	4	5000	7600	5000	6220	5000	6795	5000	5475
	6	5000	10140	5000	8420	5000	9270	5000	7490
	8	5000	11 420	5000	9460	5000	10 595	5000	8535
250	2	6000 ⁴⁾	9020 ⁴⁾	6000 ⁴⁾	7500 ⁴⁾	6000 ⁴⁾	8335 ⁴⁾	6000 ⁴⁾	6755 ⁴⁾
	4	6000	9800	6000	8040	6000	8820	6000	7120
	6	6000	11520	6000	9520	6000	10 275	6000	8235
	8	6000	13 700	6000	11 380	6000	12 645	6000	10 205
280	2	5260	5260	4220	4220	6400	4400	5420	3420
	4	6500	6500	5160	5160	7920	5400	6640	4120
	6	7500	7500	6040	6040	8500	6180	7840	4640
	8	7740	7740	6180	6180	8500	6435	7980	4775

¹⁾ The maximum lifetime of the grease is 38 000 h

²⁾ The maximum lifetime of the grease is 27 000 h

³⁾ The maximum lifetime of the grease is 23 000 h

⁴⁾ The maximum lifetime of the grease is 16 000 h

Mechanical design

Terminal box

Sizes 56 to 180

The terminal box is made of aluminum alloy and is located on top of the stator. The lower part of the box is integrated with the stator. It is provided with two knockout openings on each side. Sizes 132 SM_ and 160 - 180 also have a third smaller opening. Cable glands are not included.

Sizes 200 to 280

The terminal box and cover are made of deep drawn steel and mounted on top of the stator. The box is bolted to the stator and is not rotatable. The size of the box is the same for all frame sizes.

The motors can also be provided with an extra large terminal box, standard for voltage code S and frame size 280. See variant code 019 under the heading "Terminal box". This will increase the dimension HD by 32 mm. The box is supplied with two FL 21 openings. The right opening is provided with a flange with two holes for M63 cable glands. The holes are sealed by means of plastic plugs. Cable glands are not supplied. The opening on the other side is provided with a cover flange. The box can also be provided with an FL 13 opening towards the N-end.

When new motors are manufactured the terminal box can be mounted on the left or the right side. See variant codes 021 and 180 under the heading "Terminal box".

In the basic design the terminal box is provided with twoFL 13 flange openings, one on each side. The opening on the right side, seen from the D-end, is supplied with a flange with two holes for M40 cable glands. On delivery the holes are sealed by means of plastic plugs. Cable glands are not supplied. The opening on the other side is provided with a cover flange.

Dimensions for terminal box

Motor size	Dimensions		
	HB	HD	HE
Code 019: Larger than standard terminal box			
200 ML	332.5	603	240
225 SM	353	578	260.5
250 SM	376	626	283.5
Code 021: Terminal box on left-hand side seen from D end			
Code 180: Terminal box on right-hand side seen from D end			
200 ML	332	532	239
225 SM	354	579	260.5
250 SM	377	627	284
Code 467: Lower than standard terminal box without screw terminals and extended rubber connection cable 2 m.			
160	211.5	371.5	
180	226.5	406.5	
200 ML	248	448	
225 SM	269	494	
250 SM	292	542	
280	292	572	

Refer to the Dimension drawings section for dimensions HB, HD and HE.

—
01 Terminal board for
motor sizes 56-80
56-63 gen F
71-80 gen E
80 gen K


02 Terminal board for
motor sizes 90 to 112
gen E

03 Terminal board for
motor sizes 90-132
90 gen K
100 gen K
112 gen K
132 gen E


04 Terminal board for
motor sizes 132-180
132 gen K
160 gen G and K
180 gen G and K

05 Terminal board for
motor sizes 200 to 280 in
G and K-generation


Connections

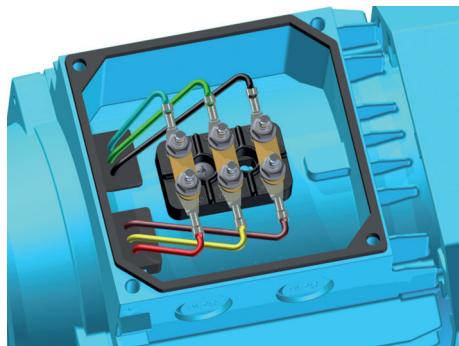


—
01

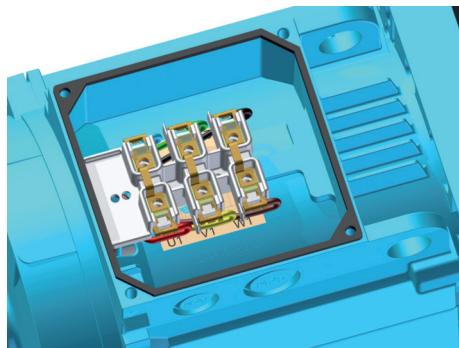


—
02

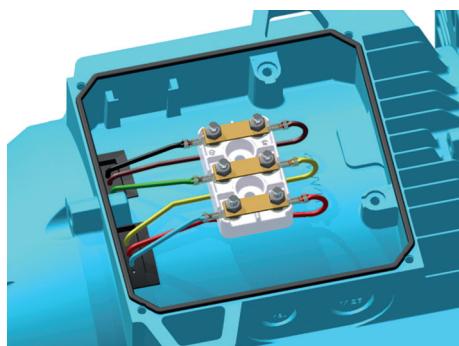

—
03

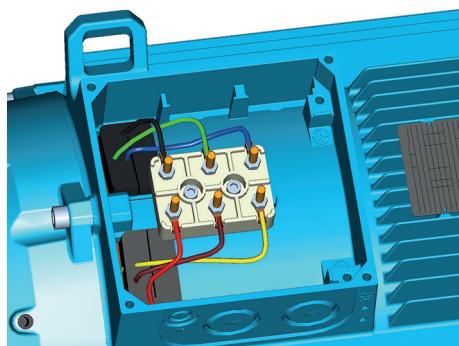

—
04

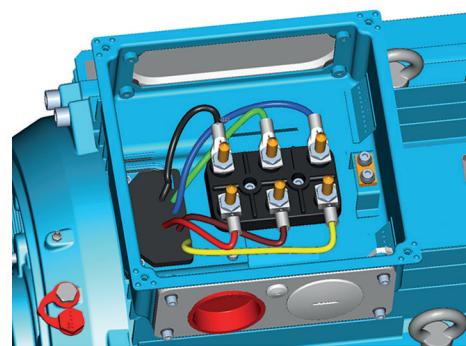

—
05

The terminal block is provided with six terminals
for connecting Cu-cable.
The terminals are marked in accordance with IEC
60034-8.

Connection openings

Motor size	Opening	Metric cable entry	Method of connection	Terminal bolt size	Maximum connectable Cu-cable area, mm ²
56-63	Knock-out opening	2x(M16+M16)	Cable lug	M4	2.5
71-80	Knock-out opening	2 x (2 x M20)	Cable lug	M4	4
90-112	Knock-out opening	2 x (M25 + M20)	Screw terminal	M4	6
132 ¹⁾	Knock-out opening	2 x (M25 + M20)	Cable lug	M5	10
132 ²⁾	Knock-out opening	2 x (M40 x M32 + M12)	Cable lug	M6	35
160-180	Knock-out opening	2 x (2 x M40) + M16	Cable lug	M6	35
200-250	2 x FL 13	1 x (2 x M40 + M16)	Cable lug	M10	70
280	2 x FL 21	1 x (2 x M63 + M16)	Cable lug	M10	70

¹⁾ All types except ²⁾


²⁾ SM_

Earthing (VC067)

Motor size	Earthing on frame	Earthing in terminal box
56-63	M4 (use self tapping screw)	M4 (use self tapping screw)
71-100	-	M4 (use self tapping screw)
112	-	M5 (use self tapping screw)
132	-	M5 (use self tapping screw)
160-180	-	M6 (use self tapping screw)
200-280	-	M6 (bracket)

Dimension drawings

Process performance IE3 aluminum motors

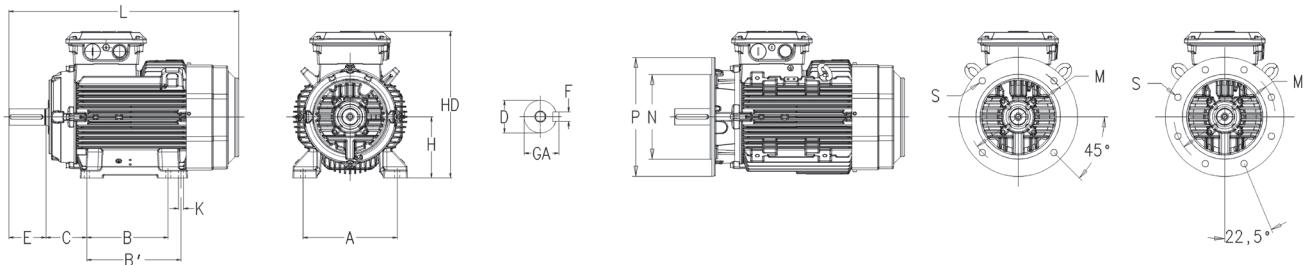

Motor size	Poles	D	GA	F	E	L max	A	B	B1	HD	HD	K	M	N	P	S
80	MB2, MC2	19	21.5	6	40	265.5	125	100		50	193.5	10	165	130	200	12
80	ME4	19	21.5	6	40	293.5	125	100		50	193.5	10	165	130	200	12
90	2-6	24	27	8	50	331.5	140	125		56	217	10	165	130	200	12
100	2-6	28	31	8	60	432	160	140		63	237	12	215	180	250	15
112	2-6 ¹⁾	28	31	8	60	431	190	140		70	260	12	215	180	250	15
112	4 ²⁾	28	31	8	60	477	190	140		70	260	12	215	180	250	15
132	2-6 ¹⁾	38	41	10	80	487	216	140	178	89	298	12	265	230	300	14.5
132	2-4 ^{3), 4)}	38	41	10	80	550	216	140	212	89	321	12	265	230	300	14.5
132	4 ⁵⁾	38	41	10	80	590	216	140	212	89	321	12	265	230	300	14.5
160	2-6	42	45	12	110	681	254	210	254	108	370	15	300	250	350	19
180	2-6	48	51.5	14	110	726	279	241	279	121	405	15	300	250	350	19
200	2-6	55	59	16	110	821	318	267	305	133	532	18	400	350	400	19
225	2	55	59	16	110	850	356	286	311	149	553	18	400	350	450	19
225	4-6	60	64	18	140	880	356	286	311	149	553	18	400	350	450	19
250	2	60	64	18	140	884	406	311	349	168	601	22	500	450	550	19
250	4-6	65	69	18	140	884	406	311	349	168	601	22	500	450	550	19

¹⁾ all types except ²⁾ 4p 5,5kW (HO) ³⁾ 2p 11/15kW (HO)

⁴⁾ 4p 11kW (HO) ⁵⁾ 4p 15kW (HO)

IMB14 (IM3601)


Motor size	M	N	P	S	Motor size	M	N	P	S
63	75	60	90	5	100	130	110	160	8
71	85	70	105	6	112	130	110	160	8
80	100	80	120	6	132	165	130	200	10
90	115	95	140	8	132SM_	165	130	200	10

Tolerances		Tolerances	
A, B	±0,8	F	ISO h9
D	ISO j6 ≤ Ø 28 mm	H	-0,5
	ISO k6 < Ø 38 mm	N	ISO js6
	ISO m6 ≥ Ø 55 mm	C	±0,8

The table gives the main dimension in mm. For detailed drawings please see our web pages www.abb.com/motors&generators.

Dimension drawings

Process performance IE2 aluminum motors

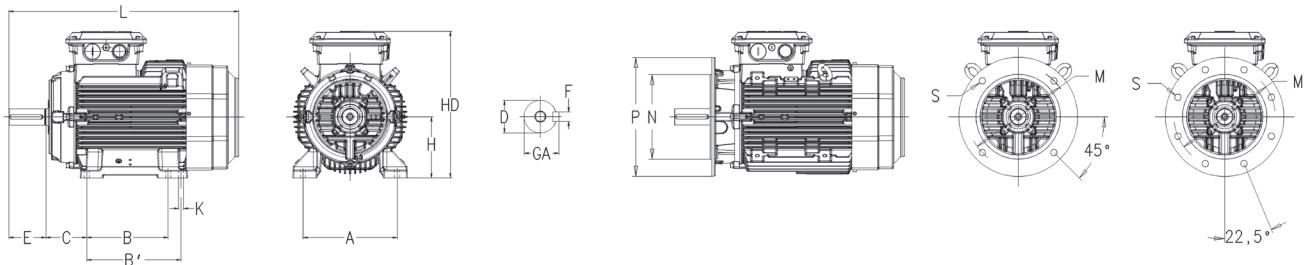

Foot-mounted motor IM1001, B3 and flange-mounted motor IM3001, B5

Motor size	Poles	D	GA	F	E	L max	A	B	B1	C	HD	K	M	N	P	S
56		9	10.4	3	20	183	90	71		36	56	143	100	80	120	7
63		11	12.5	4	23	208	100	80		40.1	154	7.5	115	95	140	10
71		14	12.5	5	30	240	112	90		45	180	7	130	110	160	10
80		19	21.5	6	40	265.5	125	100		50	193.5	10	165	130	200	12
90	S 8	24	27	8	50	284.5	140	125		56	217	10	165	130	200	12
90	L2, L8, LB 2-8	24	27	8	50	309.5	140	125		56	217	10	165	130	200	12
90	LD 4-6	24	27	8	50	331.5	140	125		56	217	10	165	130	200	12
100	LB2, LC 4-8, LA8, LB8	28	31	8	60	351	160	140		63	237	12	215	180	250	15
100	LD 4	28	31	8	60	373	160	140		63	237	12	215	180	250	15
112		28	31	8	60	393	190	140		70	249	12	215	180	250	15
132	SB2, M4, MA4, MBA4	38	41	10	80	447	216	140	178	89	295.5	12	265	230	300	14.5
132	SC2, MC6	38	41	10	80	487	216	140	178	89	295.5	12	265	230	300	14.5
132	SM_	38	41	10	80	550	216	140	178	89	321	12	265	230	300	14.5
160	MLA 2-8, MLB2, MLB8	42	45	12	110	584	254	210	254	108	370	15	300	250	350	19
160	MLB 4-6, MLC 2-8, MLD 2-4	42	45	12	110	681	254	210	254	108	370	15	300	250	350	19
180		48	51.5	14	110	726	279	241	279	121	405	15	300	250	350	19
200		55	59	16	110	821	318	267	305	133	532	18	400	350	400	19
225		55	59	16	110	850	356	286	311	149	579	18	400	350	450	19
225		60	63	18	140	880	356	286	311	149	579	18	400	350	450	19
250		60	64	18	140	884	406	406	349	168	627	22	500	450	550	19
250		65	69	18	140	884	406	406	349	168	627	22	500	450	550	19
280		65	69	18	140	884	457	457	419	190	657	24	500	450	550	19
280		75	79.5	20	140	884	457	457	419	190	657	24	500	450	550	19

IMB14 (IM3601)

Motor size	M	N	P	S	Motor size	M	N	P	S
63	75	60	90	5	100	130	110	160	8
71	85	70	105	6	112	130	110	160	8
80	100	80	120	6	132	165	130	200	10
90	115	95	140	8	132SM_	165	130	200	10


Tolerances

Tolerances		Tolerances	
A, B	±0,8	F	ISO h9
D	ISO j6 ≤ Ø 28 mm	H	-0,5
	ISO k6 < Ø 38 mm	N	ISO js6
	ISO m6 ≥ Ø 55 mm	C	±0,8

The table gives the main dimension in mm. For detailed drawings please see our web pages www.abb.com/motors&generators.

Accessories

Slide rails for motor sizes 160 to 280

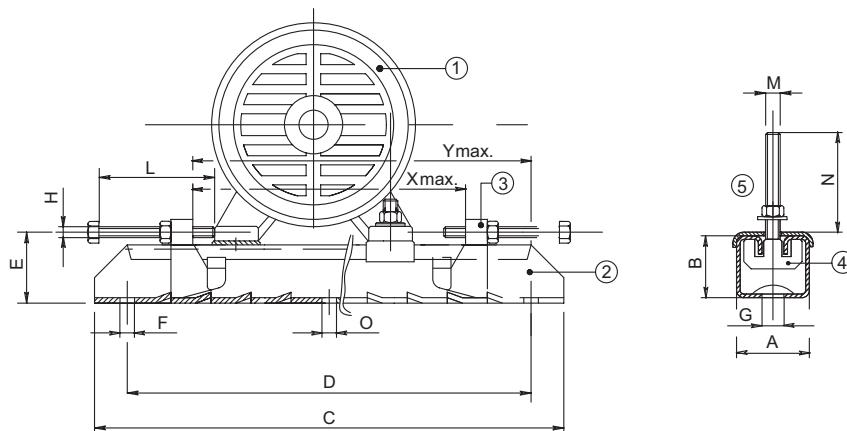

1 Motor | 2 Rail | 3 Movable adjusting bolt | 4 Fixing bolt, motor | 5 Plate

Motor size	Type	Product code 3GZV103001-														Weight (kg)	
			A	B	C	D	E	F	G	H	L	M	N	O	Xmax	Ymax	
160-180	TT180/12	-14	75	42	700	630	57	17	26	M12	120	M12	50	-	520	580	12.0
200-225	TT225/16	-15	82	50	864	800	68	17	27	M16	140	M16	65	17	670	740	20.4
250-280	TT280/20	-16	116	70	1072	1000	90	20	27	M18	150	M20	80	20	870	940	43.0

¹⁾ Smaller sizes on request.

Each set includes two complete slide rails including screw for mounting the motor on the rails. Screws for mounting the rails on the foundation are not included. Slide rails are supplied with unmachined lower surfaces and should, prior to tightening down, be supported in a suitable manner.

Motors in brief

Aluminum motors, sizes 56 - 132

Motor size	M3AA	56-63	71	80	90	100	112	132
Stator and end shields	Material	Die-cast aluminum alloy						
	Paint colour shade	Munsell blue 8B 4.5/3.25						
	Corrosion class	C3 according to IEC/EN 12944-5						
Feet	Integrated aluminum feet							
Bearings	D-end	6201-2Z/C3	6203-2Z/C3	6204-2Z/C3	6205-2Z/C3	6306-2Z/C3	6306-2Z/C3	6208-2Z/C3 6308-2Z/C3 ¹⁾ E2.6208-2Z/C3 ²⁾ E2.6308-2Z/C3 ³⁾
	N-end	6201-2Z/C3	6202-2Z/C3	6203-2Z/C3	6204-2Z/C3	6205-2Z/C3	6205-2Z/C3	6206-2Z/C3 E2.6206-2Z/C3 ⁴⁾
Axially-locked bearings	Inner bearing cover	ND-end retaining ring	Locked at D-end					
Bearing seal	D-end	V-ring						
	N-end	Labyrinth seal						
Lubrication		Permanent grease lubrication. Grease temperature range -40°C to +160°C						
Measuring nipples for condition monitoring of the bearings		Not included						
Rating plate	Material	Aluminum						
Terminal box	Material	Die-cast aluminum alloy, integrated to stator						
	Cover screws material	Zinc-electroplated steel						
Connections	Openings	2x(M16+M16) 2x(M20 + M20)		2x(M20+M25)				2x(M20+M25) ⁵⁾ 2x(M40+M32+M12) ⁶⁾
	Terminals	6 terminals for connection with cable lugs (not included)						
	Cable glands	Optional						
Fan	Material	Glass-fiber reinforced polypropylene						
Fan cover	Material	Polypropylene						
	Paint colour shade	Munsell blue 8B 4.5/3.25						
	Corrosion class	C3						
Stator winding	Material	Copper						
	Insulation	Insulation class F						
	Winding protection	Optional						
Rotor winding	Material	Die-cast aluminum						
Balancing		Half key balancing						
Key ways		Closed key way						
Drain holes	Without drain holes	Drain holes with closable plastic plugs, open on delivery						
External earthing bolt		As option						
Enclosure		IP 55						
Cooling method		IC 411						

¹⁾ (SM) except 4p 11&15kW HO ⁴⁾ HO 2p 9,2&15kW

²⁾ 2p 9,2kw HO

⁵⁾ S, SB, M, MA

³⁾ 2p 15kW HO

⁶⁾ SC, MC, SMA-SME

Motors in brief

Aluminum motors, sizes 160 - 280

Motor size	M3AA	160	180	200	225	250	280													
Stator and end shields	Material	Die-cast aluminum alloy	Extruded aluminum alloy																	
	Paint colour shade	Munsell blue 8B 4.5/3.25																		
	Corrosion class	C3 medium according IEC/EN 12944-5																		
Feet	Separate aluminum feet			Separate cast iron feet																
Bearings	D-end	6309-2Z/C3	6310-2Z/C3	6312-2Z/C3	6313-2Z/C3	6315-2Z/C3	6315/C3 ¹⁾ 6316/C3 ²⁾													
	N-end	6209-2Z/C3	6209-2Z/C3	6210-2Z/C3	6212-2Z/C3	6213-2Z/C3	6213/C3													
Axially-locked bearings	Inner bearing cover		Locked at D-end																	
Bearing seal	D-end	Axial seal																		
	N-end	Axial seal																		
Lubrication	Permanently lubricated shielded bearings					Regreasable														
Measuring nipples for condition monitoring of the bearings	Not included																			
Rating plate	Material	Aluminum																		
Terminal box	Material	Die-cast aluminum alloy, integrated	Deep-drawn steel sheet, bolted to stator to stator																	
	Cover screws material	Zinc-electroplated steel																		
Connections	Openings	(2xM40+M16+(2xM40)	2xFL13, 2xM40 + 1xM16			2xFL21														
	Knock-out																			
	Terminals	6 terminals for connection with cable lugs (not included)																		
Fan	Cable glands	Optional																		
	Material	Glass-fiber reinforced polypropylene																		
	Material	Steel																		
Fan cover	Paint colour shade	Munsell blue 8B 4.5/3.25																		
	Corrosion class	C3																		
	Material	Copper																		
Stator winding	Insulation	Insulation class F																		
	Winding protection	3 PTC thermistors, 150 °C																		
	Material	Die-cast aluminum																		
Balancing	Half key balancing																			
Key ways	Closed key way																			
Drain holes	Drain holes with closable plastic plugs, open on delivery																			
External earthing bolt	As option																			
Enclosure	IP 55																			
Cooling method	IC411																			

¹⁾ SC, MC, SMA-SME

²⁾ 4-8 poles

Total product offering

Motors, generators and mechanical power transmission products with a complete portfolio of services



IEC motors

- Low voltage motors
- High voltage induction and synchronous motors
- Marine motors
- Motors for explosive atmospheres
- Motors for food and beverage
- Motors for variable speed drives
- Permanent magnet motors
- Synchronous reluctance motors
- Traction motors

NEMA motors

- Low voltage motors
- High voltage induction and synchronous motors
- Marine motors
- Motors for explosive atmospheres
- Motors for variable speed drives
- Permanent magnet motors
- Servomotors
- Washdown motors

Generators

- Generators for wind turbines
- Generators for diesel and gas engine power plants
- Generators for steam and gas turbine power plants
- Generators for marine applications
- Generators for industrial applications
- Generators for traction applications
- Synchronous condensers for reactive power compensation

Mechanical power transmission components, bearings, gearings

- Mounted bearings
- Enclosed gearing
- Mechanical drive components
- Couplings
- Sheaves and bushings
- Conveyor components
- Geared motor units

Life cycle services

ABB's portfolio of drives

Optimal solution for you



Being able to rely on the continuous high performance and efficiency of your operations is something you want to take for granted. ABB variable-frequency drives are made with all this in mind, established upon more than 40 years of experience and backed by a broad range of life cycle services.

ABB drives help you to optimize your processes and systems with state-of-the-art motor control technology, resulting in increased energy efficiency, better product quality, and reduced operating costs with higher output, less downtime, and reduced need for maintenance. All ABB drives are designed for easy selection, ordering, installation and use, and they offer integrated safety features, giving you more time to focus on what matters for you and your business.

Our portfolio offers low-voltage AC and DC drives, medium-voltage AC drives, and motion control drives spanning the fractional-kilowatt to multi-megawatt power level. There is a drive available for essentially every industry and application and for all types of motors, in environments ranging from water utility facilities to clean electrical rooms, and to harsh coal mines and windy offshore platforms to food and beverage production. This wide product range allows you to select the best-fitting drive solution, providing maximum reliability and efficiency for every need.

Contact us

For more information and contact details:

www.abb.com/motors&generators