

## I/O systems

### Introduction

#### I/O systems

#### Overview



#### **SIMATIC ET 200 offers the right solution for every application**

With SIMATIC ET 200 a wide range of distributed I/O systems is available - for solutions in the control cabinet or without a control cabinet directly at the machine, as well as for applications in hazardous areas. The modular design makes it possible to scale and expand the ET 200 systems simply and in small stages. Already integrated add-on modules reduce costs and at the same time offer a widely diverse range of possible applications. You can choose from many different combination options: digital and analog inputs/outputs, intelligent modules with CPU functionality, safety systems, motor starters, pneumatic devices, frequency converters, as well as various different technology modules (e.g. for counting, positioning).

Communication over PROFINET and PROFIBUS, uniform engineering, transparent diagnostic possibilities as well as optimal interfacing to SIMATIC controllers and HMI units prove the unique integration of Totally Integrated Automation.

#### **PROFINET**

PROFINET is the open, cross-vendor Industrial Ethernet standard (IEC 61158/61784) for automation.

Based on Industrial Ethernet, PROFINET enables direct communication between field devices (IO devices) and controllers (IO controllers), up to and including the solution of isochronous drive controls for Motion Control applications.

As PROFINET is based on Standard Ethernet according to IEEE 802.3, any devices from the field level to the management level can be connected.

In this way, PROFINET enables system-wide communication, supports plant-wide engineering and applies IT standards, such as web server or FTP, right down to field level. Tried and tested fieldbus systems, such as PROFIBUS or AS-Interface, can be easily integrated without any modification to the existing devices.

#### **PROFIBUS**

PROFIBUS is the international standard (IEC 61158/61784) for the field level. It is the only fieldbus to allow communication both in manufacturing applications and in process-oriented applications.

PROFIBUS is used to connect field devices, e.g. distributed I/O devices or drives, to automation systems such as SIMATIC S7, SIMOTION, SINUMERIK, or PCs.

PROFIBUS is standardized in accordance with IEC 61158 and is a powerful, open and rugged fieldbus system with short response times. PROFIBUS is available in different forms for various applications.

#### **PROFIBUS DP (distributed I/O)**

PROFIBUS DP is used for connecting distributed field devices, e.g. SIMATIC ET 200, or drives with extremely fast response times. PROFIBUS DP is used when sensors/actuators are distributed at the machine or in the plant (e.g. field level).

#### **AS-Interface**

AS-Interface is the international standard (IEC 62026/EN 50295) which, as an alternative to the cable harness, links especially cost-effective sensors and actuators by means of a two-wire line. This two-wire line is also used to supply the individual stations with power. This makes the AS-Interface the ideal partner for PROFINET and PROFIBUS DP. AS-i communications modules in ET 200SP enable the flexible combination of AS-Interface and distributed I/O. AS-Interface transmits standard data and safety data up to PL e / SIL 3 in the same AS-i network. AS-Interface is not only suitable for efficient transmission of digital and analog I/O signals but also ideal for the user-friendly connection of EMERGENCY STOP pushbuttons and protective doors.


#### **IO-Link**

The communication standard IO-Link permits the intelligent connection of sensors and switching devices to the control level. IO-Link facilitates the integration of all components in the control cabinet and on the field level - for maximum integration and seamless communication on the final meters to the process.

IO-Link solutions from Siemens ensure maximum precision and cost-effectiveness in any production system. IO-Link is completely integrated in Totally Integrated Automation (TIA) and offers many advantages.

- The open standard permits the networking of devices from different manufacturers
- Simple wiring facilitates the installation process
- Reduced wiring effort saves time and money during installation
- Efficient engineering facilitates configuration and commissioning
- High-speed diagnostics ensures short plant standstill times and high plant availability
- High process transparency permits, for example, efficient power management

## Overview

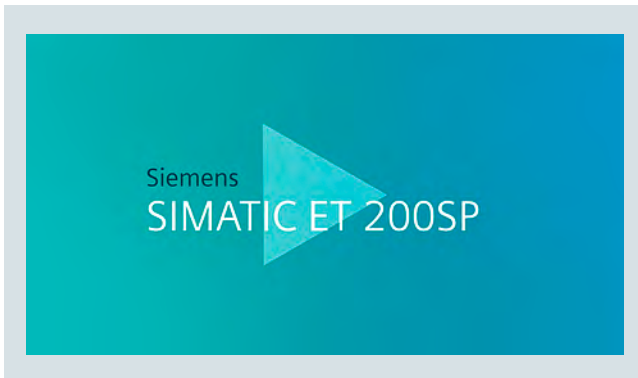

SIMATIC ET 200SP video  
[https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoId=6140549987001](https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6140549987001)

### SIMATIC ET 200SP



The scalable SIMATIC ET 200SP I/O system is a highly flexible, modular I/O system with IP20 degree of protection. Via interface modules, it can exchange IO data of the connected I/O modules with a higher-level PLC. The following interface variants are available for this purpose:

- MultiFieldbus: IM155-6MF with the Ethernet-based protocols PROFINET, EtherNet/IP and Modbus TCP
- PROFINET: IM155-6PN
- PROFIBUS: IM155-6DP

Alternatively, as further head-end stations, various PLC, F-PLC and Open Controllers are available as compact S7-1500 Controllers (Distributed Controllers). ET 200SP components in SIPLUS version meet extreme requirements and have a high degree of robustness.

An extensive range of I/O modules, including fail-safe and Ex versions, enable the flexible connection of sensors and actuators:

- Digital input modules (DI), with color coding white
- Digital output modules (DO), with color coding black
- Analog input modules (AI), with color coding light blue
- Analog output modules (AO), with color coding dark blue
- Technology modules (TM), with color coding turquoise
- Communications modules (CM), with color coding light gray
- Special modules, with color coding mint green
- Motor starters as direct-on-line starters (DS) and reversing starters (RS), also as F-version in each case
- Pneumatics

Apart from the standard type of delivery in an individual package, selected I/O modules and BaseUnits are also available in a pack of 10 units.

The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

#### Compact design

- Modular configuration with up to 64 modules
- System-integrated, self-assembling potential groups, potential group supply without power module with infeed of supply voltage via light BaseUnits
- Small size and highly flexible due to the modular design and comprehensive product range
- Up to 16 channels per module
- Permanent wiring
- Hot swapping: Module replacement without tools in RUN
- Startup and operation with slot gaps (free spaces)

#### Flexible connection system

- Flexible fieldbus connection via BusAdapter (RJ45, FastConnect, plastic or glass fiber-optic cables), also as integrated media converter
- Push-in terminals for cross-sections up to 1.5 mm<sup>2</sup> with wire end ferrule, and up to 2.5 mm<sup>2</sup> without wire end ferrule
- BaseUnits for 1-wire or direct multi-wire connection
- PotDis module for system-integrated and space-saving provision of additional potential terminals
- Optimum accessibility for wiring due to spring release and measuring tap next to the conductor opening
- System-integrated, space-saving shielding for installation without tools



SIMATIC ET 200SP shielding video  
[https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoId=6196729280001](https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6196729280001)

## I/O systems

### SIMATIC ET 200 systems for the control cabinet

#### SIMATIC ET 200SP

#### Overview

##### Safety Integrated

- Easy integration of fail-safe modules
- Easy F parameter assignment via software
- Group-by-group disconnection of non-fail-safe modules

##### High performance

- Isochronous PROFINET
- Internal data transfer with up to 100 Mbps
- Record analog values and output as of 50 µs
- Record digital values and output as of 1 µs

##### High-performance technology

- Modules for the functions Servodrive, Counting, Positioning, Weighing, Output cams, PWM, Force measurement, Flow measurement, etc.

##### Energy efficiency

- Energy meter for recording electrical variables
- System-integrated PROFIenergy with interval substitute values

##### Extended functions

- Configuration control: application-based adaptation of the actual configuration via user software (option handling)
- Time-based IO: time stamping of the signals to the µs
- MSI/MSO: Simultaneous access to I/O data from up to 4 PLCs
- MtM: Direct data exchange between IO modules (**Module-to-Module** communication)
- Oversampling: n-fold acquisition or output of digital and analog signals within a PN cycle
- Adaptation of measuring range: increased resolution by adapting the measuring range to a limited section of a measuring range supported by the analog input module
- Scaling of measured values: permits the transmission of the analog value normalized to the required physical value as a REAL value (32-bit floating point)

##### Communication standards

- PROFINET IO
- EtherNet/IP
- Modbus TCP
- PROFIBUS DP V0/V1
- ET connection for connecting the ET 200AL (IP67)
- IO-Link V1.1
- CAN
- DALI
- AS-Interface
- Point-to-point (RS232, RS485, RS422)
- Freeport
- 3964(R)
- USS
- DMX
- Modbus RTU (master/slave)

##### CPU

- PROFINET connection with 3 ports
- IO controller and PN IO device
- Optional expansion as DP master/slave
- Also as fail-safe version and Open Controller

##### Labeling of I/O modules

- Meaningful labeling on the front of the I/O modules
  - Module type in plain text including function class, e.g. "DI 8x24VDC HF"
  - Article No.
  - 2D matrix code with article and serial number (with call via the "Industry Online Support" app, direct link to the support page of the module)
  - Hardware functional status and firmware version
  - Suitable BU type for the respective I/O module
  - Color code of the suitable color-coding label
  - Connection diagram
- Optionally expandable with
  - Labeling strips
  - Equipment labeling plate

#### Overview of ET 200SP components

Basic components	Function
<b>CPU</b>	The CPU: <ul style="list-style-type: none"> <li>• Executes the user program</li> <li>• Is used as IO controller, I-Device on PROFINET IO, or as standalone CPU</li> <li>• Connects the ET 200SP with the IO devices or the IO controller</li> <li>• Exchanges data with the I/O modules via the backplane bus.</li> </ul> Further functions of the CPU: <ul style="list-style-type: none"> <li>• Communication via PROFIBUS DP (in combination with the CM DP communications module, the CPU can be used as DP master or slave)</li> <li>• Integrated web server</li> <li>• Integrated technology</li> <li>• Integrated trace functionality</li> <li>• Integrated system diagnostics</li> <li>• Integrated safety</li> </ul>

Basic components	Function
<b>Open Controller</b>	As the first controller of this type, the SIMATIC ET 200SP Open Controller combines the functions of a PC-based software controller with visualization, PC applications and central I/Os (inputs/outputs) in a single, compact device. <ul style="list-style-type: none"> <li>• All in one</li> <li>• High system availability</li> <li>• Compact and modular</li> <li>• Rugged</li> <li>• User-friendly design</li> <li>• Efficient engineering in TIA Portal</li> </ul>
<b>Interface modules with MultiFieldbus interface (IM 155-6MF)</b>	The MF interface module: <ul style="list-style-type: none"> <li>• Supports the three Ethernet protocols PROFINET IO, EtherNet/IP and Modbus TCP</li> <li>• Is easy to configure via MultiFieldbus Configuration Tool (MFCT)</li> <li>• Connects ET 200SP with the IO controller</li> <li>• Exchanges data with the I/O modules via the backplane bus.</li> </ul>

## Overview

Basic components	Function
<b>Interface modules for PROFINET IO (IM 155-6PN)</b>	The interface module: <ul style="list-style-type: none"> <li>• Is used as IO device on PROFINET IO</li> <li>• Connects ET 200SP with the IO controller</li> <li>• Exchanges data with the I/O modules via the backplane bus.</li> </ul>
<b>Interface module for PROFIBUS DP (IM 155-6DP)</b>	The interface module: <ul style="list-style-type: none"> <li>• Is used as DP slave on PROFIBUS DP</li> <li>• Connects ET 200SP with the DP master</li> <li>• Exchanges data with the I/O modules via the backplane bus.</li> </ul>
<b>SIMATIC BusAdapter (BA)</b>	SIMATIC BusAdapters permit the free selection of the connection system and physical connection for head-end stations with PROFINET or MultiFieldbus interface.  Various versions are available for the connection of copper cables or plastic and glass fiber-optic cables. Hybrid copper/fiber-optic versions are also available as integrated media converters.  Cable length between 2 stations: max. 100 m (Cu), max. 50 m (POF), max 100m (PCF), max. 3 km (multi-mode glass FOC).  For expanding the station with the I/O system ET 200AL via ET connection, the BA-Send BusAdapter is available
<b>BaseUnit (BU)</b>	The BaseUnits provide the electrical and mechanical connection for the ET 200SP components. <ul style="list-style-type: none"> <li>• Bright BaseUnits permit a new potential group up to max. 10 A</li> <li>• Dark BaseUnits forward the self-assembling voltage busbars P1, P2 and AUX from the left to the right BaseUnit.</li> <li>• Suitable BaseUnits with 12 to 28 terminals are available for different connection systems (single or direct multi-conductor connection) and functions.</li> <li>• The I/O module is plugged onto the desired BaseUnit and determines the potential assignment of the terminals on the BaseUnit.</li> <li>• For expanding the station with the I/O system ET 200AL via ET connection, the BaseUnit BU-Send is available.</li> </ul>

Basic components	Function
<b>Potential distributor modules (PotDis BU, PotDis TB)</b>	With the potential distributor modules for SIMATIC ET 200SP, additional potentials required within an ET 200SP station can be set up quickly and in a space-saving manner. Due to the free combinability of PotDis-BUs and PotDis-TBs, the potential distributor modules allow a large number of design variants and thus simple adaptation to individual needs. Within the station, existing potentials can be multiplied or even new potential groups can be formed. With 36 terminals per 15 mm width, the PotDis modules require very little space without compromising on the conductor cross-sections (maximum 2.5 mm <sup>2</sup> ). They allow the connection of voltages up to 48 V DC with a maximum current carrying capacity of 10 A, and with the PotDis TB-BR-W even up to 230 V AC/10 A as well as the possibility to connect a protective conductor.
<b>I/O modules and fail-safe I/O modules</b>	The I/O module determines the function at the terminals. The PLC detects the current process state via the connected sensors and triggers corresponding responses via the connected actuators. Some I/O modules feature extended functions, in part they are also designed as individual operating mode. I/O modules are divided into the following module types; the fail-safe versions are identified by a preceding 'F-' and a yellow module enclosure: <ul style="list-style-type: none"> <li>• DI (digital input)</li> <li>• DQ (digital output)</li> <li>• AI (analog input)</li> <li>• AQ (analog output)</li> <li>• TM (technology modules)</li> <li>• CM (communications modules)</li> <li>• SM (special modules)</li> </ul>
<b>Protective cover (BU cover)</b>	The ET 200SP system can be operated with any number of slot gaps (BU slot without I/O module). Applications for this include: <ul style="list-style-type: none"> <li>• partial commissioning</li> <li>• prewired, and currently unequipped options</li> </ul> To protect against damage, such slot gaps must be covered by a BU cover. Within the BU cover, an equipment labeling plate can be kept for the possible later use of an I/O module.  Versions: <ul style="list-style-type: none"> <li>• for BaseUnits with a width of 15 mm</li> <li>• for BaseUnits with a width of 20 mm</li> </ul>

## I/O systems

### SIMATIC ET 200 systems for the control cabinet

#### SIMATIC ET 200SP

#### Overview

Basic components	Function
<b>Server module</b>	The server module concludes the setup of an ET 200SP station. On the server module there are holders for 3 spare fuses (5 x 20 mm). The server module is included in the scope of supply of all head-end stations.
<b>DIN rail according to EN 60715</b>	The DIN rail is the module rack of the ET 200SP I/O system. ET 200SP is mounted on the DIN rail.
<b>Coding element</b>	<p>When plugging an I/O module onto a BaseUnit for the first time, the coding element moves from the I/O module to the BaseUnit. There it prevents the destruction of the ET 200SP components in the event of a subsequent module replacement with incorrectly selected I/O module.</p> <p>The coding element is available in two versions:</p> <ul style="list-style-type: none"> <li>• Mechanical coding element</li> <li>• Electronic coding element: additionally features an electronic, re-writable memory for the redundant storage of module-specific configuration data (e.g. F target address for fail-safe modules, parameter data for IO-Link master). Thus these data are automatically backed up during a module replacement.</li> </ul>
<b>System-integrated shield connection</b>	<p>The shield connection permits the connection of cable shields. Compared to external shield supports, the system offers the following advantages:</p> <ul style="list-style-type: none"> <li>• Quick installation without tools by plugging the shield connection element onto the BaseUnit</li> <li>• Automatic low-impedance connection to the functional ground (DIN rail)</li> <li>• Optimized EMC properties by separating the supply voltage lines from the signal cables by means of the shield connection element and short, unshielded cable lengths</li> <li>• Low space requirements</li> </ul>
<b>Labeling strips</b>	<p>Optionally, for system-specific marking the head-end stations and I/O modules can be equipped with labeling strips (13 x 31 mm). The labeling strips can be inscribed mechanically. Labeling strips are available in two versions in the colors light gray and yellow:</p> <ul style="list-style-type: none"> <li>• 500 strips on the roll, for printing on thermal-transfer printers. Core diameter 40 mm, external diameter 70 mm, width 62 mm.</li> <li>• 10 DIN A4 sheets with 100 strips each, card 180 g/mm<sup>2</sup>, perforated, for printing with a laser printer direct from TIA Portal or via print templates.</li> </ul>

Basic components	Function
<b>Equipment labeling plate</b>	<p>Optionally, one equipment labeling plate each can be plugged onto head-end stations, BusAdapters, BaseUnits, potential distributor modules (PotDis BU and PotDis TB), and I/O modules. Equipment labeling plates are supplied in packs of 10 sheets with 16 labels each. The labels can be printed with thermal-transfer card printers or plotters, or stickers can be attached to them. Advantages compared to labels that are attached directly:</p> <ul style="list-style-type: none"> <li>• The inscription on the front is not covered</li> <li>• Simple label replacement when replacing a module</li> <li>• No parallax errors when marking the BaseUnits on the mounting plate</li> </ul> <p>The size of the inscribable area of the labels is 14.8 x 10.5 mm (W x H)</p>
<b>Color-coded labels</b>	<p>The I/O modules that are plugged onto the BaseUnits determine the potentials connected at the process terminals. The +/- potentials can optionally be identified using module-specific color-coded labels. The potentials of the AUX and add-on terminals as well as potential distributor modules can also be marked using color-coded labels. Color-coded labels are supplied in packs of 10 or 50 labels. Advantages of the color-coded labels:</p> <ul style="list-style-type: none"> <li>• Quick installation (one label for marking up to 16 terminals)</li> <li>• Avoidance of wiring errors</li> <li>• Simple detection of potentials during servicing</li> </ul>

## Overview



SIMATIC ET 200SP MultiFieldbus video  
[https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoid=6144272396001](https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoid=6144272396001)



Thanks to their wide scope of functions, the interface modules of the scalable SIMATIC ET 200SP I/O system, even in their basic versions, cover a wide range of applications. The basic functions of the interface modules include:

- Short data update times of typically 1 ms
- Single Hot Swap (withdrawing and insertion of an I/O module during operation without impairing the communication with the remaining modules)
- Operation with gaps (empty BaseUnits)
- Complete diagnostic support, extending to channel-by-channel diagnostics
- Configuration control / option handling (adaptation of the actual configuration via user software)
- Device replacement without programming device, with automatic re-initialization, with and without topological configuring
- I&M data 0 to 3 (electronic rating plate with non-volatile storage of plant data)
- Firmware update
- Pluggable 24 V DC supply connection
- Mains/voltage failure buffering time of at least 5 ms or 10 ms
- Labeling option via optional labeling strips and equipment labeling plates

When using PROFINET interface modules, the following basic functions are also included:

- Media redundancy (MRP)
- Integrated 2-port switch
- Freely selectable connection system (Standard function class and above) and physical connection (High Feature function class and above) by means of SIMATIC BusAdapters, also as system-integrated media converter from fiber-optic to copper cable. Can also be used for interface modules with MultiFieldbus interface.
- Reset button for simple return to factory settings without the need for programming device
- Automatic synchronization of the backplane bus to the PROFINET cycle to minimize the response time fluctuations (jitter)

Listed below is a short overview of the interface modules available for the ET 200SP, showing the essential differences. An up-to-date, clear and more precise comparison of functions of the different interface modules is offered by the TIA Selection Tool.

#### SIMATIC IM155-6DP High Feature with PROFIBUS connection

- Max. 32 I/O modules, also PROFIsafe modules with complete diagnostic support.
- Expansion option with max. 16 modules from the ET 200AL series using the BU-Send BaseUnit and the BA-Send BusAdapter
- Max. 244 bytes in each case for input and output data per module and per station
- Data update time: typ. 5 ms
- PROFIBUS connection via 9-pin D-sub socket
- Package includes server module and PROFIBUS connector with programming device socket

#### SIMATIC IM155-6PN Basic with PROFINET access

- Max. 12 I/O modules, no PROFIsafe modules, with complete diagnostic support
- Max. 32 bytes in each case for input and output data per module and per station
- Data update time: typ. 1 ms
- PROFINET connection via 2 integrated RJ45 sockets (integrated 2-port switch)
- Package includes server module

#### SIMATIC IM 155-6PN Standard with a PROFINET interface for SIMATIC BusAdapters

- Two types of delivery:
  - As package with IM155-6PN ST, with pre-assembled BA 2xRJ45 BusAdapter, including server module
  - As package with IM155-6PN ST, without BusAdapter, including server module
- Max. 32 I/O modules, also PROFIsafe modules, with complete diagnostic support
- Expansion option with max. 16 modules from the ET 200AL series using the BU-Send BaseUnit and the BA-Send BusAdapter
- Max. 256 bytes in each case for input and output data per module and max. 512 bytes per station (depending on configuration)
- Data update time: typ. 1 ms
- Selection of the type of connection of the PROFINET by means of SIMATIC BusAdapter (BusAdapter for copper cables only)

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### Interface modules > IM 155-6

#### Overview

SIMATIC IM155-6PN/2 High Feature, 2-port IM with one slot for SIMATIC BusAdapter

- Max. 64 I/O modules, also PROFIsafe modules, with complete diagnostic support
- Expansion option with max. 16 modules from the ET 200AL series using the BU-Send BaseUnit and the BA-Send BusAdapter
- Max. 288 bytes in each case for input and output data per module and max. 1440 bytes per station (depending on configuration)
- Fast data refresh time from 250 µs, also in isochronous mode
- S2 system redundancy
- Choice of connection type and physical connection of the PROFINET by means of SIMATIC BusAdapter. All BusAdapters with a connection for copper and/or fiber-optic cables can be used; BusAdapter must be ordered separately
- Package includes server module

SIMATIC IM155-6MF High Feature, MultiFieldbus IM with two slots for SIMATIC BusAdapters

Differences compared to the 2-port IM155-6PN High Feature:

- Multi-protocol capability  
Operation on Ethernet controllers via the PROFINET, EtherNet/IP and Modbus protocols
- Compatible with IM155-6MF High Feature (as of 6ES7155-6AU01-0CN0);  
Exception: Isochronous mode and prioritized startup

SIMATIC IM155-6PN/3 High Feature, 3-port IM with two slots for SIMATIC BusAdapter

Additional functions compared to 2-port High Feature IM:

- Second slot for SIMATIC BusAdapter, max. 3 ports can be used
- Local IO data coupling between up to 4 controllers

SIMATIC IM 155-6PN High Speed with a PROFINET interface for SIMATIC BusAdapters

- Max. 30 I/O modules, also PROFIsafe modules, with complete diagnostic support
- Max. 32 bytes in each case for input and output data per module and max. 968 bytes per station (depending on configuration)
- Fast data refresh time from isochronous mode from 125 µs
- Performance upgrade for PROFINET
- Choice of connection type and physical connection of the PROFINET by means of SIMATIC BusAdapter. All BusAdapters with a connection for copper and/or fiber-optic cables can be used; BusAdapter must be ordered separately
- Package includes server module

#### Ordering data

#### Article No.

<b>IM155-6MF High Feature MultiFieldbus interface module</b> 2-port IM with server module, without SIMATIC BusAdapter; PROFINET, EtherNet/IP and Modbus TCP	<b>6ES7155-6MU00-0CN0</b>
<b>IM155-6PN Basic PROFINET interface module</b> With server module; two integrated RJ45 sockets	<b>6ES7155-6AR00-0AN0</b>
<b>IM155-6PN Standard PROFINET interface module</b> With server module	
• With attached SIMATIC BA 2xRJ45 BusAdapter	<b>6ES7155-6AA01-0BN0</b>
• Without SIMATIC BusAdapter	<b>6ES7155-6AU01-0BN0</b>
<b>IM155-6PN/2 High Feature PROFINET interface module</b> 2-port IM with server module, without SIMATIC BusAdapter	<b>6ES7155-6AU01-0CN0</b>
<b>IM155-6PN/3 High Feature PROFINET interface module</b> 3-port IM with server module, without SIMATIC BusAdapter	<b>6ES7155-6AU30-0CN0</b>
<b>IM155-6PN High Speed PROFINET interface module</b> With server module, without SIMATIC BusAdapter	<b>6ES7155-6AU00-0DN0</b>
<b>IM155-6DP High Feature PROFIBUS interface module</b> With server module, with PROFIBUS plug with PG socket	<b>6ES7155-6BA01-0CN0</b>
<b>Accessories</b>	
<b>Strain relief for the PROFINET cable</b> System-integrated strain relief for High Feature PN interface modules (5 units)	<b>6ES7193-6RA00-1AN0</b>
<b>SIMATIC BA 2xRJ45 BusAdapter</b> For PROFINET interface modules, standard function class or above; max. cable length 50 m	<b>6ES7193-6AR00-0AA0</b>
<b>SIMATIC BA 2xFC BusAdapter</b> For PROFINET interface modules, standard function class or above; for increased vibration and EMC loads; max. cable length 50 m	<b>6ES7193-6AF00-0AA0</b>
<b>BA 2xM12 BusAdapter</b> For IM 155-6PN ST, HF; 2 x M12 push-pull sockets, D-coding, also suitable for standard M12. For PROFINET	<b>6ES7193-6AM00-0AA0</b>
<b>SIMATIC BA 2xSCRJ BusAdapter</b> For PROFINET interface modules from High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load capacity; max. cable length 50 m (POF) or 100 m (PCF)	<b>6ES7193-6AP00-0AA0</b>

Ordering data	Article No.	Article No.
<b>SIMATIC BA SCRJ/RJ45 BusAdapter</b> For PROFINET interface modules from High Feature function class or above; with media converter FOC-Cu; for increased vibration and EMC loads; max. cable length 50 m (POF, copper) or 100 m (PCF)	6ES7193-6AP20-0AA0	<b>Equipment labeling plate</b> 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter
<b>SIMATIC BA SCRJ/FC BusAdapter</b> For PROFINET interface modules from High Feature function class or above; with media converter FOC-Cu; for increased vibration and EMC loads; max. cable length 50 m (POF, copper) or 100 m (PCF)	6ES7193-6AP40-0AA0	<b>DIN rail, 35 mm</b> Length 483 mm for 19" cabinets
<b>SIMATIC BA 2XLC BusAdapter</b> For PROFINET interface modules from High Feature function class or above; with LC fiber-optic connection; for increased vibration and EMC load capacity; max. cable length 2 km	6ES7193-6AG00-0AA0	Length 530 mm for 600 mm cabinets
<b>SIMATIC BA LC/RJ45 BusAdapter</b> For PROFINET interface modules from High Feature function class or above; with media converter FOC-Cu; for increased vibration and EMC loads; max. cable length 2 km (glass) or 50 m (copper)	6ES7193-6AG20-0AA0	Length 830 mm for 900 mm cabinets
<b>SIMATIC BA LC/FC BusAdapter</b> For PROFINET interface modules from High Feature function class or above; with media converter FOC-Cu; for increased vibration and EMC loads; max. cable length 2 km (glass) or 50 m (copper)	6ES7193-6AG40-0AA0	Length 2 m
<b>Station expansion with IP67 I/O system ET 200AL</b>		<b>Manuals for ET 200SP distributed I/O system</b> SIMATIC ET 200SP Manual Collection: PDF file with the following content: • <b>Basic information</b> System manual, product information, overview tables, correction information or manual supplements • <b>Device-specific information</b> Device manuals for the interface modules, PLC, OC and I/O modules, including fail-safe and motor starters • <b>Comprehensive information</b> Function manuals The ET 200SP Manual Collection can be downloaded from the Internet as a PDF file: <a href="https://support.industry.siemens.com/cs/ww/en/view/84133942">https://support.industry.siemens.com/cs/ww/en/view/84133942</a>
<b>ET 200SP BA-Send 1 x FC BusAdapter</b>	6ES7193-6AS00-0AA0	<b>SIMATIC Manual Collection</b> Electronic manuals on DVD, multi-language: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC Distributed I/O, SIMATIC HMI, SIMATIC sensors, SIMATIC NET, SIMATIC PC-based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC software, SIMATIC TDC
<b>BaseUnit BU-Send</b>	6ES7193-6BN00-0NE0	<b>SIMATIC Manual Collection update service for 1 year</b> Current Manual Collection DVD and the three subsequent updates
<b>Other accessories</b>		<b>Spare parts</b>
<b>Labeling strips</b> 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AA0	<b>Server module</b> Terminates an ET 200SP station; included in the scope of supply of the interface modules, CPUs and Open Controllers
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AG0	<b>Power supply connector for ET 200SP head-end stations (interface module, CPU and open controller)</b> For connecting the 24 V DC supply voltage, push-in version; included in scope of supply of the head-end station
1 000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AA0	with Push-in terminals (10 units)
1 000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AG0	



**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**Interface modules > IM 155-6****Technical specifications**

Article number	<b>6ES7155-6MU00-0CNO</b> ET 200SP, IM155-6MF HF
<b>General information</b>	
Product type designation	IM 155-6 MF HF
<b>Product function</b>	
• I&M data	Yes; I&M0 to I&M3
• Module swapping during operation (hot swapping)	Yes; Multi-hot swapping
• Isochronous mode	No
• Tool changer	Yes; Docking station and docking unit
• Local coupling, IO data	No
• Local coupling, data records	No
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/integrated from version	via IM155-6PN/2 HF in compatibility mode
• STEP 7 configurable/integrated from version	via IM155-6PN/2 HF in compatibility mode
• PROFINET from GSD version/GSD revision	GSDML V2.3
• Multi Fieldbus Configuration Tool (MFCT)	V1.0 Update 2
<b>Supply voltage</b>	
Rated value (DC)	24 V
Reverse polarity protection	Yes
<b>Address area</b>	
<b>Address space per station</b>	
• Address space per station, max.	1 440 byte; Dependent on configuration
<b>Hardware configuration</b>	
<b>Rack</b>	
• Quantity of operable ET 200SP modules, max.	64
• Quantity of operable ET 200AL modules, max.	16
<b>Submodules</b>	
• Number of submodules per station, max.	256
<b>Interfaces</b>	
Number of PROFINET interfaces	1; 2 ports (switch)
<b>1. Interface</b>	
<b>Interface types</b>	
• Number of ports	2; via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x M12, BA 2x FC, BA 2x LC, BA LC/RJ45, BA LC/FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC,
<b>Protocols</b>	
• PROFINET IO Device	Yes
• Open IE communication	Yes
<b>Interface types</b>	
<b>RJ 45 (Ethernet)</b>	
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• 10 Mbps	No
• 100 Mbps	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• Autonegotiation	Yes
• Autocrossing	Yes
<b>Protocols</b>	
Modbus TCP	Yes
<b>Number of connections</b>	
• Number of MtM communication relationships/connections, max.	16

Article number	<b>6ES7155-6MU00-0CNO</b> ET 200SP, IM155-6MF HF
<b>PROFINET IO Device</b>	
<b>Services</b>	
- IRT	No
- PROFIenergy	Yes
- Prioritized startup	No
- Shared device	No
<b>Redundancy mode</b>	
• PROFINET system redundancy (S2)	Yes
- on S7-1500R/H	Yes
- on S7-400H	Yes
• H-Sync forwarding	Yes
<b>Media redundancy</b>	
- MRP	Yes
- MRPD	No
<b>EtherNet/IP</b>	
<b>Services</b>	
- CIP Implicit Messaging	Yes
- CIP Explicit Messaging	Yes
- CIP Safety	No
- Configuration control via Explicit Messaging	No
- Shared device	No
<b>Updating times</b>	
- Requested Packet Interval (RPI)	2 ms
<b>Address area</b>	
- Address space per module, max.	288 byte; (246 byte outputs / 288 byte inputs)
- ForwardOpen (Class1 & 32 bit Header)	500 byte; (246 byte outputs / 500 byte inputs)
- LargeForwardOpen (Class3)	4 002 byte
<b>Connections</b>	
- Number of rack connections	1
<b>Open IE communication</b>	
• TCP/IP	Yes
• UDP	Yes
• SNMP	Yes
• LLDP	Yes
• ARP	Yes
• IGMP	Yes
• Multicast	Yes
• Broadcast	Yes
• IPv4	Yes
• IPv6	No
<b>Interrupts/diagnostics/status information</b>	
Status indicator	Yes
Alarms	Yes
Diagnostics function	Yes
<b>Diagnostics indication LED</b>	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• NS LED	Yes; green/red LED
• MS LED	Yes; green/red LED
• IO LED	Yes; red-green-yellow LED
• Connection display LINK TX/RX	Yes; 2x green link LEDs on BusAdapter

#### Technical specifications

Article number	<b>6ES7155-6MU00-0CNO</b> ET 200SP, IM155-6MF HF			Article number	<b>6ES7155-6MU00-0CNO</b> ET 200SP, IM155-6MF HF		
<b>Standards, approvals, certificates</b>				<b>Connection method</b>			
Security level	According to Security Level 1 Test Cases V1.1.1			<b>ET-Connection</b>			
<b>Ambient conditions</b>				• via BU/BA Send			
<b>Ambient temperature during operation</b>				Yes; + 16 ET 200AL modules			
• horizontal installation, min.	-30 °C; No condensation			<b>Mechanics/material</b>			
• horizontal installation, max.	60 °C			Strain relief			
• vertical installation, min.	-30 °C; No condensation			Yes; Optional			
• vertical installation, max.	50 °C			<b>Dimensions</b>			
<b>Altitude during operation relating to sea level</b>				Width			
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual			Height			
				Depth			
				<b>Weights</b>			
				Weight, approx.			
				120 g; without BusAdapter			
Article number	<b>6ES7155-6AR00-0AN0</b> ET 200SP, IM155-6PN Basic	<b>6ES7155-6AA01-0BN0</b> ET 200SP, IM155-6PN ST incl. BA 2xRJ45	<b>6ES7155-6AU01-0BN0</b> ET 200SP, IM155-6PN ST				
<b>General information</b>							
Product type designation	IM 155-6 PN BA	IM 155-6 PN ST	IM 155-6 PN ST				
<b>Product function</b>							
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3				
• Module swapping during operation (hot swapping)	Yes; Single hot swapping	Yes; Single hot swapping	Yes; Single hot swapping				
• Isochronous mode	No	No	No				
<b>Engineering with</b>							
• STEP 7 TIA Portal configurable/integrated from version	V13 SP1	V14	V14				
• STEP 7 configurable/integrated from version	V5.5 SP4 and higher	V5.5 SP4 and higher	V5.5 SP4 and higher				
• PROFINET from GSD version/GSD revision	V2.3 / -	V2.3 / -	V2.3 / -				
<b>Supply voltage</b>							
Rated value (DC)	24 V	24 V	24 V				
Reverse polarity protection	Yes	Yes	Yes				
Short-circuit protection		Yes	Yes				
<b>Input current</b>							
Current consumption (rated value)		450 mA	450 mA				
<b>Address area</b>							
<b>Address space per station</b>							
• Address space per station, max.	32 byte; per input / output	512 byte; Dependent on configuration	512 byte; Dependent on configuration				
<b>Hardware configuration</b>							
<b>Rack</b>							
• Quantity of operable ET 200SP modules, max.	12	32	32				
• Quantity of operable ET 200AL modules, max.	0	16	16				
<b>Submodules</b>							
• Number of submodules per station, max.		256	256				
<b>Interfaces</b>							
Number of PROFINET interfaces	1; 2 ports (switch)	1; 2 ports (switch)	1; 2 ports (switch)				

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**Interface modules > IM 155-6****Technical specifications**

Article number	<b>6ES7155-6AR00-0AN0</b> ET 200SP, IM155-6PN Basic	<b>6ES7155-6AA01-0BN0</b> ET 200SP, IM155-6PN ST incl. BA 2xRJ45	<b>6ES7155-6AU01-0BN0</b> ET 200SP, IM155-6PN ST
<b>1. Interface</b>			
<b>Interface types</b>			
• RJ 45 (Ethernet)	Yes; 2 integrated RJ45 ports	Yes; Pre-assembled BusAdapter BA 2x RJ45	
• Number of ports	2	2	2
• integrated switch	Yes	Yes	Yes
• BusAdapter (PROFINET)	No	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12
<b>Protocols</b>			
• PROFINET IO Device	Yes	Yes	Yes
• Open IE communication	Yes	Yes	Yes
• Media redundancy	Yes; PROFINET MRP	Yes; PROFINET MRP	Yes; PROFINET MRP
<b>Interface types</b>			
<b>RJ 45 (Ethernet)</b>			
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• 10 Mbps	No		
• 100 Mbps	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• Autonegotiation	Yes	Yes	Yes
• Autocrossing	Yes	Yes	Yes
<b>PROFINET IO Device</b>			
<b>Services</b>			
- IRT	No	Yes; with send cycles of between 250 µs and 4 ms in increments of 125 µs	Yes; with send cycles of between 250 µs and 4 ms in increments of 125 µs
- PROFIenergy	No	Yes	Yes
- Prioritized startup	No	Yes	Yes
- Shared device	No	Yes	Yes
- Number of IO Controllers with shared device, max.		2	2
<b>Redundancy mode</b>			
• PROFINET system redundancy (S2)	No	No	No
<b>Media redundancy</b>			
- MRP	Yes	Yes	Yes
- MRPD	No	No	No
<b>Open IE communication</b>			
• TCP/IP	Yes	Yes	Yes
• SNMP	Yes	Yes	Yes
• LLDP	Yes	Yes	Yes
<b>Isochronous mode</b>			
Equidistance	No		
<b>Interrupts/diagnostics/ status information</b>			
Status indicator	Yes	Yes	Yes
Alarms	Yes	Yes	Yes
Diagnostics function	Yes	Yes	Yes
<b>Diagnostics indication LED</b>			
• RUN LED	Yes; green LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED	Yes; red LED
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Connection display LINK TX/RX	Yes; 2x green link LEDs on BusAdapter	Yes; 2x green link LEDs on BusAdapter	Yes; 2x green link LEDs on BusAdapter
<b>Standards, approvals, certificates</b>			
Security level		According to Security Level 1 Test Cases V1.1.1	According to Security Level 1 Test Cases V1.1.1

### Technical specifications

Article number	<b>6ES7155-6AR00-0AN0</b> ET 200SP, IM155-6PN Basic	<b>6ES7155-6AA01-0BN0</b> ET 200SP, IM155-6PN ST incl. BA 2xRJ45	<b>6ES7155-6AU01-0BN0</b> ET 200SP, IM155-6PN ST	
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-30 °C	0 °C	0 °C	
• horizontal installation, max.	60 °C	60 °C	60 °C	
• vertical installation, min.	-30 °C	0 °C	0 °C	
• vertical installation, max.	50 °C	50 °C	50 °C	
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m	
<b>Connection method</b>				
<b>ET-Connection</b>				
• via BU/BA Send	No	Yes; + 16 ET 200AL modules	Yes; + 16 ET 200AL modules	
<b>Dimensions</b>				
Width	35 mm	50 mm	50 mm	
Height	117 mm	117 mm	117 mm	
Depth	74 mm	74 mm	74 mm	
<b>Weights</b>				
Weight, approx.	125 g	190 g; IM 155-6 PN BA with 2x RJ45 ports and server module	147 g; without BusAdapter	
Article number	<b>6ES7155-6AU01-0CN0</b> ET 200SP, IM155-6PN/2 HF	<b>6ES7155-6AU30-0CN0</b> ET 200SP, IM155-6PN/3 HF	<b>6ES7155-6AU00-0DN0</b> ET 200SP, IM155-6PN HS	<b>6ES7155-6BA01-0CN0</b> ET 200SP, IM155-6DP HF incl. DP-Connect.
<b>General information</b>				
Product type designation	IM 155-6 PN/2 HF	IM 155-6 PN/3 HF	IM 155-6 PN HS	IM 155-6 DP HF
<b>Product function</b>				
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
• Module swapping during operation (hot swapping)	Yes; Multi-hot swapping	Yes; Multi-hot swapping	Yes; Multi-hot swapping	Yes; Multi-hot swapping
• Isochronous mode	Yes	Yes	Yes	No
• Tool changer	Yes; Docking station and docking unit	Yes; Docking station and docking unit		
• Local coupling, IO data	No	Yes		
- Number of coupling modules		16		
- Number of coupling submodules per module		4		
• Local coupling, data records	No	No		
<b>Engineering with</b>				
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V15.1 or higher		STEP 7 V14 or higher	
• STEP 7 configurable/integrated from version	Configurable via GSD file	Configurable via GSD file	V5.5 SP4 and higher	As of V5.5 SP4, only up to FW V3.1
• PROFIBUS from GSD version/GSD revision				One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/GSD revision	GSDML V2.3	GSDML V2.3	- / V2.3	
<b>Supply voltage</b>				
Rated value (DC)	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes
<b>Input current</b>				
Current consumption (rated value)		175 mA; At 24 V, 2 slots 2x RJ45 BusAdapter, no I/O modules		
<b>Address area</b>				
<b>Address space per station</b>				
• Address space per station, max.	1 440 byte; Dependent on configuration	1 440 byte; Dependent on configuration	968 byte; For input and output data respectively	244 byte; per input / output

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**Interface modules > IM 155-6****Technical specifications**

Article number	<b>6ES7155-6AU01-0CNO</b> ET 200SP, IM155-6PN/2 HF	<b>6ES7155-6AU30-0CNO</b> ET 200SP, IM155-6PN/3 HF	<b>6ES7155-6AU00-0DNO</b> ET 200SP, IM155-6PN HS	<b>6ES7155-6BA01-0CNO</b> ET 200SP, IM155-6DP HF incl. DP-Connect.
<b>Hardware configuration</b>				
<b>Rack</b>				
• Quantity of operable ET 200SP modules, max.	64	64	30	32
• Quantity of operable ET 200AL modules, max.	16	16	0	16
<b>Submodules</b>				
• Number of submodules per station, max.	256	256	125	
<b>Time stamping</b>				
Accuracy	10 ms			
<b>Interfaces</b>				
Number of PROFINET interfaces	1; 2 ports (switch)	1; 3 ports (switch)	1; 2 ports (switch)	
Number of PROFIBUS interfaces				1
<b>1. Interface</b>				
<b>Interface types</b>				
• RS 485				Yes
• Number of ports	2; via BusAdapter	3; Via 2 BusAdapter slots	2	
• integrated switch	Yes	Yes	Yes	
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x M12, BA 2x FC, BA 2x LC, BA LC/RJ45, BA LC/FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC,	Yes; Compatible BusAdapter: BA 2x RJ45, BA 2x FC, BA 2x SCRJ, BA SCRJ / RJ45, BA SCRJ / FC, BA 2x LC, BA LC / RJ45, BA LC / FC	Yes; Compatible BusAdapter: BA 2x RJ45, BA 2x FC, BA 2x SCRJ, BA SCRJ / RJ45, BA SCRJ / FC, BA 2x LC, BA LC / RJ45, BA LC / FC	
• Output current of the interface, max.				90 mA
<b>Protocols</b>				
• PROFINET IO Device	Yes	Yes	Yes	
• PROFIBUS DP slave				Yes
• Open IE communication	Yes	Yes	Yes	
• Media redundancy	Yes; PROFINET MRP	Yes; PROFINET MRP	Yes; As MRP or MRPD client; max. 50 or 30 devices in the ring	
<b>Interface types</b>				
<b>RJ 45 (Ethernet)</b>				
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	
• 10 Mbps	No	No	No	
• 100 Mbps	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)	
• Autonegotiation	Yes	Yes	Yes	
• Autocrossing	Yes	Yes	Yes	
<b>RS 485</b>				
• Transmission rate, max.				12 Mbit/s
<b>Protocols</b>				
<b>Number of connections</b>				
• Number of MtM communication relationships/connections, max.	16	16		
<b>PROFINET IO Device Services</b>				
- IRT	Yes; 250 µs, 500 µs, 1 ms, 2 ms, 4 ms additionally with IRT with high performance: 250 µs to 4 ms in 125 µs frame	Yes; 250 µs, 500 µs, 1 ms, 2 ms, 4 ms additionally with IRT with high performance: 250 µs to 4 ms in 125 µs frame	Yes; 125 µs, 250 µs, 500 µs, 1 ms, 2 ms, 4 ms additionally with IRT with high performance: 250 µs to 4 ms in 125 µs frame	
- PROFIenergy	Yes	Yes	Yes	
- Prioritized startup	Yes	Yes	Yes	
- Shared device	Yes	Yes	Yes	
- Number of IO Controllers with shared device, max.	4	4	4	

#### Technical specifications

Article number	6ES7155-6AU01-0CN0 ET 200SP, IM155-6PN/2 HF	6ES7155-6AU30-0CN0 ET 200SP, IM155-6PN/3 HF	6ES7155-6AU00-0DN0 ET 200SP, IM155-6PN HS	6ES7155-6BA01-0CN0 ET 200SP, IM155-6DP HF incl. DP-Connect.
<b>Redundancy mode</b>				
• PROFINET system redundancy (S2)	Yes; NAP S2	Yes; NAP S2	No	
• Redundant PROFINET configuration (R1)		No		
• H-Sync forwarding	Yes	Yes		
<b>Media redundancy</b>				
- MRP	Yes	Yes	Yes	
- MRPD	No	No	Yes	
<b>Open IE communication</b>				
• TCP/IP	Yes	Yes	Yes	No
• SNMP	Yes	Yes	Yes	
• LLDP	Yes	Yes	Yes	
<b>PROFIBUS DP</b>				
<b>Services</b>				
- SYNC capability				Yes
- FREEZE capability				Yes
- DPV0				Yes
- DPV1				Yes
<b>Isochronous mode</b>				
Equidistance	Yes	Yes	Yes	
shortest clock pulse	250 µs	250 µs	125 µs	
max. cycle	4 ms	4 ms	4 ms	
Bus cycle time (TDP), min.	250 µs	250 µs	125 µs	
<b>Interrupts/diagnostics/ status information</b>				
Status indicator	Yes	Yes	Yes	Yes
Alarms	Yes	Yes	Yes	Yes
Diagnostics function	Yes	Yes	Yes	Yes
<b>Diagnostics indication LED</b>				
• RUN LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Connection display LINK TX/RX	Yes; 2x green link LEDs on BusAdapter	Yes; 2x green link LEDs on BusAdapter	Yes; 2x green link LEDs on BusAdapter	
• Connection display DP				Yes; green DP LED
<b>Standards, approvals, certificates</b>				
Security level	According to Security Level 1 Test Cases V1.1.1	According to Security Level 1 Test Cases V1.1.1	According to Security Level 1 Test Cases V1.1.1	
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-30 °C; No condensation	-30 °C	-25 °C; No condensation	-25 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; No condensation	-30 °C	-25 °C; No condensation	-25 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual

**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**Interface modules > IM 155-6****Technical specifications**

Article number	<b>6ES7155-6AU01-0CN0</b> ET 200SP, IM155-6PN/2 HF	<b>6ES7155-6AU30-0CN0</b> ET 200SP, IM155-6PN/3 HF	<b>6ES7155-6AU00-0DN0</b> ET 200SP, IM155-6PN HS	<b>6ES7155-6BA01-0CN0</b> ET 200SP, IM155-6DP HF incl. DP-Connect.
<b>Connection method</b>				
<b>ET-Connection</b>				
• via BU/BA Send	Yes; + 16 ET 200AL modules	Yes; + 16 ET 200AL modules	No	Yes; + 16 ET 200AL modules
<b>Mechanics/material</b>				
Strain relief	Yes; Optional	Yes; Optional		
<b>Dimensions</b>				
Width	50 mm	100 mm	50 mm	50 mm
Height	117 mm	117 mm	117 mm	117 mm
Depth	74 mm	74 mm	74 mm	74 mm
<b>Weights</b>				
Weight, approx.	120 g; without BusAdapter	220 g; without BusAdapter	147 g; without BusAdapter	150 g

## Overview



- Interface modules for linking the I/O modules to a higher-level PLC with PROFINET or PROFIBUS
- Server module included in the scope of supply
- Station expansion with IP67 I/O system ET 200AL via ET-connection to BU-Send / BA-Send
- PROFINET bus connection
  - 2 ports for line configuration
  - PN connection selected via BusAdapter (ST, HF)
  - Two integrated RJ45 sockets (BA)
- PROFIBUS bus connection
  - 9-pin sub D socket
  - PROFIBUS connector included in scope of supply
  - Hot swapping (module replacement during operation)
  - Startup and operation with gaps
  - Dynamic re-parameterization in RUN mode
  - Configuration control (option handling)
  - Pluggable 24 V DC supply connector
  - Electronically readable rating plate (I&M data)

**Note:**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

## Ordering data

## Article No.

**SIPLUS PROFINET IM155-6PN  
Standard interface module**

(Extended temperature range and exposure to environmental substances)

IM 155-6PN ST, with server module and installed BusAdapter BA 2xRJ45, plus extended power failure backup time

**6AG1155-6AA01-7BN0****SIPLUS interface module  
High Feature**

(Extended temperature range and exposure to environmental substances)

IM 155-6DP HF, with server module, with multi-hot-swap, incl. PROFIBUS connector

**6AG1155-6BA01-7CN0**

IM 155-6PN HF, incl. server module, without BusAdapter

- Temperature range -40...+60 °C
- Temperature range -40...+70 °C

**6AG1155-6AU01-2CN0****6AG1155-6AU01-7CN0****6AG1155-6AU01-7BN0**

IM 155-6PN HF, including server module, without BusAdapter, plus extended power failure backup time

**Accessories****SIPLUS Mounting Kit ET 200SP****6AG1193-6AA00-0AA0**

Mounting accessories for use with increased mechanical vibration and shock loads. Not approved for SIPLUS BusAdapter BA 2xRJ45

**Other accessories**

See SIMATIC ET 200SP, IM 155-6 interface module, page 10/10



## I/O systems

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

### Interface modules > SIPLUS interface modules

#### Technical specifications

Article number	6AG1155-6AA01-7BNO	6AG1155-6AU01-2CNO	6AG1155-6AU01-7CNO	6AG1155-6AU01-7BNO	6AG1155-6BA01-7CNO
Based on	6ES7155-6AA01-0BNO SIPLUS ET 200SP IM155-6PN ST / BA	6ES7155-6AU01-2CNO SIPLUS ET 200SP IM155-6PN HF	6ES7155-6AU01-0CNO SIPLUS ET 200SP IM155-6PN HF	6ES7155-6AU01-0BNO SIPLUS ET 200SP IM155-6PN ST	6ES7155-6BA01-0CNO SIPLUS ET 200SP IM155-6DP HF
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	60 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax
• vertical installation, min.	-40 °C; = Tmin	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin	-40 °C; = Tmin (incl. condensation/frost)
• vertical installation, max.	50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax
<b>Altitude during operation relating to sea level</b>					
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>					
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Resistance</b>					
<b>Coolants and lubricants</b>					
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>					
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

**Technical specifications**

Article number	6AG1155-6AA01-7BNO	6AG1155-6AU01-2CNO	6AG1155-6AU01-7CNO	6AG1155-6AU01-7BNO	6AG1155-6BA01-7CNO
Based on	6ES7155-6AA01-0BNO	6ES7155-6AU01-2CNO	6ES7155-6AU01-0CNO	6ES7155-6AU01-0BNO	6ES7155-6BA01-0CNO
	SIPLUS ET 200SP IM155-6PN ST / BA	SIPLUS ET 200SP IM155-6PN HF	SIPLUS ET 200SP IM155-6PN HF	SIPLUS ET 200SP IM155-6PN ST	SIPLUS ET 200SP IM155-6DP HF
<b>Use on ships/at sea</b>					
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6		Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Usage in industrial process technology</b>					
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>					
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>					
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > Digital input modules****Overview**

- 4, 8 and 16-channel digital input (DI) modules
- Apart from the standard type of delivery in an individual package, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

For different requirements, the digital input modules offer:

- Function classes Basic, Standard, High Feature and High Speed as well as fail-safe DI (see "Fail-safe I/O modules")
- BaseUnits for single or multiple-conductor connection with automatic slot coding
- Potential distributor modules for system-integrated expansion with additional potential terminals
- Individual system-integrated potential group formation with self-assembling voltage busbars (a separate power module is no longer required for ET 200SP)

- Option of connecting sensors compliant with IEC 61131 type 1, 2 or 3 (module-dependent) for rated voltages of up to 24 V DC or 230 V AC
- PNP (sinking input) and NPN (sourcing input) versions
- Clear labeling on front of module
- LEDs for diagnostics, status, supply voltage and faults (e.g. wire break/short-circuit)
- Electronically readable and non-volatile writable rating plate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
  - MSI operating mode (simultaneous reading of input data from as many as three other PLCs)
  - Counting operating mode (multi-channel counter for pulse generators with 32-bit counting width and up to 10 kHz counting frequency)
  - Oversampling operating mode (n-fold equidistant acquisition of digital values within one PN cycle for increasing the time resolution for slow CPU cycles)
  - Parameterizable input delay time
  - Isochronous mode (simultaneous equidistant reading of all input channels)
  - Hardware interrupts
  - Pulse extension
  - Re-parameterization during operation
  - Firmware update
  - Diagnosis of wire break and short-circuit (on channel or module basis)
  - Value status (optional binary validity information of the input signal in the process image)
  - Supports the PROFlenergy profile
- Optional accessories
  - Labeling strips (film or card)
  - Equipment labeling plate
  - Color-coded label with module-specific CC code
  - Shielding terminal

A quick and clear comparison of the functions of the different DI modules is offered by the TIA Selection Tool.

Overview of digital input modules

Digital input	PU	Article No.	CC code	BU type
DI 16 x 24 V DC ST	1	6ES7131-6BH01-0BA0	CC00	A0
DI 16 x 24 V DC ST	10	6ES7131-6BH01-2BA0	CC00	A0
DI 8 x 24 V DC BA	1	6ES7131-6BF01-0AA0	CC01	A0
DI 8 x 24 V DC BA	10	6ES7131-6BF01-2AA0	CC01	A0
DI 8 x 24 V DC SRC BA	1	6ES7131-6BF61-0AA0	CC02	A0
DI 8 x 24 V DC ST	1	6ES7131-6BF01-0BA0	CC01	A0
DI 8 x 24 V DC ST	10	6ES7131-6BF01-2BA0	CC01	A0
DI 8 x 24 V DC HF	1	6ES7131-6BF00-0CA0	CC01	A0
DI 8 x 24 V DC HF	10	6ES7131-6BF00-2CA0	CC01	A0
DI 8 x NAMUR HF	1	6ES7131-6TF00-0CA0	CC01	A0
DI 8 x 24 V DC HS	1	6ES7131-6BF00-0DA0	CC01	A0
With three operating modes: • High-speed isochronous DI • 4 pulse counters, 32-bit, 10 kHz • Oversampling				
DI 4 x 120 ... 230 V AC ST	1	6ES7131-6FD01-0BB1	CC41	B1
DI 8 x 24 V AC ... 48 V UC	1	6ES7131-6CF00-0AU0	CC20	U0

**Overview**

## Overview of BaseUnits

BaseUnit	PU	Article No.	CC codes for push-in terminals	CC codes for AUX terminals
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • With 10 AUX terminals	1	6ES7193-6BP20-0DA0	CC00 to CC05	CC71 to CC73
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • With 10 AUX terminals	10	6ES7193-6BP20-2DA0	CC00 to CC05	CC71 to CC73
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0DA0	CC00 to CC05	--
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2DA0	CC00 to CC05	--
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • With 10 AUX terminals	1	6ES7193-6BP20-0BA0	CC00 to CC05	CC71 to CC73
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • With 10 AUX terminals	10	6ES7193-6BP20-2BA0	CC00 to CC05	CC71 to CC73
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0BA0	CC00 to CC05	--
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2BA0	CC00 to CC05	--
<b>BU type B1</b> • Forwarding of the potential group (dark) • 12 push-in terminals • 2 x 2 (1L, 2L, 1N, 2N) direct infeed module • Without AUX terminals	1	6ES7193-6BP20-0BB1	CC41	--
<b>BU type B1</b> • Forwarding of the potential group (dark) • 12 push-in terminals • 2 x 2 (1L, 2L, 1N, 2N) direct infeed module • Without AUX terminals	10	6ES7193-6BP20-2BB1	CC41	--
<b>BU type U0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0DU0	CC00	--
<b>BU type U0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2DU0	CC00	--
<b>BU type U0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0BU0	CC00	--
<b>BU type U0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2BU0	CC00	--

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > Digital input modules

#### Overview

Overview of potential distributor modules

Potential distributor module	PU	Article No.	CC codes for push-in terminals
<b>PotDis BU</b> Type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP1	CC00, CC62
<b>PotDis BU</b> Type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP1	CC00, CC62
<b>PotDis BU</b> Type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP2	CC00, CC63
<b>PotDis BU</b> Type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP2	CC00, CC63
<b>PotDis TB</b> Type BR-W, 18x internally jumpered terminals, without reference to P1, P2 or AUX, (total current max. 10 A)	1	6ES7193-6TP00-0TP0	CC10 to CC13
<b>PotDis TB</b> Type P1-R, 18x P1 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP1	CC10, CC12
<b>PotDis TB</b> Type P2-B, 18x P2 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP2	CC10, CC13
<b>PotDis TB</b> Type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX	1	6ES7193-6TP00-0TN0	CC10

#### Ordering data

##### Digital input modules

Delivery options:  
Apart from the standard type of delivery in single-unit package, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

The number of modules required is the number of modules ordered. The pack type is selected by selecting the article number. Packs of 10 can therefore only be ordered in integer multiples of 10.

Digital input module  
DI 8x24VDC Basic, BU type A0, color code CC01

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10

Digital input module  
DI 8x24VDC Sourcing Input, Basic, BU type A0, color code CC02; PU: 1 unit

#### Article No.

6ES7131-6BF01-0AA0  
6ES7131-6BF01-2AA0

6ES7131-6BF61-0AA0

#### Article No.

Digital input module  
DI 8x24VDC Standard,  
BU type A0, color code CC01

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10

6ES7131-6BF01-0BA0  
6ES7131-6BF01-2BA0

Digital input module  
DI 16 x 24 V DC Standard,  
BU type A0, color code CC00

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10

6ES7131-6BH01-0BA0  
6ES7131-6BH01-2BA0

Digital input module  
DI 8x24VDC High Feature,  
BU type A0, color code CC01,  
channel-specific diagnostics,  
isochronous mode,  
shared input (MSI); PU: 1 unit

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10

6ES7131-6BF00-0CA0  
6ES7131-6BF00-2CA0

Ordering data	Article No.	Article No.
Digital input module DI 8x24VDC High Speed, BU type A0, color code CC01; 3 operating modes (fast isochronous DI, 4 pulse counters 32-bit 10 kHz, oversampling); PU: 1 unit	<b>6ES7131-6BF00-0DA0</b>	
Digital input module DI 8xNAMUR High Feature, BU type A0, color code CC01; PU: 1 unit	<b>6ES7131-6TF00-0CA0</b>	
Digital input module DI 4x120VAC-230VAC Standard, BU type B1, color code CC41; PU: 1 unit	<b>6ES7131-6FD01-0BB1</b>	
Digital input module DI 8x24VAC-48VUC Basic, BU type U0, color code CC20, module diagnostics, PU: 1 unit	<b>6ES7131-6CF00-0AU0</b>	
<b>Suitable BaseUnits</b>		
<b>BU15-P16+A10+2D</b>		
BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10	<b>6ES7193-6BP20-0DA0</b> <b>6ES7193-6BP20-2DA0</b>	
<b>BU15-P16+A0+2D</b>		
BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10	<b>6ES7193-6BP00-0DA0</b> <b>6ES7193-6BP00-2DA0</b>	
<b>2BU15-P16+A0+2DB</b>		
Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (light/dark) with 16 push-in terminals to the module; for starting a new potential group (max. 10 A) • Pack of 1 unit	<b>6ES7193-6BP60-0DA0</b>	
<b>BU15-P16+A10+2B</b>		
BU type A0; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10	<b>6ES7193-6BP20-0BA0</b> <b>6ES7193-6BP20-2BA0</b>	
<b>BU15-P16+A0+2B</b>		
BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10	<b>6ES7193-6BP00-0BA0</b> <b>6ES7193-6BP00-2BA0</b>	
<b>2BU15-P16+A0+2B</b>		
Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the potential group • Pack of 1 unit	<b>6ES7193-6BP60-0BA0</b>	
<b>BU20-P12+A0+4B</b>		
BU type B1; BaseUnit (dark) with 12 push-in terminals to the module; for continuing the potential group; 1 unit • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10	<b>6ES7193-6BP20-0BB1</b> <b>6ES7193-6BP20-2BB1</b>	
<b>BU20-P16+A0+2D</b>		
BU type U0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10	<b>6ES7193-6BP00-0DU0</b> <b>6ES7193-6BP00-2DU0</b>	
<b>BU20-P16+A0+2B</b>		
BU type U0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10	<b>6ES7193-6BP00-0BU0</b> <b>6ES7193-6BP00-2BU0</b>	
<b>Potential distributor modules</b>		
<b>PotDis BU</b>		
PotDis BU, Type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)	<b>6ES7193-6UP00-0DP1</b>	
PotDis BU, Type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group	<b>6ES7193-6UP00-0BP1</b>	
PotDis BU, Type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)	<b>6ES7193-6UP00-0DP2</b>	
PotDis BU, Type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	<b>6ES7193-6UP00-0BP2</b>	
<b>PotDis TB</b>		
PotDis TB, type BR-W, 18x internally jumpered terminals, without reference to P1, P2 or AUX, (total current max. 10 A)	<b>6ES7193-6TP00-0TP0</b>	
PotDis TB, type P1-R, 18x P1 potential, (total current max. 10 A)	<b>6ES7193-6TP00-0TP1</b>	
PotDis TB, type P2-B, 18x P2 potential, (total current max. 10 A)	<b>6ES7193-6TP00-0TP2</b>	
PotDis TB, type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX	<b>6ES7193-6TP00-0TN0</b>	

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > Digital input modules****Ordering data****Article No.****Article No.****Accessories****Equipment labeling plate**

10 sheets of 16 labels, for printing with thermal transfer card printer or plotter

**6ES7193-6LF30-0AW0****Labeling strips**

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

**6ES7193-6LR10-0AA0**

500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer

**6ES7193-6LR10-0AG0**

1 000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer

**6ES7193-6LA10-0AA0**

1 000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer

**6ES7193-6LA10-0AG0****BU cover**

For covering empty slots (gaps); 5 units

- 15 mm wide
- 20 mm wide

**6ES7133-6CV15-1AM0****6ES7133-6CV20-1AM0****Shield connection**

5 shield supports and 5 shield terminals

**6ES7193-6SC00-1AM0****Color-coded labels for 15 mm-wide BaseUnits**

Color code CC00, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units

**6ES7193-6CP00-2MA0**

Color code CC01, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units

**6ES7193-6CP01-2MA0**

Color code CC01, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 50 units

**6ES7193-6CP01-4MA0**

Color code CC02, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16); 10 units

**6ES7193-6CP02-2MA0**

Color code CC02, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16); 50 units

**6ES7193-6CP02-4MA0**

Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A); 10 units

**6ES7193-6CP71-2AA0**

Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A); 10 units

**6ES7193-6CP72-2AA0**

Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 10 units

**6ES7193-6CP73-2AA0**

Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 50 units

**6ES7193-6CP73-4AA0****Color-coded labels for 20 mm-wide BaseUnits**

Color code CC41, for 16 push-in terminals, BU type B1, gray (terminals 1 to 4), red (terminals 5 to 8), blue (terminals 9 to 12); 10 units

**6ES7193-6CP41-2MB0****Color-coded labels for PotDis BU**

Color code CC62, for 16 push-in terminals, PotDis BU type P1, red (terminals 1 to 16); 10 units

**6ES7193-6CP62-2MA0**

Color code CC63, for 16 push-in terminals, PotDis BU type P2, blue (terminals 1 to 16); 10 units

**6ES7193-6CP63-2MA0****Color-coded labels for PotDis TB**

Color code CC10, for 18 push-in terminals, PotDis TB, gray (terminals 1 to 18); 10 units

**6ES7193-6CP10-2MT0**

Color code CC11, for 18 push-in terminals, PotDis TB, yellow-green (terminals 1 to 18); 10 units

**6ES7193-6CP11-2MT0**

Color code CC12, for 18 push-in terminals, PotDis TB, type P1 and BR, red (terminals 1 to 18); 10 units

**6ES7193-6CP12-2MT0**

Color code CC13, for 18 push-in terminals, PotDis TB, type P2 and BR, blue (terminals 1 to 18); 10 units

**6ES7193-6CP13-2MT0****Mechanical coding elements**

For automatic coding of I/O modules; spare part. 20 units

Type A

**6ES7193-6KA00-3AA0**

Type B

**6ES7193-6KB00-3AA0**

Type C

**6ES7193-6KC00-3AA0**

Type D

**6ES7193-6KD00-3AA0**

**Technical specifications**

Article number	<b>6ES7131-6BF01-0AA0</b> ET 200SP, DI 8x 24V DC Basic, PU 1	<b>6ES7131-6BF61-0AA0</b> ET 200SP, DI 8x 24V DC SRC BA	<b>6ES7131-6BF01-0BA0</b> ET 200SP, DI 8x 24V DC ST, PU 1	<b>6ES7131-6BH01-0BA0</b> ET 200SP, DI 16x 24V DC ST, PU 1
<b>General information</b>				
Product type designation	DI 8x24VDC BA	DI 8x24 VDC SRC BA	DI 8x24 VDC ST	DI 16x24VDC ST
<b>Product function</b>				
• Isochronous mode	No	No	No	No
<b>Engineering with</b>				
• STEP 7 TIA Portal configurable/ integrated from version	V14	V14	V14	V14
• STEP 7 configurable/integrated from version	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 or higher	V5.5 SP3
• PCS 7 configurable/integrated from version			V8.1 SP1	V8.1 SP1
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3
<b>Operating mode</b>				
• DI	Yes	Yes	Yes	Yes
• Counter	No	No	No	No
• Oversampling	No	No	No	No
• MSI	No	No	No	No
<b>Supply voltage</b>				
Rated value (DC)	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes
<b>Encoder supply</b>				
Number of outputs	8		8	
Short-circuit protection	Yes; per module	No	Yes; per module	
<b>24 V encoder supply</b>				
• 24 V	Yes		Yes	No
• Short-circuit protection	Yes		Yes	
• Output current, max.			700 mA	
• Output current per channel, max.	700 mA		700 mA	
• Output current per module, max.	700 mA		700 mA	
<b>Digital inputs</b>				
Number of digital inputs	8	8	8	16
Digital inputs, parameterizable	Yes	Yes	Yes	Yes
Source/sink input	P-reading	Sourcing	P-reading	P-reading
Input characteristic curve in accordance with IEC 61131, type 1	Yes	Yes		
Input characteristic curve in accordance with IEC 61131, type 2	Yes			
Input characteristic curve in accordance with IEC 61131, type 3	Yes		Yes	Yes
<b>Input voltage</b>				
• Rated value (DC)	24 V	24 V	24 V	24 V
- 24 V DC	Yes	Yes	Yes	Yes
• for signal *0*	-30 to +5 V	30 V to -5 V (reference potential is L+)	-30 to +5 V	-30 to +5 V
• for signal *1*	+11 to +30V	-11 V to -30 V (reference potential is L+)	+11 to +30V	+11 to +30V
<b>Input current</b>				
• for signal *1*, typ.	6.8 mA	6 mA	2.5 mA	2.5 mA
<b>Input delay (for rated value of input voltage) for standard inputs</b>				
- parameterizable	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)



**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > Digital input modules****Technical specifications**

Article number	<b>6ES7131-6BF01-0AA0</b> ET 200SP, DI 8x 24V DC Basic, PU 1	<b>6ES7131-6BF61-0AA0</b> ET 200SP, DI 8x 24V DC SRC BA	<b>6ES7131-6BF01-0BA0</b> ET 200SP, DI 8x 24V DC ST, PU 1	<b>6ES7131-6BH01-0BA0</b> ET 200SP, DI 16x 24V DC ST, PU 1
<b>Encoder</b>				
<b>Connectable encoders</b>				
• 2-wire sensor	Yes	Yes	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	2 mA	1.5 mA	1.5 mA	1.5 mA
<b>Interrupts/diagnostics/ status information</b>				
Diagnostics function	Yes	Yes	Yes	Yes
<b>Alarms</b>				
• Diagnostic alarm	Yes	Yes	Yes	Yes
<b>Diagnoses</b>				
• Diagnostic information readable	Yes	Yes	Yes	Yes
• Monitoring the supply voltage	Yes	Yes	Yes	Yes
- parameterizable	Yes	Yes	Yes	Yes
• Monitoring of encoder power supply	No	No	Yes; Module-by-module, optional protective circuit for preventing wire-break diagnostics in the case of simple encoder contacts: 25 kOhm to 45 kOhm	No
• Wire-break	No	No	Yes; Module-wise	Yes; Module-by-module, optional protective circuit for preventing wire-break diagnostics in the case of simple encoder contacts: 25 kOhm to 45 kOhm
• Short-circuit	No	No	Yes; Module-wise	No
• Group error	Yes	Yes	Yes	Yes
<b>Diagnostics indication LED</b>				
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	No	No	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Potential separation</b>				
<b>Potential separation channels</b>				
• between the channels and backplane bus	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>				
Suitable for safety functions		No		
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-30 °C; < 0 °C as of FS03	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS02
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; < 0 °C as of FS03	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS02
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Dimensions</b>				
Width	15 mm	15 mm	15 mm	15 mm
Height	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm
<b>Weights</b>				
Weight, approx.	28 g	28 g	28 g	28 g

**Technical specifications**

Article number	<b>6ES7131-6BF00-0CA0</b>	<b>6ES7131-6BF00-0DA0</b>	<b>6ES7131-6TF00-0CA0</b>	<b>6ES7131-6FD01-0BB1</b>	<b>6ES7131-6CF00-0AU0</b>
	ET 200SP, DI 8x24VDC HF, PU 1	ET 200SP, DI 8x24VDC High Speed	ET 200SP, DI 8xNAMUR HF	ET 200SP, DI 4x 120...230VvAC ST	ET 200SP, DI 8x 24VAC..48VUC BA, PU 1
<b>General information</b>					
Product type designation	DI 8x24 V DC HF	DI 8x24 V DC HS	DI 8xNAMUR HF	DI 4x120 ... 230 V AC ST	DI 8x24VAC/48VUC BA
<b>Product function</b>					
• Isochronous mode	Yes	Yes	No	No	No
<b>Engineering with</b>					
• STEP 7 TIA Portal configurable/ integrated from version	V13 SP1 / -	V13 SP1	V13 / V13	V14	V15
• STEP 7 configurable/integrated from version	V5.5 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3	
• PCS 7 configurable/integrated from version	V8.1 SP1				
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	GSD Revision 5	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3
<b>Operating mode</b>					
• DI	Yes	Yes	Yes	Yes	Yes
• Counter	No	Yes	No	No	No
• Oversampling	No	Yes	No	No	No
• MSI	Yes	No	No	No	No
<b>Supply voltage</b>					
Rated value (DC)	24 V	24 V	24 V		48 V
Rated value (AC)				230 V	48 V; 24 V/48 V; 50 Hz/60 Hz
Reverse polarity protection	Yes	Yes	Yes	No	Yes
<b>Encoder supply</b>					
Number of outputs	8		8	4	8
Short-circuit protection	Yes		Yes	No; when using BU type B1, a fuse with 10 A tripping current must be provided	Yes; Per module, 5x 20 mm fuse, 2 A/250 V, quick-response, replaceable
<b>Output current</b>					
• up to 60 °C, max.				10 A	1 A
<b>24 V encoder supply</b>					
• 24 V	Yes	Yes	No		No
• Short-circuit protection	Yes; per channel, electronic	Yes; per module, electronic	No		
• Output current, max.		700 mA			
• Output current per channel, max.	700 mA				
• Output current per module, max.	700 mA				
<b>Digital inputs</b>					
Number of digital inputs	8	8	8; NAMUR	4	8
Digital inputs, parameterizable	Yes		Yes		
Source/sink input	P-reading	P-reading			P-reading
Input characteristic curve in accordance with IEC 61131, type 1					Yes
Input characteristic curve in accordance with IEC 61131, type 2					No
Input characteristic curve in accordance with IEC 61131, type 3	Yes			Yes	No
Pulse extension	Yes; Pulse duration from 4 µs	Yes	Yes; 0.5 s, 1 s, 2 s		No
• Length	2 s; 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s	2 s; 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s			
Edge evaluation	Yes; rising edge, falling edge, edge change		Yes; rising edge, falling edge, edge change		
Signal change flutter			Yes; 2 to 32 signal changes		
Flutter observation window			Yes; 0.5 s, 1 s to 100 s in 1-s steps		

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > Digital input modules

#### Technical specifications

Article number	6ES7131-6BF00-0CA0	6ES7131-6BF00-0DA0	6ES7131-6TF00-0CA0	6ES7131-6FD01-0BB1	6ES7131-6CF00-0AU0
	ET 200SP, DI 8x24VDC HF, PU 1	ET 200SP, DI 8x24VDC High Speed	ET 200SP, DI 8xNAMUR HF	ET 200SP, DI 4x 120..230VvAC ST	ET 200SP, DI 8x 24VAC..48VUC BA, PU 1
<b>Digital input functions, parameterizable</b>					
• Gate start/stop		Yes			
• Freely usable digital input		Yes			
• Counter		Yes			
• Digital input with oversampling		Yes			
<b>Input voltage</b>					
• Rated value (DC)	24 V	24 V	8.2 V		
- 24 V DC	Yes				
• Rated value (AC)				230 V	
• for signal *0*	-30 to +5 V	-30 to +5 V		0V AC to 40V AC	AC/DC < 10 V
• for signal *1*	+11 to +30V	+11 to +30V		74 V AC to 264 V AC	AC > 14 V, DC > 34 V
<b>Input current</b>					
• for signal *1*, typ.	2.5 mA	6 mA		10.8 mA	3.5 mA
<b>for 10 k switched contact</b>					
- for signal *0*			0.35 to 1.2 mA		
- for signal *1*			2.1 to 7 mA		
<b>for unswitched contact</b>					
- for signal *0*, max. (permissible quiescent current)			0.5 mA		
- for signal *1*			typ. 8 mA		
<b>for NAMUR encoders</b>					
- for signal *0*			0.35 to 1.2 mA		
- for signal *1*			2.1 to 7 mA		
<b>Input delay (for rated value of input voltage)</b>					
• tolerated changeover time for changeover contacts			300 ms		
<b>for standard inputs</b>					
- parameterizable	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms	No	No	No
<b>for interrupt inputs</b>					
- parameterizable		Yes			
<b>for technological functions</b>					
- parameterizable		Yes			
<b>Encoder</b>					
<b>Connectable encoders</b>					
• NAMUR encoder/changeover contact according to EN 60947			Yes		
• Single contact / changeover contact unconnected			Yes		
• Single contact / changeover contact connected with 10 kΩ			Yes		
• 2-wire sensor	Yes	Yes		Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA			
<b>Isochronous mode</b>					
Filtering and processing time (TCI), min.	420 µs				
Bus cycle time (TDP), min.	500 µs	125 µs			
<b>Interrupts/diagnostics/ status information</b>					
Diagnostics function	Yes	Yes	Yes		Yes
<b>Alarms</b>					
• Diagnostic alarm	Yes; channel by channel	Yes	Yes; channel by channel	No	Yes
• Hardware interrupt	Yes; Parameterizable, channels 0 to 7	Yes	Yes; Parameterizable, channels 0 to 7	No	

**Technical specifications**

Article number	<b>6ES7131-6BF00-0CA0</b>	<b>6ES7131-6BF00-0DA0</b>	<b>6ES7131-6TF00-0CA0</b>	<b>6ES7131-6FD01-0BB1</b>	<b>6ES7131-6CF00-0AU0</b>
	ET 200SP, DI 8x24VDC HF, PU 1	ET 200SP, DI 8x24VDC High Speed	ET 200SP, DI 8xNAMUR HF	ET 200SP, DI 4x 120..230VvAC ST	ET 200SP, DI 8x 24VAC..48VUC BA, PU 1
<b>Diagnoses</b>					
• Diagnostic information readable	Yes	Yes	Yes		Yes
• Monitoring the supply voltage	Yes	Yes	Yes	No	Yes
- parameterizable	Yes	Yes	Yes		
• Monitoring of encoder power supply	Yes; channel by channel	Yes; Module-wise	No		Yes
• Wire-break	Yes; Channel by channel, optional protective circuit for preventing wire-break diagnostics in the case of simple encoder contacts: 25 kOhm to 45 kOhm	No	Yes; channel by channel	No	
• Short-circuit	Yes; channel by channel	Yes; Module-wise	Yes; channel by channel	No	
• Group error					Yes
<b>Diagnostics indication LED</b>					
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	No	Yes; red LED	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Potential separation</b>					
<b>Potential separation channels</b>					
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>					
Suitable for safety functions	No	No	No	No	No
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• horizontal installation, min.	-30 °C; < 0 °C as of FS07	-30 °C; < 0 °C as of FS04	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; < 0 °C as of FS07	-30 °C; < 0 °C as of FS04	-30 °C	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m
<b>Dimensions</b>					
Width	15 mm	15 mm	15 mm	20 mm	20 mm
Height	73 mm	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm	58 mm
<b>Weights</b>					
Weight, approx.	28 g	28 g	32 g	36 g	40 g

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > Digital output modules

#### Overview



- 4, 8 and 16-channel digital output (DQ) modules
- Apart from the standard type of delivery in an individual package, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

For different requirements, the digital output modules offer:

- Function classes Basic, Standard, High Feature and High Speed as well as fail-safe DQ (see "Fail-safe I/O modules")
- BaseUnits for single or multiple-conductor connection with automatic slot coding
- Potential distributor modules for system-integrated expansion with potential terminals
- Individual system-integrated potential group formation with self-assembling voltage busbars (a separate power module is no longer required for ET 200SP)
- Option of connecting actuators with rated load voltages of up to 120 V DC or 230 V AC and load currents of up to 5 A (depending on module)

- Relay modules
  - NO contact or changeover contact
  - for load or signal voltages (coupling relay)
  - with manual operation (as simulation module for inputs and outputs, jog mode for commissioning or emergency operation on failure of PLC)
- PNP (sourcing output) and NPN (sinking output) versions
- Clear labeling on front of module
- LEDs for diagnostics, status, supply voltage and faults
- Electronically readable and non-volatile writable rating plate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
  - MSO operating mode (simultaneous reading of output data from as many as three other PLCs)
  - Pulse width modulation mode (output value as pulse-pause ratio of between 0.0% and 100.0% for controlling the output current)
  - Oversampling operating mode (n-fold equidistant output of digital values within a PN cycle for the precise time control of an output or a sequence of output values)
  - Isochronous mode (simultaneous equidistant output of all output channels)
  - Output of substitute value in the event of interruptions to communication (0, 1 or last value retained)
  - Re-parameterization during operation
  - Firmware update
  - Valve control (output signal does not switch automatically after a set pickup time to a current-saving PWM output)
  - Diagnosis of wire break and short-circuit (on channel or module basis)
  - Value status (optional binary validity information of the output signal in the process image)
  - Supports the PROFlenergy profile
- Optional accessories
  - Labeling strips (film or card)
  - Equipment labeling plate
  - Color-coded label with module-specific CC code
  - Shielding terminal

A quick and clear comparison of the functions of the different DQ modules is offered by the TIA Selection Tool.

10

## Overview

### Overview of digital output modules

Digital output	PU	Article No.	CC code	BU type
DQ 16 x 24 V DC/0.5 A BA	1	6ES7132-6BH00-0AA0	CC00	A0
DQ 16 x 24 V DC/0.5 A BA	10	6ES7132-6BH00-2AA0	CC00	A0
DQ 16 x 24 V DC/0.5 A ST	1	6ES7132-6BH01-0BA0	CC00	A0
DQ 16 x 24 V DC/0.5 A ST	10	6ES7132-6BH01-2BA0	CC00	A0
DQ 8 x 24 V DC/0.5 A SNK BA	1	6ES7132-6BF61-0AA0	CC01	A0
DQ 8 x 24 V DC/0.5 A BA	1	6ES7132-6BF01-0AA0	CC02	A0
DQ 8 x 24 V DC/0.5 A BA	10	6ES7132-6BF01-2AA0	CC02	A0
DQ 8 x 24 V DC/0.5 A ST	1	6ES7132-6BF01-0BA0	CC02	A0
DQ 8 x 24 V DC/0.5 A ST	10	6ES7132-6BF01-2BA0	CC02	A0
DQ 8 x 24 V DC/0.5 A HF	1	6ES7132-6BF00-0CA0	CC02	A0
DQ 8 x 24 V DC/0.5 A HF	10	6ES7132-6BF00-2CA0	CC02	A0
DQ 4 x 24 V DC/2 A ST	1	6ES7132-6BD20-0BA0	CC02	A0
DQ 4 x 24 V DC/2 A ST	10	6ES7132-6BD20-2BA0	CC02	A0
DQ 4 x 24 V DC/2 A HF	1	6ES7132-6BD20-0CA0	CC02	A0
DQ 4 x 24 V DC/2 A HS	1	6ES7132-6BD20-0DA0	CC02	A0
With three operating modes: • Fast isochronous DQ with valve control • Pulse width modulation • Oversampling				
DQ 4 x 24 ... 230 V AC/2 A ST	1	6ES7132-6FD00-0BB1	CC41	B0, B1
DQ 4 x 24 ... 230 V AC/2 A ST	10	6ES7132-6FD00-2BB1	CC41	B0, B1
DQ 4 x 24 ... 230 V AC/2 A HF	1	6ES7132-6FD00-0CU0	CC20	U0
With two operating modes: • DQ • PC: Power control via phase angle, half-wave or full-wave control				
RQ 4 x 24 V UC/2 A CO ST	1	6ES7132-6GD51-0BA0	--	A0
RQ 4 x 120 V DC-230 V AC/5 A NO ST	1	6ES7132-6HD01-0BB1	--	B0, B1
RQ 4 x 120 V DC-230 V AC/5 A NO ST	10	6ES7132-6HD01-2BB1	--	B0, B1
RQ MA 4 x 120 V DC ... 230 V AC/5 A NO ST	1	6ES7132-6MD00-0BB1	--	B0, B1

### Overview of BaseUnits

BaseUnit	PU	Article No.	CC codes for push-in terminals	CC codes for AUX terminals
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • With 10 AUX terminals	1	6ES7193-6BP20-0DA0	CC01 to CC05	CC71 to CC73
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • With 10 AUX terminals	10	6ES7193-6BP20-2DA0	CC01 to CC05	CC71 to CC73
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0DA0	CC01 to CC05	--
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2DA0	CC01 to CC05	--
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • With 10 AUX terminals	1	6ES7193-6BP20-0BA0	CC01 to CC05	CC71 to CC73

**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**I/O modules > Digital output modules****Overview**

BaseUnit	PU	Article No.	CC codes for push-in terminals	CC codes for AUX terminals
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • With 10 AUX terminals	10	6ES7193-6BP20-2BA0	CC01 to CC05	CC71 to CC73
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0BA0	CC01 to CC05	--
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2BA0	CC01 to CC05	--
<b>BU type B0</b> • Forwarding of the potential group (dark) • 12 push-in terminals • With 4 AUX terminals	1	6ES7193-6BP20-0BB0	CC41	CC81 to CC83
<b>BU type B0</b> • Forwarding of the potential group (dark) • 12 push-in terminals • With 4 AUX terminals	10	6ES7193-6BP20-0BB0	CC41	CC81 to CC83
<b>BU type B1</b> • Forwarding of the potential group (dark) • 12 push-in terminals • 2 x 2 (1L, 2L, 1N, 2N) direct infeed module • Without AUX terminals	1	6ES7193-6BP20-0BB1	CC41	--
<b>BU type B1</b> • Forwarding of the potential group (dark) • 12 push-in terminals • 2 x 2 (1L, 2L, 1N, 2N) direct infeed module • Without AUX terminals	10	6ES7193-6BP20-2BB1	CC41	--
<b>BU type U0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0BU0	CC20	--
<b>BU type U0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2BU0	CC20	--
<b>BU type U0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0DU0	CC20	--
<b>BU type U0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2DU0	CC20	--

## Overview

### Overview of potential distributor modules

Potential distributor module	PU	Article No.	CC codes for push-in terminals
<b>PotDis BU</b> Type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP1	CC00, CC62
<b>PotDis BU</b> Type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP1	CC00, CC62
<b>PotDis BU</b> Type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP2	CC00, CC63
<b>PotDis BU</b> Type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP2	CC00, CC63
<b>PotDis TB</b> Type BR-W, 18x internally jumpered terminals, without reference to P1, P2 or AUX, (total current max. 10 A)	1	6ES7193-6TP00-0TP0	CC10 to CC13
<b>PotDis TB</b> Type P1-R, 18x P1 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP1	CC10, CC12
<b>PotDis TB</b> Type P2-B, 18x P2 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP2	CC10, CC13
<b>PotDis TB</b> Type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX	1	6ES7193-6TP00-0TN0	CC10

10

## Ordering data

### Digital output modules

Type of delivery:  
Apart from the standard type of delivery in an individual package, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

The number of modules required is the number of modules ordered. The pack type is selected by selecting the article number. Packs of 10 can therefore only be ordered in integer multiples of 10.

Digital output module  
DQ 16x24VDC/0.5A Basic,  
BU type A0, color code CC00

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7132-6BH00-0AA0**  
**6ES7132-6BH00-2AA0**

Digital output module  
DQ 16x24VDC/0.5A Standard,  
BU type A0, color code CC00

- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7132-6BH00-2BA0**

Digital output module  
DQ 16x24VDC/0.5A Standard,  
Source output (switching to P  
potential), BU type A0,  
color code CC00

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7132-6BH01-0BA0**  
**6ES7132-6BH01-2BA0**

Digital output module  
DQ 8x24VDC/0.5A Sinking output,  
Basic, BU type A0,  
color code CC01

- Pack of 1 unit

**6ES7132-6BF61-0AA0**

Digital output module  
DQ 8x24VDC/0.5A Basic,  
BU type A0, color code CC02

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7132-6BF01-0AA0**  
**6ES7132-6BF01-2AA0**



**I/O systems**

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

**I/O modules > Digital output modules****Ordering data****Article No.****Article No.**

Digital output module  
DQ 8x24VDC/0.5A Standard,  
BU type A0, color code CC02

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7132-6BF01-0BA0**  
**6ES7132-6BF01-2BA0**

Digital output module  
DQ 8x24VDC/0.5A High Feature,  
BU type A0, color code CC02

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7132-6BF00-0CA0**  
**6ES7132-6BF00-2CA0**

Digital output module  
DQ 4x24VDC/2A Standard,  
BU type A0, color code CC02

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7132-6BD20-0BA0**  
**6ES7132-6BD20-2BA0**

Digital output module  
DQ 4x24VDC/2A High Feature,  
BU type A0, color code CC02,  
channel-specific diagnostics,  
isochronous mode, shared output  
(MSO)

- Pack of 1 unit

**6ES7132-6BD20-0CA0**

Digital output module  
DQ 4x24VDC/2A High Speed,  
BU type A0, color code CC02,  
3 operating modes  
(fast isochronous DQ with valve  
control, pulse width modulation,  
oversampling)

- Pack of 1 unit

**6ES7132-6BD20-0DA0**

Digital output module  
DQ 4x24VAC...230VAC/2A  
Standard for BU type B1,  
color code CC41

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7132-6FD00-0BB1**  
**6ES7132-6FD00-2BB1**

Digital output module  
DQ 4x24VAC...230VAC/2A  
High Feature for BU type U0,  
color code CC20,  
2 operating modes: DQ and PC  
(power control via phase angle,  
half-wave and full-wave control)

- Pack of 1 unit

**6ES7132-6FD00-0CU0**

Signal relay module  
RQ CO 4x24VUC/2A Standard,  
changeover contact, BU type A0,  
color code CC00

- Pack of 1 unit

**6ES7132-6GD51-0BA0**

Relay module  
RQ NO 4x120VDC-230VAC/5A  
Standard, NO contact,  
BU type B0, B1

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7132-6HD01-0BB1**  
**6ES7132-6HD01-2BB1**

Relay module  
RQ NO 4x120VDC-230VAC/5A  
Standard, NO contact, with manual  
operation, BU type B0, B1

**6ES7132-6MD00-0BB1**

Relay module  
RQ CO 3x120V DC..230VAC/5A  
Standard, changeover contact,  
floating, BU type U0,  
color code CC20

**6ES7132-6HC50-0BU0**

Relay module  
RQ COOni 3x120V DC..230VAC/5A  
Standard, changeover contact,  
non-floating, BU type U0,  
color code CC20

**6ES7132-6HC70-0BU0**

**Suitable BaseUnits****BU15-P16+A10+2D**

BU type A0; BaseUnit (light)  
with 16 push-in terminals (1 ... 16)  
to the module and an additional  
10 internally jumpered  
AUX terminals (1 A to 10 A);  
for starting a new potential group  
(max. 10 A)

- Pack of 1 unit
- Pack of 10 units;  
to order a pack, please order this  
article number with an order  
quantity of 10.

**6ES7193-6BP20-0DA0**  
**6ES7193-6BP20-2DA0**

**BU15-P16+A0+2D**

BU type A0; BaseUnit (light)  
with 16 push-in terminals to the  
module; for starting a new potential  
group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units;  
to order a pack, please order this  
article number with an order  
quantity of 10.

**6ES7193-6BP00-0DA0**  
**6ES7193-6BP00-2DA0**

**2BU15-P16+A0+2DB**

Double BaseUnit  
for holding 2 I/O modules;  
BU type A0; BaseUnit (light/dark)  
with 16 push-in terminals to the  
module; for starting a new potential  
group (max. 10 A)

- Pack of 1 unit

**6ES7193-6BP60-0DA0**

**BU15-P16+A10+2B**

BU type A0; BaseUnit (dark)  
with 16 push-in terminals (1 ... 16)  
to the module and an additional  
10 internally jumpered  
AUX terminals (1 A to 10 A);  
for continuing the potential group

- Pack of 1 unit
- Pack of 10 units;  
to order a pack, please order this  
article number with an order  
quantity of 10.

**6ES7193-6BP20-0BA0**  
**6ES7193-6BP20-2BA0**

**BU15-P16+A0+2B**

BU type A0; BaseUnit (dark) with  
16 push-in terminals to the module;  
for continuing the potential group

- Pack of 1 unit
- Pack of 10 units;  
to order a pack, please order this  
article number with an order  
quantity of 10.

**6ES7193-6BP00-0BA0**  
**6ES7193-6BP00-2BA0**

Ordering data	Article No.	Article No.
<b>2BU15-P16+A0+2B</b> Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the potential group • Pack of 1 unit	<b>6ES7193-6BP60-0BA0</b>	
<b>BU20-P12+A4+0B</b> BU type B0; BaseUnit (dark) with 12 push-in terminals (1 ... 12) to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP20-0BB0</b> <b>6ES7193-6BP20-2BB0</b>	
<b>BU20-P12+A0+4B</b> BU type B1; BaseUnit (dark) with 12 push-in terminals to the module; for continuing the potential group; PU: 1 unit • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP20-0BB1</b> <b>6ES7193-6BP20-2BB1</b>	
<b>BU20-P16+A0+2D</b> BU type U0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP00-0DU0</b> <b>6ES7193-6BP00-2DU0</b>	
<b>BU20-P16+A0+2B</b> BU type U0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP00-0BU0</b> <b>6ES7193-6BP00-2BU0</b>	
<b>Potential distributor modules</b>		
<b>PotDis BU</b>		
PotDis BU, Type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)	<b>6ES7193-6UP00-0DP1</b>	
PotDis BU, Type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group	<b>6ES7193-6UP00-0BP1</b>	
PotDis BU, Type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)	<b>6ES7193-6UP00-0DP2</b>	
PotDis BU, Type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	<b>6ES7193-6UP00-0BP2</b>	
		<b>PotDis TB</b>
		PotDis TB, type BR-W, 18x internally jumpered terminals, without reference to P1, P2 or AUX, (total current max. 10 A)
		<b>6ES7193-6TP00-0TP0</b>
		PotDis TB, type P1-R, 18x P1 potential, (total current max. 10 A)
		<b>6ES7193-6TP00-0TP1</b>
		PotDis TB, type P2-B, 18x P2 potential, (total current max. 10 A)
		<b>6ES7193-6TP00-0TP2</b>
		PotDis TB, type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX
		<b>6ES7193-6TP00-0TN0</b>
		<b>Accessories</b>
		<b>Equipment labeling plate</b>
		10 sheets of 16 labels, for printing with thermal transfer card printer or plotter
		<b>6ES7193-6LF30-0AW0</b>
		<b>Labeling strips</b>
		500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer
		<b>6ES7193-6LR10-0AA0</b>
		500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer
		<b>6ES7193-6LR10-0AG0</b>
		1 000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer
		<b>6ES7193-6LA10-0AA0</b>
		1 000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer
		<b>6ES7193-6LA10-0AG0</b>
		<b>BU cover</b>
		For covering empty slots (gaps); 5 units
		• 15 mm wide
		<b>6ES7133-6CV15-1AM0</b>
		• 20 mm wide
		<b>6ES7133-6CV20-1AM0</b>
		<b>Shield connection</b>
		5 shield supports and 5 shield terminals
		<b>6ES7193-6SC00-1AM0</b>
		<b>Color-coded labels for 15 mm-wide BaseUnits</b>
		Color code CC00, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units
		<b>6ES7193-6CP00-2MA0</b>
		Color code CC01, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units
		<b>6ES7193-6CP01-2MA0</b>
		Color code CC01, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 50 units
		<b>6ES7193-6CP01-4MA0</b>
		Color code CC02, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16); 10 units
		<b>6ES7193-6CP02-2MA0</b>
		Color code CC02, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16); 50 units
		<b>6ES7193-6CP02-4MA0</b>
		Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A); 10 units
		<b>6ES7193-6CP71-2AA0</b>
		Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A); 10 units
		<b>6ES7193-6CP72-2AA0</b>

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > Digital output modules

Ordering data	Article No.	Article No.
Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 10 units	<b>6ES7193-6CP73-2AA0</b>	<b>Color-coded labels for PotDis TB</b>
Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 50 units	<b>6ES7193-6CP73-4AA0</b>	Color code CC10, for 18 push-in terminals, PotDis TB, gray (terminals 1 to 18); 10 units
<b>Color-coded labels for 20 mm-wide BaseUnits</b>		Color code CC11, for 18 push-in terminals, PotDis TB, yellow-green (terminals 1 to 18); 10 units
Color code CC41, for 16 push-in terminals, BU type B1, gray (terminals 1 to 4), red (terminals 5 to 8), blue (terminals 9 to 12); 10 units	<b>6ES7193-6CP41-2MB0</b>	Color code CC12, for 18 push-in terminals, PotDis TB, type P1 and BR, red (terminals 1 to 18); 10 units
Color code CC81, for 4 AUX terminals, BU type B0, yellow/green (terminals 1 A to 4 A); 10 units	<b>6ES7193-6CP81-2AB0</b>	Color code CC13, for 18 push-in terminals, PotDis TB, type P2 and BR, blue (terminals 1 to 18); 10 units
Color code CC82, for 4 AUX terminals, BU type B0, red (terminals 1 A to 4 A); 10 units	<b>6ES7193-6CP82-2AB0</b>	<b>Mechanical coding elements</b>
Color code CC83, for 4 AUX terminals, BU type B0, blue (terminals 1 A to 4 A); 10 units	<b>6ES7193-6CP83-2AB0</b>	For automatic coding of I/O modules; spare part. 20 units
<b>Color-coded labels for PotDis BU</b>		Type A
Color code CC62, for 16 push-in terminals, PotDis BU type P1, red (terminals 1 to 16); 10 units	<b>6ES7193-6CP62-2MA0</b>	Type B
Color code CC63, for 16 push-in terminals, PotDis BU type P2, blue (terminals 1 to 16); 10 units	<b>6ES7193-6CP63-2MA0</b>	Type C
		Type D
		<b>6ES7193-6KA00-3AA0</b>
		<b>6ES7193-6KB00-3AA0</b>
		<b>6ES7193-6KC00-3AA0</b>
		<b>6ES7193-6KD00-3AA0</b>

### Technical specifications

Article number	<b>6ES7132-6BF61-0AA0</b>	<b>6ES7132-6BH00-0AA0</b>	<b>6ES7132-6BF01-0AA0</b>	<b>6ES7132-6BH01-0BA0</b>	<b>6ES7132-6BF01-0BA0</b>
	ET 200SP, DQ 8x 24VDC/0,5A SINK BA, PU 1	ET 200SP, DQ 16x24VDC/0,5A BA, PU 1	ET 200SP, DQ 8x 24V DC/0,5A Basic, PU 1	ET 200SP, DQ 16x 24V DC/0,5A ST, PU 1	ET 200SP, DQ 8x 24V DC/0,5A ST, PU 1
<b>General information</b>					
Product type designation	DQ 8x24VDC/0,5A SNK BA	DQ 16x24VDC/0,5A BA	DQ 8x24VDC/0,5A BA	DQ 16x24VDC/0,5A ST	DQ 8x24VDC/0,5A ST
<b>Product function</b>					
• Isochronous mode	No	No	No	No	No
<b>Engineering with</b>					
• STEP 7 TIA Portal configurable/integrated from version	V14	V14	V14	V14	V14
• STEP 7 configurable/integrated from version	V5.5 SP3	STEP 7 V5.5 or higher	V5.5 SP3	V5.5 SP3	V5.5 SP3 or higher
• PCS 7 configurable/integrated from version				V8.1 SP1	V8.1 SP1
• PROFIBUS from GSD version/GSD revision	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3
<b>Operating mode</b>					
• DQ	Yes	Yes	Yes	Yes	Yes
• DQ with energy-saving function	No	No	No	No	No
• PWM	No	No	No	No	No
• Oversampling	No	No	No	No	No
• MSO	No	No	No	No	No

### Technical specifications

Article number	6ES7132-6BF61-0AA0	6ES7132-6BH00-0AA0	6ES7132-6BF01-0AA0	6ES7132-6BH01-0BA0	6ES7132-6BF01-0BA0
	ET 200SP, DQ 8x 24VDC/0,5A SINK BA, PU 1	ET 200SP, DQ 16x24VDC/0,5A BA, PU 1	ET 200SP, DQ 8x 24V DC/0,5A Basic, PU 1	ET 200SP, DQ 16x 24V DC/0,5A ST, PU 1	ET 200SP, DQ 8x 24V DC/0,5A ST, PU 1
<b>Supply voltage</b>					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
Reverse polarity protection		Yes	Yes	Yes	Yes
<b>Digital outputs</b>					
Type of digital output	Sink output (NPN)	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)
Number of digital outputs	8	16	8	16	8
Current-sinking	Yes	No		No	
Current-sourcing		Yes	Yes	Yes	Yes
Digital outputs, parameterizable	Yes	Yes	Yes	Yes	Yes
Short-circuit protection	Yes	Yes	Yes; per channel, electronic	Yes	Yes
Open-circuit detection		No		Yes	
Limitation of inductive shutdown voltage to	Typ. 47 V	Typ. L+ (-53 V)	Typ. L+ (-50 V)	Typ. L+ (-50 V)	Typ. L+ (-50 V)
Controlling a digital input	Yes	Yes	Yes	Yes	Yes
<b>Switching capacity of the outputs</b>					
• with resistive load, max.	0.5 A	0.5 A	0.5 A	0.5 A	0.5 A
• on lamp load, max.	5 W	5 W	5 W	5 W	5 W
<b>Load resistance range</b>					
• lower limit	48 Ω	48 Ω	48 Ω	48 Ω	48 Ω
• upper limit	3 400 Ω	100 kΩ	100 kΩ	12 kΩ	12 kΩ
<b>Output voltage</b>					
• for signal "1", min.					L+ (-0.8 V)
<b>Output current</b>					
• for signal "1" rated value	0.5 A	0.5 A	0.5 A	0.5 A	0.5 A
• for signal "0" residual current, max.	5 μA	30 μA	10 μA	0.1 mA	0.1 mA
<b>Output delay with resistive load</b>					
• "0" to "1", typ.		80 μs; at rated load		50 μs	
• "0" to "1", max.	300 μs	150 μs; at rated load	100 μs; at rated load		50 μs; at rated load
• "1" to "0", typ.		100 μs; at rated load		100 μs	
• "1" to "0", max.	600 μs	200 μs; at rated load	150 μs; at rated load		100 μs; at rated load
<b>Parallel switching of two outputs</b>					
• for uprating	No	No	No	No	No
• for redundant control of a load	Yes	Yes	Yes	Yes	Yes
<b>Switching frequency</b>					
• with resistive load, max.	100 Hz	100 Hz	100 Hz	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz	2 Hz	2 Hz	2 Hz	2 Hz
• on lamp load, max.	10 Hz	10 Hz	10 Hz	10 Hz	10 Hz
<b>Total current of the outputs</b>					
• Current per channel, max.	0.5 A	0.5 A	0.5 A	0.5 A	0.5 A
• Current per module, max.	4 A	8 A	4 A	8 A	4 A
<b>Total current of the outputs (per module)</b>					
<b>horizontal installation</b>					
- up to 40 °C, max.				8 A	
- up to 50 °C, max.				6 A	
- up to 60 °C, max.	4 A	8 A	4 A	4 A	4 A
<b>vertical installation</b>					
- up to 30 °C, max.				8 A	
- up to 40 °C, max.				6 A	
- up to 50 °C, max.	4 A	8 A	4 A	4 A	4 A
<b>Cable length</b>					
• shielded, max.	1 000 m	1 000 m	1 000 m	1 000 m	1 000 m
• unshielded, max.	600 m	600 m	600 m	600 m	600 m

**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**I/O modules > Digital output modules****Technical specifications**

Article number	<b>6ES7132-6BF61-0AA0</b>	<b>6ES7132-6BH00-0AA0</b>	<b>6ES7132-6BF01-0AA0</b>	<b>6ES7132-6BH01-0BA0</b>	<b>6ES7132-6BF01-0BA0</b>
	ET 200SP, DQ 8x 24VDC/0,5A SINK BA, PU 1	ET 200SP, DQ 16x24VDC/0,5A BA, PU 1	ET 200SP, DQ 8x 24V DC/0,5A Basic, PU 1	ET 200SP, DQ 16x 24V DC/0,5A ST, PU 1	ET 200SP, DQ 8x 24V DC/0,5A ST, PU 1
<b>Interrupts/diagnostics/ status information</b>					
Diagnostics function	Yes	Yes	Yes	Yes	Yes
Substitute values connectable	Yes	Yes	Yes	Yes	Yes
<b>Alarms</b>					
• Diagnostic alarm	Yes	Yes	Yes	Yes	Yes
<b>Diagnoses</b>					
• Monitoring the supply voltage	Yes	Yes	Yes	Yes	Yes
• Wire-break	No	No	No	Yes; Module-wise	Yes; Module-wise
• Short-circuit	No	No	No		
• Short-circuit to M				Yes; Module-wise	Yes; Module-wise
• Short-circuit to L+				Yes; Module-wise	Yes; Module-wise
• Group error	Yes	Yes	Yes	Yes	Yes
<b>Diagnostics indication LED</b>					
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	No	No	No	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Potential separation</b>					
<b>Potential separation channels</b>					
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>					
Suitable for safety functions	No	No	No	No	No
Suitable for safety-related tripping of standard modules		No	Yes; From FS01	Yes; From FS01	Yes; From FS01
<b>Highest safety class achievable in safety mode</b>					
• Performance level according to ISO 13849-1			PL d	PL d	PL d
• SIL acc. to IEC 61508			SIL 2	SIL 2	SIL 2
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• horizontal installation, min.	-25 °C	-30 °C	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS03	-30 °C; < 0 °C as of FS02
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-25 °C	-30 °C	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS03	-30 °C; < 0 °C as of FS02
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Dimensions</b>					
Width	15 mm	15 mm	15 mm	15 mm	15 mm
Height	73 mm	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm	58 mm
<b>Weights</b>					
Weight, approx.	30 g	30 g	30 g	30 g	30 g

### Technical specifications

Article number	6ES7132-6BF00-0CA0	6ES7132-6BD20-0BA0	6ES7132-6BD20-0CA0	6ES7132-6BD20-0DA0	6ES7132-6FD00-0BB1
	ET 200SP, DQ 8x24VDC/0,5A HF, PU 1	ET 200SP, DQ 4x24VDC/2A ST	ET 200SP, DQ 4x24VDC/2A HF	ET 200SP, DQ 4x24VDC/2A High Speed, PU 1	ET 200SP, DQ 4x24...230VAC/2A ST
<b>General information</b>					
Product type designation	DQ 8x24 V DC/0.5 A HF	DQ 4x24 V DC/2 A ST	DQ 4x DC 24 V/2 A HF	DQ 4x24 V DC/2 A HS	DQ 4x24 ... 230 V AC/2 A ST
<b>Product function</b>					
• Isochronous mode	Yes	No	Yes	Yes; Operating modes DQ and OVS only	No
<b>Engineering with</b>					
• STEP 7 TIA Portal configurable/integrated from version	V13 SP1 / -	V11 SP2 / V13	V13 SP1 / -	STEP 7 V15.1 or higher	V13 / V13
• STEP 7 configurable/integrated from version	V5.5 / -	V5.5 SP3 / -	V5.5 / -	via GSD as of V5.6 HF4	V5.5 SP3 / - HF4
• PCS 7 configurable/integrated from version	V8.1 SP1	V8.1 SP1			
• PROFIBUS from GSD version/GSD revision	One GSD file each, Revision 3 and 5 and higher	GSD Revision 5	GSD Revision 5	One GSD file each, Revision 3 and 5 and higher	GSD Revision 5
• PROFINET from GSD version/GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.33	GSDML V2.3
<b>Operating mode</b>					
• DQ	Yes	Yes	Yes	Yes	Yes
• DQ with energy-saving function	No	No	No	Yes; Valve control	No
• PWM	No	No	No	Yes	No
• Cam control (switching at comparison values)				Yes; Via MtM (module-to-module communication)	
• Oversampling	No	No	No	Yes	No
• MSO	Yes	No	Yes	No	No
<b>Supply voltage</b>					
Rated value (DC)	24 V	24 V	24 V	24 V	
Rated value (AC)					230 V
Reverse polarity protection	Yes	Yes	Yes	Yes	
<b>Digital outputs</b>					
Type of digital output	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)	Triac with zero point detection
Number of digital outputs	8	4	4	4	4
Current-sinking	No	No	No	No	No
Current-sourcing	Yes	Yes	Yes	Yes; Push-pull output	Yes
Digital outputs, parameterizable	Yes	Yes	Yes	Yes	No
Short-circuit protection	Yes	Yes	Yes	Yes	No; When using BU type B1, a miniature, quick-response fuse with 10 A tripping current must be provided
Limitation of inductive shutdown voltage to	Typ. L+ (-50 V)	Typ. L+ (-50 V)	L+ (-37 to 41V)	M (-1 V)	
Controlling a digital input	Yes	Yes	Yes; Minimum current consumption 7 mA	No	Yes
<b>Digital output functions, parameterizable</b>					
• Switching tripped by comparison values				Yes	
- Number of cam tracks, max.				4	
• Freely usable digital output				Yes	
• PWM output				Yes	
- Number, max.				4	
• Digital output with oversampling				Yes	
- Number, max.				4	
<b>Switching capacity of the outputs</b>					
• with resistive load, max.	0.5 A	2 A	2 A	2 A	2 A
• on lamp load, max.	5 W	10 W	10 W	10 W	100 W
<b>Load resistance range</b>					
• lower limit	48 Ω	12 Ω	12 Ω	12 Ω	
• upper limit	12 kΩ	3 400 Ω	3 400 Ω	3 400 Ω	

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > Digital output modules

#### Technical specifications

Article number	6ES7132-6BF00-0CA0	6ES7132-6BD20-0BA0	6ES7132-6BD20-0CA0	6ES7132-6BD20-0DA0	6ES7132-6FD00-0BB1
	ET 200SP, DQ 8x24VDC/0,5A HF, PU 1	ET 200SP, DQ 4x24VDC/2A ST	ET 200SP, DQ 4x24VDC/2A HF	ET 200SP, DQ 4x24VDC/2A High Speed, PU 1	ET 200SP, DQ 4x24VDC/2A ST
<b>Output voltage</b>					
• for signal "1", min.					20.4 V
<b>Output current</b>					
• for signal "1" rated value	0.5 A	2 A	2 A	2 A	2 A
• for signal "0" residual current, max.	0.1 mA	0.1 mA	0.1 mA	0.1 mA	460 µA
<b>Output delay with resistive load</b>					
• "0" to "1", typ.	50 µs	50 µs	50 µs		
• "0" to "1", max.		50 µs		1 µs	10 ms
• "1" to "0", typ.	100 µs	100 µs	100 µs		
• "1" to "0", max.		100 µs		1 µs	10 ms
<b>Parallel switching of two outputs</b>					
• for logic links					No
• for uprating	No	No	No	No	No
• for redundant control of a load	Yes	Yes			Yes
<b>Switching frequency</b>					
• with resistive load, max.	100 Hz	100 Hz	100 Hz	5 kHz	10 Hz
• with inductive load, max.	2 Hz	2 Hz	2 Hz	5 kHz	0.5 Hz; Higher frequencies are possible, see Equipment Manual / Product Information
• on lamp load, max.	10 Hz	10 Hz	10 Hz	5 kHz	1 Hz
<b>Total current of the outputs</b>					
• Current per channel, max.	0.5 A	2 A	2 A	2 A	2 A
• Current per module, max.	4 A	8 A	8 A	8 A	8 A
<b>Total current of the outputs (per module)</b>					
<b>horizontal installation</b>					
- up to 30 °C, max.				8 A; DQ mode	
- up to 40 °C, max.		8 A	8 A	6.9 A; DQ mode	8 A
- up to 50 °C, max.		6 A	6 A	4.7 A; DQ mode	6 A
- up to 60 °C, max.	4 A	4 A	4 A	2.5 A; DQ mode	4 A
<b>vertical installation</b>					
- up to 30 °C, max.		8 A	8 A	7.2 A; DQ mode	8 A
- up to 40 °C, max.		6 A	6 A	5.6 A; DQ mode	6 A
- up to 50 °C, max.	4 A	4 A	4 A	4 A; DQ mode	4 A
- up to 60 °C, max.		4 A			
<b>Cable length</b>					
• shielded, max.	1 000 m	1 000 m	1 000 m	50 m	1 000 m
• unshielded, max.	600 m	600 m	600 m	50 m	600 m
<b>Isochronous mode</b>					
Execution and activation time (TCO), min.	48 µs			40 µs	
Bus cycle time (TDP), min.	500 µs		500 µs	125 µs	
<b>Interrupts/diagnostics/status information</b>					
Diagnostics function	Yes	Yes	Yes	Yes	No
Substitute values connectable	Yes	Yes	Yes	Yes	Yes
<b>Alarms</b>					
• Diagnostic alarm	Yes	Yes	Yes	Yes	No
<b>Diagnoses</b>					
• Diagnostic information readable				Yes	
• Monitoring the supply voltage	Yes	Yes	Yes	Yes	No
• Wire-break	Yes; channel by channel	Yes; Module-wise	Yes; channel by channel	No	No
• Short-circuit	Yes; channel by channel	Yes; Module-wise	Yes; channel by channel	Yes; Module-wise	No
• Group error	Yes	Yes	Yes	Yes	Yes

### Technical specifications

Article number	6ES7132-6BF00-0CA0	6ES7132-6BD20-0BA0	6ES7132-6BD20-0CA0	6ES7132-6BD20-0DA0	6ES7132-6FD00-0BB1
	ET 200SP, DQ 8x24VDC/0,5A HF, PU 1	ET 200SP, DQ 4x24VDC/2A ST	ET 200SP, DQ 4x24VDC/2A HF	ET 200SP, DQ 4x24VDC/2A High Speed, PU 1	ET 200SP, DQ 4x24VDC/2A ST
<b>Diagnostics indication LED</b>					
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	No	Yes; red LED	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Potential separation</b>					
<b>Potential separation channels</b>					
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>					
Suitable for safety functions	No	No	No	No	No
Suitable for safety-related tripping of standard modules	Yes; From FS02	Yes; From FS03	Yes; From FS02	No	
<b>Highest safety class achievable in safety mode</b>					
• Performance level according to ISO 13849-1	PL d	PL d	PL d		
• SIL acc. to IEC 61508	SIL 2	SIL 2	SIL 2		
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• horizontal installation, min.	-30 °C; < 0 °C as of FS07	-30 °C; < 0 °C as of FS08	-30 °C; < 0 °C as of FS06	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; < 0 °C as of FS07	-30 °C; < 0 °C as of FS08	-30 °C; < 0 °C as of FS06	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C	60 °C
<b>Altitude during operation relating to sea level</b>					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	2 000 m; On request: Installation altitudes greater than 2 000 m
<b>Dimensions</b>					
Width	15 mm	15 mm	15 mm	15 mm	20 mm
Height	73 mm	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm	58 mm
<b>Weights</b>					
Weight, approx.	30 g	30 g	30 g	31 g	50 g
Article number	6ES7132-6FD00-0CU0	6ES7132-6GD51-0BA0	6ES7132-6HD01-0BB1	6ES7132-6MD00-0BB1	
	ET 200SP, DQ 4x24VDC/2A HF, PU 1	ET 200SP, RQ CO 4x 24V DC/2A ST, VPE 1	ET 200SP, RQ NO 4x 120VDC...230VAC/5A, PU1	ET 200SP,RQ NO-mA 4x120VDC...230VAC/5A ST	
<b>General information</b>					
Product type designation	DQ 4x24 ... 230 V AC/2 A HF	RQ CO 4x24VDC/2A ST	RQ 4x120 VDC ... 230 VAC/ 5 A NO ST	RQ 4x120 V DC ... 230 V AC/5 A NO MA ST	
<b>Product function</b>					
• Isochronous mode	No	No	No		
<b>Engineering with</b>					
• STEP 7 TIA Portal configurable/integrated from version	V14	V14	V14	V13 SP1	
• STEP 7 configurable/integrated from version	STEP 7 V5.5 or higher	V5.5 SP3	V5.5 SP3	V5.5 SP3 / -	
• PCS 7 configurable/integrated from version			V8.1 SP1		
• PROFIBUS from GSD version/GSD revision	GSD as of Revision 5	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	
• PROFINET from GSD version/GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3	



**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**I/O modules > Digital output modules****Technical specifications**

Article number	<b>6ES7132-6FD00-0CU0</b>	<b>6ES7132-6GD51-0BA0</b>	<b>6ES7132-6HD01-0BB1</b>	<b>6ES7132-6MD00-0BB1</b>
	ET 200SP, DQ 4x24...230VAC/2A HF, PU 1	ET 200SP, RQ CO 4x 24V DC/2A ST, VPE 1	ET 200SP, RQ NO 4x 120VDC..230VAC/5A, PU1	ET 200SP,RQ NO-mA 4x120VDC..230VAC/5A ST
<b>Operating mode</b>				
• DQ	Yes	Yes	Yes	Yes
• DQ with energy-saving function	Yes	No	No	No
• PWM	No	No	No	No
• Oversampling	No	No	No	No
• MSO	No	No	No	No
• Phase control	Yes; Control area: 8.5 ... 100% of the phase angle			
• Trailing-edge phase	No			
• Half-wave	Yes			
• Full-wave	Yes			
<b>Supply voltage</b>				
Rated value (DC)		24 V	24 V	24 V
Rated value (AC)	230 V; 47 ... 63 Hz, max. rate of change of frequency 1 mHz/s			
Reverse polarity protection		Yes	Yes	Yes
<b>Digital outputs</b>				
Type of digital output		Relays	Relays	Relays
Number of digital outputs	4	4	4	4
Current-sinking	No	Yes	Yes	
Current-sourcing	Yes	Yes	Yes	
Digital outputs, parameterizable	Yes	Yes	Yes	
Short-circuit protection	No; external fusing necessary	No	No	No
Open-circuit detection	Yes; channel by channel			
Overload protection	No; A miniature fuse with 10 tripping current and tripping characteristic "quick response" must be provided in the module supply			
Controlling a digital input	Yes			
<b>Switching capacity of the outputs</b>				
• with resistive load, max.	2 A; Max. 4 A, see additional description in manual			
• with inductive load, max.	2 A			
• on lamp load, max.	100 W; Tungsten rating in accordance with UL; for thermistors with higher power ratings, see the notes in the manual			
<b>Output voltage</b>				
• for signal "1", min.	20.4 V			
<b>Output current</b>				
• for signal "1" rated value	2 A			
• for signal "0" residual current, max.	3 mA			
<b>Output delay with resistive load</b>				
• "0" to "1", max.	40 ms; 2 AC cycles			
• "1" to "0", max.	20 ms; 1 AC cycle			
<b>Parallel switching of two outputs</b>				
• for logic links	No	Yes	Yes	
• for uprating	No	No	No	
• for redundant control of a load	Yes	Yes	Yes	

**Technical specifications**

Article number	<b>6ES7132-6FD00-0CU0</b> ET 200SP, DQ 4x24..230VAC/2A HF, PU 1	<b>6ES7132-6GD51-0BA0</b> ET 200SP, RQ CO 4x 24V DC/2A ST, VPE 1	<b>6ES7132-6HD01-0BB1</b> ET 200SP, RQ NO 4x 120VDC..230VAC/5A, PU1	<b>6ES7132-6MD00-0BB1</b> ET 200SP,RQ NO-mA 4x120VDC..230VAC/5A ST
<b>Switching frequency</b>				
• with resistive load, max.	10 Hz; Applies to DQ mode; limited by line frequency in PC mode	2 Hz	2 Hz	2 Hz
• with inductive load, max.			0.5 Hz	0.5 Hz
• with inductive load (acc. to IEC 60947-5-1, AC15), max.	10 Hz; Applies to DQ mode; limited by line frequency in PC mode			
• on lamp load, max.	1 Hz; Applies to DQ mode; limited by line frequency in PC mode		2 Hz	2 Hz
<b>Total current of the outputs</b>				
• Current per channel, max.	2 A; Max. 4 A, see additional description in manual	2 A	5 A	5 A
• Current per module, max.	8 A	8 A	20 A	20 A
<b>Total current of the outputs (per module)</b>				
<b>horizontal installation</b>				
- up to 40 °C, max.	8 A	8 A		
- up to 50 °C, max.	6 A	6 A	20 A	20 A
- up to 60 °C, max.	4 A	4 A	16 A	16 A
<b>vertical installation</b>				
- up to 30 °C, max.	8 A	8 A		
- up to 40 °C, max.	6 A	6 A	20 A	20 A
- up to 50 °C, max.	4 A	4 A	16 A	16 A
<b>Relay outputs</b>				
• Number of relay outputs		4	4	4
• Rated supply voltage of relay coil L+ (DC)		24 V	24 V	24 V
• Current consumption of relays (coil current of all relays), max.		40 mA	40 mA	40 mA
• external protection for relay outputs			Yes, with miniature fuse max. 6 A tripping current and quick-response tripping characteristic	Yes, with miniature fuse max. 6 A tripping current and quick-response tripping characteristic
• Number of operating cycles, max.			7 000 000; see additional description in the manual	7 000 000; see additional description in the manual
<b>Switching capacity of contacts</b>				
- with inductive load, max.			2 A; see additional description in the manual	2 A; see additional description in the manual
- with resistive load, max.		2 A	5 A; see additional description in the manual	5 A; see additional description in the manual
- Thermal continuous current, max.		2 A	5 A; Max. 1 385 VA, 150 W	5 A
- Switching current, min.		1 mA; 5 V DC	100 mA; 5 V DC	100 mA; 5 V DC
- Rated switching voltage (DC)		24 V	24 V DC to 120 V DC	24 V DC to 120 V DC
- Rated switching voltage (AC)		24 V	24V AC to 230V AC	24V AC to 230V AC
<b>Cable length</b>				
• shielded, max.	1 000 m	1 000 m	1 000 m	1 000 m
• unshielded, max.	600 m	200 m	200 m	200 m
<b>Interrupts/diagnostics/ status information</b>				
Diagnostics function	Yes	Yes	Yes	Yes
Substitute values connectable	Yes	Yes	Yes	Yes
<b>Alarms</b>				
• Diagnostic alarm	Yes	Yes	Yes	Yes

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > Digital output modules

#### Technical specifications

Article number	<b>6ES7132-6FD00-0CU0</b> ET 200SP, DQ 4x24...230VAC/2A HF, PU 1	<b>6ES7132-6GD51-0BA0</b> ET 200SP, RQ CO 4x 24V DC/2A ST, VPE 1	<b>6ES7132-6HD01-0BB1</b> ET 200SP, RQ NO 4x 120VDC..230VAC/5A, PU1	<b>6ES7132-6MD00-0BB1</b> ET 200SP,RQ NO-mA 4x120VDC..230VAC/5A ST
<b>Diagnoses</b>				
• Diagnostic information readable	Yes			
• Monitoring the supply voltage	Yes	Yes	Yes	Yes
• Wire-break	Yes; channel by channel	No	No	No
• Short-circuit	No	No	No	No
• Group error	Yes			Yes
<b>Diagnoses indication LED</b>				
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red Fn LED	No	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Potential separation</b>				
<b>Potential separation channels</b>				
• between the channels and backplane bus	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>				
Suitable for safety functions	No	No	No	No
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m
<b>Dimensions</b>				
Width	20 mm	15 mm	20 mm	20 mm
Height	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm
<b>Weights</b>				
Weight, approx.	50 g	30 g	40 g	45 g
Article number	<b>6ES7132-6HC50-0BU0</b> ET 200SP, RQ CO 3x120VDC..230VAC/5A ST		<b>6ES7132-6HC70-0BU0</b> ET 200SP, RQ CO ni 3x120VDC..230VAC/5A ST	
<b>General information</b>				
Product type designation	RQ 3x120VDC-230VAC/5A CO ST		RQ 3x120VDC-230VAC/5A CO n.i. ST	
<b>Product function</b>				
• Isochronous mode	No		No	
<b>Engineering with</b>				
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V16 or higher			
• STEP 7 configurable/integrated from version	Configurable via GSD file			
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher			
<b>Supply voltage</b>				
Rated value (DC)	24 V		24 V	
Reverse polarity protection	Yes		Yes	

#### Technical specifications

Article number	<b>6ES7132-6HC50-0BU0</b> ET 200SP, RQ CO 3x120VDC.230VAC/5A ST	<b>6ES7132-6HC70-0BU0</b> ET 200SP, RQ COni 3x120VDC.230VAC/5A ST
<b>Digital outputs</b>		
Type of digital output	Relays	Relays
Number of digital outputs	3	3
Current-sinking	Yes	Yes
Current-sourcing	Yes	Yes
Digital outputs, parameterizable	Yes	Yes
Short-circuit protection	No	No
<b>Switching capacity of the outputs</b>		
• with resistive load, max.	5 A; see additional description in the manual	5 A; see additional description in the manual
• with inductive load, max.	2 A; see additional description in the manual	2 A; see additional description in the manual
<b>Parallel switching of two outputs</b>		
• for logic links	Yes	Yes
• for uprating	No	No
• for redundant control of a load	Yes	Yes
<b>Switching frequency</b>		
• with resistive load, max.	2 Hz	2 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz
• on lamp load, max.	2 Hz	2 Hz
<b>Total current of the outputs</b>		
• Current per channel, max.	5 A	5 A
• Current per module, max.	15 A	5 A
<b>Total current of the outputs (per module)</b>		
<b>horizontal installation</b>		
- up to 50 °C, max.	15 A	5 A
- up to 60 °C, max.	12 A; maximum channel current 4A	5 A
<b>vertical installation</b>		
- up to 40 °C, max.	15 A	5 A
- up to 50 °C, max.	12 A; maximum channel current 4A	5 A
<b>Relay outputs</b>		
• Number of relay outputs	3; changeover contact, isolated	3; Changeover contact, non-floating
• Rated supply voltage of relay coil L+ (DC)	24 V	24 V
• Current consumption of relays (coil current of all relays), max.	30 mA	40 mA
• external protection for relay outputs	yes, with miniature fuse max. 6.3 A tripping current, quick-response tripping characteristic and 1 500 A breaking capacity	yes, with miniature fuse max. 6.3 A tripping current, quick-response tripping characteristic and 1 500 A breaking capacity
• Number of operating cycles, max.	1 000 000; see additional description in the manual	1 000 000; see additional description in the manual
<b>Switching capacity of contacts</b>		
- with inductive load, max.	2 A; see additional description in the manual	2 A; see additional description in the manual
- with resistive load, max.	5 A; see additional description in the manual	5 A; see additional description in the manual
- Thermal continuous current, max.	5 A; Max. 1 385 VA, 150 W	5 A; Max. 1 385 VA, 150 W
- Switching current, min.	10 mA; 5 V DC	10 mA; 5 V DC
- Rated switching voltage (DC)	24 V DC to 120 V DC	24 V DC to 120 V DC
- Rated switching voltage (AC)	24V AC to 230V AC	24V AC to 230V AC
<b>Cable length</b>		
• shielded, max.	1 000 m	1 000 m
• unshielded, max.	200 m	200 m
<b>Interrupts/diagnostics/status information</b>		
Diagnostics function	Yes	Yes
Substitute values connectable	Yes	Yes
<b>Alarms</b>		
• Diagnostic alarm	Yes	Yes

**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**I/O modules > Digital output modules****Technical specifications**

Article number	<b>6ES7132-6HC50-0BU0</b> ET 200SP, RQ CO 3x120VDC.230VAC/5A ST	<b>6ES7132-6HC70-0BU0</b> ET 200SP, RQ CO ni 3x120VDC.230VAC/5A ST
<b>Diagnoses</b>		
• Monitoring the supply voltage	Yes	Yes
• Wire-break	No	No
• Short-circuit	No	No
<b>Diagnostics indication LED</b>		
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Potential separation</b>		
<b>Potential separation channels</b>		
• between the channels and backplane bus	Yes	Yes
<b>Standards, approvals, certificates</b>		
Suitable for safety functions	No	No
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• horizontal installation, min.	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>		
• Installation altitude above sea level, max.	2 000 m	2 000 m
<b>Dimensions</b>		
Width	20 mm	20 mm
Height	73 mm	73 mm
Depth	58 mm	58 mm
<b>Weights</b>		
Weight, approx.	40 g	40 g

10

## Overview

Energy Meter HF module  
for SIMATIC ET 200SP

Energy Meter HF module for SIMATIC ET 200SP video  
[https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoId=5848889024001](https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=5848889024001)



- 2, 4 and 8-channel analog input (AI) modules
- Apart from the standard type of delivery in an individual package, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

For different requirements, the digital output modules offer:

- Function classes Basic, Standard, High Feature and High Speed
- BaseUnits for single or multiple-conductor connection with automatic slot coding
- Potential distributor modules for system-integrated expansion with potential terminals
- Individual system-integrated potential group formation with self-assembling voltage busbars (a separate power module is no longer required for ET 200SP)
- Option of connecting current, voltage and resistance sensors, as well as thermocouples
- Option of connecting force and torque sensors

- Energy Meter for recording up to 600 electrical variables
- Clear labeling on front of module
- LEDs for diagnostics, status, supply voltage and faults
- Electronically readable and non-volatile writable rating plate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
  - MSI operating mode (simultaneous reading of input data from as many as three other PLCs)
  - Oversampling operating mode (n-fold equidistant acquisition of analog values within one PN cycle for increasing the time resolution for slow CPU cycles)
  - Isochronous mode (simultaneous equidistant reading in of all analog values)
  - Scalable measuring range (adaptation of measuring range, increase of the 16-bit resolution by adapting the measuring range to a limited section)
  - Scaling of the measured values (transmission of the analog value normalized to the required physical value as a 32-bit floating point value)
  - Internal compensation of the line resistance for thermocouples by means of terminal temperature measurement in the BaseUnit for BU type A1
  - Internal compensation also for 2-conductor resistance measurement by means of adjustable line resistance
  - Calibration during runtime
  - Single-channel galvanic isolation
  - HART communication
  - Re-parameterization during operation
  - Firmware update
  - Diagnostics of wire break, short-circuit, overflow, underflow
  - Two upper and lower hardware interrupts in each case, interference frequency suppression, smoothing
  - Value status (optional binary validity information of the analog value status in the process image)
  - Supports the PROFIenergy profile
- Optional accessories
  - Labeling strips (film or card)
  - Equipment labeling plate
  - Color-coded label with module-specific CC code
  - Shielding terminal

A quick and clear comparison of the functions of the AI modules is offered by the TIA Selection Tool.

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > Analog input modules****Overview**

## Overview of analog input modules

Analog input	PU	Article No.	CC code	BU type
AI 8 x I 2/4-wire BA	1	6ES7134-6GF00-0AA1	CC01	A0, A1
AI 2 x U ST	1	6ES7134-6FB00-0BA1	CC00	A0, A1
AI 8 x U BA	1	6ES7134-6FF00-0AA1	CC02	A0, A1
AI 4 x U/I 2-wire ST	1	6ES7134-6HD00-0BA1	CC03	A0, A1
AI 4 x U/I 2-wire ST	10	6ES7134-6HD00-2BA1	CC03	A0, A1
AI 2 x I 2/4-wire ST	1	6ES7134-6GB00-0BA1	CC05	A0, A1
AI 4 x I 2/4-wire ST	1	6ES7134-6GD00-0BA1	CC03	A0, A1
AI 4 x I 2/4-wire ST	10	6ES7134-6GD00-2BA1	CC03	A0, A1
AI 4 x I 2-wire 4 ... 20 mA HART	1	6ES7134-6TD00-0CA1	CC03	A0, A1
AI 2 x U/I 2/4-wire HF	1	6ES7134-6HB00-0CA1	CC05	A0, A1
AI 2 x U/I 2/4-wire HS	1	6ES7134-6HB00-0DA1	CC00	A0, A1
With two operating modes: • High-speed isochronous AI • Oversampling				
AI 8 x RTD/TC 2-wire HF	1	6ES7134-6JF00-0CA1	CC00	A0, A1
AI 8 x RTD/TC 2-wire HF	10	6ES7134-6JF00-2CA1	CC00	A0, A1
AI 4 x RTD/TC 2/3/4-wire HF	1	6ES7134-6JD00-0CA1	CC00	A0, A1
AI 4 x RTD/TC 2/3/4-wire HF	10	6ES7134-6JD00-2CA1	CC00	A0, A1
AI 4 x TC High Speed	1	6ES7134-6JD00-0DA1	CC00	A0, A1
AI 2 x SG 4/6-wire High Speed	1	7MH4134-6LB00-0DA0	CC00	A0
AI Energy Meter 400 V AC ST	1	6ES7134-6PA01-0BU0	--	D0
AI Energy Meter 480 V AC ST	1	6ES7134-6PA21-0BU0	--	D0
AI Energy Meter 480 V AC/CT High Feature	1	6ES7134-6PA01-0CU0	--	U0
AI Energy Meter 480 V AC/RT High Feature	1	6ES7134-6PA21-0CU0	--	U0

## Overview of BaseUnits

BaseUnit	PU	Article No.	CC codes for push-in terminals	CC codes for AUX terminals
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • With 10 AUX terminals	1	6ES7193-6BP20-0DA0	CC01 to CC05	CC71 to CC73
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • With 10 AUX terminals	10	6ES7193-6BP20-2DA0	CC01 to CC05	CC71 to CC73
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0DA0	CC01 to CC05	--
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2DA0	CC01 to CC05	--
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • With 10 AUX terminals	1	6ES7193-6BP20-0BA0	CC01 to CC05	CC71 to CC73
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • With 10 AUX terminals	10	6ES7193-6BP20-2BA0	CC01 to CC05	CC71 to CC73
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0BA0	CC01 to CC05	--

**Overview**

BaseUnit	PU	Article No.	CC codes for push-in terminals	CC codes for AUX terminals
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2BA0	CC01 to CC05	--
<b>BU type A1</b> • New potential group (light) • With temperature sensor • 16 push-in terminals • With 2x5 additional terminals	1	6ES7193-6BP40-0DA1	CC01 to CC05	CC74
<b>BU type A1</b> • New potential group (light) • With temperature sensor • 16 push-in terminals • Without 2x5 additional terminals	1	6ES7193-6BP00-0DA1	CC01 to CC05	--
<b>BU type A1</b> • Forwarding of the potential group (dark) • With temperature sensor • 16 push-in terminals • With 2x5 additional terminals	1	6ES7193-6BP40-0BA1	CC01 to CC05	CC74
<b>BU type A1</b> • Forwarding of the potential group (dark) • With temperature sensor • 16 push-in terminals • Without 2x5 additional terminals	1	6ES7193-6BP00-0BA1	CC01 to CC05	--
<b>BU type D0</b> • Forwarding of the potential group (dark) • 12 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0BD0	--	--
<b>BU type U0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0DU0	CC00	--
<b>BU type U0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2DU0	CC00	--
<b>BU type U0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0BU0	CC00	--
<b>BU type U0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2BU0	CC00	--

Overview of potential distributor modules

Potential distributor module	PU	Article No.	CC codes for push-in terminals
<b>PotDis BU</b> Type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP1	CC00, CC62
<b>PotDis BU</b> Type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP1	CC00, CC62
<b>PotDis BU</b> Type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP2	CC00, CC63



**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > Analog input modules****Overview**

Potential distributor module	PU	Article No.	CC codes for push-in terminals
<b>PotDis BU</b> Type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP2	CC00, CC63
<b>PotDis TB</b> Type BR-W, 18x internally jumpered terminals, without reference to P1, P2 or AUX, (total current max. 10 A)	1	6ES7193-6TP00-0TP0	CC10 to CC13
<b>PotDis TB</b> Type P1-R, 18x P1 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP1	CC10, CC12
<b>PotDis TB</b> Type P2-B, 18x P2 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP2	CC10, CC13
<b>PotDis TB</b> Type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX	1	6ES7193-6TP00-0TN0	CC10

**Ordering data****Article No.****Article No.****Analog input modules**

Type of delivery:  
Apart from the standard type of delivery in a single-unit package, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

The number of modules required is the number of modules ordered. The pack type is selected by selecting the article number. Packs of 10 can therefore only be ordered in integer multiples of 10.

Analog input module  
AI 8xI 2/4-wire BA, BU type A0 or A1, color code CC01

**6ES7 134-6GF00-0AA1**

Analog input module  
AI 2xU ST, BU type A0 or A1, color code CC00

**6ES7134-6FB00-0BA1**

Analog input module  
AI 8xU BA, BU type A0 or A1, color code CC02

**6ES7 134-6FF00-0AA1**

Analog input module  
AI 4xU/I 2-wire Standard, BU type A0 or A1, color code CC03, 16-bit,  $\pm 0.3\%$

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7134-6HD01-0BA1**  
**6ES7134-6HD01-2BA1**

Analog input module  
AI 2xI 2/4-wire Standard, BU type A0 or A1, color code CC05, 16-bit

- Pack of 1 unit

**6ES7134-6GB00-0BA1**

Analog input module  
AI 4xI 2/4-wire Standard, BU type A0 or A1, color code CC03, 16-bit,  $\pm 0.3\%$

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7134-6GD01-0BA1**  
**6ES7134-6GD01-2BA1**

Analog input module  
AI 4xI 2-wire 4 ... 20 mA HART, BU type A0 or A1, color code CC03

**6ES7134-6TD00-0CA1**

Analog input module  
AI 2xU/I 2/4-wire High Feature, BU type A0 or A1, color code CC05, 16-bit,  $\pm 0.1\%$ , independent channel galvanic isolation, isochronous mode above 1 ms

**6ES7134-6HB00-0CA1**

Analog input module  
AI 2xU/I 2/4-wire High Speed, BU type A0 or A1, color code CC00, 16-bit,  $\pm 0.3\%$ , isochronous mode above 250  $\mu\text{s}$ , oversampling above 50  $\mu\text{s}$

**6ES7134-6HB00-0DA1**

Analog input module  
AI 8xRTD/TC 2-wire High Feature, BU type A0 or A1, color code CC00, 16-bit,  $\pm 0.1\%$ , scalable measuring range

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7134-6JF00-0CA1**  
**6ES7134-6JF00-2CA1**

Analog input module  
AI 4xRTD/TC 2/3/4-wire High Feature, BU type A0 or A1, color code CC00, 16-bit,  $\pm 0.1\%$ , scalable measuring range

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7134-6JD00-0CA1**  
**6ES7134-6JD00-2CA1**

Ordering data	Article No.	Article No.
Analog input module AI 4xTC High Speed, BU type A0 or A1, color code CC00, 16-bit, channel diagnostics	<b>6ES7134-6JD00-0DA1</b>	<b>BU15-P16+A0+2B</b> BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.
Analog input module AI 2x SG, 4/6-wire High Speed, BU type A0, color code CC00, channel diagnostics, 28/16-bit, ±0.05%, for DMS full bridges; for connecting force and torque sensors	<b>7MH4134-6LB00-0DA0</b>	<b>6ES7193-6BP00-0BA0</b> <b>6ES7193-6BP00-2BA0</b>
Analog input module AI Energy Meter Standard, 400 V AC, BU type D0	<b>6ES7134-6PA01-0BU0</b>	<b>2BU15-P16+A0+2B</b> Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the potential group • Pack of 1 unit
Analog input module AI Energy Meter Standard, 480 V AC, BU type D0	<b>6ES7134-6PA21-0BU0</b>	<b>6ES7193-6BP60-0BA0</b>
Analog input module AI Energy Meter 480 V AC/CT High Feature, for 1 A or 5 A current transformers, with line analysis functions, channel diagnostics; BU type U0	<b>6ES7134-6PA01-0CU0</b>	<b>Usable type A1 BaseUnits (temperature detection)</b>
Analog input module AI Energy Meter 480 V AC/RT High Feature, for Rogowski coils or 333 mV current/voltage transformers, with line analysis functions, channel diagnostics; BU type U0	<b>6ES7134-6PA21-0CU0</b>	<b>BU15-P16+A0+12D/T</b> BU type A1; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new potential group (max. 10 A)
<b>Usable type A0 BaseUnits</b>		<b>BU15-P16+A0+2D/T</b> BU type A1; BaseUnit (light) with 16 push-in terminals to the module; for starting a new potential group (max. 10 A)
<b>BU15-P16+A10+2D</b> BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP20-0DA0</b> <b>6ES7193-6BP20-2DA0</b>	<b>6ES7193-6BP00-0DA1</b>
<b>BU15-P16+A0+2D</b> BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP00-0DA0</b> <b>6ES7193-6BP00-2DA0</b>	<b>BU15-P16+A0+12B/T</b> BU type A1; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the potential group
<b>2BU15-P16+A0+2DB</b> Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (light/dark) with 16 push-in terminals to the module; for starting a new potential group (max. 10 A) • Pack of 1 unit	<b>6ES7193-6BP60-0DA0</b>	<b>BU15-P16+A0+2B/T</b> BU type A1; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the potential group
<b>BU15-P16+A10+2B</b> BU type A0; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP20-0BA0</b> <b>6ES7193-6BP20-2BA0</b>	<b>Usable type D0 BaseUnits</b>
		<b>BU20-P12+A0+0B</b> BU type D0; BaseUnit with 12 push-in terminals, without AUX terminals, bridged to the left
		<b>Suitable type U0 BaseUnits</b>
		<b>BU20-P16+A0+2D</b> BU type U0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.
		<b>6ES7193-6BP00-0DU0</b> <b>6ES7193-6BP00-2DU0</b>

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > Analog input modules

#### Ordering data

##### BU20-P16+A0+2B

BU type U0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the potential group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP00-0BU0  
6ES7193-6BP00-2BU0

##### Potential distributor modules

##### PotDis BU

PotDis BU, Type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)

6ES7193-6UP00-ODP1

PotDis BU, Type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group

6ES7193-6UP00-OBP1

PotDis BU, Type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)

6ES7193-6UP00-ODP2

PotDis BU, Type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group

6ES7193-6UP00-OBP2

##### PotDis TB

PotDis TB, type BR-W, 18x internally jumpered terminals, without reference to P1, P2 or AUX, (total current max. 10 A)

6ES7193-6TP00-0TP0

PotDis TB, type P1-R, 18x P1 potential, (total current max. 10 A)

6ES7193-6TP00-0TP1

PotDis TB, type P2-B, 18x P2 potential, (total current max. 10 A)

6ES7193-6TP00-0TP2

PotDis TB, type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX

6ES7193-6TP00-0TN0

##### Accessories

##### Equipment labeling plate

10 sheets of 16 labels, for printing with thermal transfer card printer or plotter

6ES7193-6LF30-0AW0

##### Labeling strips

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AA0

500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AG0

1 000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer

6ES7193-6LA10-0AA0

1 000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer

6ES7193-6LA10-0AG0

##### BU cover

For covering empty slots (gaps); 5 units

- 15 mm wide
- 20 mm wide

6ES7133-6CV15-1AM0  
6ES7133-6CV20-1AM0

##### Shield connection

5 shield supports and 5 shield terminals

6ES7193-6SC00-1AM0

##### Color-coded labels

Color code CC00, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units

6ES7193-6CP00-2MA0

Color code CC01, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units

6ES7193-6CP01-2MA0

Color code CC01, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 50 units

6ES7193-6CP01-4MA0

Color code CC02, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16); 10 units

6ES7193-6CP02-2MA0

Color code CC02, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16); 50 units

6ES7193-6CP02-4MA0

Color code CC03, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 12), gray (terminals 13 to 16); 10 units

6ES7193-6CP03-2MA0

Color code CC05, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 12), red (terminals 13 to 14), blue (terminals 15 to 16); 10 units

6ES7193-6CP05-2MA0

Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A); 10 units

6ES7193-6CP71-2AA0

Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A); 10 units

6ES7193-6CP72-2AA0

Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 10 units

6ES7193-6CP73-2AA0

Color code CC74, for 2x5 additional terminals, BU type A1, red (terminals 1B to 5B), blue (terminals 1C to 5C); 10 units

6ES7193-6CP74-2AA0

##### Color-coded labels for PotDis BU

Color code CC62, for 16 push-in terminals, PotDis BU type P1, red (terminals 1 to 16); 10 units

6ES7193-6CP62-2MA0

Color code CC63, for 16 push-in terminals, PotDis BU type P2, blue (terminals 1 to 16); 10 units

6ES7193-6CP63-2MA0

##### Color-coded labels for PotDis TB

Color code CC10, for 18 push-in terminals, PotDis TB, gray (terminals 1 to 18); 10 units

6ES7193-6CP10-2MT0

Color code CC11, for 18 push-in terminals, PotDis TB, yellow-green (terminals 1 to 18); 10 units

6ES7193-6CP11-2MT0

Ordering data	Article No.	Article No.
Color code CC12, for 18 push-in terminals, PotDis TB, type P1 and BR, red (terminals 1 to 18); 10 units	<b>6ES7193-6CP12-2MT0</b>	<b>Mechanical coding elements</b> For automatic coding of I/O modules; spare part. 20 units Type A Type B Type C Type D
Color code CC13, for 18 push-in terminals, PotDis TB, type P2 and BR, blue (terminals 1 to 18); 10 units	<b>6ES7193-6CP13-2MT0</b>	
		<b>6ES7193-6KA00-3AA0</b>
		<b>6ES7193-6KB00-3AA0</b>
		<b>6ES7193-6KC00-3AA0</b>
		<b>6ES7193-6KD00-3AA0</b>

**Technical specifications**

Article number	<b>6ES7134-6GF00-0AA1</b> ET 200SP, AI 8xI 2-/4-Wire Basic	<b>6ES7134-6FB00-0BA1</b> ET 200SP, AI 2xU Standard, PU 1	<b>6ES7134-6FF00-0AA1</b> ET 200SP, AI 8xU Basic	<b>6ES7134-6HD01-0BA1</b> ET 200SP, AI 4xU/I 2-Wire ST, PU 1	<b>6ES7134-6GB00-0BA1</b> ET 200SP, AI 2xI 2-/4-Wire ST, PU 1
<b>General information</b>					
Product type designation	AI 8xI 2-/4-wire BA	AI 2xU ST	AI 8xU BA	AI 4x U/I 2-wire	AI 2xI 2-/4-wire ST
<b>Product function</b>					
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
• Isochronous mode	No	No	No	No	No
• Measuring range scalable	No	No	No	No	No
<b>Engineering with</b>					
• STEP 7 TIA Portal configurable/integrated from version	V13 SP1	V13 SP1	V13 SP1	V14 / -	V13 SP1
• STEP 7 configurable/integrated from version	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.6 and higher	V5.5 SP3
• PCS 7 configurable/integrated from version				V8.1 SP1	
• PROFIBUS from GSD version/GSD revision	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3	V2.3 / -
<b>Operating mode</b>					
• Oversampling	No	No	No	No	No
• MSI	No	No	No	No	No
<b>Supply voltage</b>					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes	Yes
<b>Analog inputs</b>					
Number of analog inputs	8; Single-ended	2	8; Single-ended	4; Differential inputs	2
• For current measurement	8				2
• For voltage measurement		2	8		
permissible input voltage for voltage input (destruction limit), max.		30 V	30 V	30 V	
permissible input current for current input (destruction limit), max.	50 mA			50 mA	50 mA
Cycle time (all channels), min.	1 ms; per channel	500 µs	1 ms; per channel	Sum of the basic conversion times and additional processing times (depending on the parameterization of the active channels)	500 µs
<b>Input ranges (rated values), voltages</b>					
• 0 to +10 V		Yes; 15 bit	Yes; 15 bit	Yes; 15 bit	
• 1 V to 5 V		Yes; 15 bit		Yes; 15 bit	
• -10 V to +10 V		Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• -5 V to +5 V		Yes; 16 bit incl. sign		Yes; 16 bit incl. sign	

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > Analog input modules

#### Technical specifications

Article number	6ES7134-6GF00-0AA1	6ES7134-6FB00-0BA1	6ES7134-6FF00-0AA1	6ES7134-6HD01-0BA1	6ES7134-6GB00-0BA1
	ET 200SP, AI 8xI 2-/4-Wire Basic	ET 200SP, AI 2xU Standard, PU 1	ET 200SP, AI 8xU Basic	ET 200SP, AI 4xU/I 2-Wire ST, PU 1	ET 200SP, AI 2xI 2-/4-Wire ST, PU 1
<b>Input ranges (rated values), currents</b>					
• 0 to 20 mA	Yes			Yes; 15 bit	Yes; 15 bit
• -20 mA to +20 mA	Yes				Yes; 16 bit incl. sign
• 4 mA to 20 mA	Yes			Yes; 15 bit	Yes; 15 bit
<b>Cable length</b>					
• shielded, max.	200 m	200 m	200 m	1 000 m; 200 m for voltage measurement	1 000 m
<b>Analog value generation for the inputs</b>					
Measurement principle		Sigma Delta		integrating (Sigma-Delta)	Sigma Delta
<b>Integration and conversion time/ resolution per channel</b>					
• Resolution with overrange (bit including sign), max.	16 bit	16 bit	16 bit	16 bit	16 bit
• Integration time, parameterizable	Yes	Yes	Yes	Yes	Yes
• Interference voltage suppression for interference frequency f <sub>1</sub> in Hz	16.67 / 50 / 60 / 4 800 (16.67 / 50 / 60)	16.6 / 50 / 60 Hz / off	16.67 / 50 / 60 / 4 800 (16.67 / 50 / 60)	16.6 / 50 / 60 Hz	16.6 / 50 / 60 Hz / off
• Conversion time (per channel)	180 / 60 / 50 / 0.625 (67.5 / 22.5 / 18.75) ms	50 ms @ 60 Hz, 60 ms @ 50 Hz, 180 ms @ 16.6 Hz, 250 μs without filter	180 / 60 / 50 / 0.625 (67.5 / 22.5 / 18.75) ms	180 / 60 / 50 ms	50 ms @ 60 Hz, 60 ms @ 50 Hz, 180 ms @ 16.6 Hz, 500 μs without filter
<b>Smoothing of measured values</b>					
• Number of smoothing levels	4; None; 4/8/16 times	4	4; None; 4/8/16 times	4; None; 4/8/16 times	4
• parameterizable	Yes	Yes	Yes	Yes	Yes
<b>Encoder</b>					
<b>Connection of signal encoders</b>					
• for voltage measurement	No	Yes	Yes	Yes	
• for current measurement as 2-wire transducer	Yes			Yes	Yes
- Burden of 2-wire transmitter, max.	650 Ω			650 Ω	650 Ω
• for current measurement as 4-wire transducer	Yes		No	No	Yes
<b>Errors/accuracies</b>					
<b>Basic error limit (operational limit at 25 °C)</b>					
• Voltage, relative to input range, (+/-)		0.3 %	0.3 %	0.3 %	
• Current, relative to input range, (+/-)	0.3 %			0.3 %	0.3 %
<b>Interference voltage suppression for f = n x (f<sub>1</sub> +/- 1 %), f<sub>1</sub> = interference frequency</b>					
• Series mode interference (peak value of interference < rated value of input range), min.	70 dB; With conversion time 67.5 / 22.5 / 18.75 ms: 40 dB	70 dB	70 dB; With conversion time 67.5 / 22.5 / 18.75 ms: 40 dB	70 dB	70 dB
• Common mode voltage, max.		10 V		10 V	10 V
• Common mode interference, min.		90 dB		90 dB	90 dB
<b>Interrupts/diagnostics/ status information</b>					
Diagnostics function	Yes	Yes	Yes	Yes	Yes
<b>Alarms</b>					
• Diagnostic alarm	Yes	Yes	Yes	Yes	Yes
• Limit value alarm	No	No	No	No	No

#### Technical specifications

Article number	6ES7134-6GF00-0AA1	6ES7134-6FB00-0BA1	6ES7134-6FF00-0AA1	6ES7134-6HD01-0BA1	6ES7134-6GB00-0BA1
	ET 200SP, AI 8xI 2-/4-Wire Basic	ET 200SP, AI 2xU Standard, PU 1	ET 200SP, AI 8xU Basic	ET 200SP, AI 4xU/I 2-Wire ST, PU 1	ET 200SP, AI 2xI 2-/4-Wire ST, PU 1
<b>Diagnoses</b>					
• Monitoring the supply voltage	Yes	Yes	Yes	Yes	Yes
• Wire-break	Yes; at 4 to 20 mA	No	No	Yes; at 4 to 20 mA	Yes; at 4 to 20 mA
• Short-circuit	Yes; Sensor supply to M; module by module	Yes; at 1 to 5 V	No	Yes; with 1 to 5 V or 2-wire mode: Short-circuit of the encoder supply to ground or of an input to the encoder supply	Yes; Short-circuit of the encoder supply
• Group error	Yes	Yes	Yes	Yes	Yes
• Overflow/underflow	Yes	Yes	Yes	Yes	Yes
<b>Diagnostics indication LED</b>					
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	No	No	No	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red LED	Yes; green/red DIAG LED
<b>Potential separation</b>					
<b>Potential separation channels</b>					
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>					
Suitable for applications according to AMS 2750				Yes; Declaration of Conformity, see online support entry 109757262	
Suitable for applications according to CQI-9				Yes	
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• horizontal installation, min.	-30 °C; < 0 °C as of FS04	-30 °C; < 0 °C as of FS04	-30 °C; < 0 °C as of FS04	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS04
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; < 0 °C as of FS04	-30 °C; < 0 °C as of FS04	-30 °C; < 0 °C as of FS04	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS04
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Dimensions</b>					
Width	15 mm	15 mm	15 mm	15 mm	15 mm
Height	73 mm	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm	58 mm
<b>Weights</b>					
Weight, approx.	31 g	31 g	31 g	31 g	32 g

## I/O systems

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

### I/O modules > Analog input modules

#### Technical specifications

Article number	<b>6ES7134-6GD01-0BA1</b> ET 200SP, AI 4Xl 2-/4-Wire ST, PU 1	<b>6ES7134-6TD00-0CA1</b> ET 200SP, AI 4Xl 2-WIRE 4...20MA HART	<b>6ES7134-6HB00-0CA1</b> ET 200SP AI 2 X U/I 2-, 4-Wire HF	<b>6ES7134-6HB00-0DA1</b> ET 200SP AI 2 X U/I 2-, 4-Wire HS
<b>General information</b>				
Product type designation	AI 4xl 2-/4-wire ST	AI 4xl 2-wire HART	AI 2xU/I 2-/4-wire HF	AI 2xU/I 2-/4-wire HS
<b>Product function</b>				
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
• Isochronous mode	No	No	Yes	Yes
• Measuring range scalable	No	No	No	No
• Scalable measured values				No
• Adjustment of measuring range				No
<b>Engineering with</b>				
• STEP 7 TIA Portal configurable/ integrated from version	V14 / -	V13 SP1	V13	V13 SP1
• STEP 7 configurable/integrated from version	V5.6 and higher	V5.5 SP4 and higher	V5.5 / -	V5.5 SP3 / -
• PCS 7 configurable/integrated from version	V8.1 SP1	V8.1 SP1	V8.1 SP1	
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher	GSD Revision 5	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3
<b>Operating mode</b>				
• Oversampling	No	No	No	Yes; 2 channels per module
• MSI	No	No	Yes	No
<b>Supply voltage</b>				
Rated value (DC)	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes
<b>Analog inputs</b>				
Number of analog inputs	4; Differential inputs	4; Differential inputs	2; Differential inputs	2; Differential inputs
• For current measurement		4	2	2
• For voltage measurement			2	2
permissible input voltage for voltage input (destruction limit), max.			30 V	30 V
permissible input current for current input (destruction limit), max.	50 mA	50 mA	50 mA	50 mA
Cycle time (all channels), min.	Sum of the basic conversion times and additional processing times (depending on the parameterization of the active channels)			125 µs
Analog input with oversampling			No	Yes
• Values per cycle, max.				16
• Resolution, min.				50 µs
Standardization of measured values			Yes	
<b>Input ranges (rated values), voltages</b>				
• 0 to +10 V			Yes; 15 bit	Yes; 15 bit
• 1 V to 5 V			Yes; 15 bit	Yes; 13 bit
• -10 V to +10 V			Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• -5 V to +5 V			Yes; 16 bit incl. sign	Yes; 15 bit incl. sign
<b>Input ranges (rated values), currents</b>				
• 0 to 20 mA	Yes; 16 bit incl. sign	No	Yes; 15 bit	Yes; 15 bit
• -20 mA to +20 mA	Yes	No	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• 4 mA to 20 mA	Yes; 15 bit	Yes; 15 bit + sign	Yes; 15 bit	Yes; 14 bit
<b>Cable length</b>				
• shielded, max.	1 000 m	800 m	1 000 m; 200 m for voltage measurement	1 000 m; 200 m for voltage measurement
<b>Analog value generation for the inputs</b>				
Measurement principle	integrating (Sigma-Delta)	integrating (Sigma-Delta)	Sigma Delta	Actual value encryption (successive approximation)

#### Technical specifications

Article number	<b>6ES7134-6GD01-0BA1</b> ET 200SP, AI 4X1 2-/4-Wire ST, PU 1	<b>6ES7134-6TD00-0CA1</b> ET 200SP, AI 4X1 2-WIRE 4...20MA HART	<b>6ES7134-6HB00-0CA1</b> ET 200SP AI 2 X U/I 2-, 4-Wire HF	<b>6ES7134-6HB00-0DA1</b> ET 200SP AI 2 X U/I 2-, 4-Wire HS
<b>Integration and conversion time/ resolution per channel</b>				
<ul style="list-style-type: none"> <li>Resolution with overrange (bit including sign), max.</li> <li>Integration time, parameterizable</li> <li>Integration time (ms)</li> <li>Basic conversion time, including integration time (ms)</li> <li>Interference voltage suppression for interference frequency <math>f_1</math> in Hz</li> <li>Conversion time (per channel)</li> <li>Basic execution time of the module (all channels released)</li> </ul>	16 bit Yes  16.6 / 50 / 60 Hz 180 / 60 / 50 ms	16 bit Yes; channel by channel  10 / 50 / 60 Hz	16 bit Yes 67.5 / 22.5 / 18.75 / 10 / 5 / 2.5 / 1.25 / 0.625 ms 68.03 / 22.83 / 19.03 / 10.28 / 5.23 / 2.68 / 1.43 / 0.730 ms 16.6 / 50 / 60 / 300 / 600 / 1 200 / 2 400 / 4 800 68.2 / 23 / 19.2 / 10.45 / 5.40 / 2.85 / 1.6 / 0.9 ms 1 ms	16 bit   No 10 $\mu$ s
<b>Smoothing of measured values</b>				
<ul style="list-style-type: none"> <li>Number of smoothing levels</li> <li>parameterizable</li> </ul>	4; None; 4/8/16 times Yes	4; None; 4/8/16 times Yes	6; none; 2-/4-/8-/16-/32-fold Yes	7; none; 2-/4-/8-/16-/32-/64-fold Yes
<b>Encoder</b>				
<b>Connection of signal encoders</b>				
<ul style="list-style-type: none"> <li>for voltage measurement</li> <li>for current measurement as 2-wire transducer - Burden of 2-wire transmitter, max.</li> <li>for current measurement as 4-wire transducer</li> </ul>	No Yes 650 $\Omega$ Yes	No Yes	Yes Yes 650 $\Omega$ Yes	Yes Yes 650 $\Omega$ Yes
<b>Errors/accuracies</b>				
<b>Basic error limit (operational limit at 25 °C)</b>				
<ul style="list-style-type: none"> <li>Voltage, relative to input range, (+/-)</li> <li>Current, relative to input range, (+/-)</li> </ul>	 0.3 %	 0.3 %	0.05 %; 0.1 % at SFU 4.8 kHz 0.05 %; 0.1 % at SFU 4.8 kHz	0.2 % 0.2 %
<b>Interference voltage suppression for <math>f = n \times (f_1 \pm 1 \%)</math>, <math>f_1 =</math> interference frequency</b>				
<ul style="list-style-type: none"> <li>Series mode interference (peak value of interference &lt; rated value of input range), min.</li> <li>Common mode voltage, max.</li> <li>Common mode interference, min.</li> </ul>	70 dB 10 V 90 dB	60 dB	35 V 90 dB	35 V 90 dB
<b>Isochronous mode</b>				
Filtering and processing time (TCI), min. Bus cycle time (TDP), min.			800 $\mu$ s 1 ms	80 $\mu$ s 125 $\mu$ s; Starting from firmware Version V2.0.1
<b>Interrupts/diagnostics/ status information</b>				
Diagnostics function	Yes	Yes	Yes	
<b>Alarms</b>				
<ul style="list-style-type: none"> <li>Diagnostic alarm</li> <li>Limit value alarm</li> </ul>	Yes No	Yes Yes	Yes Yes; two upper and two lower limit values in each case	Yes Yes; two upper and two lower limit values in each case



## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > Analog input modules

#### Technical specifications

Article number	<b>6ES7134-6GD01-0BA1</b> ET 200SP, AI 4X1 2-/4-Wire ST, PU 1	<b>6ES7134-6TD00-0CA1</b> ET 200SP, AI 4X1 2-WIRE 4...20MA HART	<b>6ES7134-6HB00-0CA1</b> ET 200SP AI 2 X U/I 2-, 4-Wire HF	<b>6ES7134-6HB00-0DA1</b> ET 200SP AI 2 X U/I 2-, 4-Wire HS
<b>Diagnoses</b>				
• Monitoring the supply voltage	Yes	Yes	Yes	Yes
• Wire-break	Yes; at 4 to 20 mA	Yes; channel by channel	Yes; Measuring range 4 to 20 mA only	Yes; channel-by-channel, at 4 to 20 mA only
• Short-circuit	Yes; 2-wire mode: Short-circuit of the encoder supply to ground or of an input to the encoder supply	Yes; Channel-by-channel, short-circuit of the encoder supply to ground or of an input to the encoder supply	Yes; channel-by-channel, at 1 to 5 V or for short-circuit in encoder supply	Yes; channel-by-channel, at 1 to 5 V or for current measuring ranges short-circuit in encoder supply
• Group error	Yes	Yes	Yes	Yes
• Overflow/underflow	Yes	Yes; channel by channel	Yes	Yes
<b>Diagnoses indication LED</b>				
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	No	Yes; red LED	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Potential separation</b>				
<b>Potential separation channels</b>				
• between the channels and backplane bus	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-30 °C; < 0 °C as of FS02	-30 °C	-30 °C; < 0 °C as of FS06	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; < 0 °C as of FS02	-30 °C	-30 °C; < 0 °C as of FS06	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Dimensions</b>				
Width	15 mm	15 mm	15 mm	15 mm
Height	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm
<b>Weights</b>				
Weight, approx.	31 g	31 g	32 g	32 g
Article number	<b>6ES7134-6JF00-0CA1</b> ET 200SP, AI 8xRTD/TC 2-Wire HF	<b>6ES7134-6JD00-0CA1</b> ET 200SP, AI 4xRTD/TC 2-/3-/4-Wire HF	<b>6ES7134-6JD00-0DA1</b> ET 200SP, AI 4x TC HS	
<b>General information</b>				
Product type designation	AI 8xRTD/TC 2-wire HF	AI 4xRTD/TC 2-/3-/4-wire HF	AI 4xTC HS	
<b>Product function</b>				
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	
• Isochronous mode	No	No	No	
• Measuring range scalable	Yes		Yes	
• Adjustment of measuring range		Yes		
<b>Engineering with</b>				
• STEP 7 TIA Portal configurable/ integrated from version	V14 / -	V14	V15 with HSP 265/integrated as of V15.1	
• STEP 7 configurable/integrated from version			V5.5 SP3 or higher	
• PCS 7 configurable/integrated from version		V8.1 SP1		
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	

**Technical specifications**

Article number	<b>6ES7134-6JF00-0CA1</b> ET 200SP, AI 8xRTD/TC 2-Wire HF	<b>6ES7134-6JD00-0CA1</b> ET 200SP, AI 4xRTD/TC 2-/3-/4-Wire HF	<b>6ES7134-6JD00-0DA1</b> ET 200SP, AI 4x TC HS
<b>Operating mode</b>			
• Oversampling	No	No	No
• MSI	No	No	Yes
<b>Supply voltage</b>			
Rated value (DC)	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes
<b>Analog inputs</b>			
Number of analog inputs	8	4	4
permissible input voltage for voltage input (destruction limit), max.	30 V	30 V	30 V
Constant measurement current for resistance-type transmitter, typ.	2 mA	0.7 mA; 1.7 mA for Cu10 sensors	
Cycle time (all channels), min.	Sum of the basic conversion times and additional processing times (depending on the parameterization of the active channels)	Sum of the basic conversion times and additional processing times (depending on the parameterization of the active channels); for line compensation in case of a three-wire connection, an additional cycle is necessary	5 ms; Sum of the basic conversion times and additional processing times (depending on the parameterization of the active channels)
Technical unit for temperature measurement adjustable	Yes; °C/°F/K	Yes; °C/°F/K	Yes; °C/°F/K
<b>Input ranges (rated values), voltages</b>			
• -1 V to +1 V	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• -250 mV to +250 mV	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• -50 mV to +50 mV	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• -80 mV to +80 mV	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
<b>Input ranges (rated values), thermocouples</b>			
• Type B	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type C	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type E	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type J	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type K	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type L	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type N	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type R	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type S	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type T	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type U	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type TXK/TXK(L) to GOST	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
<b>Input ranges (rated values), resistance thermometer</b>			
• Cu 10		Yes; 16 bit incl. sign	
• Ni 100	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Ni 1000	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• LG-Ni 1000	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Ni 120	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Ni 200	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Ni 500	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Pt 100	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Pt 1000	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Pt 200	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Pt 500	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > Analog input modules****Technical specifications**

Article number	<b>6ES7134-6JF00-0CA1</b> ET 200SP, AI 8xRTD/TC 2-Wire HF	<b>6ES7134-6JD00-0CA1</b> ET 200SP, AI 4xRTD/TC 2-/3-/4-Wire HF	<b>6ES7134-6JD00-0DA1</b> ET 200SP, AI 4x TC HS
<b>Input ranges (rated values), resistors</b>			
• 0 to 150 ohms	Yes; 15 bit	Yes; 15 bit	
• 0 to 300 ohms	Yes; 15 bit	Yes; 15 bit	
• 0 to 600 ohms	Yes; 15 bit	Yes; 15 bit	
• 0 to 3000 ohms	Yes; 15 bit	Yes; 15 bit	
• 0 to 6000 ohms	Yes; 15 bit	Yes; 15 bit	
• PTC	Yes; 15 bit	Yes; 15 bit	
<b>Thermocouple (TC)</b>			
<b>Temperature compensation</b>			
- parameterizable	Yes	Yes	Yes
<b>Cable length</b>			
• shielded, max.	200 m; 50 m with thermocouples	200 m; 50 m with thermocouples	200 m; 100 m for thermocouples
<b>Analog value generation for the inputs</b>			
Measurement principle	integrating (Sigma-Delta)	integrating (Sigma-Delta)	integrating (Sigma-Delta)
<b>Integration and conversion time/resolution per channel</b>			
• Resolution with overrange (bit including sign), max.	16 bit	16 bit	16 bit
• Integration time, parameterizable	Yes	Yes	Yes
• Interference voltage suppression for interference frequency f1 in Hz	16.6 / 50 / 60 Hz	16.6 / 50 / 60 Hz	16.6 / 50 / 60 Hz / off
• Conversion time (per channel)	180 / 60 / 50 ms	180 / 60 / 50 ms	180/60/50/1.25 ms
<b>Smoothing of measured values</b>			
• Number of smoothing levels	4; None; 4/8/16 times	4; None; 4/8/16 times	4; None; 4/8/16 times
• parameterizable	Yes	Yes	Yes
<b>Encoder</b>			
<b>Connection of signal encoders</b>			
• for voltage measurement	Yes	Yes	Yes
• for resistance measurement with two-wire connection	Yes	Yes	
• for resistance measurement with three-wire connection	No	Yes	
• for resistance measurement with four-wire connection	No	Yes	
<b>Errors/accuracies</b>			
<b>Basic error limit (operational limit at 25 °C)</b>			
• Voltage, relative to input range, (+/-)	0.05 %	0.05 %	0.05 %; 0.2 % when SFU OFF
• Resistance, relative to input range, (+/-)	0.05 %	0.05 %	
<b>Interference voltage suppression for f = n x (f1 +/- 1 %), f1 = interference frequency</b>			
• Series mode interference (peak value of interference < rated value of input range), min.	70 dB	70 dB	70 dB
• Common mode voltage, max.	10 V	10 V	60 V; DC
• Common mode interference, min.	90 dB	90 dB	90 dB
<b>Interrupts/diagnostics/status information</b>			
Diagnostics function	Yes	Yes	Yes
<b>Alarms</b>			
• Diagnostic alarm	Yes	Yes	Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case	Yes; two upper and two lower limit values in each case	Yes; two upper and two lower limit values in each case

#### Technical specifications

Article number	<b>6ES7134-6JF00-0CA1</b> ET 200SP, AI 8xRTD/TC 2-Wire HF	<b>6ES7134-6JD00-0CA1</b> ET 200SP, AI 4xRTD/TC 2-/3-/4-Wire HF	<b>6ES7134-6JD00-0DA1</b> ET 200SP, AI 4x TC HS
<b>Diagnoses</b>			
• Monitoring the supply voltage	Yes	Yes	Yes
• Wire-break	Yes; channel by channel	Yes; channel by channel	Yes; channel by channel
• Group error	Yes	Yes	Yes
• Overflow/underflow	Yes; channel by channel	Yes; channel by channel	Yes; channel by channel
<b>Diagnostics indication LED</b>			
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red LED
<b>Potential separation</b>			
<b>Potential separation channels</b>			
• between the channels and backplane bus	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
Suitable for applications according to AMS 2750			Yes; Declaration of Conformity, see online support entry 109757262
Suitable for applications according to CQI-9			Yes; Based on AMS 2750 E
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• horizontal installation, min.	-30 °C; < 0 °C as of FS05	-30 °C; < 0 °C as of FS08	-30 °C; < 0 °C as of FS02
• horizontal installation, max.	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; < 0 °C as of FS05	-30 °C; < 0 °C as of FS08	-30 °C; < 0 °C as of FS02
• vertical installation, max.	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>			
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Dimensions</b>			
Width	15 mm	15 mm	15 mm
Height	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm
<b>Weights</b>			
Weight, approx.			33 g

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > Analog input modules

#### Technical specifications

Article number	<b>7MH4134-6LB00-0DA0</b> ET 200SP AI 2 X SG 4-/6-WIRE HS
<b>General information</b>	
Product type designation	AI 2xSG 4-/6-wire HS
<b>Product function</b>	
• I&M data	Yes; I&M0 to I&M3
• Isochronous mode	Yes
• Measuring range scalable	Yes
• Scalable measured values	No
• Adjustment of measuring range	Yes; $\pm 0.5 \dots 320$ mV/V
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/ integrated from version	V14 SP1
• PROFIBUS from GSD version/ GSD revision	V03.01.105
• PROFINET from GSD version/ GSD revision	GSDML V2.33
<b>Operating mode</b>	
• Oversampling	Yes; 2 channels per module
• MSI	No
<b>Supply voltage</b>	
Rated value (DC)	24 V
Reverse polarity protection	Yes
<b>Analog inputs</b>	
Number of analog inputs	2; Differential inputs
Cycle time (all channels), min.	100 $\mu$ s
Analog input with oversampling	Yes
• Values per cycle, max.	14
• Resolution, min.	100 $\mu$ s
<b>Input ranges</b>	
• Strain gauges (full bridges)	Yes
<b>Cable length</b>	
• shielded, max.	500 m
<b>Analog value generation for the inputs</b>	
Measurement principle	Sigma Delta
<b>Integration and conversion time/ resolution per channel</b>	
• Resolution with overrange (bit including sign), max.	28 bit; 16 bits with oversampling
• Integration time, parameterizable	Yes
• Interference voltage suppression for interference frequency f1 in Hz	60 / 50 Hz / no
• Conversion time (per channel)	100 $\mu$ s
<b>Smoothing of measured values</b>	
• IIR low-pass filter frequency	0.01 ... 600 Hz
• Notch filter frequency	0.1 ... 1 000 Hz
• Notch filter quality	5.00 ... 250.00
• Average value filter	0.1 ... 655.3 ms
<b>Encoder</b>	
<b>Connection of signal encoders</b>	
• For strain gauges (full bridges) with 4-conductor connection	Yes
• For strain gauges (full bridges) with 6-conductor connection	Yes
• Resistance of full bridge, min.	80 $\Omega$
• Resistance of full bridge, max.	5 000 $\Omega$

Article number	<b>7MH4134-6LB00-0DA0</b> ET 200SP AI 2 X SG 4-/6-WIRE HS
<b>Errors/accuracies</b>	
Temperature coefficient, zero point	$\leq \pm 0.25$ $\mu$ V/K
Temperature coefficient, span, 4-wire connection (in relation to end value)	$\leq \pm 5$ ppm/K
Temperature coefficient, span, 6-wire connection (in relation to end value)	$\leq \pm 10$ ppm/K
<b>Basic error limit (operational limit at 25 °C)</b>	
• Voltage, relative to input range, (+/-)	0.05 %; See manual for details
<b>Isochronous mode</b>	
Filtering and processing time (TCI), min.	87 $\mu$ s
Bus cycle time (TDP), min.	125 $\mu$ s
<b>Interrupts/diagnostics/ status information</b>	
Diagnostics function	Yes
<b>Alarms</b>	
• Diagnostic alarm	Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case
<b>Diagnoses</b>	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Group error	Yes
• Overflow/underflow	Yes
<b>Diagnostics indication LED</b>	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and backplane bus	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-25 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-25 °C
• vertical installation, max.	50 °C
<b>Altitude during operation relating to sea level</b>	
• Ambient air temperature- barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 1 K/100 m) at 795 hPa ... 701 hPa (+2 000 m ... +3 000 m)
<b>Dimensions</b>	
Width	15 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	45 g

**Technical specifications**

Article number	<b>6ES7134-6PA01-0BU0</b> ET 200SP AI Energy Meter CT ST	<b>6ES7134-6PA21-0BU0</b> ET 200SP AI Energy Meter RC ST	<b>6ES7134-6PA01-0CU0</b> ET 200SP AI Energy Meter CT HF	<b>6ES7134-6PA21-0CU0</b> ET 200SP AI Energy Meter RC HF
<b>General information</b>				
Product type designation	AI Energy Meter CT ST	AI Energy Meter RC ST	AI Energy Meter CT HF	AI Energy Meter RC HF
<b>Product function</b>				
• Voltage measurement	Yes	Yes	Yes	Yes
- without voltage transformer	Yes	Yes	Yes	Yes
- with voltage transformer	Yes	Yes	Yes	Yes
• Current measurement	Yes; max. 3 + neutral conductor	Yes; max. 3 + neutral conductor	Yes; Max. 4	Yes; Max. 4
- without current transformer	No	No	No	No
- with current transformer	Yes; 1 A or 5 A current transformer	No	Yes; 1 A or 5 A current transformer	No
- With Rogowski coil	No	Yes	No	Yes
- With current-voltage-converter	No	Yes; 333 mV interface	No	Yes; 333 mV interface
• Energy measurement	Yes	Yes	Yes	Yes
• Frequency measurement	Yes	Yes	Yes	Yes
• Power measurement	Yes	Yes	Yes	Yes
• Active power measurement	Yes	Yes	Yes	Yes
• Reactive power measurement	Yes	Yes	Yes	Yes
• Power factor measurement	Yes	Yes	Yes	Yes
• Active factor measurement	Yes	Yes	Yes	Yes
• Reactive power compensation	Yes	Yes	Yes	Yes
• Line analysis	No	No	Yes	Yes
- Monitoring of instantaneous and half-wave values			Yes	Yes
- THD measurement for current and voltage			Yes	Yes
- Harmonics for current and voltage			Yes	Yes
- Voltage dip (DIP)			Yes	Yes
- Voltage swell			Yes	Yes
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
• Isochronous mode	No	No	No	No
<b>Engineering with</b>				
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V16 or higher with HSP	STEP 7 V16 or higher with HSP	STEP 7 V16 or higher with HSP	STEP 7 V16 or higher with HSP
• STEP 7 configurable/integrated from version	Configurable via GSD file	Configurable via GSD file	V5.5 SP3 or higher	V5.5 SP3 or higher
• PROFIBUS from GSD version/GSD revision	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/GSD revision	V2.3	V2.3	V2.3	V2.3
<b>Operating mode</b>				
• Switching between operating modes in RUN	Yes; For module version 32 I/20 Q, it is possible to dynamically switch between 25 user data variants, 23 of which are pre-defined and 2 of which can be defined by the specific user	Yes; For module version 32 I/20 Q, it is possible to dynamically switch between 25 user data variants, 23 of which are pre-defined and 2 of which can be defined by the specific user	Yes; For module version 32 I/20 Q, it is possible to dynamically switch between 25 user data variants, 23 of which are pre-defined and 2 of which can be defined by the specific user	Yes; For module version 32 I/20 Q, it is possible to dynamically switch between 25 user data variants, 23 of which are pre-defined and 2 of which can be defined by the specific user
• Cyclic measured value access	Yes	Yes	Yes	Yes
• Acyclic measured value access	Yes	Yes	Yes	Yes
• Fixed measured value sets	Yes	Yes	Yes	Yes
• Freely definable measured value sets	Yes; For cyclic and acyclic measured value access	Yes; For cyclic and acyclic measured value access	Yes; For cyclic and acyclic measured value access	Yes; For cyclic and acyclic measured value access
<b>Installation type/mounting</b>				
Mounting position	any	any	any	any
<b>Supply voltage</b>				
Design of the power supply	DC	DC	DC	DC
Type of supply voltage	24 V DC	24 V DC	24 V DC	24 V DC

**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**I/O modules > Analog input modules****Technical specifications**

Article number	<b>6ES7134-6PA01-0BU0</b> ET 200SP AI Energy Meter CT ST	<b>6ES7134-6PA21-0BU0</b> ET 200SP AI Energy Meter RC ST	<b>6ES7134-6PA01-0CU0</b> ET 200SP AI Energy Meter CT HF	<b>6ES7134-6PA21-0CU0</b> ET 200SP AI Energy Meter RC HF
<b>Analog inputs</b>				
Cycle time (all channels), typ.	50 ms; Time for consistent update of all measured and calculated values (cyclic and acyclic data)	50 ms; Time for consistent update of all measured and calculated values (cyclic and acyclic data)	50 ms; Time for consistent update of all measured and calculated values (cyclic and acyclic data)	50 ms; Time for consistent update of all measured and calculated values (cyclic and acyclic data)
<b>Cable length</b>				
• shielded, max.	200 m	200 m	200 m	200 m
<b>Interrupts/diagnostics/ status information</b>				
<b>Alarms</b>				
• Diagnostic alarm	Yes	Yes	Yes	Yes
• Limit value alarm	Yes	Yes	Yes	Yes
• Hardware interrupt	Yes; Monitoring of up to 16 freely selectable process values (exceeding or undershooting of value)	Yes; Monitoring of up to 16 freely selectable process values (exceeding or undershooting of value)	Yes; Monitoring of up to 16 freely selectable process values (exceeding or undershooting of value)	Yes; Monitoring of up to 16 freely selectable process values (exceeding or undershooting of value)
<b>Diagnoses</b>				
• Line quality			Yes	Yes
• Supply voltage	Yes	Yes	Yes	Yes
• Hardware interrupt lost	Yes	Yes	Yes	Yes
• Parameter assignment error	Yes	Yes	Yes	Yes
• Module fault	Yes	Yes	Yes	Yes
• Channel not available	Yes	Yes	Yes	Yes
• Overflow/underflow	Yes	Yes	Yes	Yes
• Overload current	Yes	Yes	Yes	Yes
<b>Diagnostics indication LED</b>				
• Monitoring of the supply voltage (PWR-LED)	Yes	Yes	Yes	Yes
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red Fn LED	Yes; red Fn LED	Yes; red Fn LED	Yes; red Fn LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Integrated Functions</b>				
<b>Measuring functions</b>				
• Measuring procedure for voltage measurement	TRMS	TRMS	TRMS	TRMS
• Measuring procedure for current measurement	TRMS	TRMS	TRMS	TRMS
• Type of measured value acquisition	seamless	seamless	seamless	seamless
• Curve shape of voltage	Sinusoidal or distorted	Sinusoidal or distorted	Sinusoidal or distorted	Sinusoidal or distorted
• Buffering of measured variables	Yes	Yes	Yes	Yes
• Parameter length	128 byte	128 byte	128 byte	128 byte
• Bandwidth of measured value acquisition	3.2 kHz; Harmonics: 63 / 50 Hz, 52 / 60 Hz	3.2 kHz; Harmonics: 63 / 50 Hz, 52 / 60 Hz	3.2 kHz; Harmonics: 63 / 50 Hz, 52 / 60 Hz	3.2 kHz; Harmonics: 63 / 50 Hz, 52 / 60 Hz
<b>Measuring range</b>				
- Frequency measurement, min.	40 Hz	40 Hz	40 Hz	40 Hz
- Frequency measurement, max.	70 Hz	70 Hz	70 Hz	70 Hz
<b>Measuring inputs for voltage</b>				
- Measurable line voltage between phase and neutral conductor	277 V	277 V	277 V	277 V
- Measurable line voltage between the line conductors	480 V	480 V	480 V	480 V
- Measurable line voltage between phase and neutral conductor, min.	3 V	3 V	3 V	3 V
- Measurable line voltage between phase and neutral conductor, max.	300 V	300 V	300 V	300 V
- Measurable line voltage between the line conductors, min.	6 V	6 V	6 V	6 V
- Measurable line voltage between the line conductors, max.	519 V	519 V	519 V	519 V

### Technical specifications

Article number	6ES7134-6PA01-0BU0 ET 200SP AI Energy Meter CT ST	6ES7134-6PA21-0BU0 ET 200SP AI Energy Meter RC ST	6ES7134-6PA01-0CU0 ET 200SP AI Energy Meter CT HF	6ES7134-6PA21-0CU0 ET 200SP AI Energy Meter RC HF
<b>Measuring inputs for voltage (continued)</b>				
- Internal resistance line conductor and neutral conductor	1.5 MΩ	1.5 MΩ	1.5 MΩ	1.5 MΩ
- Power consumption per phase	60 mW; 300 V AC	60 mW; 300 V AC	60 mW; 300 V AC	60 mW; 300 V AC
- Impulse voltage resistance 1,2/50μs	2.5 kV	2.5 kV	2.5 kV	2.5 kV
- Overvoltage category		CAT II according to IEC 61010 Part 1		CAT II according to IEC 61010 Part 1
<b>Measuring inputs for current</b>				
- measurable relative current (AC), min.	1 %; Relative to measuring range; 1 A, 5 A		1 %; Relative to measuring range; 1 A, 5 A	
- measurable relative current (AC), max.	100 %; Relative to the secondary rated current 5 A		120 %; Relative to the secondary rated current 5 A	
- Continuous current with AC, maximum permissible	5 A		5 A; 6 A permanent thermal overload	
- Apparent power consumption per phase for measuring range 5 A	0.6 V·A		0.6 V·A	
- Rated value short-time withstand current restricted to 1 s	100 A		100 A	
- Input resistance measuring range 0 to 5 A	25 mΩ; At the terminal		25 mΩ; At the terminal	
- Surge strength	10 A; for 1 minute		10 A; for 1 minute	
- Zero point suppression	0 ... 20%, referred to the nominal current		0 ... 20%, referred to the nominal current	
<b>Measuring inputs for current (Rog. or I/U converter)</b>				
- Measurable current at AC, max.		424 mV		424 mV
- Continuous voltage, maximum permissible		2 V		2 V
- Rated value, short-time withstand voltage restricted to 1 s		30 V		30 V
- Input resistance		120 kΩ		120 kΩ
- Zero point suppression		Yes; 0 ... 20%, referred to the nominal current		Yes; 0 ... 20%, referred to the nominal current
<b>Accuracy class according to IEC 61557-12</b>				
- Measured variable apparent power	0.5	0.5	0.5	0.5
- Measured variable active power	0.5	0.5	0.5	0.5
- Measured variable power factor	0.5	0.5	0.5	0.5
- Measured variable active energy	0.5	0.5	0.5	0.5
- Measured variable phase angle	±0.5 °; not covered by IEC 61557-12	±0.5 °; not covered by IEC 61557-12	±0.5 °; not covered by IEC 61557-12	±0.5 °; not covered by IEC 61557-12
- Measured variable frequency	0.05; only valid for the permissible voltage measuring range	0.05; only valid for the permissible voltage measuring range	0.05; only valid for the permissible voltage measuring range	0.05; only valid for the permissible voltage measuring range
<b>Accuracy class line analysis acc. to IEC 61000-4-30</b>				
- Measured variable voltage			Class S	Class S
- Measured variable current			Class S	Class S
- Measured variable frequency			Class S	Class S
- Measured variable voltage interruption			Class S	Class S
- Measured variable voltage dip and swell			Class S	Class S
- Measured variable harmonic voltage			Class S	Class S
- Measured variable harmonic current			Class S	Class S



**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**I/O modules > Analog input modules****Technical specifications**

Article number	<b>6ES7134-6PA01-0BU0</b> ET 200SP AI Energy Meter CT ST	<b>6ES7134-6PA21-0BU0</b> ET 200SP AI Energy Meter RC ST	<b>6ES7134-6PA01-0CU0</b> ET 200SP AI Energy Meter CT HF	<b>6ES7134-6PA21-0CU0</b> ET 200SP AI Energy Meter RC HF
<b>Potential separation</b>				
<b>Potential separation channels</b>				
• between the channels and backplane bus	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	3 000 m; Restrictions for installation altitudes > 2 000 m, see manual	3 000 m; Restrictions for installation altitudes > 2 000 m, see manual	3 000 m; Restrictions for installation altitudes > 2 000 m, see manual	3 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Dimensions</b>				
Width	20 mm	20 mm	20 mm	20 mm
Height	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm
<b>Weights</b>				
Weight, approx.	45 g	45 g	45 g	45 g
<b>Other</b>				
<b>Data for selecting a voltage transformer</b>				
• Secondary side, max.	300 V	300 V	300 V	300 V
<b>Data for selecting a current transformer</b>				
• Burden power current transformer x/1A, min.	As a function of cable length and cross section, see device manual		As a function of cable length and cross section, see device manual	
• Burden power current transformer x/5A, min.	As a function of cable length and cross section, see device manual		As a function of cable length and cross section, see device manual	

## Overview



- 2 and 4-channel analog output (AQ) modules
- Apart from the standard type of delivery in an individual package, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

For different requirements, the analog output modules offer:

- Function classes Standard, High Feature and High-Speed
- BaseUnits for single or multiple-conductor connection with automatic slot coding
- Potential distributor modules for system-integrated expansion with potential terminals
- Individual system-integrated potential group formation with self-assembling voltage busbars (a separate power module is no longer required for ET 200SP)

- Option for connecting current and voltage actuators
- Clear labeling on front of module
- LEDs for diagnostics, status, supply voltage and faults
- Electronically readable and non-volatile writable rating plate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
  - Oversampling operating mode (n-fold equidistant output of an analog value within one PN cycle and thus the precisely timed output of an analog value or a sequence of analog values)
  - Isochronous mode (simultaneous equidistant output of analog values)
  - Output of substitute value in the event of interruptions to communication (shutdown, output adjustable substitute value, or keep last value)
  - Calibration during runtime
  - Re-parameterization during operation
  - Firmware update
  - Diagnostics of wire break, short-circuit, overflow, underflow
  - Value status (optional binary validity information of the analog value status in the process image)
  - Supports the PROFlenergy profile
- Optional accessories
  - Labeling strips (film or card)
  - Equipment labeling plate
  - Color-coded label with module-specific CC code
  - Shielding terminal

A quick and clear comparison of the functions of the AQ modules is offered by the TIA Selection Tool.

## Overview of analog output modules

Analog output	PU	Article No.	CC code	BU type
AQ 2 x U ST	1	6ES7135-6FB00-0BA1	CC00	A0, A1
AQ 2 x I ST	1	6ES7135-6GB00-0BA1	CC00	A0, A1
AQ 4 x U/I ST	1	6ES7135-6HD00-0BA1	CC00	A0, A1
AQ 2 x U/I HF	1	6ES7135-6HB00-0CA1	CC00	A0, A1
AQ 2xU/I HS	1	6ES7135-6HB00-0DA1	CC00	A0, A1
With two operating modes: • High-speed isochronous AQ • Oversampling				
AQ 4xI HART HF	1	6ES7135-6TD00-0CA1	CC00	A0, A1

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > Analog output modules****Overview**

## Overview of BaseUnits

BaseUnit	PU	Article No.	CC codes for push-in terminals	CC codes for AUX terminals
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • With 10 AUX terminals	1	6ES7193-6BP20-0DA0	CC01 to CC05	CC71 to CC73
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • With 10 AUX terminals	10	6ES7193-6BP20-2DA0	CC01 to CC05	CC71 to CC73
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0DA0	CC01 to CC05	--
<b>BU type A0</b> • New potential group (light) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2DA0	CC01 to CC05	--
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • With 10 AUX terminals	1	6ES7193-6BP20-0BA0	CC01 to CC05	CC71 to CC73
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • With 10 AUX terminals	10	6ES7193-6BP20-2BA0	CC01 to CC05	CC71 to CC73
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	1	6ES7193-6BP00-0BA0	CC01 to CC05	--
<b>BU type A0</b> • Forwarding of the potential group (dark) • 16 push-in terminals • Without AUX terminals	10	6ES7193-6BP00-2BA0	CC01 to CC05	--
<b>BU type A1</b> • New potential group (light) • With temperature sensor • 16 push-in terminals • With 2x5 additional terminals	1	6ES7193-6BP40-0DA1	CC01 to CC05	CC74
<b>BU type A1</b> • New potential group (light) • With temperature sensor • 16 push-in terminals • Without 2x5 additional terminals	1	6ES7193-6BP00-0DA1	CC01 to CC05	--
<b>BU type A1</b> • Forwarding of the potential group (dark) • With temperature sensor • 16 push-in terminals • With 2x5 additional terminals	1	6ES7193-6BP40-0BA1	CC01 to CC05	CC74
<b>BU type A1</b> • Forwarding of the potential group (dark) • With temperature sensor • 16 push-in terminals • Without 2x5 additional terminals	1	6ES7193-6BP00-0BA1	CC01 to CC05	--

**Overview**Overview of potential distributor modules

Potential distributor module	PU	Article No.	CC codes for push-in terminals
<b>PotDis BU</b> Type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP1	CC00, CC62
<b>PotDis BU</b> Type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP1	CC00, CC62
<b>PotDis BU</b> Type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP2	CC00, CC63
<b>PotDis BU</b> Type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP2	CC00, CC63
<b>PotDis TB</b> Type BR-W, 18x internally jumpered terminals, without reference to P1, P2 or AUX, (total current max. 10 A)	1	6ES7193-6TP00-0TP0	CC10 to CC13
<b>PotDis TB</b> Type P1-R, 18x P1 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP1	CC10, CC12
<b>PotDis TB</b> Type P2-B, 18x P2 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP2	CC10, CC13
<b>PotDis TB</b> Type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX	1	6ES7193-6TP00-0TN0	CC10

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > Analog output modules****Ordering data****Article No.****Article No.****Analog output modules**

Analog output module  
AQ 2xU Standard, BU type A0 or  
A1, color code CC00, 16-bit

**6ES7135-6FB00-0BA1**

Analog output module  
AQ 2xI Standard, BU type A0 or A1,  
color code CC00, 16-bit

**6ES7135-6GB00-0BA1**

Analog output module  
AQ 4xU/I Standard,  
BU type A0 or A1,  
color code CC00, 16-bit, ± 0.3%

**6ES7135-6HD00-0BA1**

Analog output module  
AQ 2xU/I High Feature,  
BU type A0 or A1,  
color code CC00, 16-bit, ±0.1%

**6ES7135-6HB00-0CA1**

Analog output module  
AQ 2xU/I High Speed,  
BU type A0 or A1,  
color code CC00, 16-bit, ± 0.3%

**6ES7135-6HB00-0DA1**

Analog output module  
AQ 4xI HART High Feature,  
BU type A0 or A1,  
color code CC00, 16-bit, ±0.3%

**6ES7135-6TD00-0CA1****Usable type A0 BaseUnits**

Type of delivery:  
Apart from the standard type of  
delivery in a single-unit package,  
selected BaseUnits are also  
available in a pack of 10 units.  
The pack of 10 units enables the  
amount of waste to be reduced  
considerably, as well as saving  
the time and cost of unpacking  
individual modules.

The number of modules required is  
the number of modules ordered.  
The pack type is selected by  
selecting the article number.  
Packs of 10 can therefore only be  
ordered in integer multiples of 10.

**BU15-P16+A10+2D**

BU type A0; BaseUnit (light) with  
16 push-in terminals (1 ... 16)  
to the module and an additional  
10 internally jumpered  
AUX terminals (1 A to 10 A);  
for starting a new potential group  
(max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack,  
please order this article number  
with an order quantity of 10.

**6ES7193-6BP20-0DA0**  
**6ES7193-6BP20-2DA0****BU15-P16+A0+2D**

BU type A0; BaseUnit (light) with  
16 push-in terminals to the module;  
for starting a new potential group  
(max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack,  
please order this article number  
with an order quantity of 10.

**6ES7193-6BP00-0DA0**  
**6ES7193-6BP00-2DA0****2BU15-P16+A0+2DB**

Double BaseUnit  
for holding 2 I/O modules;  
BU type A0; BaseUnit (light/dark)  
with 16 push-in terminals to the  
module; for starting a new potential  
group (max. 10 A)

- Pack of 1 unit

**6ES7193-6BP60-0DA0****BU15-P16+A10+2B**

BU type A0; BaseUnit (dark)  
with 16 push-in terminals (1 ... 16)  
to the module and an  
additional 10 internally jumpered  
AUX terminals (1 A to 10 A);  
for continuing the potential group

- Pack of 1 unit
- Pack of 10 units; to order a pack,  
please order this article number  
with an order quantity of 10.

**6ES7193-6BP20-0BA0**  
**6ES7193-6BP20-2BA0****BU15-P16+A0+2B**

BU type A0; BaseUnit (dark) with  
16 push-in terminals to the module;  
for continuing the potential group

- Pack of 1 unit
- Pack of 10 units; to order a pack,  
please order this article number  
with an order quantity of 10.

**6ES7193-6BP00-0BA0**  
**6ES7193-6BP00-2BA0****2BU15-P16+A0+2B**

Double BaseUnit  
for holding 2 I/O modules;  
BU type A0; BaseUnit (dark/dark)  
with 16 push-in terminals to the  
module; for continuing the potential  
group

- Pack of 1 unit

**6ES7193-6BP60-0BA0****Usable type A1 BaseUnits  
(temperature detection)****BU15-P16+A0+12D/T**

BU type A1; BaseUnit (light)  
with 16 push-in terminals (1 ... 16)  
to the module and 2x5 internally  
jumpered additional terminals  
(1 B to 5 B and 1 C to 5 C);  
for starting a new potential group  
(max. 10 A)

**6ES7193-6BP40-0DA1****BU15-P16+A0+2D/T**

BU type A1; BaseUnit (light) with  
16 push-in terminals to the module;  
for starting a new potential group  
(max. 10 A)

**6ES7193-6BP00-0DA1****BU15-P16+A0+12B/T**

BU type A1; BaseUnit (dark)  
with 16 push-in terminals (1 ... 16)  
to the module and 2x5 internally  
jumpered additional terminals  
(1 B to 5 B and 1 C to 5 C);  
for continuing the potential group

**6ES7193-6BP40-0BA1****BU15-P16+A0+2B/T**

BU type A1; BaseUnit (dark) with  
16 push-in terminals to the module;  
for continuing the potential group

**6ES7193-6BP00-0BA1**

Ordering data	Article No.	Article No.
<b>Potential distributor modules</b>		<b>Shield connection</b>
<b>PotDis BU</b>		6ES7193-6SC00-1AM0
PotDis BU, Type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)	6ES7193-6UP00-ODP1	5 shield supports and 5 shield terminals
PotDis BU, Type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group	6ES7193-6UP00-OBP1	<b>Color-coded labels</b>
PotDis BU, Type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)	6ES7193-6UP00-ODP2	Color code CC00, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units
PotDis BU, Type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	6ES7193-6UP00-OBP2	Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A); 10 units
<b>PotDis TB</b>		Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A); 10 units
PotDis TB, type BR-W, 18x internally jumpered terminals, without reference to P1, P2 or AUX, (total current max. 10 A)	6ES7193-6TP00-0TP0	Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 10 units
PotDis TB, type P1-R, 18x P1 potential, (total current max. 10 A)	6ES7193-6TP00-0TP1	Color code CC74, for 2x5 additional terminals, BU type A1, red (terminals 1B to 5B), blue (terminals 1C to 5C); 10 units
PotDis TB, type P2-B, 18x P2 potential, (total current max. 10 A)	6ES7193-6TP00-0TP2	<b>Color-coded labels for PotDis BU</b>
PotDis TB, type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX	6ES7193-6TP00-0TN0	Color code CC62, for 16 push-in terminals, PotDis BU type P1, red (terminals 1 to 16); 10 units
<b>Accessories</b>		Color code CC63, for 16 push-in terminals, PotDis BU type P2, blue (terminals 1 to 16); 10 units
<b>Equipment labeling plate</b>	6ES7193-6LF30-0AW0	<b>Color-coded labels for PotDis TB</b>
10 sheets of 16 labels, for printing with thermal transfer card printer or plotter		Color code CC10, for 18 push-in terminals, PotDis TB, gray (terminals 1 to 18); 10 units
<b>Labeling strips</b>		Color code CC11, for 18 push-in terminals, PotDis TB, yellow-green (terminals 1 to 18); 10 units
500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AA0	Color code CC12, for 18 push-in terminals, PotDis TB, type P1 and BR, red (terminals 1 to 18); 10 units
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AG0	Color code CC13, for 18 push-in terminals, PotDis TB, type P2 and BR, blue (terminals 1 to 18); 10 units
1 000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AA0	<b>Mechanical coding elements</b>
1 000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AG0	For automatic coding of I/O modules; spare part. 20 units
<b>BU cover</b>		Type A
For covering empty slots (gaps); 5 units		Type B
• 15 mm	6ES7133-6CV15-1AM0	Type C
• 20 mm	6ES7133-6CV20-1AM0	Type D
		6ES7193-6KA00-3AA0
		6ES7193-6KB00-3AA0
		6ES7193-6KC00-3AA0
		6ES7193-6KD00-3AA0

**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**I/O modules > Analog output modules****Technical specifications**

Article number	<b>6ES7135-6FB00-0BA1</b>	<b>6ES7135-6GB00-0BA1</b>	<b>6ES7135-6HD00-0BA1</b>	<b>6ES7135-6HB00-0DA1</b>	<b>6ES7135-6HB00-0CA1</b>
	ET 200SP, AQ 2xU Standard, PU 1	ET 200SP, AQ 2xI Standard, PU 1	ET 200SP, AQ 4xU/I ST	ET 200SP, AQ 2 X U/I High Speed	ET 200SP, AQ 2 X U/I High Feature
<b>General information</b>					
Product type designation	AQ 2xU ST	AQ 2xI ST	AQ 4xU/I ST	AQ 2xU/I HS	AQ 2xU/I HF
<b>Product function</b>					
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
• Isochronous mode	No	No	No	Yes	Yes
• Output range scalable	No	No	No		
<b>Engineering with</b>					
• STEP 7 TIA Portal configurable/ integrated from version	V13 SP1 / -	V13 SP1 / -	V11 SP2 / V13	V13 SP1	V13 / V13
• STEP 7 configurable/integrated from version	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -
• PCS 7 configurable/integrated from version			V8.1 SP1		V8.1 SP1
• PROFIBUS from GSD version/ GSD revision	GSD Revision 5	GSD Revision 5	One GSD file each, Revision 3 and 5 and higher	GSD Revision 5	GSD Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3
<b>Operating mode</b>					
• Oversampling	No	No	No	Yes; 2 channels per module	No
• MSO	No	No	No	No	No
<b>Supply voltage</b>					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes	Yes
<b>Analog outputs</b>					
Number of analog outputs	2	2	4	2	2
Cycle time (all channels), min.	1 ms	1 ms	5 ms	125 µs	750 µs
Analog output with oversampling	No	No	No	Yes	
• Values per cycle, max.				16	
• Resolution, min.				45 µs; (2 channels), 35 µs (1 channel)	
<b>Output ranges, voltage</b>					
• 0 to 10 V	Yes; 15 bit		Yes; 15 bit	Yes; 15 bit	Yes; 15 bit
• 1 V to 5 V	Yes; 13 bit		Yes; 13 bit	Yes; 13 bit	Yes; 13 bit
• -5 V to +5 V	Yes; 15 bit incl. sign		Yes; 15 bit incl. sign	Yes; 15 bit incl. sign	Yes; 15 bit incl. sign
• -10 V to +10 V	Yes; 16 bit incl. sign		Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
<b>Output ranges, current</b>					
• 0 to 20 mA		Yes; 15 bit	Yes; 15 bit	Yes; 15 bit	Yes; 15 bit
• -20 mA to +20 mA		Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• 4 mA to 20 mA		Yes; 14 bit	Yes; 14 bit	Yes; 14 bit	Yes; 14 bit
<b>Connection of actuators</b>					
• for voltage output two-wire connection	Yes		Yes	Yes	Yes
• for voltage output four-wire connection	No		Yes	Yes	Yes
• for current output two-wire connection		Yes	Yes	Yes	Yes
<b>Load impedance (in rated range of output)</b>					
• with voltage outputs, min.	2 kΩ		2 kΩ	2 kΩ	2 kΩ
• with voltage outputs, capacitive load, max.	1 µF		1 µF	1 µF	1 µF
• with current outputs, max.		500 Ω	500 Ω	500 Ω	500 Ω
• with current outputs, inductive load, max.		1 mH	1 mH	1 mH	1 mH
<b>Cable length</b>					
• shielded, max.	200 m	1 000 m	1 000 m; 200 m for voltage output	1 000 m; 200 m for voltage output	1 000 m; 200 m for voltage output

### Technical specifications

Article number	6ES7135-6FB00-0BA1	6ES7135-6GB00-0BA1	6ES7135-6HD00-0BA1	6ES7135-6HB00-0DA1	6ES7135-6HB00-0CA1
	ET 200SP, AQ 2xU Standard, PU 1	ET 200SP, AQ 2xI Standard, PU 1	ET 200SP, AQ 4xU/I ST	ET 200SP, AQ 2 X U/I High Speed	ET 200SP, AQ 2 X U/I High Feature
<b>Analog value generation for the outputs</b>					
<b>Integration and conversion time/resolution per channel</b>					
• Resolution with overrange (bit including sign), max.	16 bit	16 bit	16 bit	16 bit	16 bit
<b>Settling time</b>					
• for resistive load	0.1 ms	0.1 ms; Typical value	0.1 ms	0.05 ms	0.05 ms
• for capacitive load	1 ms		1 ms	0.05 ms; Max. 47 nF and 20 m cable length	0.05 ms; Max. 47 nF and 20 m cable length
• for inductive load		0.5 ms	0.5 ms	0.05 ms	0.05 ms
<b>Errors/accuracies</b>					
<b>Basic error limit (operational limit at 25 °C)</b>					
• Voltage, relative to output range, (+/-)	0.3 %	0.3 %	0.3 %	0.1 %	0.1 %
• Current, relative to output range, (+/-)	0.3 %	0.3 %	0.3 %	0.1 %	0.1 %
<b>Isochronous mode</b>					
Execution and activation time (TCO), min.				70 µs	500 µs
Bus cycle time (TDP), min.				125 µs	750 µs
<b>Interrupts/diagnostics/status information</b>					
Diagnostics function	Yes	Yes	Yes	Yes	Yes
Substitute values connectable	Yes	Yes	Yes	Yes	Yes
<b>Alarms</b>					
• Diagnostic alarm	Yes	Yes	Yes	Yes	Yes
<b>Diagnoses</b>					
• Monitoring the supply voltage	Yes	Yes	Yes	Yes	Yes
• Wire-break		Yes	Yes	Yes; channel-by-channel, only for output type "current"	Yes; channel-by-channel, only for output type "current"
• Short-circuit	Yes		Yes	Yes; channel-by-channel, only for output type "voltage"	Yes; channel-by-channel, only for output type "voltage"
• Group error	Yes	Yes	Yes	Yes	Yes
• Overflow/underflow	Yes	Yes	Yes	Yes	Yes
<b>Diagnostics indication LED</b>					
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	No	No	No	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Potential separation</b>					
<b>Potential separation channels</b>					
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• horizontal installation, min.	-30 °C; < 0 °C as of FS03	-30 °C; < 0 °C as of FS03	-30 °C; < 0 °C as of FS07	-30 °C; < 0 °C as of FS06	-30 °C; < 0 °C as of FS04
• horizontal installation, max.	60 °C	60 °C	60 °C; Observe derating	60 °C	60 °C
• vertical installation, min.	-30 °C; < 0 °C as of FS03	-30 °C; < 0 °C as of FS03	-30 °C; < 0 °C as of FS07	-30 °C; < 0 °C as of FS06	-30 °C; < 0 °C as of FS04
• vertical installation, max.	50 °C	50 °C	50 °C; Observe derating	50 °C	50 °C



## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > Analog output modules

#### Technical specifications

Article number	6ES7135-6FB00-0BA1	6ES7135-6GB00-0BA1	6ES7135-6HD00-0BA1	6ES7135-6HB00-0DA1	6ES7135-6HB00-0CA1
	ET 200SP, AQ 2xU Standard, PU 1	ET 200SP, AQ 2xI Standard, PU 1	ET 200SP, AQ 4xU/I ST	ET 200SP, AQ 2 X U/I High Speed	ET 200SP, AQ 2 X U/I High Feature
<b>Altitude during operation relating to sea level</b>					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Dimensions</b>					
Width	15 mm	15 mm	15 mm	15 mm	15 mm
Height	73 mm	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm	58 mm
<b>Weights</b>					
Weight, approx.	31 g	31 g	31 g	31 g	31 g
Article number	6ES7135-6TD00-0CA1 ET 200SP, AQ 4xI HART HF			Article number 6ES7135-6TD00-0CA1 ET 200SP, AQ 4xI HART HF	
<b>General information</b>	Product type designation AQ 4xI HART HF			<b>Interrupts/diagnostics/status information</b>	
<b>Product function</b>	• I&M data Yes; I&M0 to I&M3			Diagnostics function Yes Substitute values connectable Yes	
<b>Engineering with</b>	• STEP 7 configurable/integrated from version V5.6 and higher • PCS 7 configurable/integrated from version V9.0 SP1			<b>Alarms</b> • Diagnostic alarm Yes	
<b>Supply voltage</b>	Rated value (DC) 24 V Reverse polarity protection Yes			<b>Diagnoses</b> • Monitoring the supply voltage Yes; Module-wise • Wire-break Yes; channel by channel • Short-circuit Yes • Overflow/underflow Yes; channel by channel	
<b>Analog outputs</b>	Number of analog outputs 4 Cycle time (all channels), min. 3 ms			<b>Diagnostics indication LED</b> • Monitoring of the supply voltage (PWR-LED) Yes; green PWR LED • Channel status display Yes; green LED • for channel diagnostics Yes; red LED • for module diagnostics Yes; green/red DIAG LED	
<b>Output ranges, current</b>	• 0 to 20 mA Yes; 16 bit incl. sign • -20 mA to +20 mA No • 4 mA to 20 mA Yes; 16 bit incl. sign			<b>Potential separation</b> <b>Potential separation channels</b> • between the channels and backplane bus Yes	
<b>Connection of actuators</b>	• for current output two-wire connection Yes			<b>Ambient conditions</b> <b>Ambient temperature during operation</b> • horizontal installation, min. -30 °C • horizontal installation, max. 60 °C • vertical installation, min. -30 °C • vertical installation, max. 50 °C	
<b>Load impedance (in rated range of output)</b>	• with current outputs, max. 750 Ω • with current outputs, inductive load, max. 10 mH			<b>Altitude during operation relating to sea level</b> • Installation altitude above sea level, max. 5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	
<b>Cable length</b>	• shielded, max. 800 m			<b>Dimensions</b> Width 15 mm Height 73 mm Depth 58 mm	
<b>Settling time</b>	• for resistive load 2 ms; 750 ohm • for capacitive load 2 ms • for inductive load 2 ms			<b>Weights</b> Weight, approx. 31 g	
<b>Errors/accuracies</b>	<b>Basic error limit (operational limit at 25 °C)</b> • Current, relative to output range, (+/-) 0.1 %				
<b>Protocols</b>	HART protocol Yes				

## Overview



- 4, 8 and 16-channel digital input (DI) modules

For different requirements, the digital input modules offer:

- Function classes Basic, Standard, High Feature and High Speed as well as fail-safe DI (see "Fail-safe I/O modules")
- BaseUnits for single or multiple-conductor connection with automatic slot coding
- Potential distribution modules for system-integrated expansion with additional potential terminals
- Individual system-integrated load group formation with self-assembling voltage distribution bars (a separate power module is no longer required for ET 200SP)
- Option of connecting sensors compliant with IEC 61131 type 1, 2 or 3 (module-dependent) for rated voltages of up to 24 V DC or 230 V AC
- PNP (sinking input) and NPN (sourcing input) versions
- Clear labeling on front of module

- LEDs for diagnostics, status, supply voltage and faults (e.g. wire break/short-circuit)
- Electronically readable and non-volatile writable rating plate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
  - MSI operating mode (simultaneous reading of input data from as many as three other controllers)
  - Counting operating mode (multi-channel counter for pulse generators with 32-bits counting width and up to 10 kHz counting frequency)
  - Oversampling operating mode (n-fold equidistant acquisition of digital values within one PN cycle for increasing the time resolution for slow CPU cycles)
  - Parameterizable input delay time
  - Isochronous mode (simultaneous equidistant reading of all input channels)
  - Hardware interrupt pulse stretching
  - Re-parameterization during operation
  - Firmware update
  - Diagnosis of wire break and short-circuit (on channel or module basis)
  - Value status (optional binary validity information of the input signal in the process image)
  - Supports the PROFenergy profile
- Optional accessories
  - Labeling strips (film or card)
  - Equipment labeling plate
  - Color-coded label with module-specific CC code
  - Shielding terminal

A quick and clear comparison of the functions of the different DI modules is offered by the TIA Selection Tool.

**Note:**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

## Ordering data

## Article No.

## Article No.

**SIPLUS digital input modules**

(Extended temperature range and exposure to environmental substances)

DI 8x24VDC Standard,  
BU type A0, color code CC01

**6AG1131-6BF01-7BA0**

DI 8x24VDC Sourcing Input, Basic,  
BU type A0, color code CC02

**6AG1131-6BF61-7AA0**

DI 16x24VDC Standard,  
BU type A0, color code CC00

**6AG1131-6BH01-7BA0**

DI 8x24VDC High Feature,  
BU type A0, color code CC01,  
channel-specific diagnostics,  
isochronous mode,  
shared input (MSI)

**6AG1131-6BF00-7CA0**

DI 4x120VAC-230VAC Standard,  
BU type B1, color code CC41

**6AG1131-6FD01-7BB1**

DI 8xNAMUR High Feature,  
BU type A0, color code CC01

**6AG1131-6TF00-7CA0**

DI 8x24VAC-48VUC Basic,  
BU type U0, color code CC20,  
module diagnostics

**6AG1131-6CF00-7AU0**

**Usable SIPLUS BaseUnits****BU15-P16+A0+2D**

**6AG1193-6BP00-7DA0**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

**BU15-P16+A0+2B**

**6AG1193-6BP00-7BA0**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

**BU15-P16+A10+2D**

**6AG1193-6BP20-7DA0**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > SIPLUS digital inputs**

Ordering data	Article No.		Article No.
<b>BU15-P16+A10+2B</b> (Extended temperature range and exposure to environmental substances)  BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group	<b>6AG1193-6BP20-7BA0</b>		<b>BU20-P16+A0+2B</b> (Extended temperature range and exposure to environmental substances)  BU type U0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group
<b>BU20-P12+A0+4B</b> (Extended temperature range and exposure to environmental substances)  BU type B1; BaseUnit (dark) with 12 push-in terminals to the module; for continuing the load group	<b>6AG1193-6BP20-7BB1</b>		<b>Accessories</b> <b>SIPLUS Mounting Kit ET 200SP</b> Mounting accessories for use with increased mechanical vibration and shock loads.
<b>BU20-P16+A0+2D</b> (Extended temperature range and exposure to environmental substances)  BU type U0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	<b>6AG1193-6BP00-7DU0</b>		<b>Other accessories</b> See SIMATIC ET 200SP, digital input modules, page 10/26

**Technical specifications**

Article number	<b>6AG1131-6BF61-7AA0</b>	<b>6AG1131-6BF01-7BA0</b>	<b>6AG1131-6BH01-7BA0</b>
Based on	<b>6ES7131-6BF61-0AA0</b> SIPLUS ET 200SP DI 8x24VDC SOURCE BA	<b>6ES7131-6BF01-0BA0</b> SIPLUS ET 200SP DI 8x24VDC ST	<b>6ES7131-6BH01-0BA0</b> SIPLUS ET 200SP DI 16x24VDC ST
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax
<b>Altitude during operation relating to sea level</b>			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)
<b>Resistance</b>			
<b>Coolants and lubricants</b>			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

#### Technical specifications

Article number	<b>6AG1131-6BF61-7AA0</b>	<b>6AG1131-6BF01-7BA0</b>	<b>6AG1131-6BH01-7BA0</b>	
Based on	<b>6ES7131-6BF61-0AA0</b> SIPLUS ET 200SP DI 8x24VDC SOURCE BA	<b>6ES7131-6BF01-0BA0</b> SIPLUS ET 200SP DI 8x24VDC ST	<b>6ES7131-6BH01-0BA0</b> SIPLUS ET 200SP DI 16x24VDC ST	
<b>Use on ships/at sea</b>				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
<b>Usage in industrial process technology</b>				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	
<b>Remark</b>				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	
<b>Conformal coating</b>				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	
Article number	<b>6AG1131-6BF00-7CA0</b>	<b>6AG1131-6FD01-7BB1</b>	<b>6AG1131-6TF00-7CA0</b>	<b>6AG1131-6CF00-7AU0</b>
Based on	<b>6ES7131-6BF00-0CA0</b> SIPLUS ET 200SP DI 8x24VDC HF	<b>6ES7131-6FD01-0BB1</b> SIPLUS ET 200SP DI 4X120...230VAC ST	<b>6ES7131-6TF00-0CA0</b> SIPLUS ET 200SP DI 8XNAMUR HF	<b>6ES7131-6CF00-0AU0</b> SIPLUS ET 200SP DI 8x48VUC BA
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax; > +60 °C encoder supply output current max. 350 mA per channel	70 °C; = Tmax	70 °C; = Tmax; > +60 °C number of simultaneously controllable inputs max. 4 (no adjacent points)	70 °C; = Tmax
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	5 000 m	2 000 m	5 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
<b>Relative humidity</b>				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > SIPLUS digital inputs****Technical specifications**

Article number	<b>6AG1131-6BF00-7CA0</b>	<b>6AG1131-6FD01-7BB1</b>	<b>6AG1131-6TF00-7CA0</b>	<b>6AG1131-6CF00-7AU0</b>
Based on	<b>6ES7131-6BF00-0CA0</b> SIPLUS ET 200SP DI 8x24VDC HF	<b>6ES7131-6FD01-0BB1</b> SIPLUS ET 200SP DI 4X120...230VAC ST	<b>6ES7131-6TF00-0CA0</b> SIPLUS ET 200SP DI 8XNAMUR HF	<b>6ES7131-6CF00-0AU0</b> SIPLUS ET 200SP DI 8x48VUC BA
<b>Resistance</b>				
<b>Coolants and lubricants</b>				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Usage in industrial process technology</b>				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

## 3 Overview



- 4, 8 and 16-channel DQ modules
- 4-channel RQ modules
- BaseUnits for single conductor or multiple-conductor connection
- Function classes Basic, Standard, High Feature and High-Speed as well as fail-safe DQ and RQ
- Clear labeling on front of module
- LEDs for diagnostics, status and errors
- Individual system-integrated load group formation with self-assembling potential multi-terminal busbars (power module not required for ET 200SP)
- Electronically readable rating plate (I&M data)
- Additional operating modes in some cases
- Optional accessories:
  - Labeling strips
  - Equipment marking label
  - Color-coded label with module-specific CC code
  - Shielding terminal

## Overview of digital output modules

Digital output	PU	Article No.	CC code	BU type
DQ 16 x 24 V DC/0.5 A ST	1	6AG1132-6BH01-7BA0	CC00	A0
DQ 8 x 24 V DC/0.5 A SNK BA	1	6AG1132-6BF61-7AA0	CC01	A0
DQ 8 x 24 V DC/0.5 A ST	1	6AG1132-6BF01-7BA0	CC02	A0
DQ 8 x 24 V DC/0.5 A HF	1	6AG1132-6BF00-7CA0	CC02	A0
DQ 4 x 24 V DC/2 A ST	1	6AG1132-6BD20-7BA0	CC02	A0
DQ 4 x 24 V DC/2 A HF	1	6AG1132-6BD20-7CA0	CC02	A0
DQ 4 x 24 ... 230 V AC/2 A HF	1	6AG1132-6FD00-7CU0	CC20	U0
With two operating modes:				
• DQ				
• PC: Power control via phase angle, half-wave or full-wave control				
RQ 4 x 24 V UC/2 A CO ST	1	6AG1132-6GD51-7BA0	--	A0
RQ 4 x 120 V DC-230 V AC/5 A NO ST	1	6AG1132-6HD01-7BB1	--	B0, B1

**Note:**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > SIPLUS digital outputs****Ordering data****Article No.****Article No.****SIPLUS digital output modules**

(Extended temperature range and exposure to environmental substances)

Digital output module  
DQ 8x24VDC/0.5A Sinking output, Basic, BU type A0, color code CC01**6AG1132-6BF61-7AA0**Digital output module  
DQ 4x24VDC/2A Standard, BU type A0, color code CC02**6AG1132-6BD20-7BA0**Digital output module  
DQ 8x24VDC/0.5A Standard, BU type A0, color code CC02**6AG1132-6BF01-7BA0**Digital output module  
DQ 8x24VDC/0.5A High Feature, BU type A0, color code CC02**6AG1132-6BF00-7CA0**Digital output module  
DQ 16x24VDC/0.5A Standard, BU type A0, color code CC00**6AG1132-6BH01-7BA0**Digital output module  
DQ 4x24VDC/2A High Feature, BU type A0, color code CC02, channel-precise diagnostics, isochronous mode, shared output (MSO); PU: 1 unit**6AG1132-6BD20-7CA0**Signal relay module  
RQ CO 4x24VUC/2A Standard, changeover contact, BU type A0, color code CC00**6AG1132-6GD51-7BA0**Relay module  
RQ NO 4x120VDC-230VAC/5A Standard, NO contact, BU type B0, B1**6AG1132-6HD01-7BB1**Digital output module  
DQ 4x24VAC...230VAC/2A High Feature for BU type U0, color code CC20, 2 operating modes: DQ and PC (power control via phase angle, half-wave and full-wave control)**6AG1132-6FD00-7CU0****Usable SIPLUS BaseUnits****BU15-P16+A10+2D****6AG1193-6BP20-7DA0**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

**BU15-P16+A0+2D****6AG1193-6BP00-7DA0**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

**BU15-P16+A10+2B****6AG1193-6BP20-7BA0**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

**BU15-P16+A0+2B****6AG1193-6BP00-7BA0**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

**BU20-P12+A4+0B****6AG1193-6BP20-7BB0**

(Extended temperature range and exposure to environmental substances)

BU type B0; BaseUnit (dark) with 12 process terminals (1...12) to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the load group; 1 unit

**BU20-P12+A0+4B****6AG1193-6BP20-7BB1**

(Extended temperature range and exposure to environmental substances)

BU type B1; BaseUnit (dark) with 12 process terminals to the module; for continuing the load group; 1 unit

**BU20-P16+A0+2D****6AG1193-6BP00-7DU0**

(Extended temperature range and exposure to environmental substances)

BU type U0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

**BU20-P16+A0+2B****6AG1193-6BP00-7BU0**

(Extended temperature range and exposure to environmental substances)

BU type U0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

**Accessories****SIPLUS Mounting Kit ET 200SP****6AG1193-6AA00-0AA0**

Mounting accessories for use with increased mechanical vibration and shock loads.

**Other accessories**

See SIMATIC ET 200SP, digital output modules, page 10/37

## Technical specifications

Article number	6AG1132-6BF61-7AA0	6AG1132-6BD20-7BA0	6AG1132-6BF01-7BA0
Based on	6ES7132-6BF61-0AA0 SIPLUS ET 200SP DQ 8x24VDC/0,5A SNK BA	6ES7132-6BD20-0BA0 SIPLUS ET200SP DQ 4x24VDC/2A ST	6ES7132-6BF01-0BA0 SIPLUS ET 200SP DQ 8x24VDC/0,5A ST
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax; > +60 °C number of simultaneously controllable outputs max. 2x 0.25 A or max. 4x 0.125 A, max. total current 0.5 A	70 °C; = Tmax; > +60 °C max. total current 1.0 A
• vertical installation, min.		-40 °C; = Tmin	
• vertical installation, max.		50 °C; = Tmax	
<b>Altitude during operation relating to sea level</b>			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)
<b>Resistance</b>			
<b>Coolants and lubricants</b>			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Usage in industrial process technology</b>			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!



## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > SIPLUS digital outputs

#### Technical specifications

Article number	<b>6AG1132-6BF61-7AA0</b>	<b>6AG1132-6BD20-7BA0</b>	<b>6AG1132-6BF01-7BA0</b>
Based on	<b>6ES7132-6BF61-0AA0</b> SIPLUS ET 200SP DQ 8x24VDC/0,5A SNK BA	<b>6ES7132-6BD20-0BA0</b> SIPLUS ET200SP DQ 4x24VDC/2A ST	<b>6ES7132-6BF01-0BA0</b> SIPLUS ET 200SP DQ 8x24VDC/0,5A ST
<b>Conformal coating</b>			
<ul style="list-style-type: none"> <li>Coatings for printed circuit board assemblies acc. to EN 61086</li> <li>Protection against fouling acc. to EN 60664-3</li> <li>Military testing according to MIL-I-46058C, Amendment 7</li> <li>Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A</li> </ul>	<ul style="list-style-type: none"> <li>Yes; Class 2 for high reliability</li> <li>Yes; Type 1 protection</li> <li>Yes; Discoloration of coating possible during service life</li> <li>Yes; Conformal coating, Class A</li> </ul>	<ul style="list-style-type: none"> <li>Yes; Class 2 for high reliability</li> <li>Yes; Type 1 protection</li> <li>Yes; Discoloration of coating possible during service life</li> <li>Yes; Conformal coating, Class A</li> </ul>	<ul style="list-style-type: none"> <li>Yes; Class 2 for high reliability</li> <li>Yes; Type 1 protection</li> <li>Yes; Discoloration of coating possible during service life</li> <li>Yes; Conformal coating, Class A</li> </ul>
Article number	<b>6AG1132-6BH01-7BA0</b>	<b>6AG1132-6BF00-7CA0</b>	<b>6AG1132-6GD51-7BA0</b>
Based on	<b>6ES7132-6BH01-0BA0</b> SIPLUS ET 200SP DQ 16x24VDC/0,5A ST	<b>6ES7132-6BF00-0CA0</b> SIPLUS ET 200SP DQ 8X24VDC/0,5A HF	<b>6ES7132-6GD51-0BA0</b> SIPLUS ET 200SP RQ 4x24VDC/2A CO ST
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
<ul style="list-style-type: none"> <li>horizontal installation, min.</li> <li>horizontal installation, max.</li> <li>vertical installation, min.</li> <li>vertical installation, max.</li> </ul>	<ul style="list-style-type: none"> <li>-40 °C; = Tmin (incl. condensation/frost)</li> <li>70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax &gt; 60 °C max. total current 1 A</li> </ul>	<ul style="list-style-type: none"> <li>-40 °C; = Tmin (incl. condensation/frost)</li> <li>70 °C; = Tmax; &gt; +60 °C max. total current 1.0 A</li> <li>-40 °C; = Tmin</li> <li>50 °C; = Tmax</li> </ul>	<ul style="list-style-type: none"> <li>-40 °C; = Tmin (incl. condensation/frost)</li> <li>70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax &gt; 60 °C max. aggregate current 2 A per group</li> </ul>
<b>Altitude during operation relating to sea level</b>			
<ul style="list-style-type: none"> <li>Installation altitude above sea level, max.</li> <li>Ambient air temperature-barometric pressure-altitude</li> </ul>	<ul style="list-style-type: none"> <li>5 000 m</li> <li>Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)</li> </ul>	<ul style="list-style-type: none"> <li>5 000 m</li> <li>Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)</li> </ul>	<ul style="list-style-type: none"> <li>5 000 m</li> <li>Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)</li> </ul>
<b>Relative humidity</b>			
<ul style="list-style-type: none"> <li>With condensation, tested in accordance with IEC 60068-2-38, max.</li> </ul>	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)
<b>Resistance</b>			
<b>Coolants and lubricants</b>			
<ul style="list-style-type: none"> <li>Resistant to commercially available coolants and lubricants</li> </ul>	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>			
<ul style="list-style-type: none"> <li>to biologically active substances according to EN 60721-3-3</li> <li>to chemically active substances according to EN 60721-3-3</li> <li>to mechanically active substances according to EN 60721-3-3</li> <li>Against mechanical environmental conditions acc. to EN 60721-3-3</li> </ul>	<ul style="list-style-type: none"> <li>Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request</li> <li>Yes; Class 3C4 (RH &lt; 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *</li> <li>Yes; Class 3S4 incl. sand, dust, *</li> <li>Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)</li> </ul>	<ul style="list-style-type: none"> <li>Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request</li> <li>Yes; Class 3C4 (RH &lt; 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *</li> <li>Yes; Class 3S4 incl. sand, dust, *</li> <li>Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)</li> </ul>	<ul style="list-style-type: none"> <li>Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna)</li> <li>Yes; Class 3C4 (RH &lt; 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *</li> <li>Yes; Class 3S4 incl. sand, dust, *</li> <li>Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)</li> </ul>
<b>Use on ships/at sea</b>			
<ul style="list-style-type: none"> <li>to biologically active substances according to EN 60721-3-6</li> <li>to chemically active substances according to EN 60721-3-6</li> <li>to mechanically active substances according to EN 60721-3-6</li> <li>Against mechanical environmental conditions acc. to EN 60721-3-6</li> </ul>	<ul style="list-style-type: none"> <li>Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request</li> <li>Yes; Class 6C3 (RH &lt; 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *</li> <li>Yes; Class 6S3 incl. sand, dust; *</li> <li>Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)</li> </ul>	<ul style="list-style-type: none"> <li>Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request</li> <li>Yes; Class 6C3 (RH &lt; 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *</li> <li>Yes; Class 6S3 incl. sand, dust; *</li> <li>Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)</li> </ul>	<ul style="list-style-type: none"> <li>Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request</li> <li>Yes; Class 6C3 (RH &lt; 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *</li> <li>Yes; Class 6S3 incl. sand, dust; *</li> <li>Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)</li> </ul>

## Technical specifications

Article number	6AG1132-6BH01-7BA0	6AG1132-6BF00-7CA0	6AG1132-6GD51-7BA0
Based on	6ES7132-6BH01-0BA0 SIPLUS ET 200SP DQ 16x24VDC/0,5A ST	6ES7132-6BF00-0CA0 SIPLUS ET 200SP DQ 8x24VDC/0,5A HF	6ES7132-6GD51-0BA0 SIPLUS ET 200SP RQ 4x24VDC/2A CO ST
<b>Usage in industrial process technology</b>			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Article number	6AG1132-6HD01-7BB1	6AG1132-6BD20-7CA0	6AG1132-6FD00-7CU0
Based on	6ES7132-6HD01-0BB1 SIPLUS ET 200SP RQ 4x120VDC/230VAC/5A	6ES7132-6BD20-0CA0 SIPLUS ET 200SP DQ 4x24VDC/2A HF	6ES7132-6FD00-0CU0 SIPLUS ET 200SP DQ 4x24..230VAC/2A HF
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax > 60 °C max. continuous current of 3 A per relay	70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax > 60 °C max. total current 1 A	70 °C; = Tmax
• vertical installation, min.	-40 °C; in all other mounting positions		
• vertical installation, max.	50 °C; in all other mounting positions		
<b>Altitude during operation relating to sea level</b>			
• Installation altitude above sea level, max.	3 000 m	5 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 1 K/100 m) at 795 hPa ... 701 hPa (+2 000 m ... +3 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
<b>Relative humidity</b>			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Resistance</b>			
<b>Coolants and lubricants</b>			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > SIPLUS digital outputs****Technical specifications**

Article number	<b>6AG1132-6HD01-7BB1</b>	<b>6AG1132-6BD20-7CA0</b>	<b>6AG1132-6FD00-7CU0</b>
Based on	<b>6ES7132-6HD01-0BB1</b> SIPLUS ET 200SP RQ 4x120VDC/230VAC/5A	<b>6ES7132-6BD20-0CA0</b> SIPLUS ET 200SP DQ 4X24VDC/2A HF	<b>6ES7132-6FD00-0CU0</b> SIPLUS ET 200SP DQ 4X24..230VAC/2A HF
<b>Use in stationary industrial systems</b>			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Usage in industrial process technology</b>			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

## Overview



- 2, 4 and 8-channel AI modules
- Measuring ranges for current, voltage, thermocouples, resistance thermometer, resistor and PTC
- BaseUnits for 2, 3 and 4-conductor connection
- Function classes Basic, Standard, High Feature and High Speed
- Clear labeling on front of module
- LEDs for diagnostics, status and errors
- Individual system-integrated load group formation with self-assembling potential multi-terminal busbars (power module not required for ET 200SP)
- Electronically readable rating plate (I&M data)
- Additional operating modes in some cases
- Optional accessories:
  - Labeling strips
  - Equipment marking label
  - Color-coded label with module-specific CC code
  - Shielding terminal

## Overview of SIPLUS analog input modules

Analog input	PU	Article No.	CC code	BU type
AI 8 x I 2/4-wire BA	1	6AG1134-6GF00-7AA1	CC01	A0, A1
AI 8 x U BA	1	6AG1134-6FF00-2AA1	CC02	A0, A1
AI 4 x U/I 2-wire ST	1	6AG1134-6HD01-7BA1	CC03	A0, A1
AI 4 x I 2/4-wire ST	1	6AG1134-6GD01-7BA1	CC03	A0, A1
AI 4 x I 2-wire 4 ... 20 mA HART	1	6AG1134-6TD00-2CA1	CC03	A0, A1
AI 2 x U/I 2/4-wire HF	1	6AG1134-6HB00-2CA1	CC05	A0, A1
AI 2xU/I 2/4-wire HS	1	6AG1134-6HB00-2DA1	CC00	A0, A1
With two operating modes: • High-speed isochronous AI • Oversampling				
AI 8 x RTD/TC 2-wire HF	1	6AG1134-6JF00-2CA1	CC00	A0, A1
AI 4 x RTD/TC 2/3/4-wire HF	1	6AG1134-6JD00-2CA1	CC00	A0, A1
AI Energy Meter 480 V AC ST	1	6AG1134-6PA20-7BD0	--	D0

**Note:**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > SIPLUS analog inputs

#### Ordering data

##### SIPLUS analog input modules

(Extended temperature range and exposure to environmental substances)

Analog input module  
AI 8xI 2/4-wire BA, BU type A0 or A1, color code CC01

**6AG1134-6GF00-7AA1**

Analog input module  
AI 8xU BA, BU type A0 or A1, color code CC02

**6AG1134-6FF00-2AA1**

Analog input module  
AI 4xU/I 2-wire Standard, BU type A0 or A1, color code CC03, 16-bit, ±0.3%

**6AG1134-6HD01-7BA1**

Analog input module  
AI 4xI 2-/4-wire Standard, BU type A0 or A1, color code CC03, 16-bit, ±0.3%

**6AG1134-6GD01-7BA1**

Analog input module  
AI 4xRTD/TC 2-, 3-, 4-wire High Feature, BU type A0 or A1, color code CC00, 16-bit, ±0.1%, scalable measuring range

**6AG1134-6JD00-2CA1**

Analog input module  
AI 4xI 2-wire 4 ... 20 mA HART, BU type A0 or A1, color code CC03

**6AG1134-6TD00-2CA1**

Analog input module  
AI 2xU/I 2/4-wire High Feature, BU type A0 or A1, color code CC05, 16-bit, ±0.1%, independent channel isolation, isochronous mode above 1 ms

**6AG1134-6HB00-2CA1**

Analog input module AI 2xU/I 2-/4-wire High Speed, BU type A0 or A1, color code CC00, 16-bit, ±0.3%, isochronous mode above 250 µs, oversampling above 50 µs

**6AG1134-6HB00-2DA1**

Analog input module  
AI 8xRTD/TC 2-wire High Feature, BU type A0 or A1, color code CC00, 16-bit, ±0.1%, scalable measuring range

**6AG1134-6JF00-2CA1**

Analog input module  
AI Energy Meter Standard, 480 V AC, BU type D0

**6AG1134-6PA20-7BD0**

##### Usable SIPLUS BaseUnits type A0

###### BU15-P16+A0+2D

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

**6AG1193-6BP00-7DA0**

###### BU15-P16+A0+2B

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

**6AG1193-6BP00-7BA0**

###### BU15-P16+A10+2D

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

**6AG1193-6BP20-7DA0**

###### BU15-P16+A10+2B

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

**6AG1193-6BP20-7BA0**

##### Usable SIPLUS BaseUnits type A1 (temperature detection)

###### BU15-P16+A0+2D/T

(Extended temperature range and exposure to environmental substances)

BU type A1; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

**6AG1193-6BP00-7DA1**

###### BU15-P16+A0+2B/T

(Extended temperature range and exposure to environmental substances)

BU type A1; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

**6AG1193-6BP00-7BA1**

###### BU15-P16+A0+12D/T

(Extended temperature range and exposure to environmental substances)

BU type A1; BaseUnit (light) with 16 process terminals (1...16) to the module and also 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new load group (max. 10 A)

**6AG1193-6BP40-7DA1**

###### BU15-P16+A0+12B/T

(Extended temperature range and exposure to environmental substances)

BU type A1; BaseUnit (dark) with 16 process terminals (1...16) to the module and also 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the load group

**6AG1193-6BP40-7BA1**

##### Usable SIPLUS BaseUnits type D0

###### BU20-P12+A0+0B

(Extended temperature range and exposure to environmental substances)

BU type D0; BaseUnit with 12 push-in terminals, without AUX terminals, bridged to the left

**6AG1193-6BP00-7BD0**

##### Accessories

###### SIPLUS Mounting Kit ET 200SP

Mounting accessories for use with increased mechanical vibration and shock loads.

**6AG1193-6AA00-0AA0**

##### Other accessories

See SIMATIC ET 200SP, analog input modules, page 10/54

### Technical specifications

Article number	6AG1134-6GF00-7AA1	6AG1134-6FF00-2AA1	6AG1134-6HD01-7BA1	6AG1134-6GD01-7BA1	6AG1134-6TD00-2CA1
Based on	6ES7134-6GF00-0AA1 SIPLUS ET 200SP AI 8XI 2-/4-WIRE BA	6ES7134-6FF00-0AA1 SIPLUS ET 200SP AI 8xU BASIC	6ES7134-6HD01-0BA1 SIPLUS ET 200SP AI 4xU/I 2-w ST	6ES7134-6GD01-0BA1 SIPLUS ET 200SP AI 4xI 2-/4-w ST	6ES7134-6TD00-0CA1 SIPLUS ET 200SP AI 4XI 2-WIRE 4...20MA H
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost); start-up @ -30 °C
• horizontal installation, max.	70 °C; = Tmax	60 °C; = Tmax	70 °C; = Tmax; > 60 °C max. 1x ±20 mA or 4x ±10 V permissible	70 °C; = Tmax; > 60 °C max. 1x ±20 mA permissible	60 °C; = Tmax
• vertical installation, min.			-40 °C; = Tmin	-40 °C; = Tmin	-40 °C; = Tmin (incl. condensation/frost); start-up @ -30 °C
• vertical installation, max.			50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax
<b>Altitude during operation relating to sea level</b>					
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>					
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
<b>Resistance</b>					
<b>Coolants and lubricants</b>					
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>					
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>					
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > SIPLUS analog inputs

#### Technical specifications

Article number	6AG1134-6GF00-7AA1	6AG1134-6FF00-2AA1	6AG1134-6HD01-7BA1	6AG1134-6GD01-7BA1	6AG1134-6TD00-2CA1
Based on	6ES7134-6GF00-0AA1	6ES7134-6FF00-0AA1	6ES7134-6HD01-0BA1	6ES7134-6GD01-0BA1	6ES7134-6TD00-0CA1
	SIPLUS ET 200SP AI 8Xl 2-/4-WIRE BA	SIPLUS ET 200SP AI 8xU BASIC	SIPLUS ET 200SP AI 4xU/l 2-w ST	SIPLUS ET 200SP AI 4xl 2-/4-w ST	SIPLUS ET 200SP AI 4Xl 2-WIRE 4...20MA H
<b>Usage in industrial process technology</b>					
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>					
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>					
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Article number	6AG1134-6HB00-2CA1	6AG1134-6HB00-2DA1	6AG1134-6JF00-2CA1	6AG1134-6JD00-2CA1	
Based on	6ES7134-6HB00-0CA1	6ES7134-6HB00-0DA1	6ES7134-6JF00-0CA1	6ES7134-6JD00-0CA1	
	SIPLUS ET 200SP AI 2 X U/l 2-, 4-WIRE HF	SIPLUS ET 200SP AI 2 X U/l 2-, 4-WIRE HS	SIPLUS ET 200SP AI 8XRTD/TC 2-WIRE HF	SIPLUS ET 200SP AI 4xRTD/TC HF	
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -30 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	
• horizontal installation, max.	60 °C; = Tmax	60 °C; = Tmax	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	
• vertical installation, min.			-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	
• vertical installation, max.			50 °C; = Tmax	50 °C; = Tmax	
<b>Altitude during operation relating to sea level</b>					
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	
<b>Relative humidity</b>					
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	

## Technical specifications

Article number	6AG1134-6HB00-2CA1	6AG1134-6HB00-2DA1	6AG1134-6JF00-2CA1	6AG1134-6JD00-2CA1
Based on	6ES7134-6HB00-0CA1 SIPLUS ET 200SP AI 2 X U/I 2-, 4-WIRE HF	6ES7134-6HB00-0DA1 SIPLUS ET 200SP AI 2 X U/I 2-, 4-WIRE HS	6ES7134-6JF00-0CA1 SIPLUS ET 200SP AI 8XRTD/TC 2-WIRE HF	6ES7134-6JD00-0CA1 SIPLUS ET 200SP AI 4xRTD/TC HF
<b>Resistance</b>				
<b>Coolants and lubricants</b>				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Usage in industrial process technology</b>				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A



**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > SIPLUS analog inputs****Technical specifications**

Article number	<b>6AG1134-6PA20-7BD0</b>
Based on	<b>6ES7134-6PA20-0BD0</b> SIPLUS ET 200SP AI EMETER 480VAC ST
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-40 °C; = Tmin; < -25 °C min. permissible supply voltage 110 V AC
• horizontal installation, max.	70 °C; = Tmax; > +60 °C max. permissible current 1 A per phase
• vertical installation, min.	-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
<b>Relative humidity</b>	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
<b>Resistance</b>	
<b>Coolants and lubricants</b>	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Article number	<b>6AG1134-6PA20-7BD0</b>
Based on	<b>6ES7134-6PA20-0BD0</b> SIPLUS ET 200SP AI EMETER 480VAC ST
<b>Use on ships/at sea</b>	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Usage in industrial process technology</b>	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

## Overview



- 2 and 4-channel analog output (AQ) modules

For different requirements, the digital output modules offer:

- Function classes Standard, High Feature and High-Speed
- BaseUnits for single or multiple-conductor connection with automatic slot coding
- Potential distribution modules for system-integrated expansion with potential terminals
- Individual system-integrated load group formation with self-assembling voltage distribution bars (a separate power module is no longer required for ET 200SP)

- Option for connecting current and voltage actuators
- Clear labeling on front of module
- LEDs for diagnostics, status, supply voltage and faults
- Electronically readable and non-volatile writable rating plate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
  - Oversampling operating mode (n-fold equidistant output of an analog value within one PN cycle and thus the precisely timed output of an analog value or a sequence of analog values)
  - Isochronous mode (simultaneous equidistant output of analog values)
  - Output of substitute value in the event of interruptions to communication (shutdown, output adjustable substitute value, or keep last value)
  - Calibration during runtime
  - Re-parameterization during operation
  - Firmware update
  - Diagnosis of wire break, short circuit, overflow, underflow
  - Value status (optional binary validity information of the analog signal in the process image)
  - Supports the PROFlenergy profile
- Optional accessories
  - Labeling strips (film or card)
  - Equipment labeling plate
  - Color-coded label with module-specific CC code
  - Shielding terminal

A quick and clear comparison of the functions of the AQ modules is offered by the TIA Selection Tool.

## Overview of analog output modules

Analog output	PU	Article No.	CC code	BU type
AQ 2 x I ST	1	6AG1135-6GB00-7BA1	CC00	A0, A1
AQ 4 x U/I ST	1	6AG1135-6HD00-7BA1	CC00	A0, A1
AQ 2 x U/I HF	1	6AG1135-6HB00-7CA1	CC00	A0, A1
AQ 2xU/I HS	1	6AG1135-6HB00-2DA1	CC00	A0, A1

With two operating modes:

- High-speed isochronous AQ
- Oversampling

**Note:**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > SIPLUS analog outputs****Ordering data****Article No.****Article No.****SIPLUS analog output modules**

(Extended temperature range and exposure to environmental substances)

Analog output module  
AQ 2xI Standard, BU type A0 or A1,  
color code CC00, 16-bit**6AG1135-6GB00-7BA1**Analog output module  
AQ 4xU/I Standard, BU type A0 or  
A1, color code CC03**6AG1135-6HD00-7BA1**Analog output module  
AQ 2xU/I High Feature,  
BU type A0 or A1,  
color code CC00, 16-bit, ±0.1%**6AG1135-6HB00-7CA1**Analog output module  
AQ 2xU/I High Speed,  
BU type A0 or A1,  
color code CC00, 16-bit, ± 0.3%**6AG1135-6HB00-2DA1****Usable SIPLUS BaseUnits  
type A0****BU15-P16+A0+2D**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with  
16 process terminals to the module;  
for starting a new load group  
(max. 10 A)**6AG1193-6BP00-7DA0****BU15-P16+A0+2B**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with  
16 process terminals to the module;  
for continuing the load group**6AG1193-6BP00-7BA0****BU15-P16+A10+2D**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light)  
with 16 process terminals (1...16)  
to the module and an additional  
10 internally jumpered  
AUX terminals (1 A to 10 A);  
for starting a new load group  
(max. 10 A)**6AG1193-6BP20-7DA0****BU15-P16+A10+2B**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark)  
with 16 process terminals (1...16)  
to the module and an additional  
10 internally jumpered  
AUX terminals (1 A to 10 A);  
for continuing the load group**6AG1193-6BP20-7BA0****Usable SIPLUS BaseUnits  
type A1 (temperature detection)****BU15-P16+A0+2D/T**

(Extended temperature range and exposure to environmental substances)

BU type A1; BaseUnit (light) with  
16 process terminals to the module;  
for starting a new load group  
(max. 10 A)**6AG1193-6BP00-7DA1****BU15-P16+A0+2B/T**

(Extended temperature range and exposure to environmental substances)

BU type A1; BaseUnit (dark) with  
16 process terminals to the module;  
for continuing the load group**6AG1193-6BP00-7BA1****BU15-P16+A0+12D/T**

(Extended temperature range and exposure to environmental substances)

BU type A1; BaseUnit (light) with  
16 process terminals (1...16) to  
the module and also 2x5 internally  
jumpered additional terminals  
(1 B to 5 B and 1 C to 5 C);  
for starting a new load group  
(max. 10 A)**6AG1193-6BP40-7DA1****BU15-P16+A0+12B/T**

(Extended temperature range and exposure to environmental substances)

BU type A1; BaseUnit (dark) with  
16 process terminals (1...16) to  
the module and also 2x5 internally  
jumpered additional terminals  
(1 B to 5 B and 1 C to 5 C);  
for continuing the load group**6AG1193-6BP40-7BA1****Accessories****SIPLUS Mounting Kit ET 200SP**Mounting accessories for use with  
increased mechanical vibration and  
shock loads.**6AG1193-6AA00-0AA0****Other accessories**See SIMATIC ET 200SP,  
analog output modules,  
page 10/37

## Technical specifications

Article number	6AG1135-6HD00-7BA1	6AG1135-6GB00-7BA1	6AG1135-6HB00-2DA1	6AG1135-6HB00-7CA1
Based on	6ES7135-6HD00-0BA1 SIPLUS ET 200SP AQ 4xU/I ST	6ES7135-6GB00-0BA1 SIPLUS ET 200SP AQ 2xI STANDARD	6ES7135-6HB00-0DA1 SIPLUS ET 200SP AQ 2 X U/I HIGH SPEED	6ES7135-6HB00-0CA1 SIPLUS ET 200SP AQ 2xU/I HF
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax; > +60 °C max. 2x ±10 V permissible	70 °C; = Tmax	60 °C; = Tmax	70 °C; = Tmax
• vertical installation, min.	-40 °C; = Tmin			-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax			60 °C; = Tmax
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Resistance</b>				
<b>Coolants and lubricants</b>				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > SIPLUS analog outputs****Technical specifications**

Article number	<b>6AG1135-6HD00-7BA1</b>	<b>6AG1135-6GB00-7BA1</b>	<b>6AG1135-6HB00-2DA1</b>	<b>6AG1135-6HB00-7CA1</b>
Based on	<b>6ES7135-6HD00-0BA1</b> SIPLUS ET 200SP AQ 4xU/I ST	<b>6ES7135-6GB00-0BA1</b> SIPLUS ET 200SP AQ 2xI STANDARD	<b>6ES7135-6HB00-0DA1</b> SIPLUS ET 200SP AQ 2 X U/I HIGH SPEED	<b>6ES7135-6HB00-0CA1</b> SIPLUS ET 200SP AQ 2xU/I HF
<b>Usage in industrial process technology</b>				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

## Overview

**Technical properties**

- Counter module for ET 200SP
- Interfaces:
  - 24 V encoder signals A, B and N from P, M or push-pull-switching encoders and sensors
  - 24 V encoder supply output, short-circuit proof
  - 3 digital inputs for controlling the count operation, for saving or for setting the count value
  - 2 digital outputs for fast reactions regardless of the counter status or measured value

- Counting frequency 200 kHz (800 kHz with quadruple evaluation)
- Counting range: +/- 31-bit
- Measurement function
- Parameterizable hardware interrupts
- Parameterizable input filters for suppressing interferences at sensor and digital inputs

**Supported types of encoders/signals**

- 24 V incremental encoder with and without N signal
- 24 V pulse encoder with direction signal
- 24 V pulse encoder without direction signal
- 24 V pulse encoder for pulse up and down respectively

**Supported system functions**

- Isochronous mode
- Firmware update
- Identification data I&M

**Ordering data****Article No.****Article No.****TM Count 1x24V counter module**

With one channel, max. 200 kHz; for 24 V encoder

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7138-6AA01-0BA0**  
**6ES7138-6AA01-2BA0**

**Suitable BaseUnits****BU15-P16+A10+2D**

BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP20-0DA0**  
**6ES7193-6BP20-2DA0**

**BU15-P16+A0+2D**

BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP00-0DA0**  
**6ES7193-6BP00-2DA0**

**2BU15-P16+A0+2DB**

Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (light/dark) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit

**6ES7193-6BP60-0DA0**

**BU15-P16+A10+2B**

BU type A0; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP20-0BA0**  
**6ES7193-6BP20-2BA0**

**BU15-P16+A0+2B**

BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP00-0BA0**  
**6ES7193-6BP00-2BA0**

**2BU15-P16+A0+2B**

Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the load group

- Pack of 1 unit

**6ES7193-6BP60-0BA0**

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > TM Count 1x24V counter module

Ordering data	Article No.	Article No.
<b>Accessories</b>		
<b>Equipment labeling plate</b> 10 sheets of 16 labels	<b>6ES7193-6LF30-0AW0</b>	<b>6ES7193-6CP71-2AA0</b>
<b>Labeling strips</b> 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	<b>6ES7193-6LR10-0AA0</b>	<b>6ES7193-6CP72-2AA0</b>
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	<b>6ES7193-6LR10-0AG0</b>	<b>6ES7193-6CP73-2AA0</b>
1 000 labeling strips DIN A4, light gray, card, for inscription with laser printer	<b>6ES7193-6LA10-0AA0</b>	
1 000 labeling strips DIN A4, yellow, card, for inscription with laser printer	<b>6ES7193-6LA10-0AG0</b>	
<b>BU cover</b> For covering empty slots (gaps); 5 units		
• 15 mm wide	<b>6ES7133-6CV15-1AM0</b>	
• 20 mm wide	<b>6ES7133-6CV20-1AM0</b>	
<b>Shield connection</b> 5 shield supports and 5 shield terminals	<b>6ES7193-6SC00-1AM0</b>	
		<b>Color-coded labels</b>
		• Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units
		• Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units
		• Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units
		<b>Mechanical coding elements</b>
		For automatic coding of I/O modules; spare part. 20 units
		Type A
		<b>6ES7193-6KA00-3AA0</b>
		Type B
		<b>6ES7193-6KB00-3AA0</b>
		Type C
		<b>6ES7193-6KC00-3AA0</b>
		Type D
		<b>6ES7193-6KD00-3AA0</b>

## Technical specifications

Article number	<b>6ES7138-6AA01-0BA0</b> ET 200SP, TM Count 1x24V
<b>General information</b>	
Product type designation	TM Count 1x24V
<b>Product function</b>	
• I&M data	Yes; I&M0 to I&M3
• Isochronous mode	Yes
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V15 SP1 or higher
• STEP 7 configurable/integrated from version	V5.6 and higher
• PROFIBUS from GSD version/GSD revision	One GSD file each, Revision 3 and 5 and higher
<b>Supply voltage</b>	
<b>Load voltage L+</b>	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
<b>Encoder supply</b>	
Number of outputs	1
<b>24 V encoder supply</b>	
• 24 V	Yes; L+ (-0.8 V)
• Short-circuit protection	Yes; electronic/thermal
• Output current, max.	300 mA
<b>Digital inputs</b>	
Number of digital inputs	3
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes

Article number	<b>6ES7138-6AA01-0BA0</b> ET 200SP, TM Count 1x24V
<b>Digital input functions, parameterizable</b>	
• Gate start/stop	Yes
• Capture	Yes
• Synchronization	Yes
• Freely usable digital input	Yes
<b>Input voltage</b>	
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
• permissible voltage at input, max.	30 V
<b>Input current</b>	
• for signal "1", typ.	2.5 mA
<b>Input delay (for rated value of input voltage) for standard inputs</b>	
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
- at "0" to "1", min.	6 µs; for parameterization "none"
- at "1" to "0", min.	6 µs; for parameterization "none"
<b>for technological functions</b>	
- parameterizable	Yes
<b>Digital outputs</b>	
Type of digital output	Transistor
Number of digital outputs	2
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Limitation of inductive shutdown voltage to	L+ (-53 V)
Controlling a digital input	Yes

### Technical specifications

Article number	<b>6ES7138-6AA01-0BA0</b> ET 200SP, TM Count 1x24V
<b>Digital output functions, parameterizable</b>	
• Switching tripped by comparison values	Yes
• Freely usable digital output	Yes
<b>Switching capacity of the outputs</b>	
• with resistive load, max.	0.5 A; Per digital output
• on lamp load, max.	5 W
<b>Load resistance range</b>	
• lower limit	48 Ω
• upper limit	12 kΩ
<b>Output voltage</b>	
• for signal "1", min.	23.2 V; L+ (-0.8 V)
<b>Output current</b>	
• for signal "1" rated value	0.5 A; Per digital output
• for signal "0" residual current, max.	0.5 mA
<b>Output delay with resistive load</b>	
• "0" to "1", max.	50 μs
• "1" to "0", max.	50 μs
<b>Switching frequency</b>	
• with resistive load, max.	10 kHz
• with inductive load, max.	0.5 Hz; Acc. to IEC 60947-5-1, DC-13; observe derating curve
• on lamp load, max.	10 Hz
<b>Total current of the outputs</b>	
• Current per module, max.	1 A
<b>Connectable encoders</b>	
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA
<b>Encoder signals, incremental encoder (asymmetrical)</b>	
• Input frequency, max.	200 kHz
• Counting frequency, max.	800 kHz; with quadruple evaluation
• Cable length, shielded, max.	600 m; depending on input frequency, encoder and cable quality; max. 50 m at 200 kHz
• Signal filter, parameterizable	Yes
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes
• pulse encoder	Yes
• pulse encoder with direction	Yes
• pulse encoder with one impulse signal per count direction	Yes
<b>Encoder signal 24 V</b>	
- permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
- permissible voltage at input, max.	30 V
<b>Interface types</b>	
• Source/sink input	Yes
• Input characteristic curve in accordance with IEC 61131, type 3	Yes

Article number	<b>6ES7138-6AA01-0BA0</b> ET 200SP, TM Count 1x24V
<b>Interrupts/diagnostics/status information</b>	
Substitute values connectable	Yes; Parameterizable
<b>Alarms</b>	
• Diagnostic alarm	Yes
• Hardware interrupt	Yes
<b>Diagnoses</b>	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• A/B transition error at incremental encoder	Yes
• Group error	Yes
<b>Diagnostics indication LED</b>	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red DIAG LED
• Status indicator forward counting (green)	Yes
• Status indicator backward counting (green)	Yes
<b>Integrated Functions</b>	
Counter	Yes
• Number of counters	1
• Counting frequency, max.	800 kHz; with quadruple evaluation
Fast mode	Yes
<b>Counting functions</b>	
• Can be used with TO High_Speed_Counter	Yes
• Continuous counting	Yes
• Counter response parameterizable	Yes
• Hardware gate via digital input	Yes
• Software gate	Yes
• Event-controlled stop	Yes
• Synchronization via digital input	Yes
• Counting range, parameterizable	Yes
<b>Comparator</b>	
- Number of comparators	2
- Direction dependency	Yes
- Can be changed from user program	Yes
<b>Position detection</b>	
• Incremental acquisition	Yes
• Suitable for S7-1500 Motion Control	Yes



**I/O systems**

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > TM Count 1x24V counter module

**Technical specifications**

Article number	<b>6ES7138-6AA01-0BA0</b> ET 200SP, TM Count 1x24V
<b>Measuring functions</b>	
• Measuring time, parameterizable	Yes
• Dynamic measurement period adjustment	Yes
• Number of thresholds, parameterizable	2
<b>Measuring range</b>	
- Frequency measurement, min.	0.04 Hz
- Frequency measurement, max.	800 kHz
- Cycle duration measurement, min.	1.25 µs
- Cycle duration measurement, max.	25 s
<b>Accuracy</b>	
- Frequency measurement	100 ppm; depending on measuring interval and signal evaluation
- Cycle duration measurement	100 ppm; depending on measuring interval and signal evaluation
- Velocity measurement	100 ppm; depending on measuring interval and signal evaluation
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and backplane bus	Yes
<b>Standards, approvals, certificates</b>	
Suitable for safety functions	No

Article number	<b>6ES7138-6AA01-0BA0</b> ET 200SP, TM Count 1x24V
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Decentralized operation</b>	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFIBUS master	Yes
to standard PROFINET controller	Yes
<b>Dimensions</b>	
Width	15 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	45 g

## Overview

**Technical properties**

- Counter and position detection module for ET 200SP
- Interfaces:
  - Encoder signals A, B and N for 5 V TTL or RS 422 differential signals
  - SSI interface with clock and data for RS 422 differential signals
  - 24 V encoder supply output, short-circuit proof
  - 2 digital inputs for controlling the counting process, for saving or setting the counter or position value
  - 2 digital outputs for fast reactions depending on the counter reading, position value or measured value

- Counter frequency 1 MHz (4 MHz with four-fold evaluation)
- Counting range: +/- 31 bits
- Measurement function
- Parameterizable hardware interrupts
- Parameterizable input filters for suppressing interferences at sensor and digital inputs

**Supported types of encoders/signals**

- Incremental encoders with or without N signal
- Pulse encoders with directional signal
- Pulse encoders without directional signal
- Pulse encoders for forward or reverse pulses
- SSI encoders with a frame length of 10 to 40 bits, of which up to 31 bits position value

**Supported system functions**

- Isochronous mode
- Firmware update
- Identification data (I&M)

**Ordering data****Article No.****Article No.****TM PosInput 1 counter and position detection module**

With one channel, max. 1 MHz for 5 V TTL or RS422 differential signals or SSI absolute encoder

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7138-6BA01-0BA0**  
**6ES7138-6BA01-2BA0**

**Suitable BaseUnits****BU15-P16+A10+2D**

BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP20-0DA0**  
**6ES7193-6BP20-2DA0**

**BU15-P16+A0+2D**

BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP00-0DA0**  
**6ES7193-6BP00-2DA0**

**2BU15-P16+A0+2DB**

Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (light/dark) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit

**6ES7193-6BP60-0DA0**

**BU15-P16+A10+2B**

BU type A0; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP20-0BA0**  
**6ES7193-6BP20-2BA0**

**BU15-P16+A0+2B**

BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP00-0BA0**  
**6ES7193-6BP00-2BA0**

**2BU15-P16+A0+2B**

Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the load group

- Pack of 1 unit

**6ES7193-6BP60-0BA0**

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > TM PosInput 1 counter and position detection module

Ordering data	Article No.	Article No.
<b>Accessories</b>		
<b>Equipment labeling plate</b> 10 sheets of 16 labels	<b>6ES7193-6LF30-0AW0</b>	<b>6ES7193-6CP71-2AA0</b>
<b>Labeling strips</b> 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	<b>6ES7193-6LR10-0AA0</b>	<b>6ES7193-6CP72-2AA0</b>
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	<b>6ES7193-6LR10-0AG0</b>	<b>6ES7193-6CP73-2AA0</b>
1 000 labeling strips DIN A4, light gray, card, for inscription with laser printer	<b>6ES7193-6LA10-0AA0</b>	
1 000 labeling strips DIN A4, yellow, card, for inscription with laser printer	<b>6ES7193-6LA10-0AG0</b>	
<b>BU cover</b> For covering empty slots (gaps); 5 units		
• 15 mm wide	<b>6ES7133-6CV15-1AM0</b>	
• 20 mm wide	<b>6ES7133-6CV20-1AM0</b>	
<b>Shield connection</b> 5 shield supports and 5 shield terminals	<b>6ES7193-6SC00-1AM0</b>	
		<b>Color-coded labels</b>
		• Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units
		• Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units
		• Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units
		<b>Mechanical coding elements</b>
		For automatic coding of I/O modules; spare part. 20 units
		Type A
		Type B
		Type C
		Type D
		<b>6ES7193-6KA00-3AA0</b>
		<b>6ES7193-6KB00-3AA0</b>
		<b>6ES7193-6KC00-3AA0</b>
		<b>6ES7193-6KD00-3AA0</b>

## Technical specifications

Article number	<b>6ES7138-6BA01-0BA0</b> ET 200SP, TM Posinput 1
<b>General information</b>	
Product type designation	TM PosInput 1
<b>Product function</b>	
• I&M data	Yes; I&M0 to I&M3
• Isochronous mode	Yes
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V16 or higher
• STEP 7 configurable/integrated from version	V5.6 (use previous version *6BA00*)
• PROFIBUS from GSD version/GSD revision	GSD Revision 5
<b>Supply voltage</b>	
<b>Load voltage L+</b>	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
<b>Encoder supply</b>	
Number of outputs	2
<b>5 V encoder supply</b>	
• 5 V	Yes
• Short-circuit protection	Yes; electronic/thermal
• Output current, max.	300 mA; Total current of all encoders
<b>24 V encoder supply</b>	
• 24 V	Yes; L+ (-0.8 V)
• Short-circuit protection	Yes; electronic/thermal
• Output current, max.	300 mA; Total current of all encoders
<b>Digital inputs</b>	
Number of digital inputs	2
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes

Article number	<b>6ES7138-6BA01-0BA0</b> ET 200SP, TM Posinput 1
<b>Digital input functions, parameterizable</b>	
• Gate start/stop	Yes; only for pulse and incremental encoders
• Capture	Yes
• Synchronization	Yes; only for pulse and incremental encoders
• Freely usable digital input	Yes
<b>Input voltage</b>	
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
• permissible voltage at input, max.	30 V
<b>Input current</b>	
• for signal "1", typ.	2.5 mA
<b>Input delay (for rated value of input voltage) for standard inputs</b>	
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
- at "0" to "1", min.	6 µs; for parameterization "none"
- at "1" to "0", min.	6 µs; for parameterization "none"
<b>for technological functions</b>	
- parameterizable	Yes

### Technical specifications

Article number	<b>6ES7138-6BA01-0BA0</b> ET 200SP, TM Posinput 1
<b>Digital outputs</b>	
Type of digital output	Transistor
Number of digital outputs	2
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Limitation of inductive shutdown voltage to	L+ (-53 V)
Controlling a digital input	Yes
<b>Digital output functions, parameterizable</b>	
• Switching tripped by comparison values	Yes
• Freely usable digital output	Yes
<b>Switching capacity of the outputs</b>	
• with resistive load, max.	0.5 A; Per digital output
• on lamp load, max.	5 W
<b>Load resistance range</b>	
• lower limit	48 Ω
• upper limit	12 kΩ
<b>Output voltage</b>	
• for signal "1", min.	23.2 V; L+ (-0.8 V)
<b>Output current</b>	
• for signal "1" rated value	0.5 A; Per digital output
• for signal "0" residual current, max.	0.5 mA
<b>Output delay with resistive load</b>	
• "0" to "1", max.	50 μs
• "1" to "0", max.	50 μs
<b>Switching frequency</b>	
• with resistive load, max.	10 kHz
• with inductive load, max.	0.5 Hz; Acc. to IEC 60947-5-1, DC-13; observe derating curve
• on lamp load, max.	10 Hz
<b>Total current of the outputs</b>	
• Current per module, max.	1 A
<b>Encoder signals, incremental encoder (symmetrical)</b>	
• Input frequency, max.	1 MHz
• Counting frequency, max.	4 MHz; with quadruple evaluation
• Cable length, shielded, max.	32 m; at 1 MHz
• Signal filter, parameterizable	Yes
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes
• pulse encoder	Yes
• Pulse encoder with direction	Yes
• pulse encoder with one impulse signal per count direction	Yes

Article number	<b>6ES7138-6BA01-0BA0</b> ET 200SP, TM Posinput 1
<b>Encoder signals, incremental encoder (asymmetrical)</b>	
• Input voltage	5 V TTL (push-pull encoders only)
• Input frequency, max.	1 MHz
• Counting frequency, max.	4 MHz; with quadruple evaluation
• Signal filter, parameterizable	Yes
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes
• pulse encoder	Yes
• pulse encoder with direction	Yes
• pulse encoder with one impulse signal per count direction	Yes
<b>Encoder signals, absolute encoder (SSI)</b>	
• Input signal	to RS-422
• Telegram length, parameterizable	10 ... 40 bit
• Clock frequency, max.	2 MHz; 125 kHz, 250 kHz, 500 kHz, 1 MHz, 1.5 MHz or 2 MHz
• Binary code	Yes
• Gray code	Yes
• Cable length, shielded, max.	320 m; Cable length, RS-422 SSI absolute encoders, Siemens type 6FX2001-5, 24 V supply: 125 kHz, 320 meters shielded, max.; 250 kHz, 160 meters shielded, max.; 500 kHz, 60 meters shielded, max.; 1 MHz, 20 meters shielded, max.; 1.5 MHz, 10 meters shielded, max.; 2 MHz, 8 meters shielded, max.
• Parity bit, parameterizable	Yes
• Monoflop time	16, 32, 48, 64 μs & automatic
• Multiturn	Yes
• Singleturn	Yes
<b>Interface types</b>	
• TTL 5 V	Yes; push-pull encoders only
• RS 422	Yes
<b>Interrupts/diagnostics/status information</b>	
Substitute values connectable	Yes; Parameterizable
<b>Alarms</b>	
• Diagnostic alarm	Yes
• Hardware interrupt	Yes
<b>Diagnoses</b>	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• A/B transition error at incremental encoder	Yes
• Telegram error at SSI encoder	Yes
• Group error	Yes

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > TM PosInput 1 counter and position detection module

### Technical specifications

Article number	<b>6ES7138-6BA01-0BA0</b> ET 200SP, TM Posinput 1
<b>Diagnostics indication LED</b>	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red DIAG LED
• Status indicator forward counting (green)	Yes
• Status indicator backward counting (green)	Yes
<b>Integrated Functions</b>	
Counter	Yes
• Number of counters	1
• Counting frequency, max.	4 MHz; with quadruple evaluation
Fast mode	Yes
<b>Counting functions</b>	
• Can be used with TO High_Speed_Counter	Yes; only for pulse and incremental encoders
• Continuous counting	Yes
• Counter response parameterizable	Yes
• Hardware gate via digital input	Yes
• Software gate	Yes
• Event-controlled stop	Yes
• Synchronization via digital input	Yes
• Counting range, parameterizable	Yes
<b>Comparator</b>	
- Number of comparators	2
- Direction dependency	Yes
- Can be changed from user program	Yes
<b>Position detection</b>	
• Incremental acquisition	Yes
• Absolute acquisition	Yes
• Suitable for S7-1500 Motion Control	Yes
<b>Measuring functions</b>	
• Measuring time, parameterizable	Yes
• Dynamic measurement period adjustment	Yes
• Number of thresholds, parameterizable	2
<b>Measuring range</b>	
- Frequency measurement, min.	0.04 Hz
- Frequency measurement, max.	4 MHz
- Cycle duration measurement, min.	0.25 µs
- Cycle duration measurement, max.	25 s
<b>Accuracy</b>	
- Frequency measurement	100 ppm; depending on measuring interval and signal evaluation
- Cycle duration measurement	100 ppm; depending on measuring interval and signal evaluation
- Velocity measurement	100 ppm; depending on measuring interval and signal evaluation

Article number	<b>6ES7138-6BA01-0BA0</b> ET 200SP, TM Posinput 1
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and backplane bus	Yes
<b>Standards, approvals, certificates</b>	
Suitable for safety functions	No
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C; Observe derating
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C; Observe derating
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Decentralized operation</b>	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFIBUS master	Yes
to standard PROFINET controller	Yes
<b>Dimensions</b>	
Width	15 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	45 g

## Overview



- 4 digital inputs, 6 digital outputs
- Inputs for detecting the input edges with  $\mu\text{s}$  accuracy
- Outputs for outputting the switching signals with  $\mu\text{s}$  accuracy
- 32x oversampling
- PWM output
- Counter function
- Outputs can be switched between 0.5 A standard and especially fast 0.1 A high-speed mode

## Ordering data

Ordering data	Article No.	Ordering data	Article No.
<b>TM Timer DIDQ 10x24V time-based IO module</b> 4 time-controlled inputs, 6 time-controlled outputs	<b>6ES7138-6CG00-0BA0</b>	<b>BU15-P16+A0+2B</b> BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP00-0BA0</b> <b>6ES7193-6BP00-2BA0</b>
<b>Suitable BaseUnits</b>		<b>2BU15-P16+A0+2B</b> Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the load group • Pack of 1 unit	
<b>BU15-P16+A10+2D</b> BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP20-0DA0</b> <b>6ES7193-6BP20-2DA0</b>	<b>Accessories</b>	
<b>BU15-P16+A0+2D</b> BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP00-0DA0</b> <b>6ES7193-6BP00-2DA0</b>	<b>Equipment labeling plate</b> 10 sheets of 16 labels	<b>6ES7193-6LF30-0AW0</b>
<b>2BU15-P16+A0+2DB</b> Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (light/dark) with 16 push-in terminals to the module; for starting a new load group (max. 10 A) • Pack of 1 unit	<b>6ES7193-6BP60-0DA0</b>	<b>Labeling strips</b> 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer 500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer 1 000 labeling strips DIN A4, light gray, card, for inscription with laser printer 1 000 labeling strips DIN A4, yellow, card, for inscription with laser printer	<b>6ES7193-6LR10-0AA0</b> <b>6ES7193-6LR10-0AG0</b> <b>6ES7193-6LA10-0AA0</b> <b>6ES7193-6LA10-0AG0</b>
<b>BU15-P16+A10+2B</b> BU type A0; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP20-0BA0</b> <b>6ES7193-6BP20-2BA0</b>	<b>BU cover</b> For covering empty slots (gaps); 5 units • 15 mm wide • 20 mm wide	<b>6ES7133-6CV15-1AM0</b> <b>6ES7133-6CV20-1AM0</b>
		<b>Shield connection</b> 5 shield supports and 5 shield terminals	<b>6ES7193-6SC00-1AM0</b>

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > TM Timer DIDQ 10x24V time-based IO module

### Ordering data

#### Color-coded labels

- Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units
- Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units
- Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units

### Article No.

6ES7193-6CP71-2AA0

6ES7193-6CP72-2AA0

6ES7193-6CP73-2AA0

### Article No.

#### Mechanical coding elements

For automatic coding of I/O modules; spare part. 20 units

Type A

Type B

Type C

Type D

6ES7193-6KA00-3AA0

6ES7193-6KB00-3AA0

6ES7193-6KC00-3AA0

6ES7193-6KD00-3AA0

### Technical specifications

Article number	<b>6ES7138-6CG00-0BA0</b> ET 200SP, TM Timer DIDQ 10x24V
<b>General information</b>	
Product type designation	TM Timer DIDQ 10x24V
<b>Product function</b>	
• I&M data	Yes; I&M 0
• Isochronous mode	Yes
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/integrated from version	V13 Update 3
• STEP 7 configurable/integrated from version	V5.5 SP3 / -
<b>Supply voltage</b>	
<b>Load voltage L+</b>	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
<b>Encoder supply</b>	
Number of outputs	1
<b>24 V encoder supply</b>	
• 24 V	Yes; L+ (-0.8 V)
• Short-circuit protection	Yes
• Output current, max.	500 mA; Observe derating
<b>Digital inputs</b>	
Number of digital inputs	4
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes
<b>Digital input functions, parameterizable</b>	
• Digital input with time stamp	Yes
- Number, max.	4
• Counter	Yes
- Number, max.	3
• Counter for incremental encoder	Yes
- Number, max.	1
• Digital input with oversampling	Yes
- Number, max.	4
• HW enable for digital input	Yes
- Number, max.	1
• HW enable for digital output	Yes
- Number, max.	3

Article number	<b>6ES7138-6CG00-0BA0</b> ET 200SP, TM Timer DIDQ 10x24V
<b>Input voltage</b>	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
• permissible voltage at input, max.	30 V
<b>Input current</b>	
• for signal "1", typ.	2.5 mA
<b>Input delay (for rated value of input voltage)</b>	
• Minimum pulse width for program reactions	3 μs for parameterization "none"
<b>for standard inputs</b>	
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 ms
- at "0" to "1", min.	4 μs
- at "1" to "0", min.	4 μs
<b>Digital outputs</b>	
Type of digital output	Transistor
Number of digital outputs	6
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Limitation of inductive shutdown voltage to	-0.8 V
<b>Digital output functions, parameterizable</b>	
• Digital output with time stamp	Yes
- Number, max.	6
• PWM output	Yes
- Number, max.	6
• Digital output with oversampling	Yes
- Number, max.	6
<b>Switching capacity of the outputs</b>	
• with resistive load, max.	0.5 A; 0.1 A with High Speed output
• on lamp load, max.	5 W; 1 W with High Speed output
<b>Load resistance range</b>	
• lower limit	48 Ω; 240 ohm with High Speed output
• upper limit	12 kΩ

## Technical specifications

Article number	<b>6ES7138-6CG00-0BA0</b> ET 200SP, TM Timer DIDQ 10x24V
<b>Output voltage</b>	
• Type of output voltage	DC
• for signal "0", max.	1 V; With High Speed output
• for signal "1", min.	23.2 V; L+ (-0.8 V)
<b>Output current</b>	
• for signal "1" rated value	0.5 A; 0.1 A with High Speed output, observe derating
• for signal "0" residual current, max.	0.5 mA
<b>Output delay with resistive load</b>	
• "0" to "1", max.	1 µs; With High Speed output, 5 µs with Standard output
• "1" to "0", max.	1 µs; With High Speed output, 6 µs with Standard output
<b>Switching frequency</b>	
• with resistive load, max.	10 kHz
• on lamp load, max.	10 Hz
<b>Total current of the outputs</b>	
• Current per module, max.	3.5 A; Observe derating
<b>Connectable encoders</b>	
• Incremental encoder (asymmetrical)	Yes
• 24 V initiator	Yes
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA
<b>Encoder signals, incremental encoder (asymmetrical)</b>	
• Input frequency, max.	50 kHz
• Counting frequency, max.	200 kHz; with quadruple evaluation
• Cable length, shielded, max.	600 m; Depending on input frequency, encoder and cable quality; max. 200 m at 50 kHz
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• pulse encoder	Yes
<b>Encoder signal 24 V</b>	
- permissible voltage at input, min.	-30 V
- permissible voltage at input, max.	30 V
<b>Interface types</b>	
• Input characteristic curve in accordance with IEC 61131, type 3	Yes
<b>Isochronous mode</b>	
Bus cycle time (TDP), min.	375 µs

Article number	<b>6ES7138-6CG00-0BA0</b> ET 200SP, TM Timer DIDQ 10x24V
<b>Interrupts/diagnostics/status information</b>	
Diagnostics function	Yes
Substitute values connectable	Yes
<b>Alarms</b>	
• Diagnostic alarm	Yes
<b>Diagnoses</b>	
• Monitoring the supply voltage	Yes
• Short-circuit	Yes
<b>Diagnostics indication LED</b>	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes
• for module diagnostics	Yes; green/red DIAG LED
<b>Integrated Functions</b>	
Counter	Yes
• Number of counters	3
• Counting frequency, max.	200 kHz; with quadruple evaluation
<b>Counting functions</b>	
• Continuous counting	Yes
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and backplane bus	Yes
<b>Standards, approvals, certificates</b>	
Suitable for safety functions	No
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C; Observe derating
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C; Observe derating
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual
<b>Decentralized operation</b>	
to SIMATIC S7-1500	Yes
<b>Dimensions</b>	
Width	15 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	45 g



## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > TM Pulse 2x24V pulse output module

### Overview



2-channel pulse output module for ET 200SP

- Operating modes:
  - Single pulse with defined length
  - Pulse chain with defined number of pulses
  - Pulse width modulation (with flexible ON period, optional current control and dither function)
  - PWM signal for controlling a DC motor
  - ON and OFF delay; rising and falling edge can be delayed separately to the microsecond
  - Frequency output with defined output frequency
- Hardware:
  - 2 channels 24 V, 2 A output current
  - Parallel switching for enhanced performance on 4 A output current
  - Switching frequencies to 10 kHz; at reduced output current to 0.1 A up to 100 kHz
  - Push-pull output driver for especially steep edges at the outputs
  - Polarity change in DC motor operation for direction reversal
  - 1 high-speed 24 V digital input per channel with parameterizable input delay from 4  $\mu$ s
- Channel functions:
  - HW enable; start of signal output with the onboard digital input
  - Parameterizable ON delay; for precise deceleration between the HW enable and the start of output
  - Current measurement in the operating modes pulse-width modulation and pulse chain; enables control of the output current mean value over a period. This allows you to compensate for the effect of temperature on the actuator resistance.
  - Cyclic control of the respective main setpoint from the PLC in every operating mode; other values can be modified flexibly from the user program.
- Supported system functions:
  - Isochronous mode; enables precision-timed connection of the setpoint output to a higher-level controller
  - Firmware update
  - Identification data I&M

### Ordering data

### Article No.

#### TM Pulse 2x24V pulse output module

PWM and pulse output, 2 channels of 2 A for proportional valves and DC motors

6ES7138-6DB00-0BB1

#### Suitable BaseUnits

#### BU20-P12+A0+4B

BU type B1; BaseUnit (dark); without AUX terminals; for continuing the load group

6ES7193-6BP20-0BB1

#### Accessories

#### Equipment labeling plate

10 sheets of 16 labels

6ES7193-6LF30-0AW0

#### Labeling strips

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AA0

500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AG0

1 000 labeling strips DIN A4, light gray, card, for inscription with laser printer

6ES7193-6LA10-0AA0

1 000 labeling strips DIN A4, yellow, card, for inscription with laser printer

6ES7193-6LA10-0AG0

#### BU cover

For covering empty slots (gaps); 5 units

- 15 mm wide
- 20 mm wide

6ES7133-6CV15-1AM0

6ES7133-6CV20-1AM0

#### Mechanical coding elements

For automatic coding of I/O modules; spare part. 20 units

Type A

6ES7193-6KA00-3AA0

Type B

6ES7193-6KB00-3AA0

Type C

6ES7193-6KC00-3AA0

Type D

6ES7193-6KD00-3AA0

## Technical specifications

Article number	<b>6ES7138-6DB00-0BB1</b> ET 200SP, TM Pulse 2x24V
<b>General information</b>	
Product type designation	TM Pulse 2x24 V
<b>Product function</b>	
• I&M data	Yes; I&M 0
• Isochronous mode	Yes
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/ integrated from version	V13 SP1 + HSP
• STEP 7 configurable/integrated from version	V5.5 SP4 and higher
• PROFIBUS from GSD version/ GSD revision	GSD Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.31
<b>Supply voltage</b>	
<b>Load voltage L+</b>	
• Rated value (DC)	24 V
• Short-circuit protection	Yes
• Reverse polarity protection	Yes; against destruction
<b>Encoder supply</b>	
Number of outputs	2; A common 24V encoder supply for both channels
<b>24 V encoder supply</b>	
• 24 V	Yes; L+ (-0.8 V)
• Short-circuit protection	Yes; per module, electronic
• Output current, max.	300 mA
<b>Digital inputs</b>	
Number of digital inputs	2; 1 per channel
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes
<b>Digital input functions, parameterizable</b>	
• Freely usable digital input	Yes
• HW enable for digital output	Yes
<b>Input voltage</b>	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
• permissible voltage at input, max.	30 V
<b>Input current</b>	
• for signal "1", typ.	2.5 mA
<b>Input delay (for rated value of input voltage) for standard inputs</b>	
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
- at "0" to "1", min.	4 µs; for parameterization "none"
- at "1" to "0", min.	4 µs; for parameterization "none"

Article number	<b>6ES7138-6DB00-0BB1</b> ET 200SP, TM Pulse 2x24V
<b>Digital outputs</b>	
Type of digital output	P- and M-switching
Number of digital outputs	2; 1 per channel
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Limitation of inductive shutdown voltage to	-0.8 V
Controlling a digital input	Yes
<b>Digital output functions, parameterizable</b>	
• Freely usable digital output	Yes
• PWM output	Yes
- Number, max.	2; 1 per channel
- Cycle duration, parameterizable	Yes; Max. 85 s
• Connection of a proportional valve	Yes
• Dithering	Yes
• Current measurement	Yes
• Current control	Yes
• Connection of a DC motor	Yes
• ON-delay	Yes
• OFF-delay	Yes
• Frequency output	Yes
• Pulse train	Yes
• Pulse output	Yes
<b>Switching capacity of the outputs</b>	
• with resistive load, max.	2 A
• on lamp load, max.	10 W; 1 W with High Speed output
<b>Load resistance range</b>	
• lower limit	12 Ω; 240 ohm with High Speed output
• upper limit	12 kΩ
<b>Output voltage</b>	
• Type of output voltage	DC
• for signal "0", max.	1 V
• for signal "1", min.	23.2 V; L+ (-0.8 V)
<b>Output current</b>	
• for signal "1" rated value	2 A; 0.1 A with High Speed output, observe derating
<b>Output delay with resistive load</b>	
• "0" to "1", typ.	0 µs; With High Speed output, 4.5 µs with Standard output
• "0" to "1", max.	0.8 µs; With High Speed output, 9 µs with Standard output
• "1" to "0", typ.	0 µs; With High Speed output, 4.5 µs with Standard output
• "1" to "0", max.	0.8 µs; With High Speed output, 9 µs with Standard output
<b>Parallel switching of two outputs</b>	
• for uprating	Yes

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules &gt; Technology modules &gt; TM Pulse 2x24V pulse output module

**Technical specifications**

Article number	<b>6ES7138-6DB00-0BB1</b> ET 200SP, TM Pulse 2x24V
<b>Switching frequency</b>	
• with resistive load, max.	100 kHz; With High Speed output, 10 kHz with standard output
• with inductive load, max.	100 kHz; With High Speed output, 10 kHz with standard output
• on lamp load, max.	10 Hz
<b>Total current of the outputs</b>	
• Current per channel, max.	2 A
• Current per group, max.	4 A
• Current per module, max.	4 A
<b>Isochronous mode</b>	
Bus cycle time (TDP), min.	250 µs; with 1 channel configuration, 375 µs with 2 channel configuration
<b>Interrupts/diagnostics/status information</b>	
Diagnostics function	Yes
Substitute values connectable	Yes; Parameterizable
<b>Alarms</b>	
• Diagnostic alarm	Yes
<b>Diagnoses</b>	
• Monitoring the supply voltage	Yes
• Short-circuit	Yes
<b>Diagnostics indication LED</b>	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes
• for module diagnostics	Yes; green/red DIAG LED
<b>Integrated Functions</b>	
Counter	No
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and backplane bus	Yes
<b>Standards, approvals, certificates</b>	
Suitable for safety functions	No

Article number	<b>6ES7138-6DB00-0BB1</b> ET 200SP, TM Pulse 2x24V
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C; Observe derating
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C; Observe derating
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual
<b>Decentralized operation</b>	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFIBUS master	Yes
to standard PROFINET controller	Yes
<b>Dimensions</b>	
Width	20 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	50 g

## Overview



The TM StepDrive module from Phytron is a high-precision stepper motor control with integrated power output stage for use in the SIMATIC ET 200SP distributed I/O system. It is the 1-step-drive successor model for SIMATIC ET 200S.

The module can be used together with system and I/O components of the ET 200SP distributed I/O system. Operation is possible with the following head modules:

- IM PROFIBUS
- IM PROFINET
- ET 200SP CPU

Corresponding GSD files and an HSP are available.

The ET 200SP TM StepDrive 24...48V/5A is a product of our Phytron GmbH product partner and is only available from the Phytron GmbH company.

**Note**

Product partners are external companies outside Siemens AG and its associated companies. Information about and descriptions of products made by product partners are non-binding, and are the responsibility of the product partners. These products are manufactured independently and under the responsibility of the respective product partner, and are sold and supplied by it under its terms of business and delivery.

Unless compulsory by law, Siemens assumes no liability or warranty for these products or for connection with these products of the product partners.

## Ordering data

## Article No.

**TM StepDrive stepper motor control**

More information and ordering options via Phytron (company):  
<http://www.phytron.com/tm-stepdrive>

High-precision stepper motor control for ET 200SP

**Suitable BaseUnits****BU20-P12+A0+4B****6ES7193-6BP20-0BB1**

BU type B1; BaseUnit (dark); without AUX terminals; for continuing the load group

**Accessories****Mechanical coding elements**

For automatic coding of I/O modules; spare part. 20 units

Type A

**6ES7193-6KA00-3AA0**

Type B

**6ES7193-6KB00-3AA0**

Type C

**6ES7193-6KC00-3AA0**

Type D

**6ES7193-6KD00-3AA0**

## Technical specifications

- Suitable for bipolar control of 2-phase stepper motors of 4-, (6-) or 8-wire design (in 4-wire system)
- 5 A peak phase current with adjustable current steps
- Supply voltage from 24 to 48 V DC
- Up to 1/256 microstep (physical resolution: approx. 51 200 positions per revolution (0.007°/step)).
- Maximum stepping rate: 250 000 steps/s
- 2 digital inputs for limit and reference switches
- Diagnostics LEDs (overcurrent, overtemperature, traversing task or motor running ...)
- Short-circuit-proof, overload-proof
- Data record transfer for power output stage parameter assignment and diagnostics during runtime
- Overdrive: Current adaptation for higher clock frequencies
- Booster: Enhanced torque during acceleration or braking
- Adjustable response to CPU stop

## More information

You can find more information about the module as well as contact information at:

<http://www.phytron.com/tm-stepdrive>

Here you will also find the manual, the data sheet, the HSP, a link to the GSD files as well as sample function blocks for SIMATIC.

Service and support:

<http://www.phytron.com/support>

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > SIMATIC ET 200SP ECC charging controllers

### Overview

SIPLUS and SIMATIC Electrical Charge Controller (SECC) are the key components in infrastructure solutions for the conductive charging of electric vehicles.

They perform the following functions:

- Detection of the charging cable and its permissible current carrying capacity
- Transfer of the maximum charging current from the charging station to the electric vehicle
- Evaluation of the status signals from the electric vehicle:
  - Ready for charging
  - Charging
  - Charging with ventilation
- Cost-optimized, space-saving charging infrastructure solutions due to compact design based on SIMATIC ET 200SP.

#### ET 200SP TM ECC 2xPWM ST AC module



- Control of charging outputs according to IEC 61851 by parameterizable SIMATIC ET 200SP TM ECC 2xPWM ST charging controller
- Control of load tap-off
- Control of connector lock
- Evaluation of connector lock or load contactor status

#### ET 200SP TM ECC PL ST DC module



- The SIMATIC ET 200SP TM ECC PL ST charging controller fully controls a DC charging process according to DIN SPEC 70121.
- The following sequences are performed:
  - Session Setup
  - Service Discovery
  - Service and Payment Selection
  - Contract Authentication
  - Charge Parameter Discovery
  - Power Delivery
  - Charging Status
  - Cable Check
  - Pre Charging
  - Current Demand
  - Welding Detection
  - Session Stop

#### Accessories: Calibration Kit TM ECC CCS2

Expansion kit for calibration of the power line signal strength of an EVSE.

- According to DIN SPEC 70121 / ISO15118 or design guidelines for CCS charging stations Type 2
- Suitable for the SIMATIC ET 200SP TM ECC PL ST technology module

Ordering data	Article No.	Article No.
<b>Charging controller SIMATIC ET 200SP TM ECC 2xPWM ST</b>  Designed for controlling charging outputs according to IEC 61851 and parameterizable, with 2 charging outputs, ambient temperature -30 °C ... 60° C  2x control pilot, 2x plug present, 2x DQ switching contact for load contactor as open collector, 2x DI for load contactor feedback or connector lock;  2x ACT for connector lock suitable for BU type BU20-P12+A0+4B and BU20-P12+A4+0B  With conformal coating, based on 6FE1242-6TM10-0BB1.	<b>6FE1242-6TM10-0BB1</b>	<b>Technology module SIMATIC ET 200SP TM ECC PL ST</b>  Charging controller for the conductive charging of electric vehicles according to DIN SPEC 70121, charging mode 4, ambient temperature -30 °C ... 60 °C  1x control pilot including Powerline Green Phy, 1x plug present/proximity pilot, 1x digital out TRIP function as open collector, 1x digital out (DQ P) as open collector, suitable for BU type BU20-P12+A0+4B or BU type BU20-P12+A4+0B
	<b>6FE1242-6TM10-2BB1</b>	<b>Expansion kit SIMATIC Calibration Kit TM ECC CCS2</b>  Expansion kit for calibration of the power line signal strength of an EVSE according to DIN SPEC 70121 / ISO15118 or design guidelines for CCS charging stations.  Suitable for 6FE1242-6TM20-0BB1 SIMATIC ET 200SP TM ECC PL ST
		<b>6FE1242-6TM20-0BB1</b>
		<b>6FE1244-0AD10-0AA0</b>

### Technical specifications

Article number	<b>6FE1242-6TM10-0BB1</b>	<b>6AG1242-6TM10-2BB1</b>	<b>6FE1242-6TM20-0BB1</b>
	SIMATIC ET 200SP TM ECC 2xPWM ST	SIPLUS ET 200SP TM ECC 2xPWM ST	SIMATIC ET 200SP TM ECC PL ST
<b>General information</b>			
Product type designation	ECC 2x PWM ST		ECC PL ST
Product description	Technology modules for the conductive AC charging of electric vehicles according to IEC 61851	Communication controller for controlling conductive AC charging according to IEC 61851	Technology module for the conductive charging of electric vehicles according to DIN 70121
usable BaseUnits	BU type B0, B1		
Color code for module-specific color identification plate		CC40	
Number of channels	2; Acc. to IEC 61851-1 Mode 3 and/or SAE J1772	2; According to IEC 61851/SAE J1772	1; Acc. to IEC 61851-1 Mode 4 and DIN SPEC 70121
<b>Product function</b>			
• I&M data	Yes; I&M0 to I&M3		
• Isochronous mode	No		
<b>Engineering with</b>			
• STEP 7 TIA Portal configurable/integrated from version	V14 SP1		STEP 7 V15.1 or higher
<b>Installation type/mounting</b>			
Mounting type	standard rail		
Mounting position	Horizontal		Horizontal, vertical
<b>Supply voltage</b>			
Type of supply voltage	DC		
Rated value (DC)	24 V		
Reverse polarity protection	Yes; against destruction		
<b>Load voltage L+</b>			
• Rated value (DC)	24 V		24 V
• Reverse polarity protection			Yes
<b>Input current</b>			
Current consumption, typ.	40 mA		
Current consumption, max.	90 mA		100 mA

**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

I/O modules &gt; Technology modules &gt; SIMATIC ET 200SP ECC charging controllers

**Technical specifications**

Article number	<b>6FE1242-6TM10-0BB1</b> SIMATIC ET 200SP TM ECC 2xPWM ST	<b>6AG1242-6TM10-2BB1</b> SIPLUS ET 200SP TM ECC 2xPWM ST	<b>6FE1242-6TM20-0BB1</b> SIMATIC ET 200SP TM ECC PL ST
<b>Digital inputs</b>			
Number of digital inputs	2; 1 per channel		0
Digital inputs, parameterizable	Yes; 12 V / 24 V		No
<b>Digital input functions, parameterizable</b>			
• Freely usable digital input	No; Readback contact contactor / connector lock		
<b>Input voltage</b>			
• Type of input voltage	DC		
• for signal "0"	<0.2 V (nom)		
• for signal "1"	>0.6 V (nom)		
• permissible voltage at input, min.	0 V		
• permissible voltage at input, max.	30 V		
<b>Cable length</b>			
• shielded, max.			10 m
• unshielded, max.	30 m		
<b>Digital outputs</b>			
Type of digital output	Transistor		
Number of digital outputs	2; 1 per channel		2; 1x digital out TRIP function as open collector, 1x digital out (DQ P) as open collector
Current-sinking			Yes
short-circuit proof	Yes		
Short-circuit protection	Yes; electronic/thermal		
<b>Digital output functions, parameterizable</b>			
• PWM output	Yes; According to IEC 61851		Yes; Acc. to DIN SPEC 70121
- Number, max.	2; 1 per channel		1; 1 per channel
• Connection of a DC motor	Yes; ACT p/n connector locking		No; Only fixed charging cables are permitted for DC charging systems
<b>Switching capacity of the outputs</b>			
• with resistive load, max.	1.3 A		0.6 A; Per digital output
<b>Output voltage</b>			
• Type of output voltage	DC		
• Rated value (DC)	24 V		
<b>Cable length</b>			
• unshielded, max.	30 m		10 m
<b>Analog outputs</b>			
Number of analog outputs	2; Control pilot acc. to IEC 61851-1 and/or SAE J1772		1
Type of analog output			Control pilot including Powerline Green Phy, acc. to DIN SPEC 70121
Connection of a DC motor	Yes; Motor for connector lock		No
<b>Protocols</b>			
Bus communication	Yes		Yes; Backplane bus
Vehicle communication according to IEC 61851	Yes; MODE 3		Yes; Mode 4
<b>Interrupts/diagnostics/status information</b>			
<b>Alarms</b>			
• Diagnostic alarm	Yes		
<b>Diagnoses</b>			
• Monitoring the supply voltage	No		No; Supply voltage diagnostics
• Wire-break			No
• Short-circuit	Yes		No

## Technical specifications

Article number	6FE1242-6TM10-0BB1	6AG1242-6TM10-2BB1	6FE1242-6TM20-0BB1
	SIMATIC ET 200SP TM ECC 2xPWM ST	SIPLUS ET 200SP TM ECC 2xPWM ST	SIMATIC ET 200SP TM ECC PL ST
<b>Diagnostics indication LED</b>			
• ERROR LED	Yes; red LED		No
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED		
• Channel status display	Yes; green LED		
• for module diagnostics	Yes; green/red DIAG LED		
<b>Potential separation</b>			
<b>Potential separation channels</b>			
• between the channels	No		No; Only one channel is available
• between the channels and backplane bus	Yes		
<b>EMC</b>			
Electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge		
Field-related interference acc. to IEC 61000-4-3	10 V/m (80 ... 1 000 MHz), 3 V/m (1.4 ... 2.0 GHz), 1 V/m (2.0 ... 2.7 GHz)		
Conducted interference due to burst acc. to IEC 61000-4-4	2 kV signal lines		
Conducted interference due to surge acc. to IEC 61000-4-5	On DC supply lines: 0.5 kV symmetrical and asymmetrical		
Conducted interference due to high-frequency radiation acc. to IEC 61000-4-6	10 V (0.15 ... 80 MHz)		
<b>Standards, approvals, certificates</b>			
Certificate of suitability	CE / RCM / EAC / UL / KC	CE	CE / RCM / EAC / UL / KC
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	-30 °C		-30 °C
• max.	60 °C		60 °C
• horizontal installation, min.	-30 °C	-30 °C; = Tmin	-30 °C
• horizontal installation, max.	60 °C	60 °C; = Tmax	60 °C
• vertical installation, min.	-30 °C	-30 °C; = Tmin	-30 °C
• vertical installation, max.	50 °C	50 °C; = Tmax	50 °C
<b>Ambient temperature during storage/transportation</b>			
• Storage, min.	-40 °C		
• Storage, max.	70 °C		
• Transportation, min.	-40 °C		
• Transportation, max.	70 °C		
<b>Altitude during operation relating to sea level</b>			
• Installation altitude above sea level, max.	2 000 m	5 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)
<b>Relative humidity</b>			
• Operation, min.	5 %		5 %
• Operation, max.	95 %; no condensation		95 %; no condensation
• With condensation, tested in accordance with IEC 60068-2-38, max.		100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	
<b>Vibrations</b>			
• Vibration resistance during operation acc. to IEC 60068-2-6	10 ... 58 Hz / 0.075 mm, 58 ... 150 Hz / 1 g		
<b>Shock testing</b>			
• Shock resistance acc. to IEC 60068-2-27	15 g / 11 ms		



**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules &gt; Technology modules &gt; SIMATIC ET 200SP ECC charging controllers

**Technical specifications**

Article number	6FE1242-6TM10-0BB1 SIMATIC ET 200SP TM ECC 2xPWM ST	6AG1242-6TM10-2BB1 SIPLUS ET 200SP TM ECC 2xPWM ST	6FE1242-6TM20-0BB1 SIMATIC ET 200SP TM ECC PL ST
<b>Resistance</b>			
<b>Coolants and lubricants</b>			
- Resistant to commercially available coolants and lubricants		Yes; Incl. diesel and oil droplets in the air	
<b>Use in stationary industrial systems</b>			
- to biologically active substances according to EN 60721-3-3		Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	
- to chemically active substances according to EN 60721-3-3		Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	
- to mechanically active substances according to EN 60721-3-3		Yes; Class 3S4 incl. sand, dust, *	
- Against mechanical environmental conditions acc. to EN 60721-3-3		Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
<b>Usage in industrial process technology</b>			
- Against chemically active substances acc. to EN 60654-4		Yes; Class 3 (excluding trichlorethylene)	
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04		Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	
<b>Remark</b>			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04		* The supplied plug covers must remain in place over the unused interfaces during operation!	
<b>Conformal coating</b>			
• Coatings for printed circuit board assemblies acc. to EN 61086		Yes; Class 2 for high reliability	
• Protection against fouling acc. to EN 60664-3		Yes; Type 1 protection	
• Military testing according to MIL-I-46058C, Amendment 7		Yes; Discoloration of coating possible during service life	
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A		Yes; Conformal coating, Class A	
<b>Decentralized operation</b> to SIMATIC S7-1500	Yes		
<b>Dimensions</b>			
Width	20 mm		
Height	73 mm		
Depth	58 mm		
<b>Weights</b>			
Weight, approx.	32 g		51 g
<b>Other</b>			
Note:			The Tone Mask of the Green Phy defined in DIN 70121 for North America applies

## Technical specifications

Article number	<b>6FE1244-0AD10-0AA0</b> SIMATIC Calibration Kit TM ECC CCS2
<b>General information</b>	
Product type designation	Calibration kit TM ECC CCS2
Product description	Expansion kit for adjusting the powerline signal strength of an EVSE in accordance with DIN SPEC 70121/ISO 15118 or design guidelines for CCS charging stations
<b>Installation type/mounting</b>	
Mounting type	standard rail
<b>Supply voltage</b>	
Type of supply voltage	DC
Rated value (DC)	24 V; Optional: external infeed
Reverse polarity protection	Yes
<b>Load voltage L+</b>	
• Short-circuit protection	Yes
• Reverse polarity protection	Yes
<b>Input current</b>	
Current consumption, max.	0.5 A
<b>Interfaces</b>	
Number of other interfaces	2; 1x CCS (Combined Charging System) acc. to IEC 62196 1x power supply DC adapter (5.50 mm x 2.10 mm x 9.5 mm) 24 V
<b>Protocols</b>	
Vehicle communication according to IEC 61851	Yes; Mode 4
<b>EMC</b>	
Electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge
Field-related interference acc. to IEC 61000-4-3	10 V/m (80 ... 1 000 MHz), 3 V/m (1.4 ... 2.0 GHz), 1 V/m (2.0 ... 2.7 GHz)
<b>Degree and class of protection</b>	
IP degree of protection	IP30
<b>Standards, approvals, certificates</b>	
Certificate of suitability	CE

Article number	<b>6FE1244-0AD10-0AA0</b> SIMATIC Calibration Kit TM ECC CCS2
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• min.	0 °C
• max.	40 °C
<b>Ambient temperature during storage/transportation</b>	
• Storage, min.	-30 °C
• Storage, max.	85 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	2 000 m
• Ambient air temperature-barometric pressure-altitude	Up to max. 2 000 m
<b>Relative humidity</b>	
• Operation, min.	5 %
• Operation, max.	95 %
<b>Mechanics/material</b>	
Material of housing	Plastic: polycarbonate, abbreviation: PC- GF 10 FR
<b>Dimensions</b>	
Width	250 mm
Height	122 mm
Depth	160 mm
<b>Weights</b>	
Weight, approx.	1.5 kg

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > SIWAREX WP321

### Overview



SIWAREX WP321 is a versatile and flexible weighing module for the seamless integration of a static scale into the SIMATIC automation environment.

The electronic weighing system is integrated in the SIMATIC ET 200SP series and uses all the features of a modern automation system, such as integrated communication, operator control and monitoring, diagnostic system and configuration tools in the TIA Portal, SIMATIC STEP 7, WinCC flexible and PCS 7.

In conjunction with the digital SIWAREX DB junction box, up to four connected load cells can be diagnosed separately. This enables the weigh beam module to detect the failure of individual load cells and, in the event of an error, to provide relevant load cell data such as order number and location designation directly in the CPU or at the HMI.

This increases the operational reliability of the scale, reduces downtimes, makes commissioning easier and simplifies servicing.

All messages and process values of the individual load cell channels are of course available in the SIMATIC controller.

### Ordering data

### Article No.

**TM SIWAREX WP321 weighing module** **7MH4138-6AA00-0BA0**

Single-channel, for platform scales or hopper scales with analog load cells (1 - 4 mV/V), 1 x LC, 1 x RS 485.

**SIWAREX WP321 Equipment Manual**

Available in a range of languages  
Free download on the Internet at:  
<http://www.siemens.com/weighing/documentation>

**SIWAREX WP321 "Ready for Use"**

TIA Portal and SIMATIC Manager sample configuration  
Free download on the Internet at:  
<http://www.siemens.com/weighing/documentation>

**SIWATOOL V4 & V7** **7MH4900-1AK01**

Service and commissioning software for SIWAREX weighing modules

**SIWAREX PCS 7 AddOn Library for PCS7 V8.x and V9.0** **7MH4900-1AK61**

- Supports PROFINET

APL faceplates and function blocks for:

- SIWAREX U
- SIWAREX FTA
- SIWAREX FTC\_B (belt scale)
- SIWAREX WP321

Classic faceplate and function block for:

- SIWAREX FTC\_L (Loss-in-weight)

**Accessories (mandatory requirement)**

**BaseUnit (Type A0 – one BaseUnit required for each WP321)**

- For opening a new potential group
  - BU15P-16+A0+2D
  - BU15P-16+A10+2D
- For continuing the potential group
  - BU15P-16+A0+2B
  - BU15P-16+A10+2B

**6ES7193-6BP00-0DA0**  
**6ES7193-6BP20-0DA0**

**6ES7193-6BP00-0BA0**  
**6ES7193-6BP20-0BA0**

**Shielded connection for BaseUnit (5 units / for 5 scales)** **6ES7193-6SC00-1AM0**

For laying the load cell cable

Ordering data	Article No.	Article No.
<b>Accessories (optional)</b>		
<b>SIWAREX JB junction box, aluminum housing</b>  For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes.	<b>7MH5001-0AA20</b>	<b>RS485/USB interface converter</b>  Commercially available interface converter with FTDI chip, e.g. USB-Nano from CTI  <a href="https://www.cti-shop.com/en/rs485-converter/usb-nano-485">https://www.cti-shop.com/en/rs485-converter/usb-nano-485</a>
<b>SIWAREX JB junction box, stainless steel housing</b>  For connecting up to 4 load cells in parallel.	<b>7MH5001-0AA00</b>	<b>Remote display</b>  The Siebert S102 and S302 remote digital displays can be directly connected to the SIWAREX FTA via an RS485 interface.  Siebert Industrieelektronik GmbH PO Box 1180D-65565 Eppelborn, Germany Tel: +49 6806/980-9 Fax: +49 6806/980-999  Internet: <a href="https://www.siebert-group.com/en/">https://www.siebert-group.com/en/</a>  Detailed information is available from the manufacturer.
<b>SIWAREX JB junction box, stainless steel housing (ATEX)</b>  For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate).	<b>7MH5001-0AA01</b>	
<b>Digital SIWAREX DB junction box</b>  For enhanced diagnostic and monitoring options in conjunction with SIWAREX WP electronics  Enclosure made of: • Aluminum • Stainless steel	<b>7MH5001-0AD20</b> <b>7MH5001-0AD01</b>	<b>Commissioning</b>  <b>Commissioning charge for one static scale with SIWAREX module</b>  (Flat charge for travel and setup must be ordered separately)  Scope: • Recording of data • Checking of mechanical installation of the scale • Checking of electrical wiring and function • Static adjustment of the scale  Requirements: • Mechanical design functional • Modules electrically wired and tested • Calibration weights available • Free access to scale
<b>SIWAREX IS Ex interface</b>  For intrinsically-safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately.  Approved for use in the EU • Short-circuit current < 199 mA DC • Short-circuit current < 137 mA DC	<b>7MH4710-5BA</b> <b>7MH4710-5CA</b>	<b>9LA1110-8SN50-0AA0</b>
<b>Cable (optional)</b>		
<b>Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) – CY</b>  For connecting SIWAREX electronic weighing systems to junction box (JB), extension box (EB) and Ex interface or between two EBs. For permanent installation. Occasional bending is possible.  External diameter: approx. 10.8 mm (0.43 inch) Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F) Sold by the meter. • Sheath color: orange • For hazardous atmospheres. Sheath color: blue.	<b>7MH4702-8AG</b> <b>7MH4702-8AF</b>	<b>9LA1110-8RA10-0AA0</b>

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules &gt; Technology modules &gt; SIWAREX WP321

**Technical specifications**

<b>SIWAREX WP321</b>	
<b>Integration in automation systems</b>	
SIMATIC S7-300, S7-400, S7-1200 and S7-1500	Via SIMATIC ET 200SP interface module (PROFIBUS or PROFINET)
Other manufacturers (with restrictions)	Via SIMATIC ET 200SP interface module (PROFIBUS or PROFINET)
<b>Communication interfaces</b>	<ul style="list-style-type: none"> <li>• SIMATIC ET 200SP backplane bus</li> <li>• RS 485 (SIWATOOL, Siebert remote display)</li> </ul>
<b>Commissioning options</b>	<ul style="list-style-type: none"> <li>• Using SIWATOOL V7</li> <li>• Using function block in SIMATIC CPU / Touch Panel</li> </ul>
<b>Measuring accuracy</b>	
According to DIN 1319-1 of full-scale value at 20 °C ± 10 K (68 °F ± 10 K)	0.05%
Internal resolution	± 2 million parts
Measuring frequency	100 / 120 / 600 Hz
<b>Digital filter</b>	Variable adjustable low-pass and average filter
<b>Typical applications</b>	<ul style="list-style-type: none"> <li>• Non-automatic weighing instruments</li> <li>• Force measurements</li> <li>• Fill-level monitoring</li> <li>• Belt tension monitors</li> </ul>
<b>Weighing functions</b>	
Weight values	<ul style="list-style-type: none"> <li>• Gross</li> <li>• Net</li> <li>• Tare</li> </ul>
Limit values	<ul style="list-style-type: none"> <li>• 2 × min/max</li> <li>• Empty</li> </ul>
Zeroing	Via command by controller or HMI
Tare	Via command by controller or HMI
External tare specification	Via command by controller or HMI
Calibration commands	Via command by controller or HMI

<b>SIWAREX WP321</b>	
<b>Load cells</b>	Full-bridge strain gauges in 4-wire or 6-wire system
<b>Load cell powering</b>	
Supply voltage (value applies at sensor, cable-related voltage drops of up to 5 V are controlled)	4.85 V DC ±2%
Permissible load resistance	<ul style="list-style-type: none"> <li>• <math>R_{Lmin}</math> &gt; 40 Ω</li> <li>• <math>R_{Lmax}</math> &lt; 4 100 Ω</li> </ul>
With SIWAREX IS Ex interface	<ul style="list-style-type: none"> <li>• <math>R_{Lmin}</math> &gt; 50 Ω</li> <li>• <math>R_{Lmax}</math> &lt; 4 100 Ω</li> </ul>
<b>Load cell characteristic</b>	1 ... 4 mV/V
<b>Permissible range of measuring signal (at greatest set characteristic value)</b>	-21.3 ... +21.3 mV
<b>Max. distance of load cells</b>	1000 m (459.32 ft)
<b>Connection to load cells in Ex zone 1</b>	Optionally via SIWAREX IS Ex interface (compatibility of the load cells must be checked)
<b>Approvals/certificates</b>	<ul style="list-style-type: none"> <li>• ATEX Zone 2</li> <li>• UL</li> <li>• FM</li> <li>• EAC</li> <li>• KCC</li> <li>• IECEx</li> <li>• RCM</li> </ul>
<b>Auxiliary power supply</b>	
Rated voltage	24 V DC
Max. power consumption	Typ. 0.1 A @ 24 V DC (0.2 A max.)
Max. power consumption SIMATIC Bus	30 mA
<b>IP degree of protection to DIN EN 60529; IEC 60529</b>	IP20
<b>Climatic requirements</b>	
$T_{min(IND)} \dots T_{max(IND)}$ (operating temperature)	
• Vertical installation in SIMATIC S7 <sup>1)</sup>	-25 ... +50 °C (-13 ... 122 °F)
• Horizontal installation in SIMATIC S7 <sup>1)</sup>	-25 ... +60 °C (-13 ... 140 °F)
<b>EMC requirements</b>	According to IEC 61000-6-2, IEC 61000-6-4, OIML R76-1
<b>Dimensions (width)</b>	15 mm (0.6 inch)

<sup>1)</sup> The S7 standard modules may not be operated at temperatures below 0 °C (32 °F). For operating conditions below 0 °C (32 °F), SIMATIC modules from the SIPLUS series must be used.

## Overview



The SIWAREX WP351 is a compact, precise weighing module in the SIMATIC ET 200SP format.

With a width of just 20 mm it is one of the slimmest weighing modules on the market, yet its firmware includes the functionalities of an automatic totalizing weighing instrument and checking, bagging and filling scale.

All operating modes are part of the firmware and certified according to OIML R-51, R-61, R-76 and R-107\*. This means the WP351 can be used in both scales requiring official calibration and those that do not, where demands are high regarding speed and accuracy.

\* certificates available soon

## Ordering data

**TM SIWAREX WP351 HF weighing module**

SIMATIC ET 200SP,  
TM SIWAREX WP351 HF,  
legal-for-trade weighing module  
for automatic dosing, filling and  
checking scales and totalizing  
weighing instruments

**SIWAREX WP351 Equipment Manual**

Available in a range of languages

Free download on the Internet at:  
<http://www.siemens.com/weighing/documentation>

**SIWAREX WP351 "Getting Started" sample project**

Sample software shows beginners  
how to program the scales in  
TIA Portal V15.1

Free download on the Internet at:  
<http://www.siemens.com/weighing/documentation>

**ET 200SP BaseUnit type U0**

- For constructing a new potential group (white)
- For continuing an existing potential group (gray)

**Shield connection for ET 200SP**

Includes 5 shield connections

**SIWAREX JB junction box, aluminum housing**

For connecting up to 4 load cells  
in parallel, and for connecting  
multiple junction boxes.

**SIWAREX JB junction box, stainless steel housing**

For connecting up to 4 load cells  
in parallel.

**SIWAREX JB junction box, stainless steel housing (ATEX)**

For parallel connection of up to  
4 load cells (for zone allocation,  
see manual or type-examination  
certificate).

## Article No.

7MH4138-6BA00-0CU0

6ES7193-6BP00-0DU0

6ES7193-6BP00-0BU0

6ES7193-6SC00-1AM0

7MH5001-0AA20

7MH5001-0AA00

7MH5001-0AA01

## Article No.

**SIWAREX IS Ex interface**

For intrinsically safe connection  
of load cells. With ATEX approval  
(not UL/FM). Suitable for  
SIWAREX electronic weighing  
systems. Compatibility of load cells  
must be checked separately.

- With short-circuit current  
< 199 mA DC
- With short-circuit current  
< 137 mA DC

7MH4710-5BA

7MH4710-5CA

**Cable (optional)****Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) – CY**

For connecting SIWAREX electronic  
weighing systems to junction box  
(JB), extension box (EB) and  
Ex interface or between two EBs.  
For permanent installation.  
Occasional bending is possible.

External diameter:  
approx. 10.8 mm (0.43 inch)  
Permissible ambient temperature  
-40 ... +80 °C (-40 ... +176 °F)

Sold by the meter.

- Sheath color: orange
- For hazardous atmospheres.  
Sheath color: blue.

7MH4702-8AG

7MH4702-8AF

**Commissioning****Commissioning charge for one static scale with SIWAREX module**

(Flat charge for travel and setup  
must be ordered separately)

Scope:

- Recording of data
- Checking of mechanical installation  
of the scale
- Checking of electrical wiring and  
function
- Static adjustment of the scale

Requirements:

- Mechanical design functional
- Modules electrically wired and  
tested
- Calibration weights available
- Free access to scale

9LA1110-8SN50-0AA0

**Flat charge for travel and setup in Germany**

9LA1110-8RA10-0AA0

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules &gt; Technology modules &gt; SIWAREX WP351

**Technical specifications**

<b>SIWAREX WP351</b>	
Firmware version	V1.0
• FW update possible	Yes
Usable BaseUnits	BU type U0
<b>Reliability</b>	
Mean time between failures (MTBF)	62 years @ TA = 40 °C
<b>Product function</b>	
I&M data	Yes, I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal can be configured/integrated	Configurable as of V15 using HSP0281
• PROFIBUS as of GSD version/ GSD revision	GSD V04.02.41
• PROFINET as of GSD version/ GSD revision	GSDML V2.34
<b>Supply voltage</b>	
Load voltage L+	
• Rated value (DC)	24 V
• Permissible range, low limit, static (DC)	19.2 V
• Permissible range, high limit, static (DC)	28.8 V
• Permissible range, low limit, dynamic (DC)	18.5 V
• Permissible range, high limit, dynamic (DC)	30.2 V
• Reverse polarity protection	Yes
• Non-periodic overvoltages	35 V DC for 500 ms with a recovery time of 50 s
<b>Input current</b>	
Current consumption, max.	Max. 140 mA @ 24 V DC + [DQ 3 × 0.5 A]
<b>Power loss</b>	
Typical power loss	1.7 W
<b>Address range</b>	
Assigned address range	
• Inputs	32 bytes
• Outputs	32 bytes
<b>Power supply from SIMATIC S7 backplane bus</b>	
Current consumption from ET 200SP backplane bus	Max. 27 mA @ 3.5 V (SBK4)
<b>Analog load cell interface connection</b>	
Error limit according to DIN 1319-1 at 20 °C (-4 °F) +/-10 K	≤ 0.002% v.E.
Relative accuracy (absolute accuracy can only be achieved with local calibration using calibration standards)	
Measuring accuracy in accordance with OIML R76-1:2006/ EN 45501:2015	
• Class	III
• Resolution (d=e)	3 × 6000 d
• Error percentage pi	0.4
• Step voltage	0.4 μV/e

<b>SIWAREX WP351</b>	
Accuracy delivery state	Typ. 0.1% v.E.
The accuracy is relevant for module exchange or theoretical adjustment	
Sampling rate	1.024 ms
Input signal resolution	± 20 000 000
Measuring ranges	0 ... ±1 mV/V 0 ... ±2 mV/V 0 ... ±4 mV/V
Common mode voltage range	+2.8 ... 7.7 V
Strain gauge supply (constant voltage)	10 V DC (+1 % / -3 %) at the EXC terminals
Short-circuit and overload protection	Yes
Connection	6-wire or 4-wire (parameterizable)
Sensor voltage monitoring	Typ. ≤ 5.0 V
Min. strain gauge input resistance per channel	
• Without SIWAREX IS Ex-i interface	56 Ω
• With SIWAREX IS Ex-i interface	Lower impedance by means of external supply possible 87 Ω @ type 7MH4710-5BA 180 Ω @ type 7MH4710-5CA
Max. strain gauge resistance	4 100 Ω
Temperature coefficient range	≤ ±5 ppm/K
Temperature coefficient zero point	≤ ±0.015 μV/K
Linearity error	≤ 0.001%
Measured value filtering	Low-pass and average value filter configurable (DR3)
Galvanic isolation	500 V AC
50 Hz / 60 Hz noise suppression CMRR	> 80 dB
Input resistance	
• Signal line	Typ. 8*10 <sup>6</sup> Ω
• Sense line	Typ. 300*10 <sup>6</sup> Ω
Cable length	
• When using SIWAREX cable 7MH4702-8AG	Max. 500 m
<b>Ambient conditions</b>	
Ambient temperature in operation	
• Horizontal mounting position *	Min. -30 °C Max. +60 °C
• Vertical mounting position *	Min. -30 °C Max. +50 °C
Storage and transport temperature	-40 ... +70 °C (-40 ... +158 °F)

\* At a height of more than 2 000 meters above sea level, a derating of the ambient temperature of -1°C / 100 m has to be adhered to. The maximum permissible height is 5 000 meters above sea level. At over 0.6 A total current of the digital outputs DQ, a derating of the ambient temperature of -1°C per 100 mA has to be adhered to. The max. permissible total current is 1.5 A.

## Overview

**Technical properties**

- Counter module for ET 200SP
- Interfaces:
  - 24 V encoder signals A, B and N from P, M or push-pull-switching encoders and sensors
  - 24 V encoder supply output, short-circuit proof
  - 3 digital inputs for controlling the count operation, for saving or for setting the count value
  - 2 digital outputs for fast reactions regardless of the counter status or measured value

- Counting frequency 200 kHz (800 kHz with quadruple evaluation)
- Counting range: +/- 31 bits
- Measurement function
- Parameterizable hardware interrupts
- Parameterizable input filters for suppressing interferences at sensor and digital inputs

**Supported types of encoders/signals**

- 24 V incremental encoder with and without signal N
- 24 V pulse encoder with direction signal
- 24 V pulse encoder without direction signal
- 24 V pulse encoder for pulse up and down respectively

**Supported system functions**

- Isochronous mode
- Firmware update
- Identification data I&M

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

**Ordering data****Article No.****SIPLUS TM Count 1x24V counter module**

(Extended temperature range and exposure to environmental substances)

With one channel, max. 200 kHz; for 24 V encoder

**6AG1138-6AA01-2BA0****Usable BaseUnits**

(Extended temperature range and exposure to environmental substances)

**BU15-P16+A0+2D**

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

**6AG1193-6BP00-7DA0****BU15-P16+A0+2B**

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

**6AG1193-6BP00-7BA0****Article No.****BU15-P16+A10+2D**

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

**6AG1193-6BP20-7DA0****BU15-P16+A10+2B**

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

**6AG1193-6BP20-7BA0****SIPLUS Mounting Kit ET 200SP**

Mounting accessories for use with increased mechanical vibration and shock loads.

**6AG1193-6AA00-0AA0****Other accessories**

See SIMATIC TM Count 1x24V counter module, page 10/98



## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > SIPLUS TM Count 1x24V counter module

### Technical specifications

Article number	<b>6AG1138-6AA01-2BA0</b>
Based on	<b>6ES7138-6AA01-0BA0</b> SIPLUS ET 200SP TM COUNT 1X24V
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module
• vertical installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• vertical installation, max.	50 °C; = Tmax
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Resistance</b>	
<b>Coolants and lubricants</b>	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Article number	<b>6AG1138-6AA01-2BA0</b>
Based on	<b>6ES7138-6AA01-0BA0</b> SIPLUS ET 200SP TM COUNT 1X24V
<b>Usage in industrial process technology</b>	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

10

## Overview

**Technical properties**

- Counting and position detection module for ET 200SP
- Interfaces:
  - Encoder signals A, B and N for 5 V TTL or RS 422 differential signals
  - SSI interface with clock and data for RS 422 differential signals
  - 24 V encoder supply output, short-circuit proof
  - 2 digital inputs for controlling the counting process, for saving or setting the counter or position value
  - 2 digital outputs for fast reactions depending on the counter reading, position value or measured value
- Counter frequency 1 MHz (4 MHz with four-fold evaluation)
- Counting range: +/- 31 bits
- Measurement function
- Parameterizable hardware interrupts
- Parameterizable input filters for suppressing interferences at sensor and digital inputs

**Supported types of encoders/signals**

- Incremental encoders with or without N signal
- Pulse encoders with directional signal
- Pulse encoders without directional signal
- Pulse encoders for forward or reverse pulses
- SSI encoders with a frame length of 10 to 40 bits, of which up to 31 bits position value

**Supported system functions**

- Isochronous mode
- Firmware update
- Identification data I&M

**Note**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

## Ordering data

## Article No.

**SIPLUS TM PosInput 1 counting and position detection module**

(Extended temperature range and exposure to environmental substances)

With one channel, max. 1 MHz for 5 V TTL or RS422 differential signals or SSI absolute encoder

**6AG1138-6BA00-2BA0****Usable BaseUnits**

(Extended temperature range and exposure to environmental substances)

**BU15-P16+A0+2D**

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

**6AG1193-6BP00-7DA0****BU15-P16+A0+2B**

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

**6AG1193-6BP00-7BA0****BU15-P16+A10+2D**

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

**6AG1193-6BP20-7DA0****BU15-P16+A10+2B**

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

**6AG1193-6BP20-7BA0****Accessories****SIPLUS Mounting Kit ET 200SP**

Mounting accessories for use with increased mechanical vibration and shock loads.

**6AG1193-6AA00-0AA0****Other accessories**

See TM PosInput 1 counting and position detection module, page 10/102

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > SIPLUS TM PosInput 1 counting and position detection module

### Technical specifications

Article number	<b>6AG1138-6BA00-2BA0</b>	Article number	<b>6AG1138-6BA00-2BA0</b>
Based on	<b>6ES7138-6BA00-0BA0</b> SIPLUS ET 200SP TM POSINPUT 1	Based on	<b>6ES7138-6BA00-0BA0</b> SIPLUS ET 200SP TM POSINPUT 1
<b>Ambient conditions</b>		<b>Use on ships/at sea</b>	
<b>Ambient temperature during operation</b>		- to biologically active substances according to EN 60721-3-6	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	
• horizontal installation, max.	60 °C; = Tmax; see Derating BasedOn (e.g. manual)	- to chemically active substances according to EN 60721-3-6	
• vertical installation, min.	-40 °C; = Tmin	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	
• vertical installation, max.	50 °C; = Tmax; see Derating BasedOn (e.g. manual)	- to mechanically active substances according to EN 60721-3-6	
<b>Altitude during operation relating to sea level</b>		Yes; Class 6S3 incl. sand, dust; *	
• Installation altitude above sea level, max.	5 000 m	- Against mechanical environmental conditions acc. to EN 60721-3-6	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
<b>Relative humidity</b>		<b>Usage in industrial process technology</b>	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	- Against chemically active substances acc. to EN 60654-4	
<b>Resistance</b>		- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	
<b>Coolants and lubricants</b>		<b>Remark</b>	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	
<b>Use in stationary industrial systems</b>		<b>Conformal coating</b>	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	• Coatings for printed circuit board assemblies acc. to EN 61086	
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 2 for high reliability	
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	• Protection against fouling acc. to EN 60664-3	
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Type 1 protection	
		• Military testing according to MIL-I-46058C, Amendment 7	
		Yes; Discoloration of coating possible during service life	
		• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	
		Yes; Conformal coating, Class A	

## Overview



- 4 digital inputs, 6 digital outputs
- Inputs for detecting the input edges with  $\mu\text{s}$  accuracy
- Outputs for outputting the switching signals with  $\mu\text{s}$  accuracy
- 32x oversampling
- PWM output
- Counter function
- Outputs can be switched between 0.5 A standard and especially fast 0.1 A high-speed mode

**Note**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

## Ordering data

## Article No.

**SIPLUS TM timer DIDQ 10x24 V time-based IO module**

(Extended temperature range and exposure to environmental substances)

4 time-controlled inputs,  
6 time-controlled outputs

**6AG1138-6CG00-2BA0****Usable BaseUnits**

(Extended temperature range and exposure to environmental substances)

**BU15-P16+A0+2D****6AG1193-6BP00-7DA0**

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

**BU15-P16+A0+2B****6AG1193-6BP00-7BA0**

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

**BU15-P16+A10+2D****6AG1193-6BP20-7DA0**

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

**BU15-P16+A10+2B****6AG1193-6BP20-7BA0**

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

**Accessories****SIPLUS Mounting Kit ET 200SP****6AG1193-6AA00-0AA0**

Mounting accessories for use with increased mechanical vibration and shock loads.

**Other accessories**

See SIMATIC TM timer DIDQ 10x24V time-based IO module, page 10/105

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > SIPLUS TM timer DIDQ 10x24 V time-based IO module

### Technical specifications

Article number	<b>6AG1138-6CG00-2BA0</b>
Based on	<b>6ES7138-6CG00-0BA0</b> SIPLUS ET 200SP TM TIMER DIDQ 10x24V
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax; see Derating BasedOn (e.g. manual)
• vertical installation, min.	-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax; see Derating BasedOn (e.g. manual)
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Resistance</b>	
<b>Coolants and lubricants</b>	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Article number	<b>6AG1138-6CG00-2BA0</b>
Based on	<b>6ES7138-6CG00-0BA0</b> SIPLUS ET 200SP TM TIMER DIDQ 10x24V
<b>Use on ships/at sea</b>	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Usage in industrial process technology</b>	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

## Overview



2-channel pulse output module for SIPLUS ET 200SP

- Operating modes:
  - Single pulse with defined length
  - Pulse chain with defined number of pulses
  - Pulse width modulation (with flexible ON period, optional current control and dither function)
  - PWM signal for controlling a DC motor
  - ON and OFF delay; rising and falling edge can be delayed separately to the microsecond
  - Frequency output with defined output frequency
- Hardware:
  - 2 channels 24 V, 2 A output current output current can be switched in parallel to boost performance to 4 A of output current
  - Switching frequencies to 10 kHz; at reduced output current to 0.1 A up to 100 kHz
  - Push/pull output driver for especially steep edges at the outputs
  - Polarity change in DC motor operation for direction reversal
  - 1 high-speed 24 V digital input per channel with parameterizable input delay from 4  $\mu$ s
- Channel functions:
  - HW enable; Start of signal output with the onboard digital input
  - Parameterizable ON delay; for precise deceleration between the HW enable and the start of output
  - Current measurement in the operating modes pulse-width modulation and pulse chain; enables control of the output current mean value over a period. Temperature influences can thus be balanced to the resistance of the actuator.
  - Cyclic control of the respective main setpoint from the PLC in every operating mode; other values can be modified flexibly from the user program.
- Supported system functions:
  - Isochronous mode; enables precision-timed connection of the setpoint output to a higher-level controller
  - Firmware update
  - Identification data I&M

#### Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

## Ordering data

## Article No.

**SIPLUS TM Pulse 2x24V pulse output module**
**6AG1138-6DB00-2BB1**

(Extended temperature range and exposure to environmental substances)

PWM and pulse output, 2 channels of 2 A for proportional valves and DC motors

**Usable BaseUnits**

(Extended temperature range and exposure to environmental substances)

**BU20-P12+A0+4B**
**6AG1193-6BP20-7BB1**

BU type B1; BaseUnit (dark); without AUX terminals; for continuing the load group

**Accessories**
**SIPLUS Mounting Kit ET 200SP**
**6AG1193-6AA00-0AA0**

Mounting accessories for use with increased mechanical vibration and shock loads.

**Other accessories**

See  
SIMATIC TM Pulse 2x24V pulse output module, page 10/108

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules &gt; Technology modules &gt; SIPLUS TM Pulse 2x24V pulse output module

**Technical specifications**

Article number	<b>6AG1138-6DB00-2BB1</b>	Article number	<b>6AG1138-6DB00-2BB1</b>
Based on	<b>6ES7138-6DB00-0BB1</b> SIPLUS ET 200SP TM PULSE 2x24V	Based on	<b>6ES7138-6DB00-0BB1</b> SIPLUS ET 200SP TM PULSE 2x24V
<b>Ambient conditions</b>		<b>Use on ships/at sea</b>	
<b>Ambient temperature during operation</b>		- to biologically active substances according to EN 60721-3-6	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	
• vertical installation, min.	-40 °C; = Tmin (incl. condensation/frost)	Yes; Class 6S3 incl. sand, dust; *	
• vertical installation, max.	50 °C; Observe derating	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
<b>Altitude during operation relating to sea level</b>		<b>Usage in industrial process technology</b>	
• Installation altitude above sea level, max.	5 000 m	- Against chemically active substances acc. to EN 60654-4	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	
<b>Relative humidity</b>		<b>Remark</b>	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	
<b>Resistance</b>		<b>Conformal coating</b>	
<b>Coolants and lubricants</b>		• Coatings for printed circuit board assemblies acc. to EN 61086	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Class 2 for high reliability	
<b>Use in stationary industrial systems</b>		• Protection against fouling acc. to EN 60664-3	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Type 1 protection	
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Discoloration of coating possible during service life	
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Conformal coating, Class A	
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	

## Overview



SIPLUS Electrical Charging Controllers are the key components in infrastructure solutions for the conductive charging of electric vehicles.

They perform the following functions:

- Detection of the charging cable and its permissible current carrying capacity
- Transfer of the maximum charging current from the charging station to the electric vehicle
- Evaluation of the status signals from the electric vehicle:
  - Ready for charging
  - Charging
  - Charging with ventilation
- Cost-optimized, space-saving charging infrastructure solutions due to compact design based on SIMATIC ET 200SP

**SIPLUS ET 200SP TM ECC 2xPWM ST AC module**

- Control of charging outputs according to IEC 61851 by parameterizable SIPLUS ET 200SP TM ECC 2xPWM ST charging controller
- Control of load tap-off
- Control of connector lock
- Evaluation of connector lock or load contactor status

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

## Ordering data

## Article No.

**SIPLUS ET 200SP  
TM ECC 2xPWM ST  
charging controller****6AG1242-6TM10-2BB1**

(Exposure to environmental substances)

Designed for controlling charging outputs according to IEC 61851 and parameterizable, with 2 charging outputs, ambient temperature -30 °C ... 60° C;

2x control pilot,  
2x plug present,  
2x DQ switching contact for load contactor as open collector,  
2x DI for load contactor feedback or connector lock;

**Accessories****SIPLUS Mounting Kit ET 200SP****6AG1193-6AA00-0AA0**

Mounting accessories for use with increased mechanical vibration and shock loads.



## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > SIPLUS ET 200SP ECC charging controller

### Technical specifications

Article number	<b>6AG1242-6TM10-2BB1</b>
Based on	<b>6ES7242-6TM10-0BB1</b> SIPLUS ET 200SP TM ECC 2xPWM ST
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C; = Tmin
• horizontal installation, max.	60 °C; = Tmax
• vertical installation, min.	-30 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax
<b>Ambient temperature during storage/transportation</b>	
• Storage, min.	-40 °C
• Storage, max.	70 °C
• Transportation, min.	-40 °C
• Transportation, max.	70 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Vibrations</b>	
• Vibration resistance during operation acc. to IEC 60068-2-6	10 ... 58 Hz / 0.075 mm, 58 ... 150 Hz / 1 g
<b>Shock testing</b>	
• Shock resistance acc. to IEC 60068-2-27	15 g / 11 ms
<b>Resistance</b>	
<b>Coolants and lubricants</b>	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air

Article number	<b>6AG1242-6TM10-2BB1</b>
Based on	<b>6ES7242-6TM10-0BB1</b> SIPLUS ET 200SP TM ECC 2xPWM ST
<b>Use in stationary industrial systems</b>	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Usage in industrial process technology</b>	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

## Overview



SIPLUS WP321 is a versatile and flexible weighing module for the seamless integration of a static scale into the SIMATIC automation environment.

The electronic weighing system is integrated in the SIPLUS ET 200SP series and uses all the features of a modern automation system, such as integrated communication, operator control and monitoring, diagnostic system and configuration tools in the TIA Portal, SIMATIC STEP 7, WinCC flexible and PCS 7.

## Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information has been added.

SIPLUS WP321	
Article No.	6AG1138-6AA00-2BA8
Article No. based on	7MH4138-6AA00-0BA0
Ambient temperature range	-40 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical specifications	The technical specifications of the standard product apply, except for the ambient conditions.

## Ordering data

Ordering data	Article No.
<b>SIPLUS WP321 weighing module</b>	<b>6AG1138-6AA00-2BA8</b>
Single-channel, for platform or hopper scales with analog load cells (1–4 mV/V), 1 x LC, 1 x RS 485.  Extended temperature range and exposure to environmental substances	
<b>Accessories</b>	
<b>Mandatory</b>	
<b>BaseUnit</b>	
Type A0 – one BaseUnit required for each WP321	
• For opening a new potential group	
- BU15P-16+A0+2D or	<b>6ES7193-6BP00-0DA0</b>
- BU15P-16+A10+2D	<b>6ES7193-6BP20-0DA0</b>
• For continuing the potential group	
- BU15P-16+A0+2B	<b>6ES7193-6BP00-0BA0</b>
- BU15P-16+A10+2B	<b>6ES7193-6BP20-0BA0</b>
<b>Consumables</b>	
<b>Shield connection for BaseUnit</b>	<b>6ES7193-6SC00-1AM0</b>
For laying the load cell cable (5 units / for 5 weighing instruments)	
<b>Shield connection element</b>	<b>6ES7390-5AA00-0AA0</b>
Sufficient for one SIWAREX FTA module	
<b>SIWAREX JB junction box, aluminum housing</b>	<b>7MH5001-0AA20</b>
For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes	
<b>SIWAREX JB junction box, stainless steel housing</b>	<b>7MH5001-0AA00</b>
For connecting up to 4 load cells in parallel.	

Ordering data	Article No.
<b>SIWAREX JB junction box, stainless steel housing (ATEX)</b>	<b>7MH5001-0AA01</b>
For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate).	
<b>Ex interface, type SIWAREX IS</b>	
For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of the load cells must be checked separately.	
• With short-circuit current < 199 mA DC	<b>7MH4710-5BA</b>
• With short-circuit current < 137 mA DC	<b>7MH4710-5CA</b>
<b>Cables (optional)</b>	
<b>Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) CY, orange sheath</b>	
For connecting SIWAREX electronic weighing systems to junction boxes (JB), extension boxes (EB) and Ex interface or between two EBs. For permanent installation. Occasional bending is permitted.  Outer diameter: approx. 10.8 mm (0.43 inch) Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F) Sold by the meter	
Sheath color: orange	<b>7MH4702-8AG</b>
For hazardous areas. Sheath color: blue	<b>7MH4702-8AF</b>

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Technology modules > SIPLUS SIWAREX WP321

Ordering data	Article No.	Article No.
<b>Configuration software</b>		
<b>SIWATOOL V4 &amp; V7</b> Service and commissioning software for SIWAREX weighing modules	<b>7MH4900-1AK01</b>	<b>SIWAREX WP321 "Ready for use"</b> TIA Portal and SIMATIC Manager sample configuration Free download on the Internet at: <a href="http://www.siemens.com/weighing/documentation">http://www.siemens.com/weighing/documentation</a>
<b>SIWAREX PCS 7 AddOn Library for PCS 7 V8.x and V9.0</b> • Supports PROFINET APL faceplates and function blocks for: • SIWAREX U • SIWAREX FTA • SIWAREX FTC_B (belt scales) • SIWAREX WP321 Classic faceplate and function block for: • SIWAREX FTC_L (loss in weight)	<b>7MH4900-1AK61</b>	<b>SIMATIC Manual Collection</b> Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC sensors, SIMATIC NET, SIMATIC PC-based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC software, SIMATIC TDC
<b>Documentation</b>		
<b>SIWAREX WP321 Equipment Manual</b> Available in a range of languages Free download from the Internet at: <a href="http://www.siemens.com/weighing/documentation">http://www.siemens.com/weighing/documentation</a>		<b>SIMATIC Manual Collection update service for 1 year</b> Current Manual Collection DVD and the three subsequent updates

## Technical specifications

SIPLUS WP321	6AG1138-6AA00-2BA8	SIPLUS WP321	6AG1138-6AA00-2BA8
Based on	<b>7MH4138-6AA00-0BA0</b>	Based on	<b>7MH4138-6AA00-0BA0</b>
<b>Environmental conditions</b>		<b>Resistance</b>	
Climatic requirements		• Coolants and lubricants	
$T_{min(IND)} \dots T_{max(IND)}$ (operating temperature)		- Resistant to commercially available coolants and lubricants	Yes; incl. airborne diesel and oil droplets
• Vertical installation	-40 ... +50 °C	• For use in stationary industrial equipment	
• Horizontal installation	-40 ... +60 °C	- Resistant to biologically active substances, acc. to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna); Class 3B3 on request
Operating height in relation to sea level		- Resistant to chemically active substances acc. to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity 3)*
• Installation altitude above sea level, max.	5 000 m	- Resistant to mechanically active substances acc. to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust*
• Ambient temperature, air pressure and altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	• For use on ships/at sea	
Relative humidity		- Resistant to biologically active substances acc. to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
• With condensation, tested according to IEC 60068-2-38, max.	100%; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	- Resistant to chemically active substances acc. to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity 3)*
		- Resistant to mechanically active substances acc. to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust*
		• Note	
		- Note on classification of environmental conditions acc. to EN 60721	*. The supplied plug covers must remain in place on the unused interfaces during operation.
		<b>Conformal coating</b>	
		• Coating for PCBs acc. to EN 61086	Yes; Class 2 for high availability
		• Military testing acc. to MIL-I-46058C, Amendment 7	Yes; coating discoloration possible
		• Qualification and Performance of Electrical Insulating Compound for Printed Wiring Assemblies acc. to IPC-CC-830A	Yes; conformal coating, class A

## Overview



SIMATIC ET 200SP CM PtP video  
[https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoId=6136809673001](https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6136809673001)



- CM PtP communications module; module for serial communication connections with RS232 and RS422 interfaces. RS485 for the Freeport, 3964(R), Modbus RTU, USS and DMX512 protocols, max. 115.2250 kbps, 2 KB frame length, 4 KB receive buffer.
- Protocols supported
  - Freeport: User-parameterizable frame format for universal communication, also known as ASCII frame
  - 3964(R) for improved transmission reliability
  - Modbus RTU master (requires instructions in SIMATIC S7)
  - Modbus RTU slave (requires instructions in SIMATIC S7)
  - USS, implemented through instructions
  - DMX512, can be implemented through instructions
- Interface properties
  - RS232 with auxiliary signals
  - RS422 for full-duplex connections
  - RS485 for half-duplex and multi-point connections
  - Transmission rates from 300 to 115200 bps for RS232 and RS422
  - Transmission rates from 300 to 25000 bps for RS485
- Frame lengths
  - In universal operation: 2 KB each in send and receive direction
  - In performance-optimized operation: 30 bytes in send direction, 24 bytes in receive direction
- Can be plugged into type A0 BaseUnits (BU) with automatic coding
- LED display for errors, operation and supply voltage
- Communication display for sending and receiving
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (article and serial number)
  - Connection diagram
  - Color coding of the module type
  - Hardware and firmware version
  - Complete Article No.
- Optional labeling accessories
  - Labeling strips
  - Equipment labeling plate
- Optional system-integrated shield connection

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules &gt; Communication &gt; CM PtP serial interface

**Ordering data****Article No.****Article No.****CM PtP communications module**

For serial communication connections with RS232, RS422, RS485 interfaces, BU type A0, color code CC00

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10

**6ES7137-6AA01-0BA0**  
**6ES7137-6AA01-2BA0**

**Accessories****BU15-P16+A10+2D**

BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP20-0DA0**  
**6ES7193-6BP20-2DA0**

**BU15-P16+A0+2D**

BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP00-0DA0**  
**6ES7193-6BP00-2DA0**

**2BU15-P16+A0+2DB**

Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (light/dark) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit

**6ES7193-6BP60-0DA0**

**BU15-P16+A10+2B**

BU type A0; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP20-0BA0**  
**6ES7193-6BP20-2BA0**

**BU15-P16+A0+2B**

BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP00-0BA0**  
**6ES7193-6BP00-2BA0**

**2BU15-P16+A0+2B**

Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the load group

- Pack of 1 unit

**6ES7193-6BP60-0BA0**

**Equipment labeling plate**

10 sheets of 16 labels

**6ES7193-6LF30-0AW0**

**Labeling strips**

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

**6ES7193-6LR10-0AA0**

**Shield connection**

5 shield supports and 5 shield terminals, for direct connection

**6ES7193-6SC00-1AM0**

**Mechanical coding elements**

For automatic coding of I/O modules; spare part. 20 units

Type A  
Type B  
Type C  
Type D

**6ES7193-6KA00-3AA0**  
**6ES7193-6KB00-3AA0**  
**6ES7193-6KC00-3AA0**  
**6ES7193-6KD00-3AA0**

10

## Technical specifications

Article number	<b>6ES7137-6AA01-0BA0</b> ET 200SP, CM PTP, PU 1
<b>General information</b>	
Product type designation	CM PtP
<b>Product function</b>	
• I&M data	Yes; I&M0 to I&M3
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V17 or higher
• STEP 7 configurable/integrated from version	via GSD as of V5.6 HF4
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5
<b>Supply voltage</b>	
Rated value (DC)	24 V
Reverse polarity protection	Yes
<b>1. Interface</b>	
<b>Interface types</b>	
• RS 485	Yes
• RS 422	Yes
• RS 232	Yes
• Design of the connection	Push-in terminal
<b>Interface types</b>	
<b>RS 232</b>	
• Transmission rate, max.	115.2 kbit/s
• Cable length, max.	15 m
• RS 232 auxiliary signals	RTS, CTS, DTR, DSR, RI, DCD
<b>RS 485</b>	
• Transmission rate, max.	250 kbit/s
• Cable length, max.	1 200 m; 100 to 1200 m, depending on transmission speed
<b>RS 422</b>	
• Transmission rate, max.	115.2 kbit/s
• Cable length, max.	1 200 m
• 4-wire full duplex connection	Yes
• 4-wire multipoint connection	Yes
<b>Integrated protocols</b>	
<b>Freeport</b>	
- Telegram length, max.	2 kbyte; performance mode: receive data max. 24 byte and send data max. 30 byte
- Bits per character	7 or 8
- Number of stop bits	1 or 2 bit
- Parity	None, even, odd, always 1, always 0, any
<b>3964 (R)</b>	
- Telegram length, max.	2 kbyte; performance mode: receive data max. 24 byte and send data max. 30 byte
- Bits per character	7 or 8
- Number of stop bits	1 or 2 bit
- Parity	None, even, odd, always 1, always 0, any

Article number	<b>6ES7137-6AA01-0BA0</b> ET 200SP, CM PTP, PU 1
<b>Modbus RTU master</b>	
- Address area	1 to 247, extended 1 to 65535
- Number of slaves, max.	32
<b>MODBUS RTU slave</b>	
- Address area	1 to 247, extended 1 to 65535
<b>Telegram buffer</b>	
• Buffer memory for telegrams	4 kbyte
• Number of telegrams which can be buffered	255
<b>Interrupts/diagnostics/ status information</b>	
Diagnostics function	Yes
<b>Alarms</b>	
• Diagnostic alarm	Yes
• Hardware interrupt	No
<b>Diagnoses</b>	
• Wire-break	Yes
<b>Diagnostics indication LED</b>	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• for module diagnostics	Yes; green/red DIAG LED
• Receive RxD	Yes; green LED
• Transmit TxD	Yes; green LED
<b>Potential separation</b>	
between backplane bus and interface	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m
<b>Decentralized operation</b>	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFINET controller	Yes
<b>Dimensions</b>	
Width	15 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	30 g

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > CM 4x IO-Link

### Overview



- CM 4x IO-Link communications module  
Serial communications module for connecting up to 4 IO-Link devices in accordance with IO-Link specification V1.0 and V1.1. The IO-Link parameters are configured using the Port Configuration Tool (PCT), version V3.0 and higher
- Time-based IO  
Time-based IO ensures that signals are output with a precisely defined response time. By combining inputs and outputs, for example, passing products can be accurately measured or fluids dosed in precise quantities
- Supported data transfer rates
  - COM1 (4.8 kbps)
  - COM2 (38.4 kbps)
  - COM3 (230.4 kbps)

- Expansion limits
  - Length of cable: Max. 20 m
  - Max. 32 bytes of input and output data per port
  - Max. 144 bytes of input data and 128 bytes of output data per module
- Supported ET 200SP system functions
  - Replacement without PG with automatic backup without the engineering tool of the IO-Link device parameters (V1.1 devices only) and the IO-Link master parameters by means of redundant saving of parameters on the e-coding element
  - Re-parameterization during operation
  - Identification data I&M
  - Firmware update
  - PROFlenergy
- Can be plugged into Type A0 BaseUnits (BU) with automatic e-coding
- LEDs
  - DIAG: Operating state indicator (green/red) of the module
  - C1..C4: Port status indicator (green) for Port 1, 2, 3 and 4
  - Q1..Q4: Channel status indicator (green) for Port 1, 2, 3 and 4
  - F1..F4: Port fault indicator (red) for Port 1, 2, 3 and 4
  - PWR: Supply voltage indicator (green)
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (order and serial number)
  - Connection diagram
  - Color-coding of the CM module class: silver
  - Hardware and firmware version
  - Complete Article No.
- Optional accessories
  - Labeling strips
  - Equipment labeling plates
  - Color-coding plate with color code CC04
- Optional system-integrated shield connection

#### Overview of CM 4 x IO-Link

Communications module	Article No.	CC code	BU type	PU
CM 4 x IO-Link	6ES7137-6BD00-0BA0	CC04	A0	1

**Overview**

## Overview of BaseUnits

BaseUnit	Article No.	CC codes for push-in terminals	CC codes for AUX terminals	PU
<b>BU type A0</b> • New load group (light) • 16 push-in terminals • With 10 AUX terminals	6ES7193-6BP20-0DA0	CC01 to CC05	CC71 to CC73	1
<b>BU type A0</b> • New load group (light) • 16 push-in terminals • With 10 AUX terminals	6ES7193-6BP20-2DA0	CC01 to CC05	CC71 to CC73	10
<b>BU type A0</b> • New load group (light) • 16 push-in terminals • Without AUX terminals	6ES7193-6BP00-0DA0	CC01 to CC05	--	1
<b>BU type A0</b> • New load group (light) • 16 push-in terminals • Without AUX terminals	6ES7193-6BP00-2DA0	CC01 to CC05	--	10
<b>BU type A0</b> • Forwarding of load group (dark) • 16 push-in terminals • With 10 AUX terminals	6ES7193-6BP20-0BA0	CC01 to CC05	CC71 to CC73	1
<b>BU type A0</b> • Forwarding of load group (dark) • 16 push-in terminals • With 10 AUX terminals	6ES7193-6BP20-2BA0	CC01 to CC05	CC71 to CC73	10
<b>BU type A0</b> • Forwarding of load group (dark) • 16 push-in terminals • Without AUX terminals	6ES7193-6BP00-0BA0	CC01 to CC05	--	1
<b>BU type A0</b> • Forwarding of load group (dark) • 16 push-in terminals • Without AUX terminals	6ES7193-6BP00-2BA0	CC01 to CC05	--	10



## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > CM 4x IO-Link

Ordering data	Article No.	Article No.	
<b>CM 4x IO-Link master V1.1 Standard communications module</b> Serial communications module for connecting up to 4 IO-Link devices, time-based IO, BU type A0, color code CC04	6ES7137-6BD00-0BA0	<b>Equipment labeling plate</b> 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter	6ES7193-6LF30-0AW0
<b>Accessories</b>		<b>Labeling strips</b> 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AA0
<b>Usable type A0 BaseUnits</b>		500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AG0
<b>BU15-P16+A10+2D</b> BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A) <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> <li>• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.</li> </ul>	6ES7193-6BP20-0DA0 6ES7193-6BP20-2DA0	1 000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AA0
<b>BU15-P16+A0+2D</b> BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A) <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> <li>• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.</li> </ul>	6ES7193-6BP00-0DA0 6ES7193-6BP00-2DA0	1 000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AG0
<b>2BU15-P16+A0+2DB</b> Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (light/dark) with 16 push-in terminals to the module; for starting a new load group (max. 10 A) <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> </ul>	6ES7193-6BP60-0DA0	<b>Color-coded labels</b> Color code CC04, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 12), blue (terminals 13 to 16); 10 units	6ES7193-6CP04-2MA0
<b>BU15-P16+A10+2B</b> BU type A0; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> <li>• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.</li> </ul>	6ES7193-6BP60-0DA0	Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A); 10 units	6ES7193-6CP71-2AA0
<b>BU15-P16+A0+2B</b> BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> <li>• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.</li> </ul>	6ES7193-6BP20-0BA0 6ES7193-6BP20-2BA0	Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A); 10 units	6ES7193-6CP72-2AA0
<b>2BU15-P16+A0+2B</b> Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the load group <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> </ul>	6ES7193-6BP60-0BA0	Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 10 units	6ES7193-6CP73-2AA0
		<b>Spare parts</b>	
		<b>Electronic coding element type H</b> Pack of 5 units; included in scope of supply of CM 4x IO-Link module	6ES7193-6EH00-1AA0
		<b>Mechanical coding elements</b> For automatic coding of I/O modules; spare part. 20 units	
		Type A	6ES7193-6KA00-3AA0
		Type B	6ES7193-6KB00-3AA0
		Type C	6ES7193-6KC00-3AA0
		Type D	6ES7193-6KD00-3AA0

### Technical specifications

Article number	<b>6ES7137-6BD00-0BA0</b> ET 200SP, cm 4 X IO-Link ST
<b>General information</b>	
Product type designation	CM 4 x IO-Link ST
<b>Product function</b>	
• I&M data	Yes; I&M0 to I&M3
• Isochronous mode	No; Only for PROFINET and configuration as version with FW V2.0 or V2.1
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V15 or higher
• STEP 7 configurable/integrated from version	STEP 7 V5.5 or higher
• PROFIBUS from GSD version/GSD revision	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/GSD revision	GSDML V2.3
<b>Supply voltage</b>	
Rated value (DC)	24 V
<b>Encoder supply</b>	
Number of outputs	4
<b>Output current</b>	
• Rated value	200 mA; Per channel
<b>24 V encoder supply</b>	
• Short-circuit protection	Yes
<b>IO-Link</b>	
Number of ports	4
• of which simultaneously controllable	4
IO-Link protocol 1.0	Yes
IO-Link protocol 1.1	Yes
Transmission rate	4.8 kBaud (COM1); 38.4 kBaud (COM2), 230.4 kBaud (COM3)
Cycle time, min.	2 ms; dynamic, depending on user data length
Size of process data, input per port	32 byte; max.
Size of process data, input per module	144 byte; max.
Size of process data, output per port	32 byte; max.
Size of process data, output per module	128 byte; max.
Memory size for device parameter	2 kbyte; for each port
Master backup	Yes
Configuration without S7-PCT	Yes
Cable length unshielded, max.	20 m
<b>Operating modes</b>	
• IO-Link	Yes
• DI	Yes
• DQ	Yes; max. 100 mA per channel

Article number	<b>6ES7137-6BD00-0BA0</b> ET 200SP, cm 4 X IO-Link ST
<b>Time Based IO</b>	
- TIO IO-Link IN	No; Only for PROFINET and configuration as version with FW V2.0 or V2.1
- TIO IO-Link OUT	No; Only for PROFINET and configuration as version with FW V2.0 or V2.1
- TIO IO-Link IN/OUT	No; Only for PROFINET and configuration as version with FW V2.0 or V2.1
<b>Connection of IO-Link devices</b>	
• Port type A	Yes
• Port type B	Yes; 24 V DC via external terminal
• via three-wire connection	Yes
<b>Interrupts/diagnostics/status information</b>	
<b>Alarms</b>	
• Diagnostic alarm	Yes; The port diagnosis is available in the IO-Link mode only.
<b>Diagnoses</b>	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Group error	Yes
<b>Diagnostics indication LED</b>	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; one green LED for channel status Qn (SIO mode) and port status Cn (IO-Link mode) per channel
• for channel diagnostics	Yes; red Fn LED
• for module diagnostics	Yes; green/red DIAG LED
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and back-plane bus	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m
<b>Dimensions</b>	
Width	13 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	30 g

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > CM 1xDALI

### Overview



SIMATIC ET 200SP DALI video  
[https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoId=6153144008001](https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6153144008001)



- DALI 2 multimaster module for 1 bus strand
- Allows the control, diagnostics and parameter assignment of up to 64 luminaires and 63 sensors via a 2-wire bus line
- Typical areas of application: Lighting in tunnels, (factory) halls or ships
- Realization of the control via prefabricated blocks of a function block library in TIA Portal
- DALI (Digital Addressable Lighting Interface) certification according to DALI V2 for IEC 62386-101/-103 parts
- Different DALI device types, such as LED modules, fluorescent lamps, discharge lamps, low-voltage halogen lamps and others, can be used

### Ordering data

### Article No.

#### DALI V2 multimaster module CM 1xDALI

6ES7137-6CA00-0BU0

For control of lighting solutions with DALI V2, BU type U0, color code CC20

#### Accessories

#### Suitable type U0 BaseUnits

#### BU20-P16+A0+2D

BU type U0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP00-0DU0  
6ES7193-6BP00-2DU0

#### BU20-P16+A0+2B

BU type U0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP00-0BU0  
6ES7193-6BP00-2BU0

#### Equipment labeling plate

6ES7193-6LF30-0AW0

10 sheets of 16 labels

#### Labeling strips

6ES7193-6LR10-0AA0

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

#### Mechanical coding elements

For automatic coding of I/O modules; spare part.  
20 units

Type A

6ES7193-6KA00-3AA0

Type B

6ES7193-6KB00-3AA0

Type C

6ES7193-6KC00-3AA0

Type D

6ES7193-6KD00-3AA0

## Technical specifications

Article number	<b>6ES7137-6CA00-0BU0</b> ET 200SP, CM 1x DALI
<b>General information</b>	
Product type designation	CM 1xDALI
<b>Product function</b>	
• I&M data	Yes; I&M0 to I&M3
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V15.1 or higher
• PROFIBUS from GSD version/ GSD revision	GSD Revision 5
<b>Supply voltage</b>	
Rated value (DC)	24 V
Reverse polarity protection	Yes
<b>DALI</b>	
• Integrated power supply	Yes
- Supply current, min.	160 mA
- Supply current, max.	250 mA
- Can be switched off	Yes
• Cable length, max.	300 m
<b>DALI</b>	
• Standard according to DALI	DALI V2 Multi-Master
<b>Supported operating devices</b>	
- Fluorescent lamps (device type 0)	Yes
- Emergency lighting with single battery (device type 1)	Yes
- Discharge lamps (device type 2)	Yes
- Low-voltage halogen lamps (device type 3)	Yes
- Incandescent lamps (device type 4)	Yes
- Direct voltage (device type 5)	Yes
- LED modules (device type 6)	Yes
- Switching function (device type 7)	Yes
- Color control (device type 8)	Yes
- Further operating devices	Yes; general device type
<b>Supported input devices</b>	
- Pushbuttons	Yes
- Absolute input devices	Yes
- Presence detector	Yes
- Light sensor	Yes
- Further input devices	Yes; general device type

Article number	<b>6ES7137-6CA00-0BU0</b> ET 200SP, CM 1x DALI
<b>Interrupts/diagnostics/ status information</b>	
<b>Alarms</b>	
• Diagnostic alarm	Yes
<b>Diagnoses</b>	
• Short-circuit	Yes; On DALI bus
<b>Diagnostics indication LED</b>	
• ERROR LED	Yes
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Receive RxD	Yes; green LED
• Transmit TxD	Yes; green LED
<b>Potential separation</b>	
between backplane bus and interface	Yes
<b>Standards, approvals, certificates</b>	
CE mark	Yes
RoHS conformity	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	3 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Decentralized operation</b>	
to SIMATIC S7-1200	Yes; FW V4.0 or higher
to SIMATIC S7-1500	Yes
<b>Dimensions</b>	
Width	20 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	50 g

**I/O systems**

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > CM CAN

**Overview**

- For data exchange between an ET 200SP system and CAN Bus 2.0A/B or CANopen Manager or Slave (according to CiA 301 & 302)
- CANopen features:
  - Node / lifeguarding
  - Heartbeat
  - SYNC (producer / consumer)
- Integrated in TIA via HSP, TIA Portal V15.1 or higher
- CAN connection with Push-in terminals
- Integrated CAN bus terminating resistor
- Up to 60 CAN nodes
- 128 receiver and 128 transmitter PDOs
- Galvanic isolation between the two networks
- Diagnostic interrupts
- Optionally with function block SIMATIC ECC CHAdeMO: Realization of digital communication as basis for conductible DC charging of electric vehicles in line with the CHAdeMO standard

**Ordering data****Article No.****ET 200SP CM CAN communications modules****6ES7137-6EA00-0BA0**

To connect ET 200SP with CAN bus or CANopen networks CAN bus 2.0A/B,  
CANopen Manager according to CiA301/302,  
CANopen Slave according to CiA301/302

**Accessories****Function block SIMATIC ECC CHAdeMO****6FE1263-8FB10-0AA0**

For realization of digital communication between a DC charging station and an electric vehicle according to CHAdeMO 1.x-2.0 specification; can be used with TIA Portal as of V15.1; Single license

**Usable type A0 BaseUnits****BU15-P16+A0+2D**

BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP00-0DA0**  
**6ES7193-6BP00-2DA0****BU15-P16+A0+2B**

BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

**6ES7193-6BP00-0BA0**  
**6ES7193-6BP00-2BA0****Mechanical coding elements**

For automatic coding of I/O modules; spare part. 20 units

Type A

**6ES7193-6KA00-3AA0**

Type B

**6ES7193-6KB00-3AA0**

Type C

**6ES7193-6KC00-3AA0**

Type D

**6ES7193-6KD00-3AA0**

## Technical specifications

Article number	<b>6ES7137-6EA00-0BA0</b> ET 200SP CM CAN
<b>General information</b>	
Product type designation	CM 1x CAN ST
<b>Product function</b>	
• I&M data	Yes; I&M0 to I&M3
• Module swapping during operation (hot swapping)	Yes
• Isochronous mode	No
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V15.1 or higher
<b>Supply voltage</b>	
Rated value (DC)	24 V
Reverse polarity protection	Yes
<b>Interfaces</b>	
<b>CAN</b>	
• CAN operating modes	CAN Standard CAN 2.0A/B; CANopen Manager / Slave acc. to CiA
• Specification acc. to CiA	CiA 301 & CiA 302
• Transmission rate, min.	10 kbit/s
• Transmission rate, max.	1 000 kbit/s
• Number of slaves, max.	60
• Number of SDOs in parallel	16; Parallel
• Number of PDOs	128; Send / receive
<b>Services</b>	
- Node/life-guarding	Yes
- Heartbeat	Yes
- SYNC	Yes
<b>1. Interface</b>	
Interface type	CAN according to CiA 303-1
Isolated	Yes; 500 V AC or 707 V DC
<b>Interface types</b>	
• Number of ports	1
• Design of the connection	Push-in terminal
<b>Interrupts/diagnostics/ status information</b>	
Alarms	Yes
Diagnostics function	Yes
<b>Diagnostics indication LED</b>	
• RUN LED	Yes
• ERROR LED	Yes
• MAINT LED	No
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED

Article number	<b>6ES7137-6EA00-0BA0</b> ET 200SP CM CAN
<b>Potential separation</b>	
between backplane bus and interface	Yes
<b>Standards, approvals, certificates</b>	
CE mark	Yes
UL approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes; Reg. No.: R-R-S49-ET200SPCMCAN
EAC (formerly Gost-R)	Yes
RoHS conformity	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m
<b>Decentralized operation</b>	
to SIMATIC S7-300	No
to SIMATIC S7-400	No
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
<b>Dimensions</b>	
Width	15 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	32 g

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > CM AS-i Master ST for SIMATIC ET 200SP

### Overview



CM AS-i Master ST for SIMATIC ET 200SP

A short video shows the setup of AS-Interface with ET 200SP:



[https://players.brightcove.net/1813624294001/70fec0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoid=6136807004001](https://players.brightcove.net/1813624294001/70fec0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoid=6136807004001)

#### More information

SIMATIC ET 200SP Manual Collection,  
see <https://support.industry.siemens.com/cs/ww/en/view/84133942>

Diagnostic blocks with visualization,  
see <https://support.industry.siemens.com/cs/ww/en/view/109479103>

AS-Interface block library for SIMATIC PCS 7 for simple connection of AS-Interface to PCS 7,  
see <https://mall.industry.siemens.com/mall/ww/en/Catalog/Products/10046725?tree=CatalogTree>

Released combinations of the AS-i modules for ET 200SP,  
see <https://support.industry.siemens.com/cs/ww/en/view/103624653>

The CM AS-i Master ST communications module is designed for use in the SIMATIC ET 200SP distributed I/O system and has the following features:

- Connection of up to 62 AS-Interface slaves
- Supports all AS-Interface master functions according to the AS-Interface specification V3.0
- User-friendly configuration with graphic display of the AS-i line in TIA Portal V12 or higher, or via GSD in other systems
- Supply via AS-Interface cable

- Suitable for AS-Interface with 30-V voltage and AS-i Power24V
- Integrated ground-fault monitoring for the AS-Interface cable
- Through connection to AS-Interface, the number of digital inputs and outputs available for the control system is greatly increased (max. 496 DI/496 DQ on the AS-Interface per CM AS-i Master ST)
- Integrated analog value processing

#### AS-i gateways with ET 200SP

An AS-i gateway or AS-i link enables access to the AS-Interface data via PROFINET or PROFIBUS.

With the CM AS-i Master ST module, flexible and powerful PROFINET/AS-i links or PROFIBUS/AS-i link solutions are set up. Depending on the requirements, even several AS-i masters can be plugged into one ET 200SP station, so that the setup can easily be extended from a single master to double masters or multiple masters.

The maximum number of modules is determined by the ET 200SP interface module (IM): up to 8 AS-i masters with PROFINET IM 155-6PN Standard, up to 43 AS-i masters with IM 155-6PN High Feature, or a single AS-i master with IM 155-6PN Basic. For the connection to PROFIBUS, the IM 155-6DP HF interface module with up to 7 AS-i master modules is used.

Since in many plants an ET 200SP station is provided with I/O, motor starter or other peripheral modules, the AS-i master modules are simply plugged in without any additional effort.

An AS-i Safety gateway can also be implemented without any problems by adding the safety-oriented module F-CM AS-i Safety ST in the ET 200SP station. This greatly simplifies the cabling and connection of distributed EMERGENCY STOP pushbuttons and protective door monitoring systems to a Failsafe CPU. The AS-i Safety application is completely configured in TIA Portal/STEP 7.

The ET 200SP modules CM AS-i Master ST and F-CM AS-i Safety ST (see page 10/207) can of course also be used directly on an ET 200SP CPU or F-CPU, so that an extremely compact SIMATIC control system with AS-i bus connection can be set up.

For further application possibilities,  
see the brochure "The modular AS-i Master" at <https://www.siemens.com/as-interface>.

More information, see SIMATIC ET 200SP Manual Collection

#### Design

The CM AS-i Master ST module has an ET 200SP module enclosure with a width of 20 mm. A C0 type BaseUnit (BU) is required for use in the ET 200SP.

The communications module has LED indicators for diagnostics, operation, AS-i voltage and AS-i slave status and offers informative front-side module inscription for:

- Plain-text marking of the module type and function class
- 2D matrix code (Article No. and serial number)
- Connection diagram
- Color coding module type communications module, light gray
- Hardware and firmware version
- Supported BaseUnit type BU: C0

## Overview

### Function

The CM AS-i Master ST supports all specified functions of the AS-Interface Specification V3.0.

The input/output values of the digital AS-i slaves can be activated via the cyclic process image. The values of the analog AS-i slaves are accessible via the cyclic process image or via data record transfer.

If required, master calls can be performed with the command interface, e.g. read/write parameters, read/write configuration.

Changeover of the operating mode, automatic application of the slave configuration and the re-addressing of a connected AS-i slave can be implemented via the control panel of the CM AS-i Master ST in STEP 7.

In order to implement modular machine concepts, the AS-i slaves can be activated or deactivated via the PLC program (option handling). The configuration of AS-i slaves can be modified while being executed, thus enabling variable machine setups and tool changing with integrated input/output modules during ongoing operation. Without deactivating the controller, AS-i input/output modules can be added in the system.

An existing AS-i installation can be read into the STEP 7 hardware configuration and then adapted and documented in the project. Analog values are transmitted via the cyclic process image, the length of which is adjustable and extendable up to 288 bytes (depending on the interface module (IM) used).

Diagnostic information is accessed via automatic alarm messages, via the status information in the process image or data record reading in the user program, or via the graphical status display in the online diagnostics of the TIA Portal. The AS-i network's transmission quality can also be read out. To avoid configuration errors, duplicate addresses in the AS-i network can be detected.

Configuration is possible with SIMATIC CPUs S7-300 up to S7-1500 and with a SINUMERIK 840D sl or other controller.

The online diagnostic status of the AS-i slaves can be displayed directly on the slaves in the network view in TIA Portal (for S7-1500 CPUs with firmware version V 2.0 or higher).

### Notes on security

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens products and solutions represent only one component of such a concept.

For more information on Industrial Security, see <http://www.siemens.com/industrialsecurity>.

## Configuration

The following software is required for configuration of the CM AS-i Master ST module:


- STEP 7 (TIA Portal) or
- STEP 7 (Classic) or
- the GSD file of the ET 200SP with STEP 7 or another engineering tool

STEP 7 enables user-friendly configuration and diagnostics of the AS-i master and any connected slaves.

Alternatively, you can also apply the AS-Interface ACTUAL configuration as the TARGET configuration at the "touch of a button" via the control panel integrated in the TIA Portal or an optional expansion button. Configuration with the GSD file is possible only with the button.

The CM AS-i Master ST module occupies up to 288 input bytes and up to 288 output bytes in the I/O data of the ET 200SP station. The I/O assignment depends on the configuration in STEP 7.

Together with an ET 200SP CPU 1510SP/1512SP or 1515SP PC, preprocessing of AS-i signals directly in the ET 200SP station and setting up of an independent AS-i station without a higher-level CPU are possible.

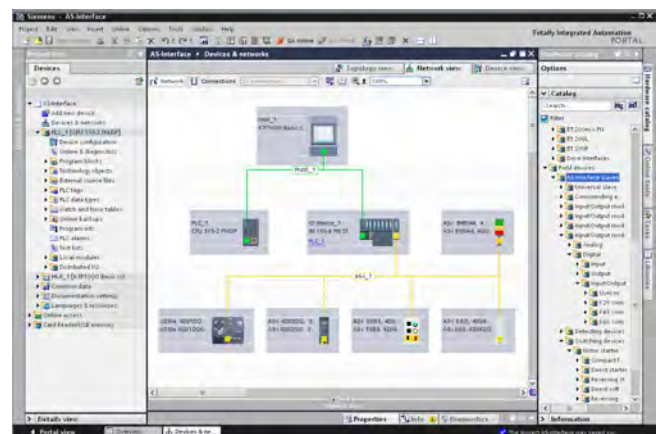

Configuration of an AS-Interface network with CM AS-i Master ST via the TIA Portal

## Benefits

The CM AS-i Master ST communications module for ET 200SP enables modular, simple and high-performance expansion of AS-interface networks via engineering in the TIA Portal.

Up to eight CM AS-i Master ST units can be plugged into one ET 200SP station with IM 155-6PN Standard. When using the IM 155-6 PN High Feature, the number of CM AS-i Master ST in the ET 200SP station can be further increased. The maximum configuration depends on the interface module used.

Multiple masters as well as single masters can thus be implemented in the ET 200SP depending on the number of modules.

Together with the interface module, a scalable PROFINET/AS-i Link or PROFIBUS/AS-i Link can be assembled.

Using STEP 7, the AS-i network is consistently configured and programmed with only one configuration tool.



## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > Communication > CM AS-i Master ST for SIMATIC ET 200SP

#### Benefits

The PRONETA PC program (for ET 200SP with PROFINET interface module) is available for convenient input/output testing during the commissioning of an AS-i network without a CPU, see <http://www.siemens.com/proneta>.

For the connection of an AS-i network to systems with Ethernet/IP and Modbus TCP, the ET 200SP MultiFieldbus interface module IM155-6MF in combination with the CM AS-i Master ST module is available.

For diagnostics during ongoing operation, diagnostics blocks with clearly arranged visualization on the SIMATIC HMI panel are available or can be downloaded free of charge via a web browser,


see <https://support.industry.siemens.com/cs/ww/en/view/109479103>.



Diagnostic block for CM AS-i Master ST

#### Application

##### Configuration examples of AS-Interface networks with CM AS-i Master ST for SIMATIC ET 200SP

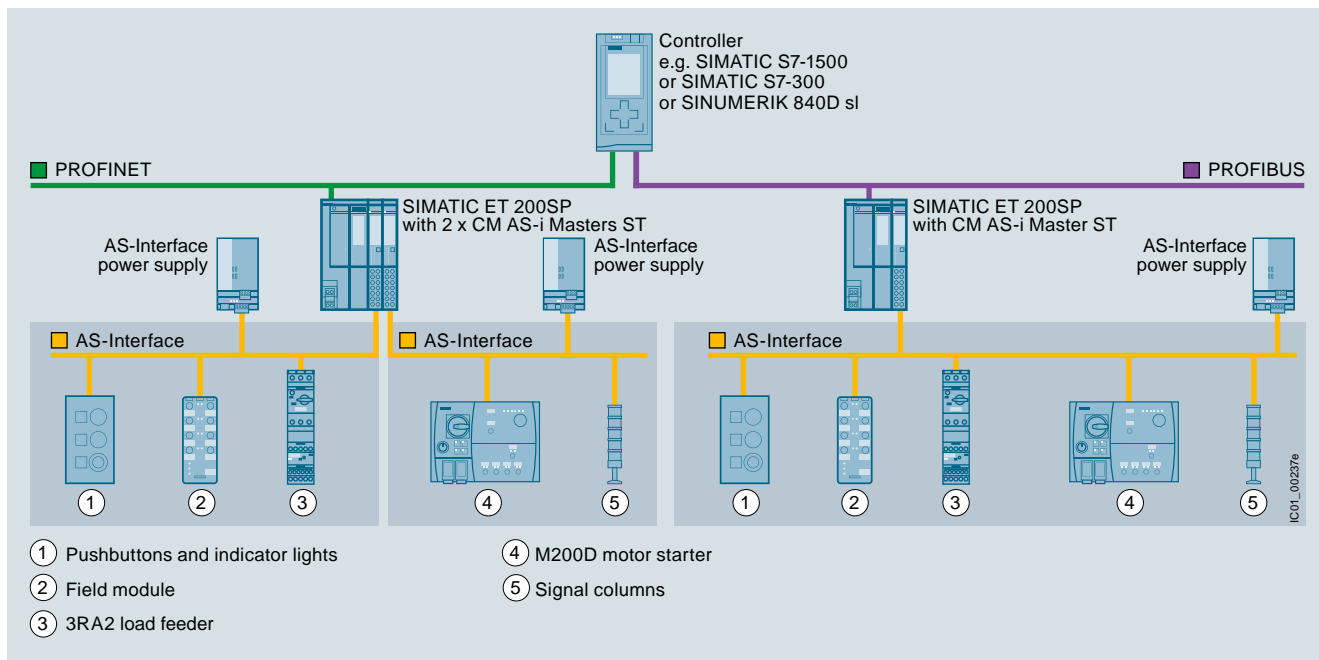

Configuration of AS-Interface networks under a SIMATIC ET 200SP

10

Ordering data	Article No.	Ordering data	Article No.
<b>CM AS-i Master ST communications module</b> <ul style="list-style-type: none"> <li>AS-Interface master for SIMATIC ET 200SP, can be plugged onto BaseUnit type C0</li> <li>Corresponds to AS-Interface specification V3.0</li> <li>Dimensions (W x H x D / mm): 20 x 73 x 58</li> </ul>	3RK7137-6SA00-0BC1	<b>PROFIBUS IM 155-6DP High Feature interface modules</b> <p>Max. 32 I/O modules, max. 244 bytes I/O data per station</p> <ul style="list-style-type: none"> <li>Including server module and PROFIBUS plug</li> </ul>	6ES7155-6BA01-0CN0
<b>Accessories</b>		<b>MultiFieldbus IM 155-6MF High Feature interface modules</b> <p>For operation on PROFINET, EtherNet/IP or Modbus TCP controllers, 1 slot for bus adapter, max. 64 I/O modules</p> <ul style="list-style-type: none"> <li>Including server module and optional strain relief (bus adapter must be ordered separately, <a href="#">see below</a>)</li> </ul> <p>For more information, <a href="https://support.industry.siemens.com/cs/ww/en/view/109779189">see https://support.industry.siemens.com/cs/ww/en/view/109779189</a>.</p>	
<b>BaseUnit BU20-P6+A2+4D</b> <ul style="list-style-type: none"> <li>BaseUnit (light), BU type C0</li> <li>Suitable for the CM AS-i Master ST module</li> <li>For connection of AS-Interface cable to the CM AS-i Master ST</li> <li>Start of an AS-i network, isolation of the AS-i voltage from the left-hand module</li> <li>For spring-loaded terminals</li> </ul>	6ES7193-6BP20-0DC0	<b>Bus adapters for PROFINET/Ethernet</b> <p>For connection of the Ethernet cable to the PROFINET IM 155-6 PN interface module and the MultiFieldbus IM 155-6MF interface module</p> <ul style="list-style-type: none"> <li>Connection 2 x RJ45 (supplied without RJ45 plug)</li> <li>Connection 2 x FC (FastConnect)</li> </ul> <p>For more bus adapters with fiber optic cable connection, <a href="http://www.siemens.com/industrymail">see http://www.siemens.com/industrymail</a>.</p>	6ES7155-6MU00-0CN0
<b>PROFINET IM 155-6PN Basic interface modules</b> <p>Max. 12 I/O modules, max. 32 bytes I/O data per station</p> <ul style="list-style-type: none"> <li>Including server module and 2 x RJ45 ports (supplied without RJ45 plug)</li> </ul>	6ES7155-6AR00-0AN0		
<b>PROFINET IM 155-6PN Standard interface modules</b> <p>Max. 32 I/O modules, max. 256 bytes I/O data per station</p> <ul style="list-style-type: none"> <li>Including server module and bus adapter 2 x RJ45 (supplied without RJ45 plug)</li> <li>Including server module (bus adapter must be ordered separately, <a href="#">see right</a>)</li> </ul>	6ES7155-6AA01-0BN0 6ES7155-6AU01-0BN0		6ES7193-6AR00-0AA0 6ES7193-6AF00-0AA0
<b>PROFINET IM 155-6PN High Feature interface modules</b> <p>Max. 64 I/O modules, max. 1 440 bytes I/O data per station</p> <ul style="list-style-type: none"> <li><b>IM 155-6 PN/2 High Feature</b> IM with a bus adapter slot, including server module and optional strain relief (bus adapter must be ordered separately, <a href="#">see right</a>)</li> <li><b>IM 155-6 PN/3 High Feature</b> 3-port IM with two bus adapter slots, including server module and optional strain relief (bus adapter must be ordered separately, <a href="#">see right</a>)</li> </ul>	6ES7155-6AU01-0CN0 6ES7155-6AU30-0CN0	<b>AS-interface addressing unit V3.0</b> <ul style="list-style-type: none"> <li>For AS-Interface modules and sensors and actuators with integrated AS-Interface according to AS-i Specification V3.0</li> <li>For setting the AS-i address of standard slaves, and slaves with extended addressing mode (A/B slaves)</li> <li>With input/output test function and many other commissioning functions</li> <li>Battery operation with four batteries type AA (IEC LR6, NEDA 15)</li> <li>Degree of protection IP40</li> <li>Dimensions (W x H x D) mm: 84 x 195 x 35</li> <li>Scope of supply: <ul style="list-style-type: none"> <li>Addressing unit with 4 batteries</li> <li>Addressing cable, with M12 plug to addressing plug (hollow plug), length 1.5 m</li> </ul> </li> </ul>	3RK1904-2AB02
<b>PROFINET IM 155-6PN High Speed interface modules</b> <p>Max. 30 I/O modules, max. 1 440 bytes I/O data per station</p> <ul style="list-style-type: none"> <li>Including server module (bus adapter must be ordered separately, <a href="#">see right</a>)</li> </ul>	6ES7155-6AU00-0DN0		

**I/O systems**

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > CM DP for ET 200SP CPU

**Overview**

- PROFIBUS DP master/slave with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps
- Expands the ET 200SP CPUs 1510SP-1 PN / 1512SP-1 PN by one PROFIBUS connection
- For communication with lower-level PROFIBUS devices at bandwidths of 9.6 Kbps to 12 Mbps
- Communication services:
  - PROFIBUS DP
  - PG/OP communication
  - S7 communication:
    - This makes it possible to establish communication between the ET 200SP CPU and other devices, for example those from the SIMATIC S7-300/400/1500 range.
- Time synchronization
- Simple programming and configuration over PROFIBUS
- Cross-network PG communication using S7 routing
- Data set routing

**Ordering data****Article No.**

**CM DP for ET 200SP CPU** **6ES7545-5DA00-0AB0**

PROFIBUS DP master/slave with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps

**Accessories**

**Equipment labeling plate** **6ES7193-6LF30-0AW0**

10 sheets of 16 labels

**Labeling strips**

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer **6ES7193-6LR10-0AA0**

500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer **6ES7193-6LR10-0AG0**

1 000 labeling strips DIN A4, light gray, card, for inscription with laser printer **6ES7193-6LA10-0AA0**

1 000 labeling strips DIN A4, yellow, card, for inscription with laser printer **6ES7193-6LA10-0AG0**

**PROFIBUS DP RS 485 bus connector**

With 90° cable outlet, max. transfer rate 12 Mbps

- without PG interface **6ES7972-0BA12-0XA0**
- with PG interface **6ES7972-0BB12-0XA0**

With 90° cable outlet for FastConnect connection system, max. transfer rate 12 Mbps

- without PG interface, 1 unit **6ES7972-0BA52-0XA0**
- without PG interface, 100 units **6ES7972-0BA52-0XB0**
- with PG interface, 1 unit **6ES7972-0BB52-0XA0**
- with PG interface, 100 units **6ES7972-0BB52-0XB0**

**FastConnect bus cable** **6XV1830-0EH10**

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

**Mechanical coding elements**

For automatic coding of I/O modules; spare part. 20 units

Type A **6ES7193-6KA00-3AA0**

Type B **6ES7193-6KB00-3AA0**

Type C **6ES7193-6KC00-3AA0**

Type D **6ES7193-6KD00-3AA0**

## Technical specifications

Article number	<b>6ES7545-5DA00-0AB0</b> ET 200SP, cm DP for ET 200SP CPU
<b>General information</b>	
Product type designation	CM PROFIBUS DP
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/ integrated from version	V13 Update 3
<b>Supply voltage</b>	
Rated value (DC)	24 V
Reverse polarity protection	Yes
<b>1. Interface</b>	
<b>Interface types</b>	
• RS 485	Yes
<b>Protocols</b>	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
<b>PROFIBUS DP master</b>	
• Number of DP slaves, max.	125
<b>Services</b>	
- PG/OP communication	Yes
- Equidistance	No
- Isochronous mode	No
- Activation/deactivation of DP slaves	Yes
<b>PROFIBUS DP slave</b>	
• Transmission rate, max.	12 Mbit/s
• automatic baud rate search	Yes
• Address area, max.	120
• User data per address area, max.	128 byte
<b>Services</b>	
- PG/OP communication	Yes; Only with active interface
- Routing	Yes; Only with active interface
- S7 communication	Yes; Only with active interface
- Direct data exchange (slave-to-slave communication)	Yes; No subscriber possible - only passive publisher
- DPV1	Yes
<b>Transfer memory</b>	
- Inputs	244 byte
- Outputs	244 byte
<b>RS 485</b>	
• Transmission rate, max.	12 Mbit/s
• Cable length, max.	100 m
<b>Protocols</b>	
<b>SIMATIC communication</b>	
• S7 routing	Yes
• Data record routing	Yes

Article number	<b>6ES7545-5DA00-0AB0</b> ET 200SP, cm DP for ET 200SP CPU
<b>Interrupts/diagnostics/ status information</b>	
Diagnostics function	Yes
<b>Diagnostics indication LED</b>	
• for module diagnostics	Yes; green/red DIAG LED
<b>Potential separation</b>	
between backplane bus and interface	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-25 °C; No condensation
• horizontal installation, max.	60 °C
• vertical installation, min.	-25 °C; No condensation
• vertical installation, max.	50 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Dimensions</b>	
Width	35 mm
Height	117 mm
Depth	75 mm
<b>Weights</b>	
Weight, approx.	80 g

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > CP 1542SP-1

### Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7
	●			●		●	●

G...JK10...XX...50730

The CP 1542SP-1 communications processor connects the ET 200SP Distributed Controller with Industrial Ethernet networks.

The module can also be used for integrating the ET 200SP Distributed Controller into an IPv6-based network. All functions are configured using STEP 7 Professional V14 (TIA Portal) or higher.

The CP 1542SP-1 supports the following communication services:

- PG/OP communication
- S7 communication
- Open communication (Open User Communication)
- IT communication
  - Sending emails via SMTP for authentication on an email server (also with IPv6)
  - SNMPv1 for transfer of network analysis information
- Integration of the ET 200SP Distributed Controller into IPv6-based networks

### Ordering data

### Article No.

#### CP 1542SP-1 communications processor

6GK7542-6UX00-0XE0

For connection of SIMATIC S7 ET 200SP to Industrial Ethernet, open IE communication (TCP/IP, ISO-ON-TCP, UDP), PG/OP, S7 routing, IP broadcast/multicast, SNMPV1, DHCP, email, IPv4/IPv6, time synchronization via NTP, access to web server of CPU, bus adapter required

#### Accessories

**SIMATIC BusAdapter BA 2xRJ45**  
For PROFINET interface modules, standard function class or above; max. cable length 50 m

6ES7193-6AR00-0AA0

**SIMATIC BusAdapter BA 2xFC**  
For PROFINET interface modules, standard function class or above; for increased vibration and EMC loads; max. cable length 50 m

6ES7193-6AF00-0AA0

**SIMATIC BusAdapter BA 2xSCRJ**  
For PROFINET interface modules, High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load capacity; max. cable length 50 m (POF) or 100 m (PCF)

6ES7193-6AP00-0AA0

**SIMATIC BusAdapter BA SCRJ/RJ45**  
For PROFINET interface modules, High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load capacity; max. cable length 50 m (POF) or 100 m (PCF)

6ES7193-6AP20-0AA0

**SIMATIC BusAdapter BA SCRJ/FC**  
For PROFINET interface modules, High Feature function class or above; with media converter FOC-cu; for increased vibration and EMC loads; max. cable length 50 m (POF, copper) or 100 m (PCF)

6ES7193-6AP40-0AA0

Ordering data	Article No.	Article No.
<p><b>IE FC RJ45 plug 180 2 x 2</b></p> <p>RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface</p> <ul style="list-style-type: none"> <li>• 1 pack = 1 unit</li> <li>• 1 pack = 10 units</li> <li>• 1 pack = 50 units</li> </ul>	<p><b>6GK1901-1BB10-2AA0</b> <b>6GK1901-1BB10-2AB0</b> <b>6GK1901-1BB10-2AE0</b></p>	<p><b>Labeling strips</b></p> <p>500 labeling strips on roll, light gray, for labeling with thermal transfer roll printer</p> <p><b>6ES7193-6LR10-0AA0</b></p> <p>500 labeling strips on roll, yellow, for labeling with thermal transfer roll printer</p> <p><b>6ES7193-6LR10-0AG0</b></p> <p>1000 labeling strips DIN A4, light gray, card, perforated, for labeling with laser printer</p> <p><b>6ES7193-6LA10-0AA0</b></p> <p>1000 labeling strips DIN A4, yellow, card, perforated, for labeling with laser printer</p> <p><b>6ES7193-6LA10-0AG0</b></p>
<p><b>IE FC RJ45 plug 4 x 2</b></p> <p>RJ45 plug connector for Industrial Ethernet (10/100/1 000 Mbps) with a sturdy metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface</p> <ul style="list-style-type: none"> <li>• 1 pack = 1 unit</li> <li>• 1 pack = 10 units</li> <li>• 1 pack = 50 units</li> </ul>	<p><b>6GK1901-1BB11-2AA0</b> <b>6GK1901-1BB11-2AB0</b> <b>6GK1901-1BB11-2AE0</b></p>	<p><b>Equipment labeling plate</b></p> <p>10 sheets of 16 labels, for printing with thermal transfer card printer or plotter</p> <p><b>6ES7193-6LF30-0AW0</b></p>
<p><b>IE FC TP Standard Cable GP 2 x 2 (Type A)</b></p> <p>4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/ IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m</p>	<p><b>6XV1840-2AH10</b></p>	<p><b>Spare parts</b></p> <p><b>Server module</b></p> <p>6ES7193-6PA00-0AA0</p> <p>Terminates an ET 200SP station; included in the scope of delivery of the interface modules</p>
<p><b>IE FC TP Standard Cable GP 4 x 2</b></p> <p>8-core, shielded TP installation cable for connection to IE FC RJ45 Modular Outlet for universal applications; with UL approval; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m</p> <ul style="list-style-type: none"> <li>• AWG22, for connection to IE FC RJ45 Modular Outlet</li> <li>• AWG24, for connection to IE FC RJ45 plug 4 x 2</li> </ul>	<p><b>6XV1870-2E</b> <b>6XV1878-2A</b></p>	<p><b>PE connection element for DIN rail 2000 mm</b></p> <p>6ES7590-5AA00-0AA0</p> <p>20 units</p>
<p><b>IE FC stripping tool</b></p> <p>Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables</p>	<p><b>6GK1901-1GA00</b></p>	<p><b>Power supply connector</b></p> <p>6ES7193-4JB00-0AA0</p> <p>Spare part; for connecting the 24 V DC supply voltage; with push-in terminals</p>

Note:

You can find order information for software for communication with PC systems in the Industry Mall under System connections – software overview

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules &gt; Communication &gt; CP 1542SP-1

**Technical specifications**

Article number	<b>6GK7542-6UX00-0XE0</b>
product type designation	CP 1542SP-1
<b>transfer rate</b>	
transfer rate	
• at the 1st interface	10 ... 100 Mbit/s
<b>interfaces</b>	
number of interfaces acc. to Industrial Ethernet	1
number of electrical connections	
• at the 1st interface acc. to Industrial Ethernet	2
type of electrical connection	
• at the 1st interface acc. to Industrial Ethernet	via ET 200SP bus adapter (RJ45, FC, SCRJ), integrated switch
<b>supply voltage, current consumption, power loss</b>	
type of voltage of the supply voltage	DC
supply voltage	24 V
supply voltage	19.2 ... 28.8 V
power loss [W]	6 W
<b>ambient conditions</b>	
ambient temperature	
• for vertical installation during operation	-30 ... +50 °C
• for horizontally arranged busbars during operation	-30 ... +60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
<b>design, dimensions and weights</b>	
width	60 mm
height	117 mm
depth	74 mm
net weight	0.18 kg
fastening method	
• 35 mm top hat DIN rail mounting	Yes
<b>product features, product functions, product components general</b>	
number of units	
• per CPU maximum	2
• note	2 CPUs can be plugged in per CPU, simultaneous operation with BA Send and CM DP is possible

Article number	<b>6GK7542-6UX00-0XE0</b>
product type designation	CP 1542SP-1
<b>performance data open communication</b>	
number of possible connections for open communication	
• by means of T blocks maximum data volume	32
• as user data per ISO on TCP connection for open communication by means of T blocks maximum	65 536 byte
<b>performance data S7 communication</b>	
number of possible connections for S7 communication	
• maximum	16
• with OP connections maximum	16
<b>performance data multi-protocol mode</b>	
number of active connections with multi-protocol mode	32
<b>product functions management, configuration, engineering</b>	
product function MIB support	Yes
protocol is supported	
• SNMP v1	Yes
• SNMP v3	No
• DCP	Yes
• LLDP	Yes
configuration software	
• required	STEP 7 Professional V14 (TIA Portal) or higher
identification & maintenance function	
• I&M0 - device-specific information	Yes
• I&M1 - higher level designation/ location designation	Yes
<b>product functions diagnostics</b>	
product function web-based diagnostics	Yes; via ET 200SP CPU
<b>product functions security</b>	
product function	
• blocking of communication via physical ports	Yes
<b>product functions time</b>	
product function SICLOCK support	Yes
product function pass on time synchronization	No
protocol is supported	
• NTP	Yes
• NTP (secure)	No
time synchronization	
• from NTP-server	Yes
<b>standards, specifications, approvals hazardous environments</b>	
certificate of suitability CCC for hazardous zone according to GB standard	Yes

## Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7
	●			●		●	●

G\_1K10\_XX\_50730

The CP 1543SP-1 communications processor connects the ET 200SP Distributed Controller with Industrial Ethernet networks. By combining a variety of security features such as an SPI (Stateful Packet Inspection) firewall, VPN and data encryption protocols (e.g. SNMPv3), the communications processor protects individual ET 200SP distributed controllers or even entire automation cells against unauthorized access.

The module can also be used for integrating the ET 200SP Distributed Controller into an IPv6-based network. All functions can be configured with STEP 7 Professional, V14 (TIA Portal) and higher.

The CP 1543SP-1 supports the following communication services:

- PG/OP communication
- S7 communication
- Open communication (Open User Communication)
- IT communication
  - Sending emails via SMTP or ESMTP with "SMTP-Auth" for authentication on an email server (also with IPv6)
- Support of SINEMA Remote Connect with autoconfiguration
- Security Integrated
  - Stateful Packet Inspection Firewall
  - Secure communication via VPN (IPsec)
- Protocols for secure communication
  - Secure access to the web server of the CPU via the HTTPS protocol
  - Secure transfer of the time of day (NTP)
  - SNMPv3 for tap-proof transfer of network analysis information
- Integration of the ET 200SP Distributed Controller into IPv6-based networks

## Ordering data

## Article No.

**CP 1543SP-1 communications processor** **6GK7543-6WX00-0XE0**

CP 1543SP-1 communications processor for connecting SIMATIC S7-ET 200SP to Industrial Ethernet, Security (firewall and VPN), open IE communication (TCP/IP, ISO-on-TCP, UDP) PG/OP, S7 routing, IP broadcast/multicast, SNMPv1/v3, DHCP, secure email, IPv4/IPv6, time synchronization via NTP, access to web server of CPU, bus adapter required

**Accessories****SIMATIC BusAdapter BA 2xRJ45** **6ES7193-6AR00-0AA0**

For PROFINET interface modules, standard function class or above; max. cable length 50 m

**SIMATIC BusAdapter BA 2xFC** **6ES7193-6AF00-0AA0**

For PROFINET interface modules, standard function class or above; for increased vibration and EMC loads; max. cable length 50 m

**SIMATIC BusAdapter BA 2xSCRJ** **6ES7193-6AP00-0AA0**

For PROFINET interface modules, High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load capacity; max. cable length 50 m (POF) or 100 m (PCF)

**SIMATIC BusAdapter BA SCRJ/RJ45** **6ES7193-6AP20-0AA0**

For PROFINET interface modules, High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load capacity; max. cable length 50 m (POF) or 100 m (PCF)

**SIMATIC BusAdapter BA SCRJ/FC** **6ES7193-6AP40-0AA0**

For PROFINET interface modules, High Feature function class or above; with media converter FOC-cu; for increased vibration and EMC loads; max. cable length 50 m (POF, copper) or 100 m (PCF)

**IE FC RJ45 plug 180 2 x 2**

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

**6GK1901-1BB10-2AA0****6GK1901-1BB10-2AB0****6GK1901-1BB10-2AE0**



**I/O systems**

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > CP 1543SP-1

Ordering data	Article No.	Article No.
<b>IE FC RJ45 plug 4 x 2</b> RJ45 plug connector for Industrial Ethernet (10/100/1 000 Mbps) with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface <ul style="list-style-type: none"> <li>• 1 pack = 1 unit</li> <li>• 1 pack = 10 units</li> <li>• 1 pack = 50 units</li> </ul>	<b>6GK1901-1BB11-2AA0</b> <b>6GK1901-1BB11-2AB0</b> <b>6GK1901-1BB11-2AE0</b>	<b>IE FC stripping tool</b> Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables
<b>IE FC TP Standard Cable GP 2 x 2 (Type A)</b> 4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/ IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m	<b>6XV1840-2AH10</b>	<b>Labeling strips</b> 500 labeling strips on roll, light gray, for labeling with thermal transfer roll printer <b>6ES7193-6LR10-0AA0</b> 500 labeling strips on roll, yellow, for labeling with thermal transfer roll printer <b>6ES7193-6LR10-0AG0</b> 1000 labeling strips DIN A4, light gray, card, perforated, for labeling with laser printer <b>6ES7193-6LA10-0AA0</b> 1000 labeling strips DIN A4, yellow, card, perforated, for labeling with laser printer <b>6ES7193-6LA10-0AG0</b>
<b>IE FC TP Standard Cable GP 4 x 2</b> 8-wire, shielded TP installation cable for connection to IE FC RJ45 modular outlet for universal applications; with UL approval; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m <ul style="list-style-type: none"> <li>• AWG22, for connection to IE FC RJ45 modular outlet</li> <li>• AWG24, for connection to IE FC RJ45 plug 4 x 2</li> </ul>	<b>6XV1870-2E</b> <b>6XV1878-2A</b>	<b>Equipment labeling plate</b> 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter <b>6ES7193-6LF30-0AW0</b>
		<b>Spare parts</b> <b>Server module</b> Terminates an ET 200SP station; included in the scope of delivery of the interface modules <b>6ES7193-6PA00-0AA0</b>
		<b>PE connection element for DIN rail 2000 mm</b> 20 units <b>6ES7590-5AA00-0AA0</b>
		<b>Power supply connector</b> Spare part; for connecting the 24 V DC supply voltage; with push-in terminals <b>6ES7193-4JB00-0AA0</b>

**Note:**

You can find order information for software for communication with PC systems in the Industry Mall under System connections – software overview

## Technical specifications

Article number	<b>6GK7543-6WX00-0XE0</b>
product type designation	CP 1543SP-1
<b>transfer rate</b>	
transfer rate	
• at the 1st interface	10 ... 100 Mbit/s
<b>interfaces</b>	
number of interfaces acc. to Industrial Ethernet	1
number of electrical connections	
• at the 1st interface acc. to Industrial Ethernet	2
type of electrical connection	
• at the 1st interface acc. to Industrial Ethernet	via ET 200SP bus adapter (RJ45, FC, SCRJ), integrated switch
<b>supply voltage, current consumption, power loss</b>	
type of voltage of the supply voltage	DC
supply voltage	24 V
supply voltage	19.2 ... 28.8 V
power loss [W]	6 W
<b>ambient conditions</b>	
ambient temperature	
• for vertical installation during operation	-30 ... +50 °C
• for horizontally arranged busbars during operation	-30 ... +60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
<b>design, dimensions and weights</b>	
width	60 mm
height	117 mm
depth	74 mm
net weight	0.18 kg
fastening method	
• 35 mm top hat DIN rail mounting	Yes
<b>product features, product functions, product components general</b>	
number of units	
• per CPU maximum	2
• note	2 CPUs can be plugged in per CPU, simultaneous operation with BA Send and CM DP is possible
<b>performance data open communication</b>	
number of possible connections for open communication	
• by means of T blocks maximum	32
data volume	
• as user data per ISO on TCP connection for open communication by means of T blocks maximum	65 536 byte
<b>performance data S7 communication</b>	
number of possible connections for S7 communication	
• maximum	16
• with OP connections maximum	16

Article number	<b>6GK7543-6WX00-0XE0</b>
product type designation	CP 1543SP-1
<b>performance data multi-protocol mode</b>	
number of active connections with multi-protocol mode	32
<b>performance data IT functions</b>	
number of possible connections	
• as email client maximum	1
<b>product functions management, configuration, engineering</b>	
product function MIB support	Yes
protocol is supported	
• SNMP v1	Yes
• SNMP v3	Yes
• DCP	Yes
• LLDP	Yes
configuration software	
• required	STEP 7 Professional V14 (TIA Portal) or higher
identification & maintenance function	
• I&MO - device-specific information	Yes
• I&M1 - higher level designation/ location designation	Yes
<b>product functions diagnostics</b>	
product function web-based diagnostics	Yes; via ET 200SP CPU
<b>product functions security</b>	
firewall version	stateful inspection
product function with VPN connection	IPsec, SINEMA RC
type of encryption algorithms with VPN connection	AES-256, AES-192, AES-128, 3DES-168, DES-56
type of authentication procedure with VPN connection	Preshared key (PSK), X.509v3 certificates
type of hashing algorithms with VPN connection	MD5, SHA-1
number of possible connections with VPN connection	4
product function	
• switch-off of non-required services	Yes
• blocking of communication via physical ports	Yes
• log file for unauthorized access	Yes
<b>product functions time</b>	
product function SICLOCK support	Yes
product function pass on time synchronization	No
protocol is supported	
• NTP	Yes
• NTP (secure)	Yes
time synchronization	
• from NTP-server	Yes
<b>standards, specifications, approvals hazardous environments</b>	
certificate of suitability CCC for hazardous zone according to GB standard	Yes

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > CP 1542SP-1 IRC

### Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7
	●			●		●	●

G\_1K10...XX...50730

The CP 1542SP-1 IRC communications processor connects the ET 200SP Distributed Controller with Industrial Ethernet networks. In addition, control centers can be connected using various telecontrol protocols.

The CP is characterized by the following:

- Ethernet-based connection to TeleControl Server Basic, e.g. via Internet
- Ethernet-based connection to the control center via SINAUT ST7, IEC 60870-5-104 or DNP3 protocol
- Data transfer of measured values, control variable values or alarms optimized for telecontrol systems
- Automatic sending of alert emails
- Data buffering of up to 100,000 values ensures a secure database, even with temporary connection failures
- Clearly laid out LED signaling for fast and easy diagnostics
- Fast commissioning thanks to easy configuration using STEP 7

The module can also be used for integrating the ET 200SP Distributed Controller into an IPv6-based network. All functions are configured using STEP 7 Professional V14 (TIA Portal) or higher.

The CP 1542SP-1 IRC supports the following communication services:

- Support of multiple telecontrol protocols such as SINAUT ST7, DNP3, IEC 60870-5-104 and TeleControl Basic
- PG/OP communication
- S7 communication
- Open communication (Open User Communication)
- IT communication
  - Sending emails via SMTP or SMTPS with "SMTP-Auth" for authentication on an email server (also with IPv6)
  - Email transfer with addressing by program block
  - Email transfer via "Notifications" (alerts)
- Support of SINEMA Remote Connect with autoconfiguration

### Ordering data

### Article No.

#### CP 1542SP-1 IRC communications processor

6GK7542-6VX00-0XE0

CP 1542SP-1 IRC communications processor for connection of SIMATIC S7 ET 200SP to Industrial Ethernet, TeleControl Server Basic, IEC 60870-5-104 or DNP3 protocol to a control center; open IE communication (TCP/IP, ISO-on-TCP, UDP), IP broadcast/multicast, SNMPV1, DHCP, secure email, IPV4/IPV6, time synchronization via NTP, access to web server of CPU, bus adapter required

#### Accessories

**SIMATIC BusAdapter BA 2xRJ45**  
For PROFINET interface modules, standard function class or above; max. cable length 50 m

6ES7193-6AR00-0AA0

**SIMATIC BusAdapter BA 2xFC**  
For PROFINET interface modules, standard function class or above; for increased vibration and EMC loads; max. cable length 50 m

6ES7193-6AF00-0AA0

**SIMATIC BusAdapter BA 2xSCRJ**  
For PROFINET interface modules, High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load capacity; max. cable length 50 m (POF) or 100 m (PCF)

6ES7193-6AP00-0AA0

**SIMATIC BusAdapter BA SCRJ/RJ45**  
For PROFINET interface modules, High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load capacity; max. cable length 50 m (POF) or 100 m (PCF)

6ES7193-6AP20-0AA0

**SIMATIC BusAdapter BA SCRJ/FC**  
For PROFINET interface modules, High Feature function class or above; with media converter FOC-cu; for increased vibration and EMC loads; max. cable length 50 m (POF, copper) or 100 m (PCF)

6ES7193-6AP40-0AA0

#### IE FC RJ45 plug 180 2 x 2

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0  
6GK1901-1BB10-2AB0  
6GK1901-1BB10-2AE0

Ordering data	Article No.	Article No.
<b>IE FC RJ45 plug 4 x 2</b> RJ45 plug connector for Industrial Ethernet (10/100/1 000 Mbps) with a sturdy metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface <ul style="list-style-type: none"> <li>• 1 pack = 1 unit</li> <li>• 1 pack = 10 units</li> <li>• 1 pack = 50 units</li> </ul>	<b>6GK1901-1BB11-2AA0</b> <b>6GK1901-1BB11-2AB0</b> <b>6GK1901-1BB11-2AE0</b>	<b>Labeling strips</b> 500 labeling strips on roll, light gray, for labeling with thermal transfer roll printer <b>6ES7193-6LR10-0AA0</b> 500 labeling strips on roll, yellow, for labeling with thermal transfer roll printer <b>6ES7193-6LR10-0AG0</b> 1000 labeling strips DIN A4, light gray, card, perforated, for labeling with laser printer <b>6ES7193-6LA10-0AA0</b> 1000 labeling strips DIN A4, yellow, card, perforated, for labeling with laser printer <b>6ES7193-6LA10-0AG0</b>
<b>IE FC TP standard cable GP 2 x 2 (Type A)</b> 4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/ IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. length per delivery unit 1 000 m, minimum order quantity 20 m	<b>6XV1840-2AH10</b>	<b>Equipment labeling plate</b> 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter <b>6ES7193-6LF30-0AW0</b>
<b>IE FC TP standard cable GP 4 x 2</b> 8-core, shielded TP installation cable for connection to IE FC RJ45 Modular Outlet for universal applications; with UL approval; sold by the meter; max. length per delivery unit 1 000 m, minimum order quantity 20 m <ul style="list-style-type: none"> <li>• AWG22, for connection to IE FC RJ45 Modular Outlet</li> <li>• AWG24, for connection to IE FC RJ45 plug 4 x 2</li> </ul>	<b>6XV1870-2E</b> <b>6XV1878-2A</b>	<b>Spare parts</b> <b>Server module</b> Terminates an ET 200SP station; included in the scope of delivery of the interface modules <b>6ES7193-6PA00-0AA0</b>
<b>IE FC stripping tool</b> Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	<b>6GK1901-1GA00</b>	<b>PE connection element for DIN rail 2000 mm</b> 20 units <b>6ES7590-5AA00-0AA0</b> <b>Power supply connector</b> Spare part; for connecting the 24 V DC supply voltage; with push-in terminals <b>6ES7193-4JB00-0AA0</b>

**Note:**

You can find order information for software for communication with PC systems in the Industry Mall under System connections – software overview

10

**Technical specifications**

Article number	<b>6GK7542-6VX00-0XE0</b>
product type designation	CP 1542SP-1 IRC
<b>transfer rate</b>	
transfer rate	
• at the 1st interface	10 ... 100 Mbit/s
<b>interfaces</b>	
number of interfaces acc. to Industrial Ethernet	1
number of electrical connections	
• at the 1st interface acc. to Industrial Ethernet	2
type of electrical connection	
• at the 1st interface acc. to Industrial Ethernet	via ET 200SP bus adapter (RJ45, FC, SCRJ), integrated switch
<b>supply voltage, current consumption, power loss</b>	
type of voltage of the supply voltage	DC
supply voltage	24 V
supply voltage	19.2 ... 28.8 V
power loss [W]	6 W

Article number	<b>6GK7542-6VX00-0XE0</b>
product type designation	CP 1542SP-1 IRC
<b>ambient conditions</b>	
ambient temperature	
• for vertical installation during operation	-30 ... +50 °C
• for horizontally arranged busbars during operation	-30 ... +60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
<b>design, dimensions and weights</b>	
width	60 mm
height	117 mm
depth	74 mm
net weight	0.18 kg
fastening method	
• 35 mm top hat DIN rail mounting	Yes

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > Communication > CP 1542SP-1 IRC****Technical specifications**

Article number	<b>6GK7542-6VX00-0XE0</b>
product type designation	CP 1542SP-1 IRC
<b>product features, product functions, product components general</b>	
number of units	2
<ul style="list-style-type: none"> <li>per CPU maximum</li> <li>note</li> </ul>	2 CPs can be plugged in per CPU, simultaneous operation with BA Send and CM DP is possible
<b>performance data open communication</b>	
number of possible connections for open communication	32
<ul style="list-style-type: none"> <li>by means of T blocks maximum data volume</li> <li>as user data per ISO on TCP connection for open communication by means of T blocks maximum</li> </ul>	65 536 byte
<b>performance data S7 communication</b>	
number of possible connections for S7 communication	16
<ul style="list-style-type: none"> <li>maximum</li> <li>with OP connections maximum</li> </ul>	16
<b>performance data multi-protocol mode</b>	
number of active connections with multi-protocol mode	32
<b>performance data IT functions</b>	
number of possible connections	1
<ul style="list-style-type: none"> <li>as email client maximum</li> </ul>	1
<b>performance data telecontrol</b>	
suitability for use	No
<ul style="list-style-type: none"> <li>node station</li> <li>substation</li> <li>TIM control center</li> </ul>	Yes Yes No
control center connection	IEC 60870-5, DNP3, (Modbus TCP by block solutions of the CPU) capable control stations, connection to Telecontrol Server Basic and ST7 capable control station
<ul style="list-style-type: none"> <li>by means of a permanent connection</li> <li>by means of demand-oriented connection</li> <li>note</li> </ul>	supported supported Connection to SCADA system by IEC 60870-5 104, DNP3, Telecontrol Server Basic and ST7 capable control center
protocol is supported	Yes
<ul style="list-style-type: none"> <li>DNP3</li> <li>IEC 60870-5</li> <li>SINAUT ST7 protocol</li> </ul>	Yes Yes Yes

Article number	<b>6GK7542-6VX00-0XE0</b>
product type designation	CP 1542SP-1 IRC
product function data buffering if connection is aborted	Yes; TCSB 64000 events, SINAUT ST7 32000 telegrams, DNP3 100000 events, IEC 60870-5 100000 events
number of data points per station maximum	1 500
number of stations for direct communication with Telecontrol Server Basic	3
<ul style="list-style-type: none"> <li>in send direction maximum</li> <li>in receive direction maximum</li> </ul>	15
<b>product functions management, configuration, engineering</b>	
product function MIB support protocol is supported	Yes
<ul style="list-style-type: none"> <li>SNMP v1</li> <li>SNMP v3</li> <li>DCP</li> <li>LLDP</li> </ul>	Yes Yes Yes Yes
configuration software	STEP 7 Professional V14 (TIA Portal) or higher
<ul style="list-style-type: none"> <li>required</li> </ul>	STEP 7 Professional V14 (TIA Portal) or higher
identification & maintenance function	Yes
<ul style="list-style-type: none"> <li>I&amp;M0 - device-specific information</li> <li>I&amp;M1 - higher level designation/location designation</li> </ul>	Yes Yes
<b>product functions diagnostics</b>	
product function web-based diagnostics	Yes; via ET 200SP CPU
<b>product functions security</b>	
product function with VPN connection	SINEMA RC
<ul style="list-style-type: none"> <li>blocking of communication via physical ports</li> </ul>	Yes
<b>product functions time</b>	
product function SICLOCK support	Yes
product function pass on time synchronization protocol is supported	Yes
<ul style="list-style-type: none"> <li>NTP</li> <li>NTP (secure)</li> </ul>	Yes No
time synchronization	Yes
<ul style="list-style-type: none"> <li>from NTP-server</li> <li>from control center</li> </ul>	Yes Yes
<b>standards, specifications, approvals hazardous environments</b>	
certificate of suitability CCC for hazardous zone according to GB standard	Yes

## Overview



- Space-saving access point, suitable for applications where the device is to be mounted in the control cabinet

## Ordering data

## Article No.

## Access Points SCALANCE W761

IWLAN Access Point with built-in wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 150 Mbps; WPA2/AES; IP20 degree of protection (0 °C to +55 °C); scope of delivery: Mounting hardware, 3-pin screw terminal for 24 V DC; manual on CD-ROM; German/English

## SCALANCE W761-1 RJ45

IWLAN Access Point with one built-in wireless interface

- National approvals for operation outside the USA
- National approvals for operation within the USA <sup>1)</sup>

6GK5761-1FC00-0AA0

6GK5761-1FC00-0AB0

## Accessories

## IE FC RJ45 plug 180 2 x 2

RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with a 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0

6GK1901-1BB10-2AB0

6GK1901-1BB10-2AE0

## IE FC Standard Cable GP 2 x 2

6XV1840-2AH10

4-wire, shielded TP installation cable for connection to IE FC outlet RJ45 plug / IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m

## IE FC stripping tool

6GK1901-1GA00

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

## Antennas and miscellaneous IWLAN accessories

See Industrial Wireless LAN/accessories

## Technical specifications

Article number	<b>6GK5761-1FC00-0AA0</b> 6GK5761-1FC00-0AB0 <sup>1)</sup>
product type designation	W761-1 RJ45
<b>transfer rate</b>	
transfer rate	
• with WLAN maximum	150 Mbit/s
• for Industrial Ethernet	10 Mbit/s, 100 Mbit/s
transfer rate for Industrial Ethernet	
• minimum	10 Mbit/s
• maximum	100 Mbit/s
<b>interfaces</b>	
number of electrical connections	
• for network components or terminal equipment	1
• for power supply	1
• for redundant voltage supply	0
type of electrical connection	
• for network components or terminal equipment	RJ45 socket
• for power supply	3-pole screw terminal
design of the removable storage	
• C-PLUG	No
• KEY-PLUG	No
<b>memory</b>	
design of the removable storage	
• C-PLUG	No
• KEY-PLUG	No
<b>interfaces wireless</b>	
number of radio cards permanently installed	1
number of electrical connections for external antenna(s)	1
type of electrical connection for external antenna(s)	R-SMA (socket)
product feature external antenna can be mounted directly on device	Yes
<b>supply voltage, current consumption, power loss</b>	
type of voltage of the supply voltage	DC
consumed current	
• at DC at 24 V typical	0.15 A
power loss [W]	
• at DC at 24 V typical	3.6 W
supply voltage 1	
• from terminal block	19.2 V
supply voltage 2	
• from terminal block	28.8 V
<b>ambient conditions</b>	
ambient temperature	
• during operation	0 ... 55 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C
relative humidity at 25 °C without condensation	95 %
during operation maximum	
ambient condition for operation	When used under hazardous conditions (Zone 2), the SCALANCE W761-1 RJ45 or W72x-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.
protection class IP	IP20

<sup>1)</sup> Wireless approval in the USA

<sup>1)</sup> Please note national approvals under <http://www.siemens.com/wireless-approvals>

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > Communication > SCALANCE W761 RJ45 for the control cabinet****Technical specifications**

Article number	<b>6GK5761-1FC00-0AA0</b> 6GK5761-1FC00-0AB0 <sup>1)</sup>
product type designation	W761-1 RJ45
<b>design, dimensions and weights</b>	
width	50 mm
height	114 mm
depth	74 mm
width of the enclosure without antenna	50 mm
height of the enclosure without antenna	114 mm
depth of the enclosure without antenna	74 mm
net weight	0.13 kg
fastening method	
• S7-300 DIN rail mounting	No
• S7-1500 rail mounting	No
• 35 mm top hat DIN rail mounting	Yes
• wall mounting	No
<b>radio frequencies</b>	
operating frequency	
• for WLAN in 2.4 GHz frequency band	2.41 ... 2.48 GHz; depending on the country approvals
• for WLAN in 5 GHz frequency band	4.9 ... 5.8 GHz; depending on the country approvals
<b>product features, product functions, product components general</b>	
product function Access Point Mode	Yes
product function client Mode	Yes
number of SSIDs	1
product function	
• iPCF Access Point	No
• iPCF client	No
• iPCF-MC Access Point	No
• iPCF-MC client	No
product function iREF	No
product function iPRP	No
<b>product functions management, configuration, engineering</b>	
number of manageable IP addresses in client	4
product function	
• CLI	Yes
• web-based management	Yes
• MIB support	Yes
• TRAPs via email	Yes
• configuration with STEP 7	Yes
• configuration with STEP 7 in the TIA Portal	Yes
• operation with IWLAN controller	No
• operation with Enterasys WLAN controller	No
• forced roaming on IP down with IWLAN	Yes
• forced roaming on link down with IWLAN	Yes
• WDS	Yes

Article number	<b>6GK5761-1FC00-0AA0</b> 6GK5761-1FC00-0AB0 <sup>1)</sup>
product type designation	W761-1 RJ45
protocol is supported	
• Address Resolution Protocol (ARP)	Yes
• ICMP	Yes
• Telnet	Yes
• HTTP	Yes
• HTTPS	Yes
• TFTP	Yes
• DCP	Yes
• LLDP	Yes
identification & maintenance function	
• I&M0 - device-specific information	Yes
• I&M1 – higher level designation/location designation	Yes
<b>product functions diagnostics</b>	
product function	
• PROFINET IO diagnosis	No
• link check	No
• connection monitoring IP-Alive	No
• localization via Aeroscout	No
• SysLog	Yes
protocol is supported	
• SNMP v1	Yes
• SNMP v2	Yes
• SNMP v3	Yes
<b>product functions VLAN</b>	
product function	
• function VLAN with IWLAN	Yes
<b>product functions DHCP</b>	
product function	
• DHCP client	Yes
• DHCP server	Yes
• DHCP Option 82	Yes
<b>product functions redundancy</b>	
protocol is supported	
• STP/RSTP	Yes
• MSTP	Yes
• RSTP	Yes
<b>product functions security</b>	
product function	
• ACL - MAC-based	Yes
• management security, ACL-IP based	Yes
• IEEE 802.1x (radius)	Yes
• NAT/NAPT	No
• access protection according to IEEE802.11i	Yes
• WPA/WPA2	Yes
• TKIP/AES	Yes
protocol is supported	
• SSH	Yes
• RADIUS	Yes

1) Wireless approval in the USA

## Technical specifications

Article number	<b>6GK5761-1FC00-0AA0</b> 6GK5761-1FC00-0AB0 <sup>1)</sup>
product type designation	W761-1 RJ45
<b>product functions time</b>	
protocol is supported	
• NTP	Yes
• SNTP	Yes
• SIMATIC time synchronization (SIMATIC Time)	Yes
<b>standards, specifications, approvals</b>	
standard	
• for FM	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4
• for safety from CSA and UL certificate of suitability	UL 60950-1, CSA C22.2 No. 60950-1
• EC Declaration of Conformity	Yes
• CE marking	Yes
• C-Tick	Yes
• E1 approval	No
• railway application in accordance with EN 50155	No
• railway application in accordance with EN 50121-4	No
• NEMA TS2	No
• IEC 61375	No
• IEC 61850-3	No
• NEMA4X	No
• Power-over-Ethernet according IEEE802.3at for type 1 and IEEE802.3af	No
• Power-over-Ethernet according to IEEE802.3at for type 2	No

Article number	<b>6GK5761-1FC00-0AA0</b> 6GK5761-1FC00-0AB0 <sup>1)</sup>
product type designation	W761-1 RJ45
standard for wireless communication	
• IEEE 802.11a	Yes
• IEEE 802.11b	Yes
• IEEE 802.11e	Yes
• IEEE 802.11g	Yes
• IEEE 802.11h	Yes
• IEEE 802.11i	Yes
• IEEE 802.11n	Yes
wireless approval	You will find the current list of countries at: <a href="http://www.siemens.com/wireless-approvals">http://www.siemens.com/wireless-approvals</a>
<b>standards, specifications, approvals</b>	
<b>marine classification</b>	
Marine classification association	
• American Bureau of Shipping Europe Ltd. (ABS)	No
• French marine classification society (BV)	No
• DNV GL	No
• Korean Register of Shipping (KRS)	No
• Lloyds Register of Shipping (LRS)	No
• Nippon Kaiji Kyokai (NK)	No
• Polski Rejestr Statkow (PRS)	No
• Royal Institution of Naval Architects (RINA)	No
<b>standards, specifications, approvals</b>	
<b>hazardous environments</b>	
standard for hazardous zone	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X
certificate of suitability CCC for hazardous zone according to GB standard	Yes
<b>accessories</b>	
accessories	24 V DC screw terminal included in scope of delivery

<sup>1)</sup> Wireless approval in the USA



## I/O systems


SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > SCALANCE W722 RJ45 for the control cabinet

### Overview



- Space-saving client module, suitable for applications where the device is to be mounted in the control cabinet
- Equipped with iFeatures

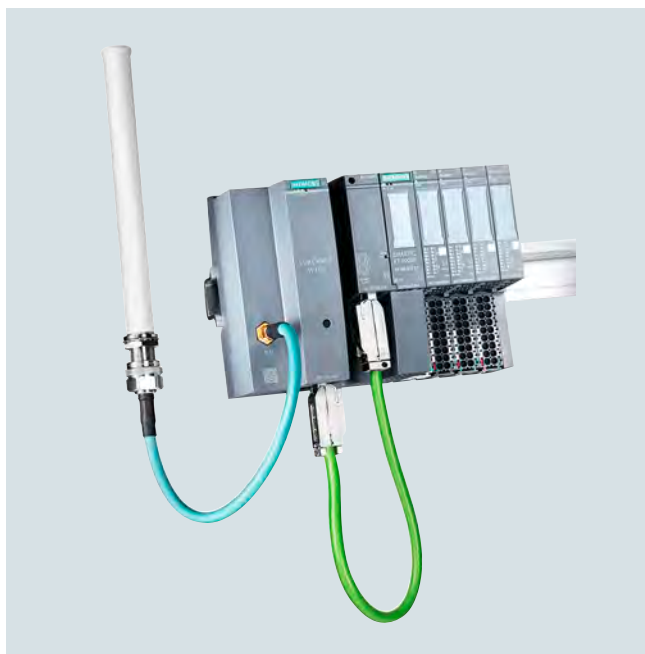

ET 200SP station with SCALANCE W722 RJ45

### Ordering data

### Article No.

#### SCALANCE W722 Client Modules

IWLAN Ethernet client modules with iFeatures support and built-in wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 150 Mbps; WPA2/AES; IP20 degree of protection (0 °C to +55 °C); scope of supply: Mounting hardware, 3-pole screw terminal for 24 V DC; manual on CD-ROM; German/English

#### SCALANCE W722-1 RJ45

For administration of a radio link with iFeatures from a connected device with Industrial Ethernet connection

- Country approvals for operation outside the USA
- Country approvals for operation within the USA<sup>1)</sup>
- National approvals for operation in Israel<sup>2)</sup>

**6GK5722-1FC00-0AA0**

**6GK5722-1FC00-0AB0**

**6GK5722-1FC00-0AC0**

#### Accessories

#### IE FC RJ45 plug 180 2 x 2

RJ45 connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation-displacement contacts for connecting Industrial Ethernet FC installation cables; with a 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

**6GK1901-1BB10-2AA0**

**6GK1901-1BB10-2AB0**

**6GK1901-1BB10-2AE0**

#### IE FC standard cable GP 2 x 2

**6XV1840-2AH10**

4-core, shielded TP installation cable for connection to IE FC outlet RJ45 plug/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; package item max. 1 000 m, minimum order quantity 20 m

#### IE FC stripping tool

**6GK1901-1GA00**

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

#### Antennas and miscellaneous IWLAN accessories

See: Industrial Wireless LAN/accessories

<sup>1)</sup> Please note country approvals under:  
<http://www.siemens.com/wireless-approvals>

## Technical specifications

Article number	<b>6GK5722-1FC00-0AA0</b> 6GK5722-1FC00-0AB0 <sup>1)</sup> 6GK5722-1FC00-0AC0 <sup>2)</sup>
product type designation	W722-1 RJ45
<b>transfer rate</b>	
transfer rate	
• with WLAN maximum	150 Mbit/s
• for Industrial Ethernet	10 Mbit/s, 100 Mbit/s
transfer rate for Industrial Ethernet	
• minimum	10 Mbit/s
• maximum	100 Mbit/s
<b>interfaces</b>	
number of electrical connections	
• for network components or terminal equipment	1
• for power supply	1
• for redundant voltage supply	0
type of electrical connection	
• for network components or terminal equipment	RJ45 socket
• for power supply	3-pole screw terminal
design of the removable storage	
• C-PLUG	No
• KEY-PLUG	No
<b>memory</b>	
design of the removable storage	
• C-PLUG	No
• KEY-PLUG	No
<b>interfaces wireless</b>	
number of radio cards permanently installed	1
number of electrical connections for external antenna(s)	1
type of electrical connection for external antenna(s)	R-SMA (socket)
product feature external antenna can be mounted directly on device	Yes
<b>supply voltage, current consumption, power loss</b>	
type of voltage of the supply voltage	DC
consumed current	
• at DC at 24 V typical	0.15 A
power loss [W]	
• at DC at 24 V typical	3.6 W
supply voltage 1	
• from terminal block	19.2 V
supply voltage 2	
• from terminal block	28.8 V
<b>ambient conditions</b>	
ambient temperature	
• during operation	0 ... 55 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C
relative humidity at 25 °C without condensation during operation maximum	95 %
ambient condition for operation	When used under hazardous conditions (Zone 2), the SCALANCE W761-1 RJ45 or W72x-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.
protection class IP	IP20

Article number	<b>6GK5722-1FC00-0AA0</b> 6GK5722-1FC00-0AB0 <sup>1)</sup> 6GK5722-1FC00-0AC0 <sup>2)</sup>
product type designation	W722-1 RJ45
<b>design, dimensions and weights</b>	
width	50 mm
height	114 mm
depth	74 mm
width of the enclosure without antenna	50 mm
height of the enclosure without antenna	114 mm
depth of the enclosure without antenna	74 mm
net weight	0.13 kg
fastening method	
• S7-300 DIN rail mounting	No
• S7-1500 rail mounting	No
• 35 mm top hat DIN rail mounting	Yes
• wall mounting	No
<b>radio frequencies</b>	
operating frequency	
• for WLAN in 2.4 GHz frequency band	2.41 ... 2.48 GHz; depending on the country approvals
• for WLAN in 5 GHz frequency band	4.9 ... 5.8 GHz; depending on the country approvals
<b>product features, product functions, product components general</b>	
product function Access Point Mode	No
product function client Mode	Yes
product function	
• iPCF client	Yes
• iPCF-MC client	Yes
number of iPCF-capable radio modules	1
product function iPRP	Yes
<b>product functions management, configuration, engineering</b>	
number of manageable IP addresses in client	4
product function	
• CLI	Yes
• web-based management	Yes
• MIB support	Yes
• TRAPs via email	Yes
• configuration with STEP 7	Yes
• configuration with STEP 7 in the TIA Portal	Yes
• WDS	No
protocol is supported	
• Address Resolution Protocol (ARP)	Yes
• ICMP	Yes
• Telnet	Yes
• HTTP	Yes
• HTTPS	Yes
• TFTP	Yes
• DCP	Yes
• LLDP	No
identification & maintenance function	
• I&M0 - device-specific information	Yes
• I&M1 - higher level designation/ location designation	Yes
1) Wireless approval in the USA	
2) Wireless approval in the Israel	

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > Communication > SCALANCE W722 RJ45 for the control cabinet****Technical specifications**

Article number	<b>6GK5722-1FC00-0AA0</b> 6GK5722-1FC00-0AB0 <sup>1)</sup> 6GK5722-1FC00-0AC0 <sup>2)</sup>
product type designation	W722-1 RJ45
<b>product functions diagnostics</b>	
product function	
• PROFINET IO diagnosis	Yes
• link check	No
• connection monitoring IP-Alive	No
• SysLog	Yes
protocol is supported	
• SNMP v1	Yes
• SNMP v2	Yes
• SNMP v3	Yes
<b>product functions VLAN</b>	
product function	
• function VLAN with IWLAN	No
<b>product functions DHCP</b>	
product function	
• DHCP client	Yes
• DHCP server	Yes
• DHCP Option 82	Yes
<b>product functions redundancy</b>	
protocol is supported	
• STP/RSTP	Yes
• MSTP	Yes
• RSTP	Yes
<b>product functions security</b>	
product function	
• ACL - MAC-based	Yes
• management security, ACL-IP based	Yes
• IEEE 802.1x (radius)	Yes
• NAT/NAPT	Yes
• access protection according to IEEE802.11i	Yes
• WPA/WPA2	Yes
• TKIP/AES	Yes
protocol is supported	
• SSH	Yes
• RADIUS	Yes
<b>product functions time</b>	
protocol is supported	
• NTP	Yes
• SNTP	Yes
• SIMATIC time synchronization (SIMATIC Time)	Yes

Article number	<b>6GK5722-1FC00-0AA0</b> 6GK5722-1FC00-0AB0 <sup>1)</sup> 6GK5722-1FC00-0AC0 <sup>2)</sup>
product type designation	W722-1 RJ45
<b>standards, specifications, approvals</b>	
standard	
• for FM	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4
• for safety from CSA and UL certificate of suitability	UL 60950-1, CSA C22.2 No. 60950-1
• EC Declaration of Conformity	Yes
• CE marking	Yes
• C-Tick	Yes
• E1 approval	No
• railway application in accordance with EN 50155	No
• NEMA TS2	No
• IEC 61375	No
• IEC 61850-3	No
• NEMA4X	No
• Power-over-Ethernet according IEEE802.3at for type 1 and IEEE802.3af	No
• Power-over-Ethernet according to IEEE802.3at for type 2	No
standard for wireless communication	
• IEEE 802.11a	Yes
• IEEE 802.11b	Yes
• IEEE 802.11e	Yes
• IEEE 802.11g	Yes
• IEEE 802.11h	Yes
• IEEE 802.11i	Yes
• IEEE 802.11n	Yes
wireless approval	You will find the current list of countries at: <a href="http://www.siemens.com/wireless-approvals">http://www.siemens.com/wireless-approvals</a>
<b>standards, specifications, approvals marine classification</b>	
Marine classification association	
• American Bureau of Shipping Europe Ltd. (ABS)	No
• French marine classification society (BV)	No
• DNV GL	No
• Korean Register of Shipping (KRS)	No
• Lloyds Register of Shipping (LRS)	No
• Nippon Kaiji Kyokai (NK)	No
• Polski Rejestr Statkow (PRS)	No
• Royal Institution of Naval Architects (RINA)	No
<b>standards, specifications, approvals hazardous environments</b>	
standard for hazardous zone	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X
certificate of suitability CCC for hazardous zone according to GB standard	Yes
<b>accessories</b>	
accessories	24 V DC screw terminal included in scope of delivery

<sup>1)</sup> Wireless approval in the USA<sup>2)</sup> Wireless approval in the Israel

## Overview



- Space-saving client module, suitable for applications where the device is to be mounted in the control cabinet

## Ordering data

## SCALANCE W721 Client Modules

IWLAN Ethernet client modules with built-in wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 150 Mbps; WPA2/AES; IP20 degree of protection (0 °C to +55 °C).  
Scope of supply:  
Mounting hardware, 3-pole screw terminal for 24 V DC; manual on CD-ROM; German/English

## SCALANCE W721-1 RJ45

For administration of a radio link from a connected device with Industrial Ethernet connection

- Country approvals for operation outside the USA
- Country approvals for operation within the USA<sup>1)</sup>

## Article No.

6GK5721-1FC00-0AA0

6GK5721-1FC00-0AB0

## Article No.

## Accessories

## IE FC RJ45 plug 180 2 x 2

RJ45 connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation-displacement contacts for connecting Industrial Ethernet FC installation cables; with a 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0

6GK1901-1BB10-2AB0

6GK1901-1BB10-2AE0

## IE FC standard cable GP 2 x 2

4-core, shielded TP installation cable for connection to IE FC outlet RJ45 plug/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; package item max. 1 000 m, minimum order quantity 20 m

6XV1840-2AH10

## IE FC stripping tool

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

## Antennas and miscellaneous IWLAN accessories

See: Industrial Wireless LAN/accessories

<sup>1)</sup> Please note country approvals under:  
<http://www.siemens.com/wireless-approvals>

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**I/O modules > Communication > SCALANCE W721 RJ45 for the control cabinet****Technical specifications**

Article number	<b>6GK5721-1FC00-0AA0</b> 6GK5721-1FC00-0AB0 <sup>1)</sup>
product type designation	W721-1 RJ45
<b>transfer rate</b>	
transfer rate	
• with WLAN maximum	150 Mbit/s
• for Industrial Ethernet	10 Mbit/s, 100 Mbit/s
transfer rate for Industrial Ethernet	
• minimum	10 Mbit/s
• maximum	100 Mbit/s
<b>interfaces</b>	
number of electrical connections	
• for network components or terminal equipment	1
• for power supply	1
• for redundant voltage supply	0
type of electrical connection	
• for network components or terminal equipment	RJ45 socket
• for power supply	3-pole screw terminal
design of the removable storage	
• C-PLUG	No
• KEY-PLUG	No
<b>memory</b>	
design of the removable storage	
• C-PLUG	No
• KEY-PLUG	No
<b>interfaces wireless</b>	
number of radio cards permanently installed	1
number of electrical connections for external antenna(s)	1
type of electrical connection for external antenna(s)	R-SMA (socket)
product feature external antenna can be mounted directly on device	Yes
<b>supply voltage, current consumption, power loss</b>	
type of voltage of the supply voltage	DC
consumed current	
• at DC at 24 V typical	0.15 A
power loss [W]	
• at DC at 24 V typical	3.6 W
supply voltage 1	
• from terminal block	19.2 V
supply voltage 2	
• from terminal block	28.8 V
<b>ambient conditions</b>	
ambient temperature	
• during operation	0 ... 55 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C
relative humidity at 25 °C without condensation during operation maximum	95 %
ambient condition for operation	When used under hazardous conditions (Zone 2), the SCALANCE W761-1 RJ45 or W72x-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.
protection class IP	IP20

Article number	<b>6GK5721-1FC00-0AA0</b> 6GK5721-1FC00-0AB0 <sup>1)</sup>
product type designation	W721-1 RJ45
<b>design, dimensions and weights</b>	
width	50 mm
height	114 mm
depth	74 mm
width of the enclosure without antenna	50 mm
height of the enclosure without antenna	114 mm
depth of the enclosure without antenna	74 mm
net weight	0.13 kg
fastening method	
• S7-300 DIN rail mounting	No
• S7-1500 rail mounting	No
• 35 mm top hat DIN rail mounting	Yes
• wall mounting	No
<b>radio frequencies</b>	
operating frequency	
• for WLAN in 2.4 GHz frequency band	2.41 ... 2.48 GHz; depending on the country approvals
• for WLAN in 5 GHz frequency band	4.9 ... 5.8 GHz; depending on the country approvals
<b>product features, product functions, product components general</b>	
product function Access Point Mode	No
product function client Mode	Yes
product function	
• iPCF client	No
• iPCF-MC client	No
product function iREF	No
product function iPRP	No
<b>product functions management, configuration, engineering</b>	
number of manageable IP addresses in client	4
product function	
• CLI	Yes
• web-based management	Yes
• MIB support	Yes
• TRAPs via email	Yes
• configuration with STEP 7	Yes
• configuration with STEP 7 in the TIA Portal	Yes
• WDS	No
protocol is supported	
• Address Resolution Protocol (ARP)	Yes
• ICMP	Yes
• Telnet	Yes
• HTTP	Yes
• HTTPS	Yes
• TFTP	Yes
• DCP	Yes
• LLDP	No
identification & maintenance function	
• I&M0 - device-specific information	Yes
• I&M1 - higher level designation/ location designation	Yes

<sup>1)</sup> Wireless approval in the USA

## Technical specifications

Article number	<b>6GK5721-1FC00-0AA0</b> 6GK5721-1FC00-0AB0 <sup>1)</sup>
product type designation	W721-1 RJ45
<b>product functions diagnostics</b>	
product function	
• PROFINET IO diagnosis	No
• link check	No
• connection monitoring IP-Alive	No
• SysLog	Yes
protocol is supported	
• SNMP v1	Yes
• SNMP v2	Yes
• SNMP v3	Yes
<b>product functions VLAN</b>	
product function	
• function VLAN with IWLAN	No
<b>product functions DHCP</b>	
product function	
• DHCP client	Yes
• DHCP server	Yes
• DHCP Option 82	Yes
<b>product functions redundancy</b>	
protocol is supported	
• STP/RSTP	Yes
• MSTP	Yes
• RSTP	Yes
<b>product functions security</b>	
product function	
• ACL - MAC-based	Yes
• management security, ACL-IP based	Yes
• IEEE 802.1x (radius)	Yes
• NAT/NAPT	Yes
• access protection according to IEEE802.11i	Yes
• WPA/WPA2	Yes
• TKIP/AES	Yes
protocol is supported	
• SSH	Yes
• RADIUS	Yes
<b>product functions time</b>	
protocol is supported	
• NTP	Yes
• SNTP	Yes
• SIMATIC time synchronization (SIMATIC Time)	Yes

Article number	<b>6GK5721-1FC00-0AA0</b> 6GK5721-1FC00-0AB0 <sup>1)</sup>
product type designation	W721-1 RJ45
<b>standards, specifications, approvals</b>	
standard	
• for FM	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4
• for safety from CSA and UL certificate of suitability	UL 60950-1, CSA C22.2 No. 60950-1
• EC Declaration of Conformity	Yes
• CE marking	Yes
• C-Tick	Yes
• E1 approval	No
• railway application in accordance with EN 50155	No
• NEMA TS2	No
• IEC 61375	No
• IEC 61850-3	No
• NEMA4X	No
• Power-over-Ethernet according to IEEE802.3at for type 1 and IEEE802.3af	No
• Power-over-Ethernet according to IEEE802.3at for type 2	No
standard for wireless communication	
• IEEE 802.11a	Yes
• IEEE 802.11b	Yes
• IEEE 802.11e	Yes
• IEEE 802.11g	Yes
• IEEE 802.11h	Yes
• IEEE 802.11i	Yes
• IEEE 802.11n	Yes
wireless approval	You will find the current list of countries at: <a href="http://www.siemens.com/wireless-approvals">http://www.siemens.com/wireless-approvals</a>
<b>standards, specifications, approvals marine classification</b>	
Marine classification association	
• American Bureau of Shipping Europe Ltd. (ABS)	No
• French marine classification society (BV)	No
• DNV GL	No
• Korean Register of Shipping (KRS)	No
• Lloyds Register of Shipping (LRS)	No
• Nippon Kaiji Kyokai (NK)	No
• Polski Rejestr Statkow (PRS)	No
• Royal Institution of Naval Architects (RINA)	No
<b>standards, specifications, approvals hazardous environments</b>	
standard for hazardous zone	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X
certificate of suitability CCC for hazardous zone according to GB standard	Yes
<b>accessories</b>	
accessories	24 V DC screw terminal included in scope of delivery

<sup>1)</sup> Wireless approval in the USA

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > SIPLUS CM PtP serial interface

### Overview



- Communications module CM PtP; Module for serial communication connections with RS232, RS422, RS485 interfaces for the Freeport, 3964(R), Modbus RTU and USS protocols, max. 115.2 kbps, 2 KB frame length, 4 KB receive buffer.
- Protocols supported
  - Freeport: User-parameterizable telegram format for universal communication
  - 3964(R) for improved transmission reliability
  - Modbus RTU master (requires instructions in SIMATIC S7)
  - Modbus RTU slave (requires instructions in SIMATIC S7)
  - USS, implemented through instructions
- Interface properties
  - RS232 with auxiliary signals
  - RS422 for full-duplex connections
  - RS485 for half-duplex and multi-point connections
  - Transmission rates from 300 to 115200 bps
- Can be plugged into type A0 BaseUnits (BU) with automatic coding
- LED display for errors, operation, and supply voltage
- Communication display for sending and receiving
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (order and serial number)
  - Connection diagram
  - Color coding of the CM module type: silver
  - Hardware and firmware version
  - Complete Article No.
- Optional labeling accessories
  - Labeling strips
  - Equipment labeling plate
- Optional system-integrated shield connection

#### Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

### Ordering data

### Article No.

#### SIPLUS CM PtP communications module

(Extended temperature range and exposure to environmental substances)

PROFIBUS DP master/slave with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps for serial communication connections with the interfaces RS232, RS422, RS485, BU type A0, color code CC00

6AG1137-6AA00-2BA0

#### Accessories

#### SIPLUS BaseUnits type A0

(Extended temperature range and exposure to environmental substances)

#### BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

6AG1193-6BP00-7DA0

#### BU15-P16+A0+2B

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

6AG1193-6BP00-7BA0

#### BU15-P16+A10+2D

BU type A0; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

6AG1193-6BP20-7DA0

#### BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

6AG1193-6BP20-7BA0

#### Accessories

#### SIPLUS Mounting Kit ET 200SP

Mounting accessories for use with increased mechanical vibration and shock loads.

6AG1193-6AA00-0AA0

#### Other accessories

See SIMATIC CM PtP, page 10/136

## Technical specifications

Article number	<b>6AG1137-6AA00-2BA0</b>
Based on	<b>6ES7137-6AA00-0BA0</b> SIPLUS ET 200SP CM PTP
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Resistance</b>	
<b>Coolants and lubricants</b>	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Article number	<b>6AG1137-6AA00-2BA0</b>
Based on	<b>6ES7137-6AA00-0BA0</b> SIPLUS ET 200SP CM PTP
<b>Usage in industrial process technology</b>	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A



## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > SIPLUS CM 4x IO-Link

### Overview



- SIPLUS CM 4x IO-Link communications module  
Serial communications module for connecting up to 4 IO-Link devices in accordance with IO-Link specification V1.0 and V1.1. The IO-Link parameters are configured using the Port Configuration Tool (PCT), version V3.0 and higher.
- Time-based IO  
Time-based IO ensures that signals are output with a precisely defined response time. By combining inputs and outputs, for example, passing products can be accurately measured or fluids dosed in precise quantities.
- Supported data transfer rates
  - COM1 (4.8 kBd)
  - COM2 (38.4 kBd)
  - COM3 (230.4 kBd)
- Expansion limits
  - Length of cable: Max. 20 m
  - Max. 32 bytes of input and output data per port
  - Max. 144 bytes of input data and 128 bytes of output data per module

- Supported ET 200SP system functions
  - Replacement without PG with automatic backup without the engineering tool of the IO-Link Device Parameter (V1.1 devices only) and the IO-Link master parameters by means of redundant saving of parameters on the e-coding element
  - Re-parameterization during operation
  - Identification data I&M
  - Firmware update
  - PROFlenergy
- Can be plugged into Type A0 BaseUnits (BU) with automatic e-coding
- LED indicators
  - DIAG: Operating state indicator (green/red) of the module
  - C1..C4: Port status indicator (green) for Port 1, 2, 3 and 4
  - Q1..Q4: Channel status indicator (green) for Port 1, 2, 3 and 4
  - F1..F4: Port fault indicator (red) for Port 1, 2, 3 and 4
  - PWR: Supply voltage indicator (green)
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (order and serial number)
  - Connection diagram
  - Color-coding of the module class CM: silver
  - Hardware and firmware version
  - Complete Article No.
- Optional accessories
  - Labeling strips
  - Equipment labeling plate
  - Color-coded label with color code CC04
- Optional system-integrated shield connection

#### Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

### Ordering data

Ordering data	Article No.	Ordering data	Article No.
<b>SIPLUS CM 4x IO-Link master V1.1 Standard communications module</b> (Extended temperature range and exposure to environmental substances) Serial communications module for connecting up to 4 IO-Link devices, time-based IO, BU type A0, color code CC04	<b>6AG1137-6BD00-2BA0</b>	<b>BU15-P16+A10+2B</b> (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group	<b>6AG1193-6BP20-7BA0</b>
<b>Usable type A0 BaseUnits</b> <b>BU15-P16+A10+2D</b> (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)	<b>6AG1193-6BP20-7DA0</b>	<b>BU15-P16+A0+2B</b> (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group	<b>6AG1193-6BP00-7BA0</b>
<b>BU15-P16+A0+2D</b> (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	<b>6AG1193-6BP00-7DA0</b>	<b>Accessories</b> <b>SIPLUS Mounting Kit ET 200SP</b> Mounting accessories for use with increased mechanical vibration and shock loads.	<b>6AG1193-6AA00-0AA0</b>
		<b>Other accessories</b> See SIMATIC CM 4x IO-Link, page 10/140	

## Technical specifications

Article number	<b>6AG1137-6BD00-2BA0</b>
Based on	<b>6ES7137-6BD00-0BA0</b> SIPLUS ET 200SP CM 4XIO-LINK
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Resistance</b>	
<b>Coolants and lubricants</b>	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Article number	<b>6AG1137-6BD00-2BA0</b>
Based on	<b>6ES7137-6BD00-0BA0</b> SIPLUS ET 200SP CM 4XIO-LINK
<b>Usage in industrial process technology</b>	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

**I/O systems**

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > Communication > SIPLUS CM DP for ET 200SP CPU

**Overview**

- PROFIBUS DP master/slave with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps
- Expands the ET 200SP CPUs 1510SP-1 PN / 1512SP-1 PN by one PROFIBUS connection
- For communication with lower-level PROFIBUS devices at bandwidths of 9.6 kbps to 12 Mbps
- Communication services:
  - PROFIBUS DP
  - PG/OP communication
  - S7 communication:
    - This makes it possible to establish communication between the ET 200SP CPU and other devices, for example those from the SIMATIC S7-300/400/1500 range.
- Time synchronization
- Simple programming and configuration over PROFIBUS
- Cross-network PG communication using S7 routing
- Data set routing

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

**Ordering data****Article No.**

**SIPLUS CM DP for ET 200SP CPU** **6AG1545-5DA00-2AB0**

(Extended temperature range and exposure to environmental substances)

PROFIBUS DP master/slave with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps

**Accessories**

**SIPLUS Mounting Kit ET 200SP** **6AG1193-6AA00-0AA0**

Mounting accessories for use with increased mechanical vibration and shock loads.

**Other accessories**

see SIMATIC CM DP, page 10/150

## Technical specifications

Article number	<b>6AG1545-5DA00-2AB0</b>	Article number	<b>6AG1545-5DA00-2AB0</b>
Based on	<b>6ES7545-5DA00-0AB0</b> SIPLUS ET 200SP CM DP	Based on	<b>6ES7545-5DA00-0AB0</b> SIPLUS ET 200SP CM DP
<b>Ambient conditions</b>		<b>Usage in industrial process technology</b>	
<b>Ambient temperature during operation</b>		- Against chemically active substances acc. to EN 60654-4	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	
• horizontal installation, max.	70 °C; = Tmax	Yes; Class 3 (excluding trichlorethylene)	
• vertical installation, min.	-40 °C; = Tmin (incl. condensation/frost)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	
• vertical installation, max.	50 °C; = Tmax		
<b>Altitude during operation relating to sea level</b>		<b>Remark</b>	
• Installation altitude above sea level, max.	5 000 m	- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	* The supplied plug covers must remain in place over the unused interfaces during operation!	
<b>Relative humidity</b>		<b>Conformal coating</b>	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	• Coatings for printed circuit board assemblies acc. to EN 61086	
<b>Resistance</b>		Yes; Class 2 for high reliability	
<b>Coolants and lubricants</b>		• Protection against fouling acc. to EN 60664-3	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Type 1 protection	
<b>Use in stationary industrial systems</b>		• Military testing according to MIL-I-46058C, Amendment 7	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Discoloration of coating possible during service life	
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Conformal coating, Class A	
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *		
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		
<b>Use on ships/at sea</b>			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request		
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *		
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *		
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

Fail-safe I/O modules > Digital F-input modules

### Overview



SIMATIC ET 200SP Safety F-DI video  
[https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoId=6151017420001](https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6151017420001)



Digital fail-safe input module:  
F-DI 8x24 V DC High Feature for BU type A0, color code CC01

Important features:

- 8-channel digital fail-safe input module for ET 200SP
- For fail-safe reading of sensor information (1 or 2 channels)
- Provides integrated discrepancy evaluation for 2-out-of-2 signals
- 8 internal sensor supplies (incl. test function) onboard
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Can be plugged into Type A0 BaseUnits (BU) with automatic coding
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (order and serial number)
  - Connection diagram
  - Color coding of the module type DI: white
  - Hardware and firmware version
  - Color code CC for module-specific color coding of the potentials at the terminals of the BU
  - Complete Article No.
- Optional labeling accessories
  - Labeling strips
  - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. Can be used with all fail-safe SIMATIC S7 CPUs.

### Ordering data

#### Digital F-input modules

F-DI 8x24VDC High Feature,  
BU type A0, color code CC01

### Article No.

**6ES7136-6BA00-0CA0**

#### Spare parts

#### E-coding element type F

5 units, for ET 200SP F-DI, F-DQ,  
F-PM E, F-AI 4x1

**6ES7193-6EF00-1AA0**

#### Suitable BaseUnits

#### BU15-P16+A10+2D

BU type A0; BaseUnit (light)  
with 16 push-in terminals (1 ... 16)  
to the module and an additional  
10 internally jumpered  
AUX terminals (1 A to 10 A);  
for starting a new load group  
(max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack,  
please order this article number  
with an order quantity of 10.

**6ES7193-6BP20-0DA0**  
**6ES7193-6BP20-2DA0**

### Article No.

#### BU15-P16+A0+2D

BU type A0; BaseUnit (light)  
with 16 push-in terminals to the  
module; for starting a new load  
group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack,  
please order this article number  
with an order quantity of 10.

**6ES7193-6BP00-0DA0**  
**6ES7193-6BP00-2DA0**

#### 2BU15-P16+A0+2DB

Double BaseUnit for  
holding 2 I/O modules;  
BU type A0; BaseUnit (light/dark)  
with 16 push-in terminals to the  
module; for starting a new load  
group (max. 10 A)

- Pack of 1 unit

**6ES7193-6BP60-0DA0**

Ordering data	Article No.	Article No.
<b>BU15-P16+A10+2B</b> BU type A0; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> <li>• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.</li> </ul>	<b>6ES7193-6BP20-0BA0</b> <b>6ES7193-6BP20-2BA0</b>	<b>STEP 7 Safety Advanced V17</b> <b>Task:</b> Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco <b>Requirement:</b> STEP 7 Professional V17 <b>Note:</b> As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case. Floating license for 1 user; license key on USB flash drive <b>6ES7833-1FA17-0YA5</b> Floating license for 1 user; license key for download <sup>1)</sup> ; Email address required for delivery <b>6ES7833-1FA17-0YH5</b>
<b>BU15-P16+A0+2B</b> BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> <li>• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.</li> </ul>	<b>6ES7193-6BP00-0BA0</b> <b>6ES7193-6BP00-2BA0</b>	
<b>2BU15-P16+A0+2B</b> Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the load group <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> </ul>	<b>6ES7193-6BP60-0BA0</b>	
<b>Accessories</b>		
<b>S7 Distributed Safety V5.4 SP5 Update 2 programming tool</b> <b>Task:</b> Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP <b>Requirement:</b> Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 as of V5.5 SP1; Please also consider the operating systems that have been released for the used STEP 7 version Floating license for 1 user; software and documentation on DVD; license key on USB flash drive <b>6ES7833-1FC02-0YA5</b> Floating license for 1 user; software, documentation and license key for download <sup>1)</sup> ; Email address required for delivery <b>6ES7833-1FC02-0YH5</b>		<b>Equipment labeling plate</b> 10 sheets of 16 labels <b>6ES7193-6LF30-0AW0</b>
<b>S7 Distributed Safety upgrade</b> From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive <b>6ES7833-1FC02-0YE5</b>		<b>Labeling strips</b> 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer <b>6ES7193-6LR10-0AA0</b> 500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer <b>6ES7193-6LR10-0AG0</b> 1 000 labeling strips DIN A4, light gray, card, for inscription with laser printer <b>6ES7193-6LA10-0AA0</b> 1 000 labeling strips DIN A4, yellow, card, for inscription with laser printer <b>6ES7193-6LA10-0AG0</b>
		<b>BU cover</b> For covering empty slots (gaps); 5 units <ul style="list-style-type: none"> <li>• 15 mm wide</li> <li>• 20 mm wide</li> </ul> <b>6ES7133-6CV15-1AM0</b> <b>6ES7133-6CV20-1AM0</b>
		<b>Shield connection</b> 5 shield supports and 5 shield terminals <b>6ES7193-6SC00-1AM0</b>
		<b>Color-coded labels</b> <ul style="list-style-type: none"> <li>• Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units</li> <li>• Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 50 units</li> <li>• Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units</li> <li>• Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units</li> <li>• Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units</li> </ul> <b>6ES7193-6CP01-2MA0</b> <b>6ES7193-6CP01-4MA0</b> <b>6ES7193-6CP71-2AA0</b> <b>6ES7193-6CP72-2AA0</b> <b>6ES7193-6CP73-2AA0</b>

<sup>1)</sup> For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**Fail-safe I/O modules > Digital F-input modules****Technical specifications**

Article number	<b>6ES7136-6BA00-0CA0</b> ET 200SP, EI-Mod., F-DI 8x24VDC HF
<b>General information</b>	
Product type designation	F-DI 8x24VDC HF
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/ integrated from version	V12
• STEP 7 configurable/integrated from version	V5.5 SP3 / -
• PROFINET from GSD version/ GSD revision	V2.31
<b>Supply voltage</b>	
Rated value (DC)	24 V
Reverse polarity protection	Yes
<b>Encoder supply</b>	
Number of outputs	8
Short-circuit protection	Yes; Electronic (response threshold 0.7 A to 1.8 A)
<b>Output current</b>	
• up to 60 °C, max.	0.3 A
<b>24 V encoder supply</b>	
• 24 V	Yes; min. L+ (-1.5 V)
• Short-circuit protection	Yes
• Output current, max.	800 mA; Total current of all encoders
<b>Digital inputs</b>	
Number of digital inputs	8
Source/sink input	Yes; P-reading
Input characteristic curve in accordance with IEC 61131, type 1	Yes
<b>Input voltage</b>	
• Rated value (DC)	24 V
• for signal *0*	-30 to +5 V
• for signal *1*	+15 to +30 V
<b>Input current</b>	
• for signal *1*, typ.	3.7 mA
<b>Input delay (for rated value of input voltage)</b>	
<b>for standard inputs</b> - parameterizable	Yes
<b>for technological functions</b> - parameterizable	No


Article number	<b>6ES7136-6BA00-0CA0</b> ET 200SP, EI-Mod., F-DI 8x24VDC HF
<b>Interrupts/diagnostics/ status information</b>	
Diagnostics function	Yes
<b>Alarms</b>	
• Diagnostic alarm	Yes
• Hardware interrupt	No
<b>Diagnostics indication LED</b>	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and backplane bus	Yes
<b>Standards, approvals, certificates</b>	
Suitable for safety functions	Yes
<b>Highest safety class achievable in safety mode</b>	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C
• vertical installation, max.	50 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	4 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Dimensions</b>	
Width	15 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	49 g

## Overview



**SIMATIC ET 200SP F-DQ 4**  
Compact fail-safe digital output module

SIMATIC ET 200SP Safety F-DQ 4 video  
[https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoId=6154332510001](https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6154332510001)

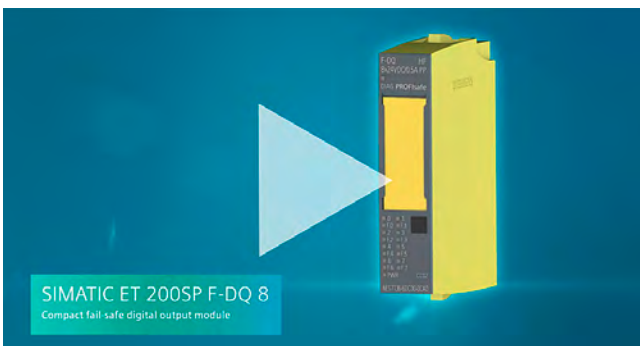

**SIMATIC ET 200SP F-DQ 8**  
Compact fail-safe digital output module

SIMATIC ET 200SP Safety F-DQ 8 video  
[https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoId=6154329323001](https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6154329323001)



Digital fail-safe output modules:

- F-DQ 4x24VDC/2A PM High Feature
- F-DQ 8x24VDC/0.5A PP High Feature

Important features:

- 4 and 8-channel digital fail-safe output modules for the ET 200SP
- Fail-safe 2-channel activation (switching to P/M potential or switching to P/P potential) of actuators
- Actuators can be controlled up to 2 A or 0.5 A
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Can be plugged into Type A0 BaseUnits (BU) with automatic coding
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (order and serial number)
  - Connection diagram
  - Color coding of the DQ module type: black
  - Hardware and firmware version
  - Color code CC for module-specific color coding of the potentials at the terminals of the BU
  - Complete Article No.
- Optional labeling accessories
  - Labeling strips
  - Equipment labeling plate
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations
- They can be used with all fail-safe SIMATIC S7 CPUs



**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**Fail-safe I/O modules > Digital F-output modules**

Ordering data	Article No.	Article No.
<b>Digital F-output modules</b>		<b>BU20-P12+A4+0B</b>
F-DQ 4x24VDC High Feature, BU type A0, color code CC01	<b>6ES7136-6DB00-0CA0</b>	BU type B0; BaseUnit (dark) with 12 push-in terminals (1 ... 12) to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the load group
F-DQ 8x24VDC High Feature, switching to P/P potential, BU type A0, color code CC01	<b>6ES7136-6DC00-0CA0</b>	
<b>Spare parts</b>		<b>Accessories</b>
<b>E-coding element type F</b>	<b>6ES7193-6EF00-1AA0</b>	<b>S7 Distributed Safety V5.4 SP5 Update 2 programming tool</b>
5 units, for ET 200SP F-DI, F-DQ, F-PM E, F-AI 4x1		<b>Task:</b> Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200SP, ET 200pro, ET 200eco, ET 200SP
<b>Suitable BaseUnits</b>		<b>Requirement:</b> Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 as of V5.5 SP1; Please also consider the operating systems that have been released for the used STEP 7 version
<b>BU15-P16+A10+2D</b>	<b>6ES7193-6EF00-1AA0</b>	Floating license for 1 user; software and documentation on DVD; license key on USB flash drive
BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)		Floating license for 1 user; software, documentation and license key for download <sup>1)</sup> ; Email address required for delivery
• Pack of 1 unit	<b>6ES7193-6BP20-0DA0</b>	
• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP20-2DA0</b>	
<b>BU15-P16+A0+2D</b>		<b>S7 Distributed Safety upgrade</b>
BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)		From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive
• Pack of 1 unit	<b>6ES7193-6BP00-0DA0</b>	
• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP00-2DA0</b>	
<b>2BU15-P16+A0+2DB</b>		<b>STEP 7 Safety Advanced V17</b>
Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (light/dark) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)		<b>Task:</b> Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O
• Pack of 1 unit	<b>6ES7193-6BP60-0DA0</b>	<b>Requirement:</b> STEP 7 Professional V17
<b>BU15-P16+A10+2B</b>		<b>Note:</b> As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.
BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group		Floating license for 1 user; license key on USB flash drive
• Pack of 1 unit	<b>6ES7193-6BP00-0BA0</b>	Floating license for 1 user; license key for download <sup>1)</sup> ; Email address required for delivery
• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP00-2BA0</b>	
<b>BU15-P16+A0+2B</b>		
BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group		
• Pack of 1 unit	<b>6ES7193-6BP00-0BA0</b>	
• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.	<b>6ES7193-6BP00-2BA0</b>	
<b>2BU15-P16+A0+2B</b>		
Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the load group		
• Pack of 1 unit	<b>6ES7193-6BP60-0BA0</b>	

<sup>1)</sup> For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

Ordering data	Article No.	Article No.
<b>Equipment labeling plate</b> 10 sheets of 16 labels	<b>6ES7193-6LF30-0AW0</b>	<b>Color-coded labels</b> <ul style="list-style-type: none"> <li>Color code CC02, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units</li> <li>Color code CC02, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 50 units</li> <li>Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units</li> <li>Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units</li> <li>Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units</li> </ul> <b>6ES7193-6CP02-2MA0</b>  <b>6ES7193-6CP02-4MA0</b>  <b>6ES7193-6CP71-2AA0</b>  <b>6ES7193-6CP72-2AA0</b>  <b>6ES7193-6CP73-2AA0</b>
<b>Labeling strips</b> 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	<b>6ES7193-6LR10-0AA0</b>	
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	<b>6ES7193-6LR10-0AG0</b>	
1 000 labeling strips DIN A4, light gray, card, for inscription with laser printer	<b>6ES7193-6LA10-0AA0</b>	
1 000 labeling strips DIN A4, yellow, card, for inscription with laser printer	<b>6ES7193-6LA10-0AG0</b>	
<b>BU cover</b> For covering empty slots (gaps); 5 units		
• 15 mm wide	<b>6ES7133-6CV15-1AM0</b>	
• 20 mm wide	<b>6ES7133-6CV20-1AM0</b>	
<b>Shield connection</b> 5 shield supports and 5 shield terminals	<b>6ES7193-6SC00-1AM0</b>	

**Technical specifications**

Article number	<b>6ES7136-6DB00-0CA0</b> ET 200SP, EI-Mod., F-DQ 4xDC 24V/2A	<b>6ES7136-6DC00-0CA0</b> ET 200SP, F-DQ 8x 24VDC/0.5A PP
<b>General information</b>		
Product type designation	F-DQ 4x24 V DC/2A HF	F-DQ 8x24 V DC/0.5 A PP HF
<b>Engineering with</b>		
• STEP 7 TIA Portal configurable/integrated from version	V12	V14 SP1 with HSP 202
• STEP 7 configurable/integrated from version	V5.5 SP3 / -	V5.5 SP4 HF5
• PROFINET from GSD version/GSD revision	V2.31	V2.31
<b>Supply voltage</b>		
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes	Yes
<b>Digital outputs</b>		
Number of digital outputs	4	8
Digital outputs, parameterizable	Yes	Yes
Short-circuit protection	Yes	Yes
Open-circuit detection	Yes	No
Overload protection	Yes	
Limitation of inductive shutdown voltage to	Typ. -2x 47 V	Typ. -39 V
Controlling a digital input		Yes
<b>Switching capacity of the outputs</b>		
• with resistive load, max.	2 A	0.5 A
• on lamp load, max.	10 W	2 W
<b>Load resistance range</b>		
• lower limit	12 Ω	48 Ω
• upper limit	2 000 Ω	12 000 Ω
<b>Output voltage</b>		
• for signal "1", min.	24 V; L+ (-0.5 V)	24 V; L+ (-0.5 V)
<b>Output current</b>		
• for signal "1" rated value	2 A	0.5 A
• for signal "0" residual current, max.	0.5 mA	0.5 mA

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**Fail-safe I/O modules > Digital F-output modules****Technical specifications**

Article number	<b>6ES7136-6DB00-0CA0</b> ET 200SP, EI-Mod., F-DQ 4xDC 24V/2A	<b>6ES7136-6DC00-0CA0</b> ET 200SP, F-DQ 8x 24VDC/0.5A PP
<b>Switching frequency</b>		
• with resistive load, max.	30 Hz; Symmetrical	30 Hz; Symmetrical
• with inductive load, max.	0.1 Hz; according to IEC 60947-5-1, DC-13, symmetrical	0.1 Hz; according to IEC 60947-5-1, DC-13, symmetrical
• with capacitive load, max.		2 Hz; Symmetrical
• on lamp load, max.	10 Hz; Symmetrical	10 Hz; Symmetrical
<b>Total current of the outputs</b>		
• Current per channel, max.	2 A; note derating data in the manual	0.5 A; note derating data in the manual
• Current per module, max.	6 A; note derating data in the manual	3 A; note derating data in the manual
<b>Total current of the outputs (per module)</b>		
<b>horizontal installation</b>		
- up to 40 °C, max.		3 A
- up to 50 °C, max.		2.5 A
- up to 60 °C, max.		2 A
<b>vertical installation</b>		
- up to 50 °C, max.		2 A
<b>Cable length</b>		
• shielded, max.	1 000 m	100 m
• unshielded, max.	500 m	100 m
<b>Interrupts/diagnostics/ status information</b>		
Diagnostics function	Yes	Yes
Substitute values connectable	No	No
<b>Alarms</b>		
• Diagnostic alarm	Yes	Yes
<b>Diagnostics indication LED</b>		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Potential separation</b>		
<b>Potential separation channels</b>		
• between the channels and backplane bus	Yes	Yes
<b>Standards, approvals, certificates</b>		
Suitable for safety functions	Yes	Yes
<b>Highest safety class achievable in safety mode</b>		
• Performance level according to ISO 13849-1	PLe	PLe
• SIL acc. to IEC 61508	SIL 3	SIL 3
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• horizontal installation, min.	0 °C	0 °C
• horizontal installation, max.	60 °C	60 °C
• vertical installation, min.	0 °C	0 °C
• vertical installation, max.	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>		
• Installation altitude above sea level, max.	4 000 m; Restrictions for installation altitudes > 2 000 m, see manual	4 000 m; with derating
<b>Dimensions</b>		
Width	15 mm	15 mm
Height	73 mm	73 mm
Depth	58 mm	58 mm
<b>Weights</b>		
Weight, approx.	57 g	48 g

## Overview



The digital F electronic module relay 1 F-RQ DC 24VDC/24.230VAC/5 A has the following characteristics:

- 1 relay output (2 NO contacts)
- Total output current 5 A
- Rated load voltage 24 V DC and 24 ... 230 V AC
- The control circuit of the two safety relays must be routed from the outside to the respective terminals

The attainable safety integrity level is SIL 3 (IEC 61508) when the control of the F-RQ module is implemented via a fail-safe output (e.g. ET 200SP 4F-DQ 24 V DC/2 A PROFIsafe).

## Ordering data

**Digital F output module  
relay 1 F-RQ**

BU type F0, relay output (2 NO contacts), total output current 5 A, load voltages 24 V DC and 24 ... 230 V AC; can be used up to SIL 3/Cat. 4/PLe if controlled via F-DQ

## Article No.

6ES7136-6RA00-0BF0

**Suitable BaseUnits****BU20-P8+A4+0B**

BU type F0; BaseUnit (dark) with 8 process terminals to the module and 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the load group

6ES7193-6BP20-0BF0

**Accessories****S7 Distributed Safety V5.4 SP5  
Update 2 programming tool****Task:**

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

**Requirement:**

Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 as of V5.5 SP1; Please also consider the operating systems that have been released for the used STEP 7 version

Floating license for 1 user; software and documentation on DVD; license key on USB flash drive

6ES7833-1FC02-0YA5

Floating license for 1 user; software, documentation and license key for download<sup>1)</sup>; Email address required for delivery

6ES7833-1FC02-0YH5

## Article No.

**S7 Distributed Safety upgrade**

From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive

6ES7833-1FC02-0YE5

**STEP 7 Safety Advanced V17****Task:**

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco

**Requirement:**

STEP 7 Professional V17

**Note:**

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

Floating license for 1 user; license key on USB flash drive

6ES7833-1FA17-0YA5

Floating license for 1 user; license key for download<sup>1)</sup>; Email address required for delivery

6ES7833-1FA17-0YH5

**Equipment labeling plate**

10 sheets of 16 labels

6ES7193-6LF30-0AW0

**Labeling strips**

500 labeling strips on roll, light gray

6ES7193-6LR10-0AA0

500 labeling strips on roll, yellow

6ES7193-6LR10-0AG0

1 000 labeling strips DIN A4, light gray

6ES7193-6LA10-0AA0

1 000 labeling strips DIN A4, yellow

6ES7193-6LA10-0AG0

<sup>1)</sup> For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### Fail-safe I/O modules > Digital F-output module relay


Ordering data	Article No.	Article No.
<b>BU cover</b> For covering empty slots (gaps); 5 units • 20 mm wide	<b>6ES7133-6CV15-1AM0</b>	
<b>Shield connection</b> 5 shield supports and 5 shield terminals	<b>6ES7193-6SC00-1AM0</b>	
<b>Color-coded labels</b> • Color code CC42, module-specific; for BaseUnit type F0; 10 units	<b>6ES7193-6CP42-2MB0</b>	
		<b>Mechanical coding elements</b> For automatic coding of I/O modules; spare part. 20 units Type A Type B Type C Type D
		<b>6ES7193-6KA00-3AA0</b> <b>6ES7193-6KB00-3AA0</b> <b>6ES7193-6KC00-3AA0</b> <b>6ES7193-6KD00-3AA0</b>

### Technical specifications


Article number	<b>6ES7136-6RA00-0BF0</b> ET 200SP, F-RQ 1x24VDC/ 24..230VAC/5A ST
<b>General information</b>	
Product type designation	F-RQ 24 ... 48VDC/24 ... 230VAC/5A ST
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/ integrated from version	V13
• STEP 7 configurable/integrated from version	V5.5 SP4 and higher
• PROFINET from GSD version/ GSD revision	V2.31
<b>Supply voltage</b>	
Rated value (DC)	24 V; Coil voltage
<b>Digital outputs</b>	
Number of digital outputs	1
Limitation of inductive shutdown voltage to	No
Controlling a digital input	Yes
<b>Switching capacity of the outputs</b>	
• with resistive load, max.	5 A
• on lamp load, max.	25 W
<b>Switching frequency</b>	
• with resistive load, max.	2 Hz
• with inductive load, max.	0.1 Hz; See data in manual
• with inductive load (acc. to IEC 60947-5-1, DC13), max.	0.1 Hz
• with inductive load (acc. to IEC 60947-5-1, AC15), max.	2 Hz
<b>Total current of the outputs (per module)</b>	
<b>horizontal installation</b>	
- up to 40 °C, max.	5 A; note derating data in the manual
- up to 50 °C, max.	4 A; note derating data in the manual
- up to 60 °C, max.	3 A; note derating data in the manual
<b>vertical installation</b>	
- up to 50 °C, max.	3 A; note derating data in the manual
<b>Relay outputs</b>	
• Number of relay outputs	1; 2 NO contacts
• Rated supply voltage of relay coil L+ (DC)	24 V
• Current consumption of relays (coil current of all relays), max.	70 mA
• external protection for relay outputs	yes; 6 A, see data in manual
• Relay approved acc. to UL 508	Yes; Pilot Duty B300, R300

Article number	<b>6ES7136-6RA00-0BF0</b> ET 200SP, F-RQ 1x24VDC/ 24..230VAC/5A ST
<b>Switching capacity of contacts</b>	
- with inductive load, max.	see additional description in the manual
- with resistive load, max.	see additional description in the manual
- Thermal continuous current, max.	5 A
- Switching current, min.	1 mA
- Switching current after exceeding 300 mA, min.	10 mA
- Switching current after exceeding 300 mA, max.	5 A
- Rated switching voltage (DC)	24 V
- Rated switching voltage (AC)	230 V
<b>Cable length</b>	
• shielded, max.	500 m; for load contacts
• unshielded, max.	300 m; for load contacts
• Control cable (input), max.	10 m
<b>Interrupts/diagnostics/ status information</b>	
Diagnostics function	Yes
<b>Diagnostics indication LED</b>	
• RUN LED	Yes; green/red DIAG LED
• Channel status display	Yes; green LED
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and backplane bus	Yes
<b>Standards, approvals, certificates</b>	
Suitable for safety functions	Yes
<b>Highest safety class achievable in safety mode</b>	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C
• vertical installation, max.	50 °C
<b>Dimensions</b>	
Width	20 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	56 g

## Overview

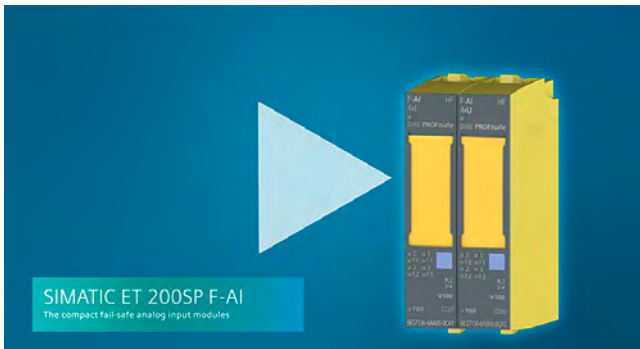SIMATIC ET 200SP F-AI  
The compact fail-safe analog input modules

SIMATIC ET 200SP Safety F-AI-4xU video  
[https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoId=6204918698001](https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6204918698001)

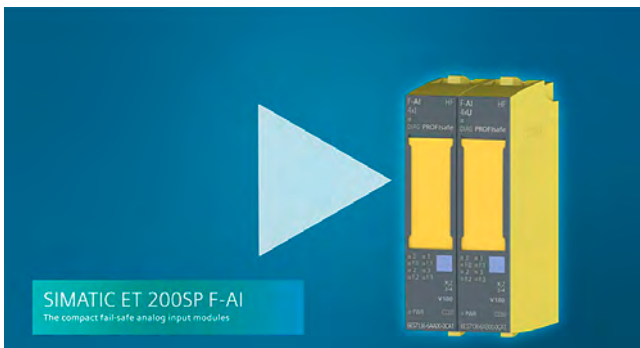SIMATIC ET 200SP F-AI  
The compact fail-safe analog input modules

SIMATIC ET 200SP Safety F-AI-4xI video  
[https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoId=6204919583001](https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6204919583001)



Analog fail-safe input modules:

- F-AI 4xI 0(4)..20 mA 2/4-wire High Feature for BU types A0 and A1, color code CC00
- F-AI 4xU 0..10 V HF, BU type A0, A1, color code CC00

Important features:

- 4-channel analog fail-safe digital inputs for ET 200SP
- 4 analog inputs with galvanic isolation between channels and backplane bus
- Measuring ranges: (0)4...20 mA and 0..10 V
- Possibility of connecting current and voltage sensors for measuring temperature, pressure, flow, level, distance measurement, etc.

10

## Ordering data

## Article No.

## Analog F-input module

F-AI 4xI 0(4) ... 20 mA 2/4-wire High Feature, BU type A0, A1, color code CC00

6ES7136-6AA00-0CA1

F-AI 4xU 0..10 V High Feature, BU type A0, A1, color code CC00

6ES7136-6AB00-0CA1

## Spare parts

## E-coding element type F

5 units, for ET 200SP F-DI, F-DQ, F-PM E, F-AI 4xI

6ES7193-6EF00-1AA0

## 5x E-coding element type H

5 units, for ET 200SP F-AI 4xU, F-TM Count, F-CM AS-i

6ES7193-6EH00-1AA0

## Suitable BaseUnits

## BU15-P16+A10+2D

BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP20-0DA0  
6ES7193-6BP20-2DA0

## BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP00-0DA0  
6ES7193-6BP00-2DA0

## 2BU15-P16+A0+2DB

Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (light/dark) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit

6ES7193-6BP60-0DA0

## BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP20-0BA0  
6ES7193-6BP20-2BA0

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**Fail-safe I/O modules > Analog F-input modules**

Ordering data	Article No.	Accessories	Article No.
<b>BU15-P16+A0+2B</b> BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> <li>• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.</li> </ul>	<b>6ES7193-6BP00-0BA0</b> <b>6ES7193-6BP00-2BA0</b>	<b>STEP 7 Safety Advanced V17</b> Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V17 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case. Floating license for 1 user; license key on USB flash drive Floating license for 1 user; license key for download <sup>1)</sup> ; Email address required for delivery	<b>6ES7833-1FA17-0YA5</b> <b>6ES7833-1FA17-0YH5</b>
<b>2BU15-P16+A0+2B</b> Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the load group <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> </ul>	<b>6ES7193-6BP60-0BA0</b>	<b>Equipment labeling plate</b> 10 sheets of 16 labels	<b>6ES7193-6LF30-0AW0</b>
<b>BU15-P16+A0+12D/T</b> BU type A1; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new load group (max. 10 A)	<b>6ES7193-6BP40-0DA1</b>	<b>Labeling strips</b> 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer 500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer 1 000 labeling strips DIN A4, light gray, card, for inscription with laser printer 1 000 labeling strips DIN A4, yellow, card, for inscription with laser printer	<b>6ES7193-6LR10-0AA0</b> <b>6ES7193-6LR10-0AG0</b> <b>6ES7193-6LA10-0AA0</b> <b>6ES7193-6LA10-0AG0</b>
<b>BU15-P16+A0+2D/T</b> BU type A1; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)	<b>6ES7193-6BP00-0DA1</b>	<b>BU cover</b> For covering empty slots (gaps); 5 units <ul style="list-style-type: none"> <li>• 15 mm wide</li> </ul>	<b>6ES7133-6CV15-1AM0</b>
<b>BU15-P16+A0+12B/T</b> BU type A1; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the load group	<b>6ES7193-6BP40-0BA1</b>	<b>Shield connection</b> 5 shield supports and 5 shield terminals	<b>6ES7193-6SC00-1AM0</b>
<b>BU15-P16+A0+2B/T</b> BU type A1; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group	<b>6ES7193-6BP00-0BA1</b>	<b>Color-coded labels</b> <ul style="list-style-type: none"> <li>• Color code CC00, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); A1; 10 units</li> </ul>	<b>6ES7193-6CP00-2MA0</b>

<sup>1)</sup> For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

#### Technical specifications


Article number	<b>6ES7136-6AA00-0CA1</b> ET 200SP, F-AI 4XI (0)4..20mA HF	<b>6ES7136-6AB00-0CA1</b> ET 200SP, F-AI 4xU 0..10V HF
<b>General information</b>		
<b>Product function</b>		
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
<b>Engineering with</b>		
• STEP 7 TIA Portal configurable/ integrated from version	V15 with HSP 203	V16 with HSP 308
<b>Operating mode</b>		
• cyclic measurement		Yes
• Oversampling		No
• MSI		No
<b>Supply voltage</b>		
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes	Yes
<b>Analog inputs</b>		
Number of analog inputs	4	4
• For current measurement	4	
• For voltage measurement		4
permissible input voltage for voltage input (destruction limit), max.		35 V
permissible input current for current input (destruction limit), max.	35 mA	
<b>Input ranges (rated values), voltages</b>		
• 0 to +10 V		Yes
<b>Input ranges (rated values), currents</b>		
• 0 to 20 mA	Yes	
• 4 mA to 20 mA	Yes	
<b>Cable length</b>		
• shielded, max.	1 000 m	200 m
<b>Analog value generation for the inputs</b>		
Measurement principle	Sigma Delta	Sigma Delta
<b>Integration and conversion time/ resolution per channel</b>		
• Resolution with overrange (bit including sign), max.	16 bit	16 bit
• Integration time, parameterizable	Yes	Yes
<b>Smoothing of measured values</b>		
• Number of smoothing levels	7	7
• parameterizable	Yes	Yes
• Average value filter		Yes
<b>Encoder</b>		
<b>Connection of signal encoders</b>		
• for voltage measurement		Yes
• for current measurement as 2-wire transducer	Yes	
- Burden of 2-wire transmitter, max.	650 Ω	
• for current measurement as 4-wire transducer	Yes	
<b>Errors/accuracies</b>		
<b>Basic error limit (operational limit at 25 °C)</b>		
• Voltage, relative to input range, (+/-)		0.1 %
• Current, relative to input range, (+/-)	0.1 %	



**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**Fail-safe I/O modules > Analog F-input modules****Technical specifications**

Article number	<b>6ES7136-6AA00-0CA1</b> ET 200SP, F-AI 4XI (0)4..20mA HF	<b>6ES7136-6AB00-0CA1</b> ET 200SP, F-AI 4xU 0..10V HF
<b>Interference voltage suppression for <math>f = n \times (f1 \pm 1 \%)</math>, <math>f1 =</math> interference frequency</b>		
• Series mode interference (peak value of interference < rated value of input range), min.	40 dB	40 dB
• Common mode voltage, max.		10 V
• Common mode interference, min.	70 dB	70 dB
<b>Interrupts/diagnostics/status information</b>		
Diagnostics function	Yes	Yes
<b>Alarms</b>		
• Diagnostic alarm	Yes	Yes
• Limit value alarm	No	No
<b>Diagnoses</b>		
• Monitoring the supply voltage	Yes	Yes
• Wire-break	Yes	Yes
• Short-circuit	Yes	
<b>Diagnostics indication LED</b>		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Potential separation</b>		
<b>Potential separation channels</b>		
• between the channels and backplane bus	Yes	Yes
<b>Standards, approvals, certificates</b>		
<b>Highest safety class achievable in safety mode</b>		
• Performance level according to ISO 13849-1	PLe	PLe
• SIL acc. to IEC 61508	SIL 3	SIL 3
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• horizontal installation, min.	0 °C	0 °C
• horizontal installation, max.	60 °C	60 °C
• vertical installation, min.	0 °C	0 °C
• vertical installation, max.	50 °C	50 °C
<b>Dimensions</b>		
Width	15 mm	15 mm
Height	73 mm	73 mm
Depth	58 mm	58 mm
<b>Weights</b>		
Weight, approx.	48 g	48 g

## Overview

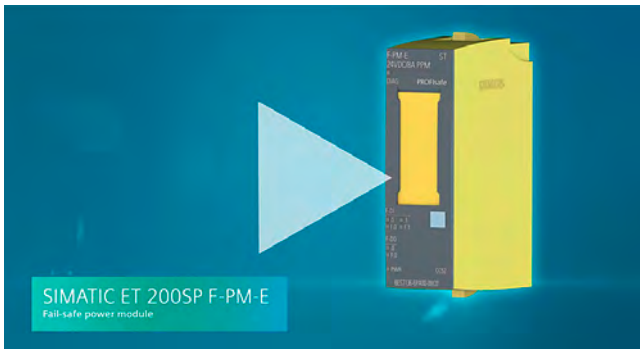

SIMATIC ET 200SP Safety F-PM-E video  
[https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoId=6154262749001](https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6154262749001)



Digital fail-safe power module:  
 F-PM-E PPM 24 V DC/8 A for BU type C0,  
 color code CC52

Important features:

- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Safety-related shutdown of output modules within the potential group of the F-PM-E
- Two fail-safe digital inputs, for reading of sensor information (1 or 2 channels)
- One fail-safe digital output onboard (switching to PPM potential, up to 2 A, up to SIL 3/PL e)
- Fail-safe digital output and potential supply switching to PP or PM potential can be parameterized
- Parameterizable onboard evaluation of the fail-safe inputs for control of the fail-safe digital outputs and of the potential group
- Digital standard output modules can be shut down up to PL d (ISO 13849) and SIL 2 (IEC61508) (up to 8 A).
- Can be plugged into type C0 BaseUnits (BU) with automatic coding
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (order and serial number)
  - Connection diagram
  - Color coding of the module type DI: white
  - Hardware and firmware version
  - Color code CC for module-specific color coding of the potentials at the terminals of the BU
  - Complete Article No.
- Optional labeling accessories
  - Labeling strips
  - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. Can be used with all fail-safe SIMATIC S7 CPUs.

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### Fail-safe I/O modules > Special fail-safe modules

Ordering data	Article No.		Article No.
<b>Digital F power module F-PM-E 24 V DC/8 A PPM Standard</b> BU type C0, color code CC52. 2 inputs, 1 output, SIL 3/Cat. 4/PL e	<b>6ES7136-6PA00-0BC0</b>	<b>BU cover</b> For covering empty slots (gaps); 5 units • 20 mm wide	<b>6ES7133-6CV20-1AM0</b>
<b>Spare parts</b> <b>E-coding element type F</b> 5 units, for ET 200SP F-DI, F-DQ, F-PM E, F-AI 4x1	<b>6ES7193-6EF00-1AA0</b>	<b>Shield connection</b> 5 shield supports and 5 shield terminals	<b>6ES7193-6SC00-1AM0</b>
<b>Suitable BaseUnits</b> <b>Type C0 BaseUnits</b> <b>BU20-P6+A2+4D</b> BU type C0; BaseUnit (light) with 6 push-in terminals (1 ... 6) to the module and 2 AUX terminals; new load group	<b>6ES7193-6BP20-0DC0</b>	<b>Color-coded labels</b> • Color code CC52, module-specific, for 8 push-in terminals; 10 units	<b>6ES7193-6CP52-2MC0</b>
<b>Accessories</b> <b>Equipment labeling plate</b> 10 sheets of 16 labels	<b>6ES7193-6LF30-0AW0</b>	<b>Mechanical coding elements</b> For automatic coding of I/O modules; spare part. 20 units  Type A Type B Type C Type D	<b>6ES7193-6KA00-3AA0</b> <b>6ES7193-6KB00-3AA0</b> <b>6ES7193-6KC00-3AA0</b> <b>6ES7193-6KD00-3AA0</b>
<b>Labeling strips</b> 1 000 labeling strips DIN A4, yellow, card, for inscription with laser printer	<b>6ES7193-6LA10-0AG0</b>		

### Technical specifications

Article number	<b>6ES7136-6PA00-0BC0</b>
	ET 200SP, Powermod. F-PM-E PPM, 24V DC
<b>General information</b>	
Product type designation	F-PM-E 24 V DC/8 A PPM ST
<b>Product function</b>	
• I&M data	Yes; I&M0 to I&M3
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/ integrated from version	V12
• STEP 7 configurable/integrated from version	V5.5 SP3 / -
• PROFINET from GSD version/ GSD revision	V2.31
<b>Supply voltage</b>	
Rated value (DC)	24 V
Reverse polarity protection	Yes
<b>Encoder supply</b>	
Number of outputs	2
Short-circuit protection	Yes; Electronic (response threshold 0.7 A to 2.1 A)
<b>Output current</b>	
• up to 60 °C, max.	0.3 A
<b>24 V encoder supply</b>	
• 24 V	Yes; min. L+ (-1.5 V)
• Short-circuit protection	Yes
• Output current, max.	600 mA; Total current of all encoders
<b>Digital inputs</b>	
Number of digital inputs	2
Source/sink input	Yes; P-reading
Input characteristic curve in accordance with IEC 61131, type 1	Yes

Article number	<b>6ES7136-6PA00-0BC0</b>
	ET 200SP, Powermod. F-PM-E PPM, 24V DC
<b>Input voltage</b>	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-30 to +5 V
• for signal "1"	+15 to +30 V
<b>Input current</b>	
• for signal "1", typ.	3.7 mA
<b>Input delay (for rated value of input voltage) for standard inputs</b>	
- parameterizable	Yes
<b>for technological functions</b>	
- parameterizable	No
<b>Digital outputs</b>	
Number of digital outputs	1
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes
Open-circuit detection	Yes
Overload protection	Yes
Limitation of inductive shutdown voltage to	Max. -1.5 V
<b>Switching capacity of the outputs</b>	
• with resistive load, max.	8 A
• on lamp load, max.	100 W
<b>Load resistance range</b>	
• lower limit	3 Ω
• upper limit	2 000 Ω

### Technical specifications

Article number	<b>6ES7136-6PA00-0BC0</b> ET 200SP, Powermod. F-PM-E PPM, 24V DC
<b>Output voltage</b>	
• for signal "1", min.	24 V; L+ (-0.5 V)
<b>Output current</b>	
• for signal "1" rated value	8 A
• for signal "0" residual current, max.	1.5 mA; PP-switching: max. 1.5 mA; PM-switching: max. 1 mA
<b>Switching frequency</b>	
• with resistive load, max.	10 Hz; Symmetrical
• with inductive load, max.	0.1 Hz; according to IEC 60947-5-1, DC-13, symmetrical
• on lamp load, max.	4 Hz; Symmetrical
<b>Total current of the outputs</b>	
• Current per channel, max.	8 A; note derating data in the manual
• Current per module, max.	8 A; note derating data in the manual
<b>Cable length</b>	
• shielded, max.	1 000 m
• unshielded, max.	500 m
<b>Interrupts/diagnostics/ status information</b>	
Diagnostics function	Yes; See Chapter "Alarms/diagnostic messages" in the manual
Substitute values connectable	No
<b>Alarms</b>	
• Diagnostic alarm	Yes
• Hardware interrupt	No
<b>Diagnostics indication LED</b>	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED

Article number	<b>6ES7136-6PA00-0BC0</b> ET 200SP, Powermod. F-PM-E PPM, 24V DC
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and back- plane bus	Yes
<b>Standards, approvals, certificates</b>	
Suitable for safety functions	Yes
<b>Highest safety class achievable in safety mode</b>	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
<b>Probability of failure (for service life of 20 years and repair time of 100 hours)</b>	
- Low demand mode: PFDavg in accordance with SIL2	< 2.00E-04
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL2	< 1.00E-08 1/h
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09 1/h
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C
• vertical installation, max.	50 °C
<b>Dimensions</b>	
Width	20 mm
Height	73 mm
Depth	55 mm
<b>Weights</b>	
Weight, approx.	70 g

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### Fail-safe I/O modules > Fail-safe technology modules

#### Overview



Fail-safe technology module:  
F-TM Count, 1x1Vpp sin/cos High Feature for BU type A0,  
color code CC00

Important features:

- Technological, fail-safe counter module for ET 200SP
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- 1x sin/cos interface for recording sin/cos differential encoder signals A, A/, B, B/, N and N/
- Option to connect sin/cos differential encoders
- Short-circuit-proof 5 V DC encoder supply
- High-speed count input up to 200 kHz
- Counting range: 32-bit (-2.147.483.648 to +2.147.483.647)
- SW gate for counter control

- Measured values:
  - Speed
  - Frequency
  - Period duration
- Integrated safety functions:
  - SOS (Safe Operation Stop)
  - SLS (Safely Limited Speed)
  - SDI (Safe Direction)
- Can be plugged onto type A0 BaseUnits (BU)
- LED display for error, operation, supply voltage and status
- Monitoring of encoder signals for wire break, short-circuit and signal strength
- Firmware update
- Identification data I&M
- Value status
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (order and serial number)
  - Connection diagram
  - Hardware and firmware version
  - Color code CC for module-specific color coding of the potentials at the terminals of the BU
  - Complete Article No.
- Optional labeling accessories:
  - Labeling strips
  - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. Can be used with all fail-safe SIMATIC S7 CPUs.

#### Ordering data

##### Fail-safe technology module F-TM Count

1 x 1Vpp sin/cos High Feature,  
BU type A0, color code CC00

#### Article No.

**6ES7136-6CB00-0CA0**

##### Spare parts

##### E-coding element type H

5 units, for ET 200SP F-AI 4xU,  
F-TM Count, F-CM AS-i

**6ES7193-6EH00-1AA0**

##### Suitable BaseUnits

##### BU15-P16+A10+2D

BU type A0; BaseUnit (light)  
with 16 push-in terminals (1 ... 16)  
to the module and an additional  
10 internally jumpered  
AUX terminals (1 A to 10 A);  
for starting a new load group  
(max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack,  
please order this article number  
with an order quantity of 10.

**6ES7193-6BP20-0DA0**  
**6ES7193-6BP20-2DA0**

#### Article No.

##### BU15-P16+A0+2D

BU type A0; BaseUnit (light) with  
16 push-in terminals to the module;  
for starting a new load group  
(max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack,  
please order this article number  
with an order quantity of 10.

**6ES7193-6BP00-0DA0**  
**6ES7193-6BP00-2DA0**

##### 2BU15-P16+A0+2DB

Double BaseUnit for  
holding 2 I/O modules;  
BU type A0; BaseUnit (light/dark)  
with 16 push-in terminals to the  
module; for starting a new load  
group (max. 10 A)

- Pack of 1 unit

**6ES7193-6BP60-0DA0**

##### BU15-P16+A10+2B

BU type A0; BaseUnit (dark)  
with 16 push-in terminals (1 ... 16)  
to the module and an additional  
10 internally jumpered  
AUX terminals (1 A to 10 A);  
for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack,  
please order this article number  
with an order quantity of 10.

**6ES7193-6BP20-0BA0**  
**6ES7193-6BP20-2BA0**

Ordering data	Article No.	Article No.
<b>BU15-P16+A0+2B</b> BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> <li>• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.</li> </ul>	<b>6ES7193-6BP00-0BA0</b> <b>6ES7193-6BP00-2BA0</b>	
<b>2BU15-P16+A0+2B</b> Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the load group <ul style="list-style-type: none"> <li>• Pack of 1 unit</li> </ul>	<b>6ES7193-6BP60-0BA0</b>	
<b>Accessories</b>		
<b>S7 Distributed Safety V5.4 SP5 Update 2 programming tool</b> Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 as of V5.5 SP1; Please also consider the operating systems that have been released for the used STEP 7 version  Floating license for 1 user; software and documentation on DVD; license key on USB flash drive  Floating license for 1 user; software, documentation and license key for download <sup>1)</sup> ; Email address required for delivery	<b>6ES7833-1FC02-0YA5</b>  <b>6ES7833-1FC02-0YH5</b>	<b>STEP 7 Safety Advanced V17</b> Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco Requirement: STEP 7 Professional V17 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.  Floating license for 1 user; license key on USB flash drive  Floating license for 1 user; license key for download <sup>1)</sup> ; Email address required for delivery
<b>S7 Distributed Safety upgrade</b> From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive	<b>6ES7833-1FC02-0YE5</b>	<b>Equipment labeling plate</b> 10 sheets of 16 labels  <b>Labeling strips</b> 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer  500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer  1 000 labeling strips DIN A4, light gray, card, for inscription with laser printer  1 000 labeling strips DIN A4, yellow, card, for inscription with laser printer  <b>BU cover</b> For covering empty slots (gaps); 5 units <ul style="list-style-type: none"> <li>• 15 mm wide</li> <li>• 20 mm wide</li> </ul> <b>Shield connection</b> 5 shield supports and 5 shield terminals  <b>Color-coded labels</b> <ul style="list-style-type: none"> <li>• Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units</li> <li>• Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 50 units</li> <li>• Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units</li> <li>• Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units</li> <li>• Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units</li> </ul>

<sup>1)</sup> For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### Fail-safe I/O modules > Fail-safe technology modules

#### Technical specifications

Article number	<b>6ES7136-6CB00-0CA0</b> F-TM Count 1x1Vpp sin/cos HF
<b>General information</b>	
Product type designation	F-TM Count 1x1Vpp sin/cos HF
<b>Product function</b>	
• I&M data	Yes; I&M0 to I&M3
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/ integrated from version	Step 7 V17 or higher: use GSDML for prior versions
<b>Supply voltage</b>	
<b>Load voltage L+</b>	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
<b>Encoder supply</b>	
<b>5 V encoder supply</b>	
• 5 V	Yes; 5.1 V ±3.5 %
• Short-circuit protection	Yes; Electronic overload protection; no protection on applying a normal or counter voltage.
• Output current, max.	300 mA
<b>Digital inputs</b>	
Number of digital inputs	1; (counter input)
Digital inputs, parameterizable	Yes
<b>Digital input functions, parameterizable</b>	
• Gate start/stop	Yes
• Counter for incremental encoder - Number, max.	Yes 1
<b>Input voltage</b>	
• Type of input voltage	sin/cos 1 Vpp
<b>Input delay (for rated value of input voltage)</b>	
• Minimum pulse width for program reactions	2.5 µs for parameterization "none"
<b>for technological functions</b>	
- parameterizable	Yes
<b>Connectable encoders</b>	
• Incremental encoder (symmetrical)	Yes; up to 200 kHz depending on cable type and length
<b>Encoder signals, incremental encoder (symmetrical)</b>	
• Input voltage	1 Vpp, centered at 2.5 V offset
• Input frequency, max.	200 kHz
• Counting frequency, max.	800 kHz; with quadruple evaluation
• Cable length, shielded, max.	150 m
• Incremental encoder with A/B tracks, 90° phase offset	Yes; sin/cos
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes; sin/cos/zero

Article number	<b>6ES7136-6CB00-0CA0</b> F-TM Count 1x1Vpp sin/cos HF
<b>Interrupts/diagnostics/ status information</b>	
Diagnostics function	Yes; see chapter "Diagnostic Messages" in the manual
<b>Alarms</b>	
• Diagnostic alarm	Yes
• Hardware interrupt	No
<b>Diagnoses</b>	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• A/B transition error at incremental encoder	Yes
<b>Diagnostics indication LED</b>	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
<b>Integrated Functions</b>	
Counter	
• Number of counters	1
• Counting frequency, max.	800 kHz; with quadruple evaluation
<b>Safety monitoring functions</b>	
• Safe Operating Stop (SOS)	Yes
• Safely-Limited Speed (SLS)	Yes
• Safe Direction (SDI)	Yes
• Safe Speed Monitor (SSM)	Yes
<b>Counting functions</b>	
• Continuous counting	Yes
• Counter response parameterizable	Yes
• Software gate	Yes
• Counting range, parameterizable	Yes
<b>Measuring functions</b>	
<b>Measuring range</b>	
- Frequency measurement, min.	0.04 Hz
- Frequency measurement, max.	800 kHz; with quadruple evaluation
- Cycle duration measurement, min.	1 µs
- Cycle duration measurement, max.	25 s
<b>Accuracy</b>	
- Frequency measurement	up to 100 ppm; depending on measuring interval and signal evaluation; at low frequency external noise may have an effect on accuracy (reference the graph in 2.2.3)
- Cycle duration measurement	up to 100 ppm; depending on measuring interval and signal evaluation; at low frequency external noise may have an effect on accuracy (reference the graph in 2.2.3)
- Velocity measurement	up to 100 ppm; depending on measuring interval and signal evaluation; at low frequency external noise may have an effect on accuracy (reference the graph in 2.2.3)

### Technical specifications

Article number	<b>6ES7136-6CB00-0CA0</b> F-TM Count 1x1Vpp sin/cos HF
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and backplane bus	Yes
<b>Standards, approvals, certificates</b>	
Suitable for safety functions	Yes
<b>Highest safety class achievable in safety mode</b>	
• Performance level according to ISO 13849-1	Cat. 4, PLe
• SIL acc. to IEC 61508	SIL 3
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C
• vertical installation, max.	55 °C

Article number	<b>6ES7136-6CB00-0CA0</b> F-TM Count 1x1Vpp sin/cos HF
<b>Altitude during operation relating to sea level</b>	
• Ambient air temperature-barometric pressure-altitude	On request: Installation altitudes greater than 2 000 m
<b>Dimensions</b>	
Width	15 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	42 g



## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

Fail-safe I/O modules > SIPLUS digital F-input modules

### Overview



Digital fail-safe input module:  
F-DI 8x24 V DC High Feature for BU type A0, color code CC01

Important features:

- 8-channel digital fail-safe input module for the ET 200SP
- For fail-safe reading of sensor information (1 or 2 channels)
- Provides integral discrepancy evaluation for 2-out-of-2 signals
- 8 internal sensor supplies (incl. test function) onboard
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Can be plugged into type A0 BaseUnits (BU) with automatic coding
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (order and serial number)
  - Connection diagram
  - Color coding of the module type DI: white
  - Hardware and firmware version
  - Color code CC for module-specific color coding of the potentials at the terminals of the BU
  - Complete Article No.
- Optional labeling accessories
  - Labeling strips
  - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. They can be used with all fail-safe SIMATIC S7 CPUs.

#### Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

### Ordering data

### Article No.

#### SIPLUS digital F-input modules

(Extended temperature range and exposure to environmental substances)

F-DI 8x24VDC High Feature, BU type A0, color code CC01

**6AG1136-6BA00-2CA0**

#### Usable BaseUnits

##### BU15-P16+A0+2D

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

**6AG1193-6BP00-7DA0**

##### BU15-P16+A0+2B

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

**6AG1193-6BP00-7BA0**

##### BU15-P16+A10+2D

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

**6AG1193-6BP20-7DA0**

##### BU15-P16+A10+2B

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

**6AG1193-6BP20-7BA0**

#### Accessories

##### SIPLUS Mounting Kit ET 200SP

Mounting accessories for use with increased mechanical vibration and shock loads.

**6AG1193-6AA00-0AA0**

#### Other accessories

See SIMATIC ET 200SP, digital F-input modules, page 10/177

## Technical specifications

Article number	6AG1136-6BA00-2CA0	Article number	6AG1136-6BA00-2CA0
Based on	6ES7136-6BA00-0CA0 SIPLUS ET 200SP F-DI 4/8x24VDC HF	Based on	6ES7136-6BA00-0CA0 SIPLUS ET 200SP F-DI 4/8x24VDC HF
<b>Ambient conditions</b>		<b>Use on land craft, rail vehicles and special-purpose vehicles</b>	
<b>Ambient temperature during operation</b>		<ul style="list-style-type: none"> <li>- Against mechanical environmental conditions acc. to EN 60721-3-5</li> <li>- against mechanical environmental conditions in agriculture acc. to ISO 15003</li> </ul>	
• horizontal installation, min.	-30 °C; = Tmin (incl. condensation/frost)	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
• vertical installation, min.	-30 °C; = Tmin	<b>Use on ships/at sea</b>	
• vertical installation, max.	50 °C; = Tmax	<ul style="list-style-type: none"> <li>- to biologically active substances according to EN 60721-3-6</li> <li>- to chemically active substances according to EN 60721-3-6</li> <li>- to mechanically active substances according to EN 60721-3-6</li> <li>- Against mechanical environmental conditions acc. to EN 60721-3-6</li> </ul>	
<b>Altitude during operation relating to sea level</b>		Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	
• Installation altitude above sea level, max.	4 000 m	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	
• Ambient air temperature-barometric pressure-altitude	Restrictions for installation altitudes > 2 000 m, see entry ID: 109771992	Yes; Class 6S3 incl. sand, dust; *	
<b>Relative humidity</b>		Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	<b>Usage in industrial process technology</b>	
<b>Resistance</b>		<ul style="list-style-type: none"> <li>- Against chemically active substances acc. to EN 60654-4</li> <li>- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04</li> </ul>	
<b>Coolants and lubricants</b>		Yes; Class 3 (excluding trichlorethylene)	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	
<b>Use in stationary industrial systems</b>		<b>Remark</b>	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	<b>Conformal coating</b>	
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	<ul style="list-style-type: none"> <li>• Coatings for printed circuit board assemblies acc. to EN 61086</li> <li>• Protection against fouling acc. to EN 60664-3</li> <li>• Military testing according to MIL-I-46058C, Amendment 7</li> <li>• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A</li> </ul>	
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 2 for high reliability	
		Yes; Type 1 protection	
		Yes; Discoloration of coating possible during service life	
		Yes; Conformal coating, Class A	

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

Fail-safe I/O modules > SIPLUS digital F-output modules

### Overview



Digital fail-safe output module:  
F-DQ 4x24VDC High Feature, BU type A0, color code CC01

Important features:

- 4-channel digital fail-safe output module for the ET 200SP
- Fail-safe 2-channel activation (switching to P/M potential) of actuators
- Actuators can be controlled up to 2 A
- Certified up to SIL 3 (IEC 61508), PL e ISO 13849)
- Can be plugged into type A0 BaseUnits (BU) with automatic coding
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (order and serial number)
  - Connection diagram
  - Color coding of the module type DI: white
  - Hardware and firmware version
  - Color code CC for module-specific color coding of the potentials at the terminals of the BU
  - Complete Article No.
- Optional labeling accessories
  - Labeling strips
  - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations
- They can be used with all fail-safe SIMATIC S7 CPUs

#### Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

### Ordering data

### Article No.

#### SIPLUS digital F-output modules

(Extended temperature range and exposure to environmental substances)

F-DQ 4x24VDC High Feature, BU type A0, color code CC01

**6AG1136-6DB00-2CA0**

F-DQ 8x24VDC High Feature, switching to PP potential, BU type A0, color code CC01

**6AG1136-6DC00-2CA0**

#### Usable BaseUnits

##### BU15-P16+A0+2D

**6AG1193-6BP00-7DA0**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

##### BU15-P16+A0+2B

**6AG1193-6BP00-7BA0**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

##### BU15-P16+A10+2D

**6AG1193-6BP20-7DA0**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

##### BU15-P16+A10+2B

**6AG1193-6BP20-7BA0**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

##### BU20-P12+A4+0B

**6AG1193-6BP20-7BB0**

(Extended temperature range and exposure to environmental substances)

BU type B0; BaseUnit (dark) with 12 process terminals (1...12) to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the load group; 1 unit

#### Accessories

##### SIPLUS Mounting Kit ET 200SP

**6AG1193-6AA00-0AA0**

Mounting accessories for use with increased mechanical vibration and shock loads.

#### Other accessories

See SIMATIC ET 200SP, digital F-output modules, page 10/180

## Technical specifications

Article number	<b>6AG1136-6DB00-2CA0</b>	<b>6AG1136-6DC00-2CA0</b>
Based on	<b>6ES7136-6DB00-0CA0</b> SIPLUS ET 200SP F-DQ 4x24VDC/2A PM HF	<b>6ES7136-6DC00-0CA0</b> SIPLUS ET 200SP F-DQ 8x24VDC/0.5A PP HF
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• horizontal installation, min.	-30 °C; = Tmin (incl. condensation/frost)	-30 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module
• vertical installation, min.	-30 °C; = Tmin	-30 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax	50 °C; = Tmax
<b>Altitude during operation relating to sea level</b>		
• Installation altitude above sea level, max.	4 000 m	4 000 m
• Ambient air temperature-barometric pressure-altitude	Restrictions for installation altitudes > 2 000 m, see entry ID: 109771992	Restrictions for installation altitudes > 2 000 m, see entry ID: 109771992
<b>Relative humidity</b>		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Resistance</b>		
<b>Coolants and lubricants</b>		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on land craft, rail vehicles and special-purpose vehicles</b>		
- Against mechanical environmental conditions acc. to EN 60721-3-5	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
- against mechanical environmental conditions in agriculture acc. to ISO 15003	Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**Fail-safe I/O modules > SIPLUS digital F-output modules****Technical specifications**

Article number	<b>6AG1136-6DB00-2CA0</b>	<b>6AG1136-6DC00-2CA0</b>
Based on	<b>6ES7136-6DB00-0CA0</b> SIPLUS ET 200SP F-DQ 4x24VDC/2A PM HF	<b>6ES7136-6DC00-0CA0</b> SIPLUS ET 200SP F-DQ 8x24VDC/0.5A PP HF
<b>Usage in industrial process technology</b>		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

## Overview



The digital F-electronic module relay 1 F-RQ DC 24VDC/24.230VAC/5 A has the following characteristics:

- 1 relay output (2 NO contacts)
- Total output current 5 A
- Rated load voltage 24 V DC and 24 ... 230 V AC
- The control circuit of the two safety relays must be routed from the outside to the respective terminals.

The attainable safety integrity level is SIL 3 (IEC 61508) when the control of the F-RQ module is implemented via a fail-safe output (e.g. ET 200SP 4F-DQ 24 V DC/2 A PROFIsafe).

**Note:**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

## Ordering data

## Article No.

**SIPLUS Digital F-output module relay 1 F-RQ**

(Extended temperature range and exposure to environmental substances)

BU type F0, relay output (2 NO contacts), total output current 5 A, load voltages 24 V DC and 24 ... 230 V AC; can be used up to SIL3/Category 4/PL e if controlled via F-DQ

**6AG1136-6RA00-2BF0****Suitable BaseUnits****BU20-P8+A4+0B**

(Extended temperature range and exposure to environmental substances)

BU type F0; BaseUnit (dark) with 8 process terminals to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the load group

**6AG1193-6BP20-2BF0****Accessories**

See SIMATIC ET 200SP, digital F-output module relay, page 10/183

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### Fail-safe I/O modules > SIPLUS digital F-output module relay

#### Technical specifications

Article number	<b>6AG1136-6RA00-2BF0</b>
Based on	<b>6ES7136-6RA00-0BF0</b> SIPLUS ET 200SP F-RQ 24VDC/24-230VAC/5A
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module
• vertical installation, min.	-30 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
<b>Relative humidity</b>	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Resistance</b>	
<b>Coolants and lubricants</b>	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
<b>Use on ships/at sea</b>	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *

Article number	<b>6AG1136-6RA00-2BF0</b>
Based on	<b>6ES7136-6RA00-0BF0</b> SIPLUS ET 200SP F-RQ 24VDC/24-230VAC/5A
<b>Usage in industrial process technology</b>	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

## Overview



Analog fail-safe input module:  
SIPLUS F-AI 4xI 0(4) ... 20 mA 2/4-wire High Feature  
for BU type A0 and A1, color code CC00

Important features:

- 4 analog inputs with galvanic isolation between channels and backplane bus (up to SIL 3/Cat. 4/PL d)
- Short-circuit-proof power supply of 2 or 4-wire transducers
- Measuring ranges: 0 ... 20 mA and 4 ... 20 mA
- Resolution: 16 bits including sign

- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Can be plugged onto type A0 and A1 BaseUnits (BU)
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (order and serial number)
  - Connection diagram
  - Color coding of the module type DI: white
  - Hardware and firmware version
  - Color code CC for module-specific color coding of the potentials at the terminals of the BU
  - Complete Article No.
- Optional labeling accessories
  - Labeling strips
  - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. They can be used with all fail-safe SIMATIC S7 CPUs.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

## Ordering data

## Article No.

**SIPLUS analog F-input module**

(Extended temperature range and exposure to environmental substances)

F-AI 4xI 0(4) ... 20 mA 2/4-wire High Feature, BU type A0, A1, color code CC00

**6AG1136-6AA00-2CA1**

**Usable BaseUnits****BU15-P16+A10+2D**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

**6AG1193-6BP20-7DA0**

**BU15-P16+A0+2D**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

**6AG1193-6BP00-7DA0**

**BU15-P16+A10+2B**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

**6AG1193-6BP20-7BA0**

## Article No.

**BU15-P16+A0+2B**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

**6AG1193-6BP00-7BA0**

**BU15-P16+A0+12D/T**

(Extended temperature range and exposure to environmental substances)

BU type A1; BaseUnit (light) with 16 process terminals (1...16) to the module and also 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new load group (max. 10 A)

**6AG1193-6BP40-7DA1**

**BU15-P16+A0+2D/T**

(Extended temperature range and exposure to environmental substances)

BU type A1; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

**6AG1193-6BP00-7DA1**

**BU15-P16+A0+12B/T**

(Extended temperature range and exposure to environmental substances)

BU type A1; BaseUnit (dark) with 16 process terminals (1...16) to the module and also 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the load group

**6AG1193-6BP40-7BA1**



## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### Fail-safe I/O modules > SIPLUS analog F-input modules

Ordering data	Article No.	Accessories	Article No.
<b>BU15-P16+A0+2B/T</b> (Extended temperature range and exposure to environmental substances)  BU type A1; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group	<b>6AG1193-6BP00-7BA1</b>	<b>SIPLUS Mounting Kit ET 200SP</b> Mounting accessories for use with increased mechanical vibration and shock loads.	<b>6AG1193-6AA00-0AA0</b>
		<b>Other accessories</b> See SIMATIC ET 200SP, analog F-input modules, page 10/186	

### Technical specifications

Article number	<b>6AG1136-6AA00-2CA1</b>
Based on	<b>6ES7136-6AA00-0CA1</b> SIPLUS ET 200SP F-AI 4xI 2-/4-wire HF
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module
• vertical installation, min.	-30 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	4 000 m
• Ambient air temperature-barometric pressure-altitude	Restrictions for installation altitudes > 2 000 m, see entry ID: 109771992
<b>Relative humidity</b>	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Resistance</b>	
<b>Coolants and lubricants</b>	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on land craft, rail vehicles and special-purpose vehicles</b>	
- Against mechanical environmental conditions acc. to EN 60721-3-5	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
- against mechanical environmental conditions in agriculture acc. to ISO 15003	Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Article number	<b>6AG1136-6AA00-2CA1</b>
Based on	<b>6ES7136-6AA00-0CA1</b> SIPLUS ET 200SP F-AI 4xI 2-/4-wire HF
<b>Use on ships/at sea</b>	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Usage in industrial process technology</b>	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

## Overview



Digital fail-safe power module:  
F-PM-E PPM 24 V DC/8 A for BU type C0,  
color code CC52

## Important features:

- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Safety-related shutdown of output modules within the potential group of the F-PM-E
- Two fail-safe digital inputs, for reading of sensor information (1 or 2 channels)
- One fail-safe digital output onboard (switching to PPM potential, up to 2 A, up to SIL 3/PL e)
- Fail-safe digital output and potential supply switching to PP or PM potential can be configured

- Configurable onboard evaluation of the fail-safe inputs for control of the fail-safe digital output and of the potential group
- Digital standard output modules can be shut down up to PL d (ISO 13849) and SIL 2 (IEC61508) (up to 8 A).
- Can be plugged into type C0 BaseUnits (BU) with automatic coding
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (order and serial number)
  - Connection diagram
  - Color coding of the module type DI: white
  - Hardware and firmware version
  - Color code CC for module-specific color coding of the potentials at the terminals of the BU
  - Complete Article No.
- Optional labeling accessories
  - Labeling strips
  - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations.
- They can be used with all fail-safe SIMATIC S7 CPUs.

**Note:**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

## Ordering data

**SIPLUS digital F-power module  
F-PM-E 24VDC/8A PPM Standard**

(Extended temperature range  
and exposure to environmental  
substances)

BU type C0, color code CC52. 2  
inputs, 1 output, SIL3/Cat.4/PL e

**Type C0 BaseUnits****BU20-P6+A2+4D**

(Extended temperature range  
and exposure to environmental  
substances)

BU type C0; BaseUnit (light)  
with 6 push-in terminals (1...6) to  
the module and 2 AUX terminals;  
new load group

## Article No.

6AG1136-6PA00-2BC0

6AG1193-6BP20-7DC0

## Article No.

**Accessories****SIPLUS Mounting Kit ET 200SP**

Mounting accessories for use with  
increased mechanical vibration and  
shock loads.

**Other accessories**

6AG1193-6AA00-0AA0

See SIMATIC ET 200SP,  
special fail-safe modules,  
page 10/190

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### Fail-safe I/O modules > SIPLUS special fail-safe modules

#### Technical specifications

Article number	6AG1136-6PA00-2BC0	Article number	6AG1136-6PA00-2BC0
Based on	6ES7136-6PA00-0BC0 SIPLUS ET 200SP F-PM-E 24VDC/8A PPM	Based on	6ES7136-6PA00-0BC0 SIPLUS ET 200SP F-PM-E 24VDC/8A PPM
<b>Ambient conditions</b>		<b>Use on ships/at sea</b>	
<b>Ambient temperature during operation</b>		<ul style="list-style-type: none"> <li>- to biologically active substances according to EN 60721-3-6</li> <li>- to chemically active substances according to EN 60721-3-6</li> <li>- to mechanically active substances according to EN 60721-3-6</li> <li>- Against mechanical environmental conditions acc. to EN 60721-3-6</li> </ul>	
<ul style="list-style-type: none"> <li>• horizontal installation, min.</li> <li>• horizontal installation, max.</li> <li>• vertical installation, min.</li> <li>• vertical installation, max.</li> </ul>	-30 °C; = Tmin (incl. condensation/frost)  60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module  -30 °C; = Tmin  50 °C; = Tmax	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna) Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
<b>Altitude during operation relating to sea level</b>		<b>Usage in industrial process technology</b>	
<ul style="list-style-type: none"> <li>• Installation altitude above sea level, max.</li> <li>• Ambient air temperature-barometric pressure-altitude</li> </ul>	4 000 m  Restrictions for installation altitudes > 2 000 m, see entry ID: 109771992	<ul style="list-style-type: none"> <li>- Against chemically active substances acc. to EN 60654-4</li> <li>- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04</li> </ul>	
<b>Relative humidity</b>		<b>Remark</b>	
<ul style="list-style-type: none"> <li>• With condensation, tested in accordance with IEC 60068-2-38, max.</li> </ul>	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	<ul style="list-style-type: none"> <li>- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04</li> </ul> * The supplied plug covers must remain in place over the unused interfaces during operation!	
<b>Resistance</b>		<b>Conformal coating</b>	
<b>Coolants and lubricants</b>		<ul style="list-style-type: none"> <li>• Coatings for printed circuit board assemblies acc. to EN 61086</li> <li>• Protection against fouling acc. to EN 60664-3</li> <li>• Military testing according to MIL-I-46058C, Amendment 7</li> <li>• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A</li> </ul>	
<ul style="list-style-type: none"> <li>- Resistant to commercially available coolants and lubricants</li> </ul>	Yes; Incl. diesel and oil droplets in the air	Yes; Class 2 for high reliability  Yes; Type 1 protection  Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	
<b>Use in stationary industrial systems</b>			
<ul style="list-style-type: none"> <li>- to biologically active substances according to EN 60721-3-3</li> <li>- to chemically active substances according to EN 60721-3-3</li> <li>- to mechanically active substances according to EN 60721-3-3</li> <li>- Against mechanical environmental conditions acc. to EN 60721-3-3</li> </ul>	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request  Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *  Yes; Class 3S4 incl. sand, dust, *  Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		
<b>Use on land craft, rail vehicles and special-purpose vehicles</b>			
<ul style="list-style-type: none"> <li>- Against mechanical environmental conditions acc. to EN 60721-3-5</li> <li>- against mechanical environmental conditions in agriculture acc. to ISO 15003</li> </ul>	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)  Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		

## Overview



F-CM AS-i Safety ST for SIMATIC ET 200SP

## More information

SIMATIC ET200SP Manual Collection,  
see <https://support.industry.siemens.com/cs/ww/en/view/84133942>

Diagnostic blocks with visualization,  
see <https://support.industry.siemens.com/cs/ww/en/view/109479103>

Released combinations of the AS-i modules for ET 200SP,  
see <https://support.industry.siemens.com/cs/ww/en/view/103624653>

The F-CM AS-i Safety ST fail-safe communications module supplements an AS-Interface network without additional wiring to produce a safety-related AS-i network.

Important features:

- Fail-safe communications module for the ET 200SP
  - 31 fail-safe input channels in the process image
  - 16 fail-safe output channels in the process image
  - Certified up to SIL 3 (IEC 62061), PL e (EN ISO 13849-1)
  - Parameterization conforms with other Failsafe I/O modules of the ET 200SP
- The communications module supports PROFIsafe in PROFINET and PROFIBUS configurations. It can be used with fail-safe SIMATIC S7-300F/S7-400F CPUs and S7-1500F CPUs and also the Failsafe versions of the ET 200SP station with ET 200SP F-CPU 1510SP F / 1512SP F or 1515SP PC F.
- For reading up to 31 fail-safe AS-i input slaves
  - Two sensor inputs/signals for each fail-safe AS-i input slave
  - Adjustable evaluation of sensor signals: two-channel or 2 x single-channel
  - Integrated discrepancy evaluation in the case of two-channel signals
  - Integrated AND operation in the case of 2 x single-channel signals
  - Input delay can be parameterized
  - Start-up test can be set
  - Sequence monitoring can be activated

- For control of up to 16 fail-safe AS-i output circuit groups
  - The output circuit groups are controlled independently of one another
  - One output circuit group can act on one or more actuators (e.g. to switch drives simultaneously)
  - An actuator (e.g. a contactor) is interfaced via an AS-i safety output module (e.g. SlimLine S45F safety module, Article No. 3RK1405-1SE15-0AA2; see <https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/10011823?tree=CatalogTree>).
  - Simple fault acknowledgment via the process image
- Simple module replacement thanks to automatic importing of the safety parameters from the coding element
- Comprehensive diagnostics options
- Can be plugged onto type C1 or type C0 BaseUnits (BU)
- Informative automatic alarm indications
- Supply via AS-Interface voltage
- Eight LED indicators for diagnostics, operating state, fault indication and supply voltage
- Informative front-side module inscription
  - Plain-text marking of the module type and function class
  - 2D matrix code (Article No. and serial number)
  - Connection diagram
  - Color coding module type communications module: light gray
  - Hardware and firmware version
  - Supported BaseUnit type BU: C1, C0

## Design

The fail-safe F-CM AS-i Safety ST module has an ET 200SP module enclosure with a width of 20 mm.

One AS-i master according to the AS-i Specification V3.0, as well as fail-safe AS-i input slaves and/or AS-i safety output modules are needed for operation. The CM AS-i master ST communications module (Article No. 3RK7137-6SA00-0BC1) is recommended as the AS-i master for the ET 200SP, see from page 10/149.

Simple combination of the CM AS-i Master ST and F-CM AS-i Safety ST modules in one ET 200SP station results in a powerful, safety-oriented network transition between PROFINET (or PROFIBUS) and AS-Interface, which can be expanded further in a modular fashion.



Combination of an ET 200SP interface module, CM AS-i Master ST and F-CM AS-i Safety ST

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

Fail-safe modules > Fail-safe communication > F-CM AS-i Safety ST for SIMATIC ET 200SP

### Overview

With the digital and analog I/O modules of the ET 200SP, additional local inputs and outputs can be realized so as to ensure that the modular AS-i router complies precisely with customer requirements. Expansion variants for almost every application are possible thanks to the selection of standard and Failsafe I/O modules.

Besides the single AS-i master, double, triple or generally multiple masters can also be realized with or without fail-safe functionality.

#### Supported BaseUnits

With the combination of the CM AS-i Master ST and F-CM AS-i Safety ST modules, the CM module is plugged onto a light type C0 BaseUnit and, directly to the right of it, the F-CM module is plugged onto a dark type C1 BaseUnit. The AS-i cable is connected only on the light BaseUnit of the CM module.

#### Notes on security

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens products and solutions represent only one component of such a concept.

For more information on Industrial Security, see <http://www.siemens.com/industrialsecurity>.

#### Configuration

The following software is required for configuration of the F-CM AS-i Safety ST module:

- STEP 7 (TIA Portal) and Safety Advanced
- or
- STEP 7 (Classic) and Distributed Safety or F-Configuration Pack or SIMATIC S7 F/FH systems

Configuration and programming are done entirely in the STEP 7 user interface. No additional configuration software is needed for commissioning.

Data management – together with all other configuration data of the SIMATIC – is realized completely in the S7 project.

The input and output channels are assigned to the process image automatically and manual linking via configuration function blocks is not necessary.

If the F-CM AS-i Safety ST module is replaced, all necessary settings are automatically imported into the new module.

The F-CM AS-i Safety ST module occupies 16 input bytes and 8 output bytes in the I/O data of the ET 200SP station.

For diagnostics during ongoing operation, diagnostics blocks with clearly arranged visualization on the SIMATIC HMI panel are available or can be downloaded free of charge via a web browser, see <https://support.industry.siemens.com/cs/ww/en/view/109479103>.



Diagnostic block for F-CM AS-i Safety ST

### Application

Thanks to use of the fail-safe module in the ET 200SP, it is possible to fulfill the safety-related application requirements in a manner that is integrated in the overall automation solution.

The safety functions required for fail-safe operation are integrated in the modules. Communication with the fail-safe SIMATIC S7 CPUs is realized via PROFIsafe.

The safety application is programmed in the SIMATIC S7 F-CPU with Distributed Safety / S7 F/FH Systems / Safety Advanced. The fail-safe input signals of the ASIsafe slave modules are read via the AS-i bus line and are combined with any chosen further signals in the fail-safe program.


The fail-safe output signals can be output via safe SIMATIC output modules or also directly via AS-i – with the help of safe AS-i output modules, e.g. SlimLine S45F safety modules, article number 3RK1405-1SE15-0AA2 (see <https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/10011823?tree=CatalogTree>). No special functions are required for this in the program.

Operation with SINUMERIK 840D sl is possible with SINUMERIK software version V4.7 SP2 HF1 or higher.

Together with an ET 200SP station with ET 200SP F-CPU 1510SP F / 1512SP F or 1515SP PC F, pre-processing of safe AS-i signals directly in the ET 200SP station is possible, as well as the configuration of an autonomous AS-i Safety station without a higher-level CPU.

## Application

## Configuration examples of AS-Interface networks with CM AS-i Master ST and F-CM AS-i Safety ST for SIMATIC ET 200SP

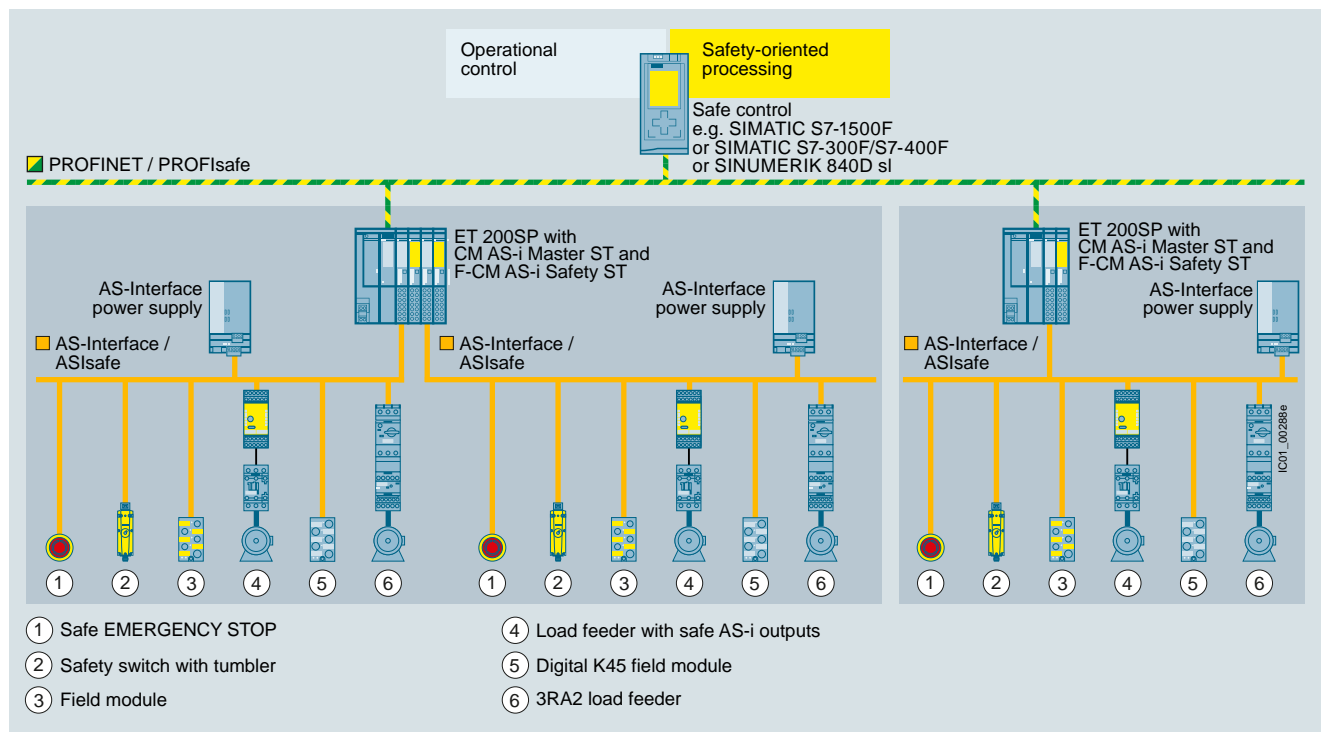

AS-Interface configuration comprising an ET 200SP station with CM AS-i Master ST and F-CM AS-i Safety ST modules

## Ordering data

## Article No.

## Article No.

**F-CM AS-i Safety ST communications module**

- Failsafe module for SIMATIC ET 200SP, can be plugged onto BaseUnit type C1 (alternatively type C0)
- Operation requires an AS-i master, e.g. CM AS-i Master ST
- Can be used up to SIL 3 (IEC 62061), PL e (EN ISO 13849-1)
- Coding element type H (included in scope of supply)
- Dimensions (W x H x D / mm): 20 x 73 x 58

**3RK7136-6SC00-0BC1****Accessories****BaseUnit BU20-P6+A2+4B**

- BaseUnit (dark), BU type C1
- Suitable for the F-CM AS-i Safety ST failsafe module
- Continuation of an AS-i network, connection with the AS-i voltage of the left-hand module
- Spring-loaded terminals

**6ES7193-6BP20-0BC1****Coding element type H (spare part)**

- For the ET 200SP modules F-CM AS-i Safety ST and CM 4xIO-Link
- Spring-loaded terminals
- Packing unit 5 items

**6ES7193-6EH00-1AA0****More accessories**

see CM AS-i Master ST communications modules, page 10/149

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### Ex I/O modules

#### Overview

The intrinsically safe ET 200SP HA Ex I/O modules extend the SIMATIC ET 200SP HA and SIMATIC ET 200SP distributed I/O systems with the option of integrating devices located in hazardous areas (intrinsically safe sensors, actuators and HART field devices) into the system.

The ET 200SP HA Ex I/O modules with device protection according to intrinsic safety "i" offer channel outputs in Zone 0 or 1. 2-channel HART analog input and output modules and 2/4-channel digital input and output modules with different characteristic curves as well as a power module for intrinsically safe power supply of the modules.

Separate Ex isolators with correspondingly complex wiring and high space requirements are no longer required. The I/O modules can be installed up to ATEX Zone 2 and offer intrinsically safe circuits in Ex ia design for field devices up to Zone 0.

The Ex modules offer channel diagnostics and configuration in Run and are approved for ambient temperatures from -40 to +70 °C.

#### Ordering data

#### Article No.

Ordering data	Article No.
<b>Ex digital modules SIMATIC ET 200SP HA</b>	
<b>Digital Ex-i input module, Ex-DI 4xNAMUR</b> Suitable for BaseUnit Type X1, channel diagnostics	6DL1131-6TD00-0HX1
<b>Digital Ex-i output module Ex-DQ 2x23,1VDC/20 mA</b> Suitable for BaseUnit Type X1, channel diagnostics	6DL1132-6EB00-0HX1
<b>Digital Ex-i output module Ex-DQ 2x17,4VDC/27 mA</b> Suitable for BaseUnit Type X1, channel diagnostics	6DL1132-6CB00-0HX1
<b>Ex analog modules SIMATIC ET 200SP HA</b>	
<b>Analog Ex-i HART input module, Ex-AI 2xI 2-wire HART</b> Suitable for BaseUnit Type X1, channel diagnostics, 16 bits, +/-0.3%	6DL1134-6TB00-0HX1
<b>Analog Ex-i input module, Ex-AI 4xTC/2xRTD 2-/3-/4-wire</b> Suitable for BaseUnit Type X1, channel diagnostics, 16 bits, +/-0.05%	6DL1134-6JD00-0HX1
<b>Analog Ex-i HART output module, Ex-AQ 2xI HART HF</b> Suitable for BaseUnit Type X1, channel diagnostics, 16 bits, +/-0.3%	6DL1135-6TB00-0HX1
<b>Power module and BaseUnits</b>	
<b>Power module Ex-PM E</b> 24 V 0.8 A, W x H: 50 mm x 117 mm, suitable for BaseUnit Type W0	6DL1133-6PX00-0HW0
<b>BU Type X1 for I/O modules</b> Push-in terminals, W x H: 20 mm x 117 mm	6DL1193-6BP00-0BX1
<b>BU Type W0 for Ex power module PM-E</b> W x H: 50 mm x 117 mm	6DL1193-6BP00-0DW0

### Technical specifications

Article number	<b>6DL1131-6TD00-0HX1</b> ET 200SP HA, EX-DI 4xNAMUR
<b>General information</b>	
Product type designation	Ex-DI 4xNAMUR
<b>Product function</b>	
• Isochronous mode	No
<b>Engineering with</b>	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V16 or higher with HSP
• STEP 7 configurable/integrated from version	STEP 7 V5.6 SP2 or higher
• PCS 7 configurable/integrated from version	V9.1
<b>Operating mode</b>	
• DI	Yes
• Counter	Yes
• MSI	Yes
<b>Encoder supply</b>	
Number of outputs	4
Short-circuit protection	Yes
<b>Digital inputs</b>	
Number of digital inputs	4; NAMUR
Digital inputs, parameterizable	Yes
Pulse extension	Yes; 0.5 s, 1 s, 2 s
Time stamping	No
Edge evaluation	Yes; Positive edge, negative edge
Signal change flutter	Yes; 2 to 32 signal changes
Flutter observation window	Yes; 0.5 s, 1 s to 100 s in 1-s steps
<b>Input voltage</b>	
• Rated value (DC)	8.2 V
<b>Input current</b>	
<b>for 10 k switched contact</b>	
- for signal *0*	Max. 1.2 mA
- for signal *1*	Min. 2.1 mA
<b>for unswitched contact</b>	
- for signal *0*, max. (permissible quiescent current)	0.5 mA
- for signal *1*	typ. 8 mA
<b>for NAMUR encoders</b>	
- for signal *0*	0.35 to 1.2 mA
- for signal *1*	2.1 ... 6.4 mA
<b>Encoder</b>	
<b>Connectable encoders</b>	
• NAMUR encoder/changeover contact according to EN 60947	Yes
• Single contact / changeover contact unconnected	Yes
• Single contact / changeover contact connected with 10 kΩ	Yes

Article number	<b>6DL1131-6TD00-0HX1</b> ET 200SP HA, EX-DI 4xNAMUR
<b>Interrupts/diagnostics/ status information</b>	
Diagnostics function	Yes
<b>Alarms</b>	
• Diagnostic alarm	Yes
• Maintenance interrupt	Yes
• Hardware interrupt	Yes; channel by channel
<b>Diagnoses</b>	
• Diagnostic information readable	Yes
• Monitoring the supply voltage	Yes
- parameterizable	Yes
• Monitoring of encoder power supply	Yes
• Wire-break	Yes; channel by channel
• Short-circuit	Yes; channel by channel
• Group error	Yes
<b>Diagnostics indication LED</b>	
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
<b>Integrated Functions</b>	
<b>Measuring functions</b>	
<b>Accuracy</b>	
- Frequency measurement	1 %
<b>Ex(I) characteristics</b>	
<b>maximum values for connecting terminals for gas group IIC</b>	
• U <sub>o</sub> (no-load voltage), max.	9.6 V
• I <sub>o</sub> (short-circuit current), max.	61 mA; applies for up to four circuits connected in parallel
• P <sub>o</sub> (power output), max.	145 mW; applies for up to four circuits connected in parallel
• C <sub>o</sub> (permissible external capacity), max.	3.6 μF; applies for up to four circuits connected in parallel
• L <sub>o</sub> (permissible external inductivity), max.	13 mH; applies for up to four circuits connected in parallel
• U <sub>m</sub> (voltage at non-intrinsically safe connecting terminals), max.	60 V
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and backplane bus	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	2 000 m
<b>Dimensions</b>	
Width	20 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	55 g



**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**Ex I/O modules****Technical specifications**

Article number	<b>6DL1132-6EB00-0HX1</b> ET 200SP HA, EX-DQ 2x23, 1VDC/20MA	<b>6DL1132-6CB00-0HX1</b> ET 200SP HA, EX-DQ 2x17, 4VDC/27MA
<b>General information</b>		
<b>Product function</b>		
• Isochronous mode	No	No
<b>Engineering with</b>		
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V16 or higher with HSP	STEP 7 V16 or higher with HSP
• STEP 7 configurable/integrated from version	STEP 7 V5.6 SP2 or higher	STEP 7 V5.6 SP2 or higher
• PCS 7 configurable/integrated from version	V9.1	V9.1
<b>Operating mode</b>		
• DQ	Yes	Yes
• MSO	Yes	Yes
<b>Digital outputs</b>		
Number of digital outputs	2	2
Current-sinking	No	No
Current-sourcing	Yes	Yes
Digital outputs, parameterizable	Yes	Yes
Short-circuit protection	Yes	Yes
Open-circuit detection	Yes; capacitive loads can cause wire-break diagnostics when the channel is switched off	Yes; capacitive loads can cause wire-break diagnostics when the channel is switched off
Overload protection	Yes	Yes
Limitation of inductive shutdown voltage to	DQ.n- (-1 V)	DQ.n- (-1 V)
<b>Switching capacity of the outputs</b>		
• with resistive load, max.	20 mA; See output characteristic in manual	27 mA; See output characteristic in manual
• with inductive load, max.	20 mA; See output characteristic in manual	27 mA; See output characteristic in manual
<b>Load resistance range</b>		
• lower limit	872 Ω; See output characteristic in manual	480 Ω; parallel operation 240 ohm, see output characteristic in manual
• upper limit	10 kΩ; See output characteristic in manual	10 kΩ; parallel operation 5 kOhm, see output characteristic in manual
<b>Output current</b>		
• for signal "1" rated value	20 mA	27 mA
• for signal "0" residual current, max.	100 µA; 250 µA test current for wire break diagnostics	100 µA; 250 µA test current for wire break diagnostics, parallel operation 500 µA
<b>Output delay with resistive load</b>		
• "0" to "1", typ.	50 µs	50 µs
• "1" to "0", typ.	100 µs	100 µs
<b>Parallel switching of two outputs</b>		
• for uprating	No	Yes
<b>Switching frequency</b>		
• with resistive load, max.	500 Hz	500 Hz
• with inductive load, max.	500 Hz	500 Hz
<b>Total current of the outputs</b>		
• Current per channel, max.	20 mA	27 mA
• Current per module, max.	40 mA	54 mA
<b>Total current of the outputs (per module)</b>		
<b>horizontal installation</b>		
- up to 70 °C, max.	40 mA	54 mA
<b>vertical installation</b>		
- up to 60 °C, max.	40 mA	54 mA
<b>Cable length</b>		
• shielded, max.	500 m; Ex characteristic values must be observed	500 m; Ex characteristic values must be observed
• unshielded, max.	500 m; Ex characteristic values must be observed	500 m; Ex characteristic values must be observed
<b>Interrupts/diagnostics/status information</b>		
Diagnostics function	Yes	Yes
Substitute values connectable	Yes	Yes

#### Technical specifications

Article number	<b>6DL1132-6EB00-0HX1</b> ET 200SP HA, EX-DQ 2x23, 1VDC/20MA	<b>6DL1132-6CB00-0HX1</b> ET 200SP HA, EX-DQ 2x17, 4VDC/27MA
<b>Alarms</b>		
• Diagnostic alarm	Yes	Yes
• Maintenance interrupt	Yes	Yes
<b>Diagnoses</b>		
• Diagnostic information readable	Yes	Yes
• Monitoring the supply voltage	Yes	Yes
- parameterizable	Yes	Yes
• Wire-break	Yes; channel by channel	Yes; channel by channel
• Short-circuit	Yes; channel by channel	Yes; channel by channel
• Group error	Yes	Yes
<b>Diagnostics indication LED</b>		
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Ex(i) characteristics</b>		
<b>maximum values for connecting terminals for gas group IIC</b>		
• U <sub>o</sub> (no-load voltage), max.	24.8 V	19.4 V
• I <sub>o</sub> (short-circuit current), max.	99 mA	133 mA; parallel operation 266 mA
• P <sub>o</sub> (power output), max.	614 mW	645 mW; parallel operation 1 290 mW
• C <sub>o</sub> (permissible external capacity), max.	100 nF	232 nF; parallel operation 220 nF
• L <sub>o</sub> (permissible external inductivity), max.	3.5 mH	1.9 mH; parallel operation 328 uH
• U <sub>m</sub> (voltage at non-intrinsically safe connecting terminals), max.	60 V	60 V
<b>Potential separation</b>		
<b>Potential separation channels</b>		
• between the channels and backplane bus	Yes	Yes
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• horizontal installation, min.	-40 °C	-40 °C
• horizontal installation, max.	70 °C	70 °C
• vertical installation, min.	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C
<b>Altitude during operation relating to sea level</b>		
• Installation altitude above sea level, max.	2 000 m	2 000 m
<b>Dimensions</b>		
Width	20 mm	20 mm
Height	73 mm	73 mm
Depth	58 mm	58 mm
<b>Weights</b>		
Weight, approx.	55 g	55 g

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**Ex I/O modules****Technical specifications**

Article number	<b>6DL1134-6TB00-0HX1</b> ET 200SP HA, EX-AI 2xI 2-WIRE HART	<b>6DL1134-6JD00-0HX1</b> ET 200SP HA, EX-AI 4xTC/2xRTD 2-/3-/4-W
<b>General information</b>		
Product type designation	Ex-AI 2xI 2-wire HART	Ex-AI 4xTC/2xRTD 2-/3-/4-wire
<b>Product function</b>		
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
• Isochronous mode	No	No
<b>Engineering with</b>		
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V16 or higher with HSP	STEP 7 V16 or higher with HSP
• STEP 7 configurable/integrated from version	STEP 7 V5.6 SP2 or higher	STEP 7 V5.6 SP2 or higher
• PCS 7 configurable/integrated from version	V9.1	V9.1
<b>Operating mode</b>		
• MSI	Yes	Yes
<b>Analog inputs</b>		
Number of analog inputs	2; Differential inputs	
• For current measurement	2	
• For voltage measurement		4
• For resistance/resistance thermometer measurement		2
• For thermocouple measurement		4
Constant measurement current for resistance-type transmitter, typ.		0.5 mA
Cycle time (all channels), min.	3 ms	
Technical unit for temperature measurement adjustable		Yes; °C/°F/K
<b>Input ranges (rated values), voltages</b>		
• -1 V to +1 V		Yes; 16 bit incl. sign
• -250 mV to +250 mV		Yes; 16 bit incl. sign
• -50 mV to +50 mV		Yes; 16 bit incl. sign
• -80 mV to +80 mV		Yes; 16 bit incl. sign
<b>Input ranges (rated values), currents</b>		
• 0 to 20 mA	Yes	
• 4 mA to 20 mA	Yes; 15 bit + sign	
<b>Input ranges (rated values), thermocouples</b>		
• Type B		Yes; 16 bit incl. sign
• Type C		Yes; 16 bit incl. sign
• Type E		Yes; 16 bit incl. sign
• Type J		Yes; 16 bit incl. sign
• Type K		Yes; 16 bit incl. sign
• Type L		Yes; 16 bit incl. sign
• Type N		Yes; 16 bit incl. sign
• Type R		Yes; 16 bit incl. sign
• Type S		Yes; 16 bit incl. sign
• Type T		Yes; 16 bit incl. sign
• Type U		Yes; 16 bit incl. sign
• Type TXK/TXK(L) to GOST		Yes; 16 bit incl. sign
<b>Input ranges (rated values), resistance thermometer</b>		
• Cu 10		Yes; 16 bit incl. sign
• Ni 100		Yes; 16 bit incl. sign
• LG-Ni 1000		Yes; 16 bit incl. sign
• Ni 120		Yes; 16 bit incl. sign
• Ni 200		Yes; 16 bit incl. sign
• Ni 500		Yes; 16 bit incl. sign
• Pt 100		Yes; 16 bit incl. sign
• Pt 1000		Yes; 16 bit incl. sign
• Pt 200		Yes; 16 bit incl. sign
• Pt 500		Yes; 16 bit incl. sign

#### Technical specifications

Article number	<b>6DL1134-6TB00-0HX1</b> ET 200SP HA, EX-AI 2xI 2-WIRE HART	<b>6DL1134-6JD00-0HX1</b> ET 200SP HA, EX-AI 4xTC/2xRTD 2-/3-/4-W
<b>Input ranges (rated values), resistors</b>		
<ul style="list-style-type: none"> <li>0 to 150 ohms</li> <li>0 to 300 ohms</li> <li>0 to 600 ohms</li> <li>0 to 3000 ohms</li> <li>0 to 6000 ohms</li> <li>PTC</li> </ul>		Yes; 15 bit Yes; 15 bit Yes; 15 bit Yes; 15 bit Yes; 15 bit Yes; 15 bit
<b>Thermocouple (TC)</b>		
<b>Temperature compensation</b> - parameterizable		Yes
<b>Cable length</b>		
<ul style="list-style-type: none"> <li>shielded, max.</li> </ul>	500 m; Ex characteristic values must be observed	200 m; Ex characteristic values must be observed; line resistance at RTD (simple) max. 25 ohm; loop resistance at TC max. 8 kOhm
<ul style="list-style-type: none"> <li>unshielded, max.</li> </ul>	300 m; Ex characteristic values must be observed	
<b>Analog value generation for the inputs</b>		
Measurement principle	integrating (Sigma-Delta)	integrating (Sigma-Delta)
<b>Integration and conversion time/resolution per channel</b>		
<ul style="list-style-type: none"> <li>Resolution with overrange (bit including sign), max.</li> <li>Integration time, parameterizable</li> </ul>	16 bit Yes; channel by channel	16 bit Yes; Channel-by-channel, results from the selected interference frequency suppression
<ul style="list-style-type: none"> <li>Interference voltage suppression for interference frequency f1 in Hz</li> <li>Conversion time (per channel)</li> </ul>	10 / 50 / 60 Hz	16.6 / 50 / 60 Hz, channel-by-channel  180 / 60 / 50 ms, results from the selected interference frequency suppression
<b>Smoothing of measured values</b>		
<ul style="list-style-type: none"> <li>Number of smoothing levels</li> <li>parameterizable</li> </ul>	4; None; 4/8/16 times Yes	Yes; none, weak, medium, strong, channel-by-channel
<b>Encoder</b>		
<b>Connection of signal encoders</b>		
<ul style="list-style-type: none"> <li>for current measurement as 2-wire transducer</li> <li>- Burden of 2-wire transmitter, max.</li> </ul>	Yes 750 Ω; At 20 mA input current	
<b>Errors/accuracies</b>		
<b>Basic error limit (operational limit at 25 °C)</b>		
<ul style="list-style-type: none"> <li>Voltage, relative to input range, (+/-)</li> <li>Current, relative to input range, (+/-)</li> <li>Resistance, relative to input range, (+/-)</li> </ul>	0.2 %	0.05 %  0.05 %
<b>Interference voltage suppression for <math>f = n \times (f_1 \pm 1 \%)</math>, <math>f_1 =</math> interference frequency</b>		
<ul style="list-style-type: none"> <li>Series mode interference (peak value of interference &lt; rated value of input range), min.</li> <li>Common mode voltage, max.</li> <li>Common mode interference, min.</li> </ul>	60 dB	70 dB  60 V; Applicable for use in non-hazardous areas; no common mode voltage permissible in hazardous areas 90 dB
<b>Protocols</b>		
HART protocol	Yes	
<b>Interrupts/diagnostics/status information</b>		
Diagnostics function	Yes	Yes
<b>Alarms</b>		
<ul style="list-style-type: none"> <li>Diagnostic alarm</li> <li>Limit value alarm</li> </ul>	Yes Yes	Yes Yes; two upper and two lower limit values in each case
<b>Diagnoses</b>		
<ul style="list-style-type: none"> <li>Monitoring the supply voltage</li> <li>Wire-break</li> <li>Short-circuit</li> </ul>	Yes Yes; channel by channel Yes; channel by channel	Yes Yes; channel by channel

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### Ex I/O modules

#### Technical specifications

Article number	<b>6DL1134-6TB00-0HX1</b> ET 200SP HA, EX-AI 2xI 2-WIRE HART	<b>6DL1134-6JD00-0HX1</b> ET 200SP HA, EX-AI 4xTC/2xRTD 2-/3-/4-W
<b>Diagnoses (continued)</b>		
• Group error	Yes	
• Overflow/underflow	Yes; channel by channel	Yes; channel by channel
<b>Diagnostics indication LED</b>		
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED
<b>Ex(i) characteristics</b>		
<b>maximum values for connecting terminals for gas group IIC</b>		
• U <sub>o</sub> (no-load voltage), max.	26 V	5.9 V
• I <sub>o</sub> (short-circuit current), max.	93 mA	18 mA
• P <sub>o</sub> (power output), max.	605 mW	27 mW
• C <sub>o</sub> (permissible external capacity), max.	99 nF	43 µF
• L <sub>o</sub> (permissible external inductivity), max.	4 mH	110 mH
• U <sub>i</sub> (intrinsically safe input voltage), max.	10 V	
<b>Potential separation</b>		
<b>Potential separation channels</b>		
• between the channels and backplane bus	Yes	Yes
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• horizontal installation, min.	-40 °C	-40 °C
• horizontal installation, max.	70 °C	70 °C
• vertical installation, min.	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C
<b>Altitude during operation relating to sea level</b>		
• Installation altitude above sea level, max.	2 000 m	2 000 m
<b>Dimensions</b>		
Width	20 mm	20 mm
Height	73 mm	73 mm
Depth	58 mm	58 mm
<b>Weights</b>		
Weight, approx.	55 g	55 g
Article number	<b>6DL1135-6TB00-0HX1</b> ET 200SP HA, EX-AQ 2xI HART	Article number <b>6DL1135-6TB00-0HX1</b> ET 200SP HA, EX-AQ 2xI HART
<b>General information</b>		
Product type designation	Ex-AQ 2xI HART	
<b>Product function</b>		
• I&M data	Yes; I&M0 to I&M3	
• Isochronous mode	No	
<b>Engineering with</b>		
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V16 or higher with HSP	
• STEP 7 configurable/integrated from version	STEP 7 V5.6 SP2 or higher	
• PCS 7 configurable/integrated from version	V9.1	
<b>Operating mode</b>		
• MSO	Yes	
<b>Analog outputs</b>		
Number of analog outputs	2	
Cycle time (all channels), min.	3 ms	
<b>Output ranges, current</b>		
• 0 to 20 mA		Yes; 15 bit
• 4 mA to 20 mA		Yes; 16 bit incl. sign
<b>Connection of actuators</b>		
• for current output two-wire connection		Yes
<b>Load impedance (in rated range of output)</b>		
• with current outputs, max.		500 Ω
• with current outputs, inductive load, max.		Ex characteristic values must be observed
<b>Cable length</b>		
• shielded, max.		500 m; Ex characteristic values must be observed
• unshielded, max.		300 m; Ex characteristic values must be observed
<b>Settling time</b>		
• for resistive load		1 ms; 500 ohms

#### Technical specifications

Article number	<b>6DL1135-6TB00-0HX1</b> ET 200SP HA, EX-AQ 2xI HART
<b>Errors/accuracies</b>	
<b>Basic error limit (operational limit at 25 °C)</b>	
• Current, relative to output range, (+/-)	0.2 %
<b>Protocols</b>	
HART protocol	Yes
<b>Interrupts/diagnostics/status information</b>	
Diagnostics function	Yes
Substitute values connectable	Yes
<b>Alarms</b>	
• Diagnostic alarm	Yes
<b>Diagnoses</b>	
• Monitoring the supply voltage	Yes; Module-wise
• Wire-break	Yes; From output value > 240 µA
• Short-circuit	Yes; < 20 ohms as of 1 mA output value
• Group error	Yes
• Overflow/underflow	Yes; channel by channel
<b>Diagnostics indication LED</b>	
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED

Article number	<b>6DL1133-6PX00-0HW0</b> ET 200SP HA, Ex-PM E POWER MODULE
<b>General information</b>	
Product type designation	Ex-PM-E
<b>Product function</b>	
• I&M data	Yes; Asset data
<b>Supply voltage</b>	
Rated value (DC)	24 V
Reverse polarity protection	Yes
<b>Output current</b>	
<b>horizontal installation</b>	
• up to 60 °C, max.	0.8 A
• up to 70 °C, max.	0.6 A
<b>vertical installation</b>	
• up to 50 °C, max.	0.8 A
• up to 60 °C, max.	0.6 A
<b>Interrupts/diagnostics/status information</b>	
Diagnostics function	Yes
<b>Diagnoses</b>	
• Diagnostic information readable	Yes
• missing load voltage	Yes

Article number	<b>6DL1135-6TB00-0HX1</b> ET 200SP HA, EX-AQ 2xI HART
<b>Ex(i) characteristics</b>	
<b>maximum values for connecting terminals for gas group IIC</b>	
• U <sub>o</sub> (no-load voltage), max.	22 V
• I <sub>o</sub> (short-circuit current), max.	91 mA
• P <sub>o</sub> (power output), max.	501 mW
• C <sub>o</sub> (permissible external capacity), max.	151 nF
• L <sub>o</sub> (permissible external inductivity), max.	4.1 mH
• U <sub>i</sub> (intrinsically safe input voltage), max.	10 V
• U <sub>m</sub> (voltage at non-intrinsically safe connecting terminals), max.	60 V
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and backplane bus	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	2 000 m
<b>Dimensions</b>	
Width	20 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	55 g

Article number	<b>6DL1133-6PX00-0HW0</b> ET 200SP HA, Ex-PM E POWER MODULE
<b>Diagnostics indication LED</b>	
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• for module diagnostics	Yes; green/red DIAG LED
<b>Ex(i) characteristics</b>	
Module for Ex(i) protection	Yes
<b>maximum values for connecting terminals for gas group IIC</b>	
• U <sub>m</sub> (voltage at non-intrinsically safe connecting terminals), max.	60 V; power supply and backplane bus
<b>Potential separation</b>	
primary/secondary	Yes

**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**Ex I/O modules****Technical specifications**

Article number	<b>6DL1133-6PX00-0HW0</b>		Article number	<b>6DL1133-6PX00-0HW0</b>	
	ET 200SP HA, Ex-PM E POWER MODULE			ET 200SP HA, Ex-PM E POWER MODULE	
<b>Ambient conditions</b>			<b>Dimensions</b>		
<b>Ambient temperature during operation</b>			Width	50 mm	
• min.	-40 °C		Height	114 mm	
• max.	70 °C; with derating		Depth	67.5 mm	
<b>Altitude during operation relating to sea level</b>			<b>Weights</b>		
• Installation altitude above sea level, max.	2 000 m		Weight, approx.	182 g	
Article number	<b>6DL1193-6BP00-0DW0</b>	<b>6DL1193-6BP00-0BX1</b>			
	ET 200SP HA, Ex-BU TYPE W0	ET 200SP HA, Ex-BU TYPE X1			
<b>General information</b>					
Product type designation	BU type W0		BU type X1		
<b>Product function</b>					
• I&M data	Yes; Asset data		Yes; Asset data		
<b>Hardware configuration</b>					
<b>Slots</b>					
• Number of slots	1		1		
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• horizontal installation, min.	-40 °C		-40 °C		
• horizontal installation, max.	70 °C		70 °C		
• vertical installation, min.	-40 °C		-40 °C		
• vertical installation, max.	60 °C		60 °C		
<b>Altitude during operation relating to sea level</b>					
• Installation altitude above sea level, max.	2 000 m		2 000 m		
<b>Connection method</b>					
<b>Terminals</b>					
• Terminal type			Push-in terminal		
• Conductor cross-section, min.			0.14 mm <sup>2</sup>		
• Conductor cross-section, max.			2.5 mm <sup>2</sup>		
• Number of process terminals to I/O module			8		
<b>Dimensions</b>					
Width	50 mm		20 mm		
Height	117 mm		117 mm		
Depth	19 mm		35 mm		
<b>Weights</b>					
Weight, approx.	38 g		42 g		

Overview



The new ET 200SP technology module F-TM StepDrive ST allows positioning and speed control of stepper motors up to 10 A peak current in very confined spaces.

Engineering in the TIA Portal stands for consistency in a single tool. This facilitates drive dimensioning, commissioning and servicing.


The new drive system consists of

- The F-TM StepDrive ST as a new member of the SIMATIC MICRO-DRIVE family
- The BaseUnit (U0)

Further information on the distributed I/O system SIMATIC ET 200SP is available on the Internet at <http://www.siemens.com/et200sp>

Characteristics

- PROFIdrive profile via PROFINET
- Hardware STO (SIL3)
- Digital input
- Encoderless operation
- Encoder connection for - Incremental encoders

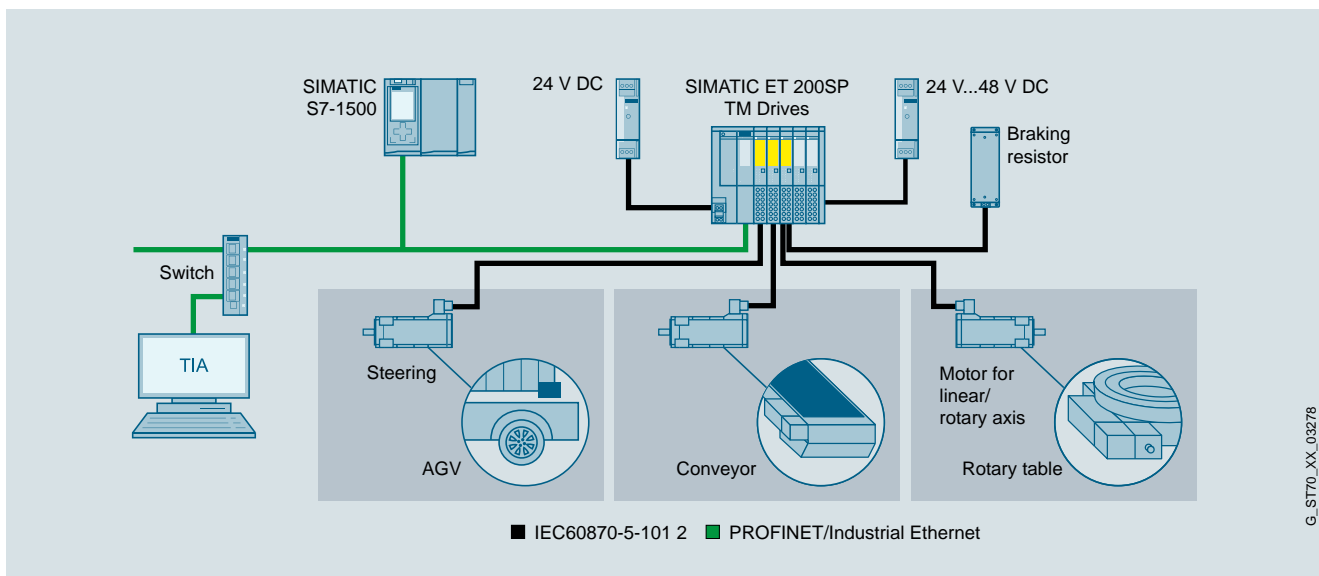

10

G\_ST70\_XX\_03278

Application example TM drive controller

Variant	Power	Device width
Standard	280 W	20 mm

More information:

<https://www.siemens.com/micro-drive>

Ordering data

Article No.

F-TM StepDrive drive controller for SIMATIC MICRO-DRIVE

Variant

- Standard V1; 24 ... 48 V, 5 A with hardware STO

6BK1136-6SB00-0BU0



**I/O systems**

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

**I/O modules > SIMATIC ET 200SP drive controllers > SIMATIC MICRO-DRIVE F-TM StepDrive ST****Technical specifications**

Article number	<b>6BK1136-6SB00-0BU0</b> F-TM StepDrive 1x24..48V 5A ST
<b>General information</b>	
Product type designation	F-TM StepDrive 1x24 ... 48 V 5 A ST
Product description	control of stepper motors
<b>Product function</b>	
• I&M data	Yes
• Isochronous mode	No
• Four-quadrant operation	Yes
• Speed control with encoder	No
• Speed control without encoder	No
• Safety Functions	Yes; Drive controller with hardwired STO
<b>Protection function</b>	
• Undervoltage protection	Yes
• Overvoltage protection	Yes
• Overload protection	Yes
• Ground-fault protection	No
• Short-circuit protection	Yes
<b>Installation type/mounting</b>	
Type of ventilation	Convection cooling
<b>Supply voltage</b>	
Design of the power supply	24 ... 48 V DC, SELV / PELV
<b>Output voltage</b>	
Rated value, min.	24 V
Rated value, max.	48 V
<b>Output current</b>	
Current output (rated value)	5 A
Output current, max.	10 A
Output frequency	1 000 Hz
<b>Encoder supply</b>	
Number of outputs	1
<b>5 V encoder supply</b>	
• 5 V	Yes
• Short-circuit protection	Yes
• Output current, max.	150 mA
<b>Digital inputs</b>	
Number of digital inputs	1; input for message signal
Number of safety inputs	1; For STO, antivalent (2-pin) - 24 V DC
<b>Encoder</b>	
<b>Connectable encoders</b>	
• Incremental encoder (symmetrical)	Yes; up to 500 Hz per channel

Article number	<b>6BK1136-6SB00-0BU0</b> F-TM StepDrive 1x24..48V 5A ST
<b>Interrupts/diagnostics/status information</b>	
<b>Alarms</b>	
• Diagnostic alarm	Yes
• Hardware interrupt	No
<b>Diagnoses</b>	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Group error	Yes
<b>Diagnostics indication LED</b>	
• RUN LED	Yes
• ERROR LED	Yes
<b>Integrated Functions</b>	
<b>Position detection</b>	
• Incremental acquisition	Yes
• Absolute acquisition	No
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and backplane bus	Yes
<b>Standards, approvals, certificates</b>	
CE mark	Yes
cULus	No
RCM (formerly C-TICK)	No
KC approval	No
EAC (formerly Gost-R)	No
China RoHS compliance	Yes
Standard for EMC according to EN 61800-3	Yes, according to second environment Category C2 acc. EN 61800-3
Standard for drive acc. to EN 61800-5-1	Yes
Standard for drive acc. to EN 61800-5-2	Yes
<b>Highest safety class achievable in safety mode</b>	
• Performance level according to ISO 13849-1	Category 3, performance level d, according to EN ISO 13849-1:2015
• SIL acc. to IEC 61508	SIL 3 according to DIN EN 61800-5-2:2017

### Technical specifications

Article number	<b>6BK1136-6SB00-0BU0</b> F-TM StepDrive 1x24..48V 5A ST
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C; No condensation, splash water, icing, salt spray or oil mist permitted.
• horizontal installation, max.	60 °C; No condensation, splash water, icing, salt spray or oil mist permitted. Note the derating data!
• vertical installation, min.	-30 °C; No condensation, splash water, icing, salt spray or oil mist permitted.
• vertical installation, max.	50 °C; No condensation, splash water, icing, salt spray or oil mist permitted. Note the derating data!
<b>Ambient temperature during storage/transportation</b>	
• Storage, min.	-40 °C
• Storage, max.	70 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	3 000 m

Article number	<b>6BK1136-6SB00-0BU0</b> F-TM StepDrive 1x24..48V 5A ST
<b>Cables</b>	
Cable length for motor, shielded, max.	10 m
<b>Dimensions</b>	
Width	20 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	55 g
<b>Other</b>	
Brake design	holding brake control via the process image
Braking chopper	No

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules > SIMATIC ET 200SP drive controllers > SIMATIC MICRO-DRIVE F-TM ServoDrive ST

### Overview



SIMATIC MICRO-DRIVE F-TM ServoDrive ST Video  
[https://players.brightcove.net/1813624294001/70fec0f-fbad-4fad-a077-d0e26af4d84c\\_default/index.html?videoId=6136813197001](https://players.brightcove.net/1813624294001/70fec0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6136813197001)



In combination with EC motors, the new ET 200SP technology module F-TM ServoDrive ST allows positioning and speed control of EC motors up to 280 W in very confined spaces.

Engineering in the TIA Portal stands for consistency in a single tool. This facilitates drive dimensioning, commissioning and servicing.

The new drive system consists of

- The F-TM ServoDrive ST as a new member of the SIMATIC MICRO-DRIVE family
- The BaseUnit (U0)
- Motors with gearbox for flexible use and
- Connecting cables.


Further information on the distributed I/O system SIMATIC ET 200SP is available on the Internet at <http://www.siemens.com/et200sp>

#### Characteristics

- PROFIdrive profile via PROFINET
- Hardware STO
- Digital input
- Integrated braking chopper
- Encoder connection for
  - IQ encoders
  - Incremental encoders

10

Overview

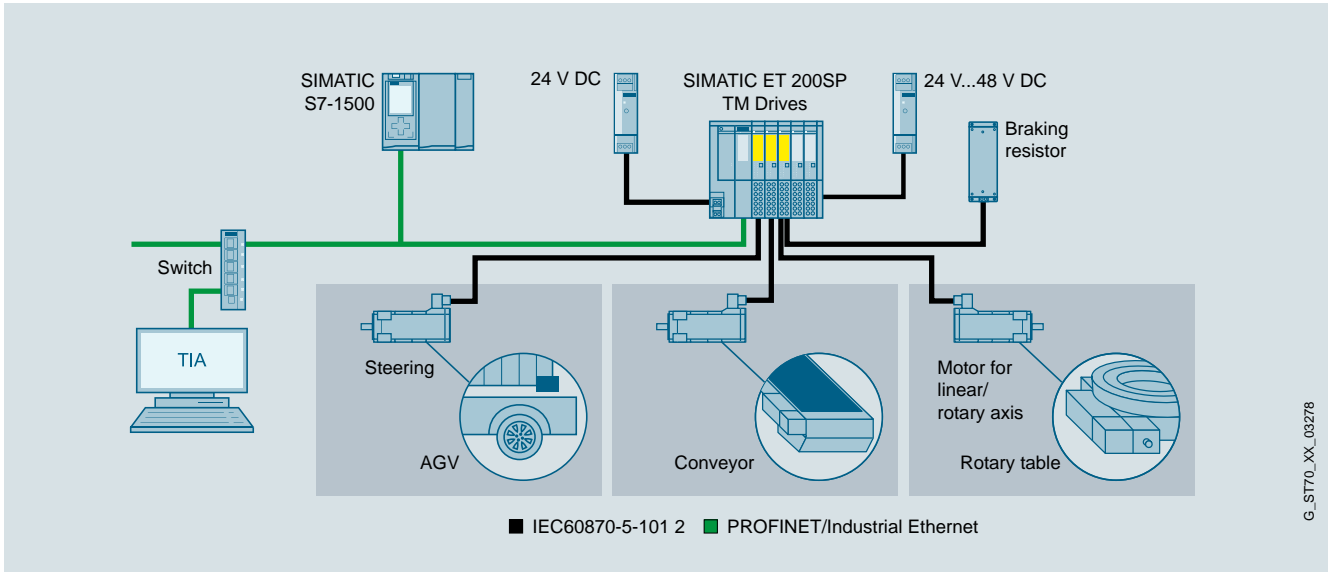

Application example TM drive controller

Variant	Power	Device width
Standard	280 W	20 mm

More information:

<https://www.siemens.com/micro-drive>

Ordering data

Article No.

**F-TM ServoDrive drive controller' for SIMATIC MICRO-DRIVE**

Variant

- Standard V1; 24 ... 48 V, 5 A with hardware STO and integrated braking chopper

**6BK1136-6AB00-0BU0**

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

I/O modules &gt; SIMATIC ET 200SP drive controllers &gt; SIMATIC MICRO-DRIVE F-TM ServoDrive ST


**Technical specifications**

Article number	<b>6BK1136-6AB00-0BU0</b> F-TM ServoDrive 1x24...48V 5A ST
<b>General information</b>	
Product type designation	F-TM ServoDrive 1x24 ... 48 V 5 A ST
Product description	Control of EC motors
<b>Product function</b>	
• I&M data	Yes
• Isochronous mode	No
• Four-quadrant operation	Yes
• Safety Functions	Yes; Drive controller with hardwired STO
<b>Protection function</b>	
• Undervoltage protection	Yes
• Overvoltage protection	Yes
• Overload protection	Yes
• Ground-fault protection	No
• Short-circuit protection	Yes
<b>Installation type/mounting</b>	
Type of ventilation	Convection cooling
<b>Supply voltage</b>	
Design of the power supply	24 ... 48 V DC, SELV / PELV
<b>Output voltage</b>	
Rated value, min.	24 V
Rated value, max.	48 V
<b>Output current</b>	
Current output (rated value)	5 A
Output current, max.	10 A
Output frequency	420 Hz
<b>Encoder supply</b>	
Number of outputs	1
<b>5 V encoder supply</b>	
• 5 V	Yes
• Short-circuit protection	Yes
• Output current, max.	120 mA
<b>Digital inputs</b>	
Number of digital inputs	1; + 1 input for message signal
Number of safety inputs	1; For STO, antivalent (2-pin) - 24 V DC
<b>Encoder</b>	
<b>Connectable encoders</b>	
• Incremental encoder (symmetrical)	Yes; up to 500 Hz per channel
<b>Interrupts/diagnostics/status information</b>	
<b>Alarms</b>	
• Diagnostic alarm	Yes
• Hardware interrupt	No
<b>Diagnoses</b>	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Group error	Yes
<b>Diagnostics indication LED</b>	
• RUN LED	Yes
• ERROR LED	Yes
<b>Integrated Functions</b>	
<b>Position detection</b>	
• Incremental acquisition	Yes


Article number	<b>6BK1136-6AB00-0BU0</b> F-TM ServoDrive 1x24...48V 5A ST
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels and backplane bus	Yes
<b>Standards, approvals, certificates</b>	
CE mark	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
China RoHS compliance	Yes
Standard for EMC according to EN 61800-3	Yes, according to second environment Category C2 acc. EN 61800-3
Standard for drive acc. to EN 61800-5-1	Yes
Standard for drive acc. to EN 61800-5-2	Yes
<b>Highest safety class achievable in safety mode</b>	
• Performance level according to ISO 13849-1	Category 3, performance level d, according to EN ISO 13849-1:2015
• SIL according to DIN EN 61800-5-2	SIL 2 according to EN 61800-5-2:2017
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C; No condensation, splash water, icing, salt spray or oil mist permitted.
• horizontal installation, max.	60 °C; No condensation, splash water, icing, salt spray or oil mist permitted. Note the derating data!
• vertical installation, min.	-30 °C; No condensation, splash water, icing, salt spray or oil mist permitted.
• vertical installation, max.	50 °C; No condensation, splash water, icing, salt spray or oil mist permitted. Note the derating data!
<b>Ambient temperature during storage/transportation</b>	
• Storage, min.	-40 °C
• Storage, max.	70 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	3 000 m
<b>Cables</b>	
Cable length for motor, shielded, max.	10 m
<b>Dimensions</b>	
Width	20 mm
Height	73 mm
Depth	58 mm
<b>Weights</b>	
Weight, approx.	55 g
<b>Other</b>	
Braking chopper	Yes

10

## Overview

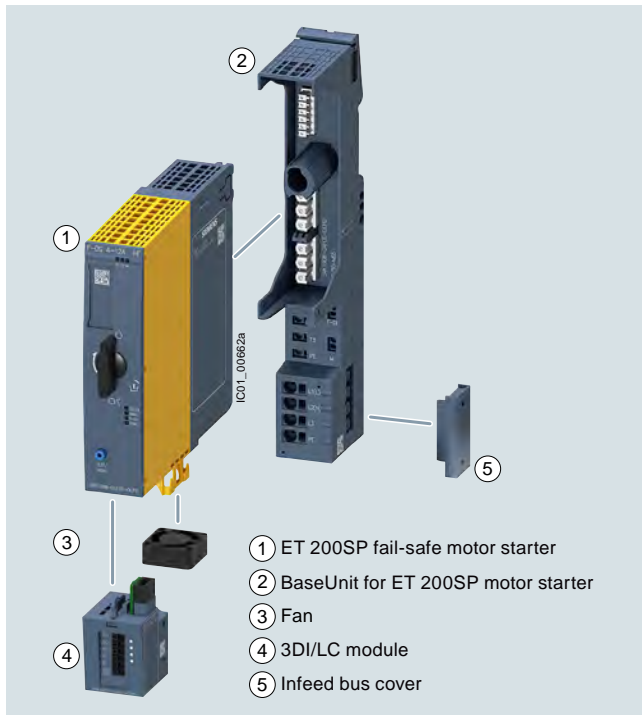

Motor starter, BaseUnit, fan and 3DI/LC control module

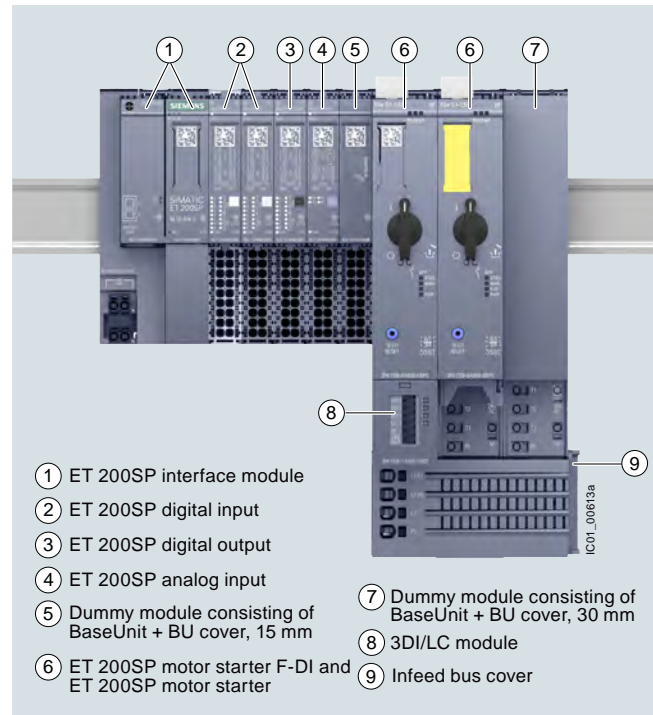

3RK1308 motor starter in the ET 200SP I/O system

## More information

Homepage, see [www.siemens.com/sirius-motor-starter-et200sp](http://www.siemens.com/sirius-motor-starter-et200sp)  
Industry Mall, see [www.siemens.com/product?3RK1308](http://www.siemens.com/product?3RK1308)

TIA Selection Tool, see [www.siemens.com/TST](http://www.siemens.com/TST)

## ET 200SP motor starters

ET 200SP is a scalable and extremely flexible modular I/O system with IP20 degree of protection.

As I/O modules, the ET 200SP motor starters are an integral part of this I/O system. They are switching and protection devices for single- and three-phase loads and are available as direct-on-line or reversing starters.



SIMATIC ET 200SP motor starter video

## Basic functionality

All versions of the ET 200SP motor starter feature the following functionality:

- Fully pre-wired motor starters for switching and protecting any AC loads up to 5.5 kW from 48 V AC to 500 V AC
- Disconnection possible via fail-safe motor starters up to SIL 3 and PL e Cat. 4
- With self-assembling 32 A power bus, i.e. the load voltage is only fed in once for a group of motor starters
- All control supply voltages connected only once, i.e. when modules are added they are automatically connected to the next module
- Hot swapping is permissible
- Digital inputs can optionally be used via a 3DI/LC module

- Control of the motor starter from the control system and diagnostics status via the cyclic process image
- Diagnostics capability for active monitoring of the switching and protection functions
- The signal states in the process image of the motor starter provide information about protective devices (short circuit or overload), the switching states of the motor starter, and system faults.

## Starter Kit

The 3RK1908-1SK00 Starter Kit is a favorably priced complete package for switching and monitoring motors in the ET 200SP system, see page 10/233.

It contains:

- a 3RK1308-0BC00-0CP0 reversing starter (0.9 to 3 A)
- a 3RK1908-0AP00-0AP0 BaseUnit with 500 V and 24 V AC/DC infeed
- an EMC distance module (consisting of 6ES7193-6BP00-0BA0 BaseUnit plus 6ES7133-6CV15-1AM0 BU cover 15 mm)

## Use of fan

For motor starters with a 12 A rated current, the 3RW4928-8VB00 fan is included in the scope of supply.

This fan can also be ordered as an option for motor starters with lower rated currents, if the boundary conditions demand this. For information on the ambient conditions for the use of motor starters, see chapter "Product overview" in the Equipment Manual.

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > ET 200SP motor starters

#### Designing interference-free motor starters

For interference-free operation of the ET 200SP station in accordance with IEC 60947-4-2 standard, use a dummy module before the first motor starter. The dummy module consists of the 6ES7193-6BP00-0BA0 or 6ES7193-6BP00-0DA0 BaseUnit and the 6ES7133-6CV15-1AM0 BU cover 15 mm.

The 15 mm BU cover protects the plug contacts of the BaseUnit against dirt.

#### Electromechanical switching devices in series with hybrid motor starters

Switching an inductive load - in particular of motors <1 kW with high inductance - with an electromechanical switching device (e.g. contactor) can cause high and steep voltage edges.

The resulting faults/damage can be prevented by first disconnecting with the hybrid motor starter or by using EMC suppression modules:

- For 3RT2916-1P.. EMC suppression modules for direct mounting on the contactor, see <https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/10047575>
- For motor suppression modules that are fitted in the main circuit, see page 10/233

#### Note:


For more information, see <https://support.industry.siemens.com/cs/ww/en/view/109758696>.

#### 3DI/LC control module

This is a digital input module with three inputs for local motor starter functions such as "manual local control", "implementation of fast inputs" or "end position disconnection". For a list of all the functions permitted by the 3DI/LC module, see chapter "Overview of functions" in the Equipment Manual.

The module is plugged into the front of the motor starter from which it is supplied with a 24 V DC operating voltage.

#### BaseUnits for motor starters

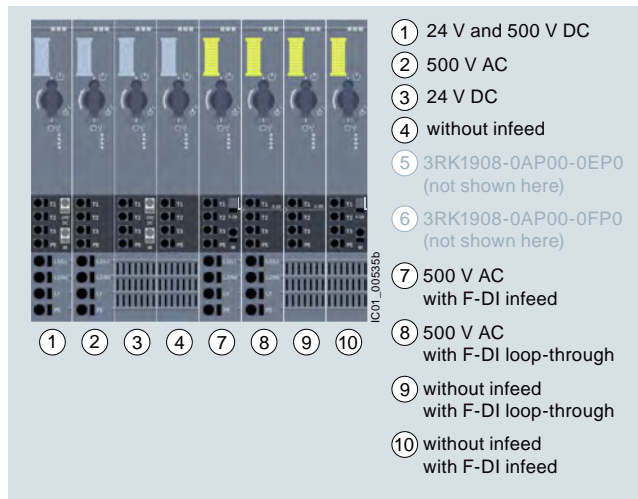

View of the BaseUnit infeeds for the motor starters

BaseUnits are components for accommodating the ET 200SP I/O modules.

The self-assembling voltage buses integrated into the BaseUnits reduce wiring outlay to the single infeed (both of auxiliary and load voltage).

All modules following on the right are automatically supplied upon plugging the BaseUnits together, if BaseUnits are inserted with routing.

The rugged design and keyed connection technology enables use in harsh industrial conditions.

The BaseUnits are available with various infeeds for the motor starters.

## Article No. scheme

Product versions		Article number	
<b>Motor starters</b>		<b>3RK1308 - 0</b> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <b>0 0 - 0 C P 0</b>	
Product function	Direct-on-line starters	<b>A</b>	For motor standard output 0.09 ... 5.5 kW <sup>1)</sup>
	Reversing starters	<b>B</b>	For motor standard output 0.09 ... 5.5 kW <sup>1)</sup>
	Fail-safe direct-on-line starters	<b>C</b>	For motor standard output 0.09 ... 5.5 kW <sup>1)</sup>
	Fail-safe reversing starters	<b>D</b>	For motor standard output 0.09 ... 5.5 kW <sup>1)</sup>
Current range	0.1 ... 0.4 A	<b>A</b>	Maximum current-carrying capacity when starting 4 A
	0.3 ... 1 A	<b>B</b>	Maximum current-carrying capacity when starting 10 A
	0.9 ... 3 A	<b>C</b>	Maximum current-carrying capacity when starting 30 A
	2.8 ... 9 A	<b>D</b>	Maximum current-carrying capacity when starting 90 A
	4 ... 12 A	<b>E</b>	Including fan (3RW4928-8VB00), maximum current-carrying capacity when starting 100 A
Example		<b>3RK1308 - 0 A D 0 0 - 0 C P 0</b>	

<sup>1)</sup> For standard motors: Single- or three-phase asynchronous motors, single-phase asynchronous motors, single-phase asynchronous motors, at 400 V AC and 500 V AC; the actual startup characteristics of the motor as well as its rated data are important factors here.

Product versions		Article number	
<b>BaseUnit</b>		<b>3RK1908 - 0 A P 0 0 - 0</b> <input type="checkbox"/> <b>P 0</b>	
BU infeed	24 V and 500 V AC	<b>A</b>	
	24 V DC	<b>B</b>	
	500 V AC	<b>C</b>	
	without infeed	<b>D</b>	
	500 V AC	<b>G</b>	with F-DI infeed
	500 V AC	<b>H</b>	with F-DI loop-through
	without infeed	<b>J</b>	with F-DI loop-through
without infeed	<b>K</b>	with F-DI infeed	
Example		<b>3RK1908 - 0 A P 0 0 - 0 A P 0</b>	

## Note:

The article number schemes show an overview of product versions for better understanding of the logic behind the article numbers.

For your orders, please use the article numbers quoted in the selection and ordering data.

## Benefits

**Product advantages**

The ET 200SP motor starters offer a number of advantages:

- Fully integrated into the ET 200SP I/O system (including TIA Selection Tool and TIA Portal)
- High degree of flexibility when it comes to safety applications via SIMATIC F-CPU or SIRIUS 3SK safety relays up to SIL 3 and PL e Cat. 4.
- Simple, integrated current value transmission
- Extensive parameterization by means of TIA Portal
- Increase of plant availability through fast replacement of units (easy mounting and plug-in technology)
- Greater endurance and reduced heat losses thanks to hybrid technology
- Less space required in the control cabinet (20 to 80%) as a result of greater functional density (direct-on-line and reversing starters in same width)
- Extensive diagnostics and information for preventive maintenance
- Parameterizable inputs via 3DI/LC control module
- Less wiring and testing required as a result of integrating several functions into a single device
- Lower overheads for stock keeping and configuration as a result of the wide setting range of the electronic overload release (up to 1:3)
- Technology has lower inherent power losses than speed-controlled drive systems, so that less cooling (and smaller footprint) are possible

- The ET 200SP motor starters can be used with highly energy-efficient IE3/IE4 motors, [see Application Manual](#). Take the current characteristics of the connected motor and motor starter into account when dimensioning. In addition to the rated current, the maximum permissible current range of the motor starter and the ratio of the rated current to the starting current of the motor are relevant.

**Standards and approvals**

- IEC/EN 60947-4-2
- UL 60947-4-2
- CSA
- ATEX
- IEC 61508-1: SIL 3
- ISO 13849: PL e
- CCC approval for China



## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > ET 200SP motor starters

#### Application

The ET 200SP motor starters are suitable for the following applications:

- Switching and monitoring of
  - Three-phase motors with overload and short-circuit protection (e.g. 400 V asynchronous motors for secondary drives in conveyor systems)
  - Single-phase motors with overload and short-circuit protection (e.g. 230 V motors for pump applications)
  - Resistive loads by means of current value and diagnostics via the maintenance function (e.g. for heaters)
- Plant monitoring and energy management in conveyor systems:
  - By means of the phase asymmetry and zero current detection during current measurement, for example, drive belt monitoring and blocking monitoring are possible.

- Track switching and lifting table control in conveyor systems: Track switches can be implemented using the quick stop function and lifting table controls by means of the "immediate end position disconnection" function without any laborious programming.
- Safe isolation of the drive from main power supply: The isolating functions according to IEC 60947-1 offer protection against inadvertent activation during plant maintenance.

#### Motor starters in the process industry

For the ET 200SP motor starters, special BaseUnits are available that enable the device to be used in the ET 200SP HA I/O system, too. This is typically used in process engineering applications.

For more information, see <https://mall.industry.siemens.com/mall/en/ww/Catalog/Products/10398144?tree=CatalogTree>.

#### Technical specifications


##### More information

Industry Mall, see [www.siemens.com/product?3RK1308](http://www.siemens.com/product?3RK1308)

Equipment Manual, see <https://support.industry.siemens.com/cs/ww/en/view/109479973>

FAQs, see <https://support.industry.siemens.com/cs/ww/en/ps/21800/faq>

#### ET 200SP motor starters

Article number		3RK1308-0.A00-0CP0	3RK1308-0.B00-0CP0	3RK1308-0.C00-0CP0	3RK1308-0.D00-0CP0	3RK1308-0.E00-0CP0
<b>Product category</b>		<b>Motor starters</b>				
<b>General technical specifications:</b>						
<b>Width x height x depth</b>	mm	30 x 142 x 150				
						
<b>Design of the switching contact</b>		Hybrid				
<b>Design of the motor protection</b>		Electronic				
<b>Installation altitude at height above sea level, maximum</b>	m	4 000, for derating <a href="#">see manual</a>				
<b>Mounting position</b>		Vertical, horizontal, flat (observe derating)				
<b>Type of mounting</b>		Can be plugged into BaseUnit				
<b>Ambient temperature</b>						
• During operation	°C	-25 ... +60				
• During transport	°C	-40 ... +70				
• During storage	°C	-40 ... +70				
<b>Relative humidity during operation</b>	%	10 ... 95				
<b>Vibration resistance</b>		15 mm up to 6 Hz; 2 g up to 500 Hz				
<b>Shock resistance</b>		6 g / 11 ms				
<b>Topic Protection class IP on the front</b> acc. to IEC 60529		IP20				
<b>Touch protection on the front</b> acc. to IEC 60529		Finger-safe				
<b>Type of coordination</b>		1				
<b>Electrical data:</b>						
<b>Supply voltage at DC rated value</b>	V	24				
<b>Operational power for AC-53a at 400 V rated value</b>	kW	0.12	0.25	1.1	4	5.5
<b>Operating frequency, rated value</b>	Hz	50 ... 60				
<b>Ultimate short-circuit current breaking capacity (I<sub>cu</sub>)</b>						
• at 400 V rated value	kA	55				
• at 500 V rated value	kA	55				
<b>Adjustable current response value of the inverse-time delayed overload release</b>	A	0.1 ... 0.4	0.3 ... 1	0.9 ... 3	2.8 ... 9	4 ... 12
<b>Max. current carrying capacity at startup</b>	A	4	10	30	90	100
<b>Max. permissible voltage for protective separation between main and auxiliary circuit</b>	V	500				
<b>Insulation voltage, rated value</b>	V	500				
<b>Trip class</b>		CLASS 5 and 10 adjustable				

**BaseUnits for motor starters**


Article number	3RK1908-0AP00-0AP0	3RK1908-0AP00-0BP0	3RK1908-0AP00-0CP0 3RK1908-0AP00-0GP0 3RK1908-0AP00-0HP0	3RK1908-0AP00-0DP0 3RK1908-0AP00-0JP0 3RK1908-0AP00-0KP0
<b>Product designation</b>	<b>BaseUnit</b>			
<b>General technical specifications:</b>				
<b>Width x height x depth</b>	mm	30 × 215 × 75		
<b>Ambient temperature</b>				
• During operation	°C	-25 ... +60		
• During transport	°C	-40 ... +70		
• During storage	°C	-40 ... +70		
<b>Protection class IP on the front</b> acc. to IEC 60529	IP20			
<b>Touch protection on the front</b> acc. to IEC 60529	Finger-safe			
<b>Connections/terminals:</b>				
<b>Type of connectable conductor cross-sections</b>				
• At the inputs for supply voltage				
- Solid		1 x 0.5 ... 2.5 mm <sup>2</sup>	--	--
- Finely stranded with end sleeve		1 x 0.5 ... 2.5 mm <sup>2</sup>	--	--
- Finely stranded without end sleeve		1 x 0.5 ... 2.5 mm <sup>2</sup>	--	--
- Solid for AWG cables		1 x 20 ... 12	--	--
• For infeed				
- Solid		1 x 1 ... 6 mm <sup>2</sup>	--	1 x 1 ... 6 mm <sup>2</sup>
- Finely stranded with end sleeve		1 x 1 ... 6 mm <sup>2</sup>	--	1 x 1 ... 6 mm <sup>2</sup>
- Finely stranded without end sleeve		1 x 1 ... 6 mm <sup>2</sup>	--	1 x 1 ... 6 mm <sup>2</sup>
- Solid for AWG cables		1 x 18 ... 10	--	1 x 18 ... 10
• For load-side outgoing feeder				
- Solid		1 x 0.5 ... 2.5 mm <sup>2</sup>		
- Finely stranded with end sleeve		1 x 0.5 ... 2.5 mm <sup>2</sup>		
- Finely stranded without end sleeve		1 x 0.5 ... 2.5 mm <sup>2</sup>		
- Solid for AWG cables		1 x 20 ... 12		
<b>Type of electrical connection for auxiliary and control circuits</b>	Spring-loaded terminals (push-in)			
<b>Miscellaneous:</b>				
<b>Type of screwdriver tip</b>	Slotted			
<b>Size of screwdriver tip</b>	Standard screwdriver 0.6 mm x 3.5 mm			

**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**I/O modules > ET 200SP motor starters****3DI/LC control module**

Article number	<b>3RK1908-1AA00-0BP0</b>	
Product designation	<b>3DI/LC control module</b>	
<b>General technical specifications:</b>		
Width x height x depth	mm	30 × 54.5 × 42.3
		
Type of product	Accessories	
Number of digital inputs	4	
Installation altitude at height above sea level, maximum	m	2 000
Mounting position	Vertical, horizontal, flat	
Type of mounting	Can be plugged onto motor starter	
Ambient temperature		
• During operation	°C	-25 ... +60
• During transport	°C	-40 ... +70
• During storage	°C	-40 ... +70
<b>Connections/terminals:</b>		
Connectable conductor cross-section for auxiliary contacts		
• Solid or stranded	mm <sup>2</sup>	0.2 ... 1.5
• Finely stranded with end sleeve	mm <sup>2</sup>	0.25 ... 1.5
• Finely stranded without end sleeve	mm <sup>2</sup>	0.2 ... 1.5
AWG number as coded connectable conductor cross-section	24 ... 16	
Type of electrical connection for auxiliary and control circuits	Spring-loaded terminals (push-in)	
<b>Electrical data:</b>		
Type of voltage of the control supply voltage	DC	
Control supply voltage at DC rated value	V	20.4 ... 28.8
<b>Miscellaneous:</b>		
Type of screwdriver tip	Slotted	
Size of screwdriver tip	Standard screwdriver 0.6 mm x 3.5 mm	

### Selection and ordering data

Adjustable current response value of the inverse-time delayed overload release	Max. current carrying capacity at startup	Article No.
A	A	

#### Motor starters

##### Direct-on-line starters



3RK1308-0AB00-0CP0

0.1 ... 0.4	4
0.3 ... 1	10
0.9 ... 3	30
2.8 ... 9	90
4 ... 12	100

**NEW**

3RK1308-0AA00-0CP0  
3RK1308-0AB00-0CP0  
3RK1308-0AC00-0CP0  
3RK1308-0AD00-0CP0  
3RK1308-0AE00-0CP0

##### Reversing starters



3RK1308-0BB00-0CP0

0.1 ... 0.4	4
0.3 ... 1	10
0.9 ... 3	30
2.8 ... 9	90
4 ... 12	100

**NEW**

3RK1308-0BA00-0CP0  
3RK1308-0BB00-0CP0  
3RK1308-0BC00-0CP0  
3RK1308-0BD00-0CP0  
3RK1308-0BE00-0CP0

##### Fail-safe direct-on-line starters



3RK1308-0CE00-0CP0

0.1 ... 0.4	4
0.3 ... 1	10
0.9 ... 3	30
2.8 ... 9	90
4 ... 12	100

**NEW**

3RK1308-0CA00-0CP0  
3RK1308-0CB00-0CP0  
3RK1308-0CC00-0CP0  
3RK1308-0CD00-0CP0  
3RK1308-0CE00-0CP0

##### Fail-safe reversing starters



3RK1308-0DE00-0CP0

0.1 ... 0.4	4
0.3 ... 1	10
0.9 ... 3	30
2.8 ... 9	90
4 ... 12	100

**NEW**

3RK1308-0DA00-0CP0  
3RK1308-0DB00-0CP0  
3RK1308-0DC00-0CP0  
3RK1308-0DD00-0CP0  
3RK1308-0DE00-0CP0

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### I/O modules > ET 200SP motor starters

Type of product	Operational voltage of the AC infeed	Supply voltage of the DC infeed	Push-in terminals
	V	V	 Article No.

#### BaseUnits<sup>1)</sup>



3RK1908-0AP00-0AP0


#### For motor starters

• with AC/DC infeed	500	24	<b>3RK1908-0AP00-0AP0</b>
• with DC infeed	--	24	<b>3RK1908-0AP00-0BP0</b>
• with AC infeed	500	--	<b>3RK1908-0AP00-0CP0</b>
• without infeed	--	--	<b>3RK1908-0AP00-0DP0</b>

#### For fail-safe motor starters **NEW**

• with AC infeed, with F-DI infeed for fail-safe motor starters	500	--	<b>3RK1908-0AP00-0GP0</b>
• with AC infeed, with F-DI loop-through for fail-safe motor starters	500	--	<b>3RK1908-0AP00-0HP0</b>
• without AC/DC infeed, with F-DI loop-through for fail-safe motor starters	--	--	<b>3RK1908-0AP00-0JP0</b>
• without AC/DC infeed, with F-DI infeed for fail-safe motor starters	--	--	<b>3RK1908-0AP00-0KP0</b>

<sup>1)</sup> The voltage is looped-through from BaseUnits with infeed to subsequent BaseUnits without infeed.

Type of product	Supply voltage at DC rated value	Loop through the potential group from the left	Push-in terminals
	V		 Article No.

#### BaseUnits



6ES7193-6BP00-0BA0

#### For dummy modules

• dark, looping through the potential group	24	Yes	<b>6ES7193-6BP00-0BA0</b>
• light, opening a new potential group	24	No	<b>6ES7193-6BP00-0DA0</b>

Control supply voltage at DC rated value	Product function	Push-in terminals
	Local control    Digital inputs parameterizable	 Article No.
V		

#### 3DI/LC control module



3RK1908-1AA00-0BP0

20.4 ... 28.8	Yes	Yes	<b>3RK1908-1AA00-0BP0</b>
---------------	-----	-----	---------------------------

	Product designation	Type of product	Article No.
<b>Accessories</b>			
	<b>BU cover 15 mm</b>	for BaseUnits Type A0 or A1	<b>6ES7133-6CV15-1AM0</b>
	<b>BU cover 30 mm</b>	For protection of empty slots, 30 mm	<b>3RK1908-1CA00-0BP0</b>
	<b>Infeed bus cover</b> (1 bag containing 10 covers)	For ET 200SP	<b>3RK1908-1DA00-2BP0</b>
	<b>Mechanical bracket</b> (1 bag containing 5 mechanical brackets)	Mechanical, for ET 200SP	<b>3RK1908-1EA00-1BP0</b>
	<b>Fan</b>	Can be used for 3RK1308	<b>3RW4928-8VB00</b>
	<b>Motor suppression module</b> • Square		<b>3RK1911-6EA00</b>
	• Round		<b>3RK1911-6EB00</b>
	<b>Starter Kit <span style="color: orange;">NEW</span></b>	consists of 3RK1308-0BC00-0CP0 reversing starter (0.9 ... 3 A), 3RK1908-0AP00-0AP0 BaseUnit with 500 V and 24 V AC/DC infeed, and EMC distance module (consisting of 6ES7193-6BP00-0BA0 BaseUnit plus 6ES7133-6CV15-1AM0 BU cover 15 mm)	<b>3RK1908-1SK00</b>

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

Pneumatics > Valve terminals AirLINE SP Typ 8647 (Bürkert Co.)

### Overview



- For pneumatic control of actuators with ET 200SP
- Can be used together with system and IO components of the ET 200SP distributed I/O system.
- Product of the product partners Bürkert Fluid Control Systems, and can only be obtained from Bürkert Fluid Control Systems.

#### Note

Product partners are external companies outside Siemens AG and its associated companies. Information and descriptions of products made by product partners are non-binding, and are the responsibility of the product partners. These products are manufactured independently and under the responsibility of the particular product partner, and are sold and supplied by it under its terms of business and delivery.

Unless compulsory by law, Siemens assumes no liability and makes no guarantee for for these products or for the connection with these products of the product partners. Please refer also to the note on exemption from liability/use of hyperlinks.

### Benefits

- High process safety by using non-return valves and pneumatic infeed modules with pressure monitoring.
- System-wide detailed diagnostics in plain text, and also locally on an LC display
- Quick and easy valve change during operation (hot swapping)
- Reduced number of components in the control cabinet (compact control cabinet is possible)
- Quick installation & configuration of the pneumatic connections

### Application

Valve terminals are widely used in industrial automation, and serve as pilot valves for controlling actuators in the food, pharmaceutical and water treatment industries. In combination with the AirLINE SP, type 8647 from the Bürkert Co., the ET 200SP forms a universal interface between process and plant control, and enables the flexible, modular structure of pilot valves and I/O modules. The valve terminal can also be attached to a control cabinet floor with an AirLINE Quick Adapter, which further reduces the space required in the control cabinet, and significantly simplifies the pneumatic installation.

### More information

For more detailed information about the AirLINE SP, type 8647 (e.g. data sheet, operating manual) please contact Bürkert directly:

<http://www.burkert.com/en/type/8647>

#### Disclaimer of liability

This information and the descriptions have been compiled with great care. However, it is not possible for Siemens to verify that the data supplied by product partners is complete, correct and up-to-date. The possibility that individual items of information might be incorrect, incomplete, or not up-to-date cannot therefore be ruled out. Unless compulsory by law, Siemens accepts no liability for the usability of the data or of the products for the user per se.

## Overview



In terms of design and functionality, the SIMATIC ET 200SP PS single-phase load power supply with automatic range switching of the input voltage is perfectly matched to the SIMATIC ET 200SP. The SIMATIC component and the power supply are wired by means of uniform push-in terminal technology. The 24 V supply provides power to the ET 200SP system components such as the interface module, technology module and communications module, as well as the digital or analog inputs/outputs. Comprehensive certifications, such as UL or GL, facilitate universal use. Its extremely flat design also makes this power supply ideally suited for installation in compact on-site control boxes.

## Ordering data

## Article No.

**SIMATIC ET 200SP PS****6EP7133-6AB00-0BNO**

Stabilized power supply for  
SIMATIC ET 200SP  
Input: 120/230 V AC  
Output: 24 V DC/5 A

**SIMATIC ET 200SP PS****6EP7133-6AE00-0BNO**

Stabilized power supply for  
SIMATIC ET 200SP  
Input: 120/230 V AC  
Output: 24 V DC/10 A

## Technical specifications

Article number	6EP7133-6AB00-0BNO	6EP7133-6AE00-0BNO
Product	SIMATIC ET 200SP PS	SIMATIC ET 200SP PS
Power supply, type	24 V/5 A	24 V/10 A
<b>Input</b>		
Input	1-phase AC	1-phase AC
• Note	Automatic range selection	Automatic range selection
supply voltage		
• 1 at AC rated value	120 V	120 V
• 2 at AC rated value	230 V	230 V
input voltage		
• 1 at AC	85 ... 132 V	85 ... 132 V
• 2 at AC	170 ... 264 V	170 ... 264 V
Wide-range input	No	No
Overvoltage resistance	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms
Mains buffering	at $V_{in} = 93/187 \text{ V}$	at $V_{in} = 93/187 \text{ V}$
Mains buffering at $I_{out \text{ rated}}$ , min.	20 ms; at $V_{in} = 93/187 \text{ V}$	20 ms; at $V_{in} = 93/187 \text{ V}$
Rated line frequency 1	50 Hz	50 Hz
Rated line frequency 2	60 Hz	60 Hz
Rated line range	47 ... 63 Hz	47 ... 63 Hz
input current		
• at rated input voltage 120 V	2.16 A	4.34 A
• at rated input voltage 230 V	1.22 A	1.92 A
Switch-on current limiting (+25 °C), max.	45 A	60 A
$I^2t$ , max.	3.15 A <sup>2</sup> ·s	6.3 A <sup>2</sup> ·s
Built-in incoming fuse	T 3,15 A/250 V (not accessible)	T 6,3 A/250 V (not accessible)
Protection in the mains power input (IEC 898)	recommended LS switch: B/C 6 A/3 A	recommended LS switch: B/C 10 A/6 A



**I/O systems**

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

**Power supplies > 1-phase, 24 V DC (for SIMATIC ET 200SP)****Technical specifications**

Article number	6EP7133-6AB00-0BNO	6EP7133-6AE00-0BNO
Product	SIMATIC ET 200SP PS	SIMATIC ET 200SP PS
Power supply, type	24 V/5 A	24 V/10 A
<b>Output</b>		
Output	Controlled, isolated DC voltage	Controlled, isolated DC voltage
Rated voltage $V_{out}$ DC	24 V	24 V
• output voltage at output 1 at DC rated value	24 V	24 V
Total tolerance, static $\pm$	3 %	3 %
Static mains compensation, approx.	0.1 %	0.1 %
Static load balancing, approx.	1 %	1 %
Residual ripple peak-peak, max.	150 mV	150 mV
Residual ripple peak-peak, typ.	50 mV	50 mV
Spikes peak-peak, max. (bandwidth: 20 MHz)	240 mV	240 mV
Spikes peak-peak, typ. (bandwidth: 20 MHz)	150 mV	150 mV
Adjustment range	22.8 ... 28 V	22.8 ... 28 V
product function output voltage adjustable	Yes	Yes
Output voltage setting	via potentiometer	via potentiometer
Status display	Green LED for 24 V OK	Green LED for 24 V OK
Signaling	Relay contact (NO contact, rating 60 V DC/ 0.3 A) for "24 V OK"	Relay contact (NO contact, rating 60 V DC/ 0.3 A) for "24 V OK"
On/off behavior	Overshoot of $V_{out} < 3 \%$	Overshoot of $V_{out} < 3 \%$
Startup delay, max.	0.3 s	0.3 s
Voltage rise, typ.	30 ms	30 ms
Rated current value $I_{out rated}$	5 A	10 A
Current range	0 ... 6 A	0 ... 12 A
• Note	5 A up to +60°C; +60 ... +70 °C: Derating 3%/K	10 A up to +60°C; +60 ... +70 °C: Derating 3%/K
supplied active power typical	120 W	240 W
short-term overload current		
• on short-circuiting during the start-up typical	15 A	30 A
• at short-circuit during operation typical	15 A	30 A
duration of overloading capability for excess current		
• on short-circuiting during the start-up	800 ms	750 ms
• at short-circuit during operation	800 ms	800 ms
Parallel switching for enhanced performance	Yes	Yes
Numbers of parallel switchable units for enhanced performance	2	2
<b>Efficiency</b>		
Efficiency at $V_{out rated}$ , $I_{out rated}$ , approx.	88 %	90 %
Power loss at $V_{out rated}$ , $I_{out rated}$ , approx.	17 W	26 W
power loss [W] during no-load operation maximum	2.7 W	2.8 W
<b>Closed-loop control</b>		
Dynamic mains compensation ( $V_{in rated} \pm 15 \%$ ), max.	0.3 %	0.3 %
Dynamic load smoothing ( $I_{out}$ : 10/90/10 %), $U_{out} \pm$ typ.	3 %	3 %
Load step setting time 10 to 90%, typ.	1 ms	1 ms
Load step setting time 90 to 10%, typ.	1 ms	1 ms

## Technical specifications

Article number	6EP7133-6AB00-0BN0	6EP7133-6AE00-0BN0
Product	SIMATIC ET 200SP PS	SIMATIC ET 200SP PS
Power supply, type	24 V/5 A	24 V/10 A
<b>Protection and monitoring</b>		
Output overvoltage protection	protection against overvoltage in case of internal fault $V_{out} < 31.8 \text{ V}$	protection against overvoltage in case of internal fault $V_{out} < 31.8 \text{ V}$
Current limitation	7 ... 7.5 A	14 ... 15 A
property of the output short-circuit proof	Yes	Yes
Short-circuit protection	Constant current characteristic	Constant current characteristic
enduring short circuit current RMS value		
• typical	7 A	14.1 A
overcurrent overload capability in normal operation	overload capability 150 % $I_{out \text{ rated}}$ up to 5 s/min	overload capability 150 % $I_{out \text{ rated}}$ up to 5 s/min
Overload/short-circuit indicator	-	-
<b>Safety</b>		
Primary/secondary isolation	Yes	Yes
galvanic isolation	Safety extra-low output voltage $U_{out}$ acc. to EN 60950-1 and EN 50178	Safety extra-low output voltage $U_{out}$ acc. to EN 60950-1 and EN 50178
Protection class	Class I	Class I
leakage current		
• maximum	3.5 mA	3.5 mA
• typical	1 mA	1 mA
Degree of protection (EN 60529)	IP20	IP20
<b>Approvals</b>		
CE mark	Yes	Yes
UL/cUL (CSA) approval	cULus-Listed (UL61010-2-201, CSA C22.2 No.142), cCSAus (CSA C22.2 No. 60950-1, UL 60950-1)	cULus-Listed (UL61010-2-201, CSA C22.2 No.142), cCSAus (CSA C22.2 No. 60950-1, UL 60950-1)
certificate of suitability NEC Class 2	No	No
CB approval	Yes	Yes
certificate of suitability EAC approval	Yes	Yes
Marine approval	BV, DNV GL	BV, DNV GL
<b>EMC</b>		
Emitted interference	EN 61000-6-3 Class B	EN 61000-6-3 Class B
Supply harmonics limitation	EN 61000-3-2	EN 61000-3-2
Noise immunity	EN 61000-6-2	EN 61000-6-2
<b>environmental conditions</b>		
ambient temperature		
• during operation	-30 ... +70 °C	-30 ... +70 °C
- Note	with natural convection	with natural convection
• during transport	-40 ... +85 °C	-40 ... +85 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C
Humidity class according to EN 60721	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K3, 5 ... 95% no condensation
<b>Mechanics</b>		
Connection technology	Push-in terminals	Push-in terminals
Connections		
• Supply input	L, N, PE: 1 push-in terminal each for 0.2 ... 2.5 mm <sup>2</sup> single-core/finely stranded	L, N, PE: 1 push-in terminal each for 0.2 ... 2.5 mm <sup>2</sup> single-core/finely stranded
• Output	+, -: 2 push-in terminals each for 0.2 ... 2.5 mm <sup>2</sup>	+, -: 2 push-in terminals each for 0.2 ... 2.5 mm <sup>2</sup>
• Auxiliary	Signaling contact: 2 push-in terminals for 0.2 ... 2.5 mm <sup>2</sup>	Signaling contact: 2 push-in terminals for 0.2 ... 2.5 mm <sup>2</sup>
• signaling contact	2 push-in terminals for 0.2 ... 2.5 mm <sup>2</sup>	2 push-in terminals for 0.2 ... 2.5 mm <sup>2</sup>
product function		
• removable terminal at input	Yes	Yes
• removable terminal at output	Yes	Yes

**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

Power supplies &gt; 1-phase, 24 V DC (for SIMATIC ET 200SP)

**Technical specifications**

Article number	6EP7133-6AB00-0BNO	6EP7133-6AE00-0BNO
Product	SIMATIC ET 200SP PS	SIMATIC ET 200SP PS
Power supply, type	24 V/5 A	24 V/10 A
width of the enclosure	160 mm	160 mm
height of the enclosure	117 mm	117 mm
depth of the enclosure	74 mm	74 mm
required spacing		
• top	50 mm	50 mm
• bottom	50 mm	50 mm
• left	0 mm	0 mm
• right	0 mm	0 mm
Weight, approx.	0.5 kg	0.7 kg
product feature of the enclosure housing can be lined up	Yes	Yes
Installation	Snaps onto DIN rail EN 60715 35x7.5/15	Snaps onto DIN rail EN 60715 35x7.5/15
electrical accessories	Redundancy module, buffer module, selectivity module, DC UPS	Redundancy module, buffer module, selectivity module, DC UPS
MTBF at 40 °C	1 598 441 h	1 114 510 h
other information	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)

## Overview



With the BaseUnits (BUs), the ET 200SP offers a rugged and service-friendly design with permanent wiring:

- No tools needed for one-handed wiring using push-in terminals
- Actuation of the spring NC contacts with a standard screwdriver, with a blade width up to 3.5 mm
- Outstanding access due to arrangement of measuring tap, spring NC contacts and cable entry in columns, while at the same time reducing the space required by 64%
- Fault-proof color coding of the spring NC contacts for better orientation in the terminal panel
- Replacement of I/O modules during operation without affecting the wiring
- Operation with module gaps (gaps without I/O module)
- Automatic coding of the I/O modules prevents destruction of the electronics if a module is accidentally inserted in the wrong slot during replacement
- High EMC interference immunity:
  - self-assembling shielded backplane bus
  - multi-layer conductor plate with shield levels for interference-free signal transmission from the terminal to the I/O module
  - system-integrated, space-saving shield connection for quick installation
- Self-assembling potential groups without external wiring or jumpers
- Replaceable terminal box
- Side-by-side latching of the BUs for high mechanical and EMC loads
- Optional module-specific color identification of the terminals according to the color code CC
- Optional equipment marking using slide-in equipment labeling plates

An ET 200SP station can be expanded via one 'BU-Send' BaseUnit with a "BA-Send" BusAdapter plugged onto it with up to 16 modules from the ET 200AL series of I/O devices with IP67 protection.

## Ordering data

## Article No.

## Article No.

## Type A0 BaseUnits

## BU15-P16+A10+2D

BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new potential group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP20-0DA0  
6ES7193-6BP20-2DA0

## BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new potential group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP00-0DA0  
6ES7193-6BP00-2DA0

## 2BU15-P16+A0+2DB

Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (light/dark) with 16 push-in terminals to the module; for starting a new potential group (max. 10 A)

- Pack of 1 unit

6ES7193-6BP60-0DA0

## BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the potential group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP20-0BA0  
6ES7193-6BP20-2BA0

## BU15-P16+A0+2B

BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the potential group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP00-0BA0  
6ES7193-6BP00-2BA0

## 2BU15-P16+A0+2B

Double BaseUnit for holding 2 I/O modules; BU type A0; BaseUnit (dark/dark) with 16 push-in terminals to the module; for continuing the potential group

- Pack of 1 unit

6ES7193-6BP60-0BA0

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### BaseUnits

Ordering data	Article No.	Ordering data	Article No.
<b>Type B0 BaseUnits</b>		<b>Type F0 BaseUnits</b>	
<b>BU20-P12+A4+0B</b>		<b>BU20-P8+A4+0B</b>	<b>6ES7193-6BP20-0BF0</b>
BU type B0; BaseUnit (dark) with 12 push-in terminals (1 ... 12) to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the potential group; 1 unit		BU type F0; BaseUnit (dark) with 8 push-in terminals to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the potential group	
<ul style="list-style-type: none"> <li>• Pack of 1 unit</li> <li>• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.</li> </ul>	<b>6ES7193-6BP20-0BB0</b> <b>6ES7193-6BP20-2BB0</b>	<b>BaseUnits type U0</b>	
<b>Type B1 BaseUnits</b>		<b>BU20-P16+A0+2D</b>	
<b>BU20-P12+A0+4B</b>		BU type U0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new potential group (max. 10 A)	
BU type B1; BaseUnit (dark) with 12 push-in terminals to the module; for continuing the potential group; 1 unit		<ul style="list-style-type: none"> <li>• Pack of 1 unit</li> <li>• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.</li> </ul>	<b>6ES7193-6BP00-0DU0</b> <b>6ES7193-6BP00-2DU0</b>
<ul style="list-style-type: none"> <li>• Pack of 1 unit</li> <li>• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.</li> </ul>	<b>6ES7193-6BP20-0BB1</b> <b>6ES7193-6BP20-2BB1</b>	<b>BU20-P16+A0+2B</b>	
<b>Type C0 BaseUnits</b>		BU type U0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the potential group	
<b>BU20-P6+A2+4D</b>	<b>6ES7193-6BP20-0DC0</b>	<ul style="list-style-type: none"> <li>• Pack of 1 unit</li> <li>• Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.</li> </ul>	<b>6ES7193-6BP00-0BU0</b> <b>6ES7193-6BP00-2BU0</b>
BU type C0; BaseUnit (light) with 6 push-in terminals (1...6) to the module and an additional 2 AUX terminals; new potential group		<b>Station expansion with IP67 I/O system ET 200AL</b>	
<b>Type C1 BaseUnits</b>		<b>BaseUnit BU-Send</b>	<b>6ES7193-6BN00-0NE0</b>
<b>BU20-P6+A2+4B</b>	<b>6ES7193-6BP20-0BC1</b>	<b>ET 200SP BusAdapter BA-Send 1 x FC</b>	<b>6ES7193-6AS00-0AA0</b>
BU type C1; BaseUnit (dark) with 6 push-in terminals (1 ... 6) to the module and 2 AUX terminals; bridged to the left		<b>Accessories</b>	
<b>Type D0 BaseUnits</b>		<b>Equipment labeling plate</b>	<b>6ES7193-6LF30-0AW0</b>
<b>BU20-P12+A0+0B</b>	<b>6ES7193-6BP00-0BD0</b>	10 sheets of 16 labels	
BU type D0; BaseUnit (dark) with 12 push-in terminals, without AUX terminals, bridged to the left		<b>BU cover</b>	
		For covering empty slots (gaps); 5 units	
<b>Type A1 BaseUnits (with temperature detection)</b>		<ul style="list-style-type: none"> <li>• 15 mm wide</li> <li>• 20 mm wide</li> </ul>	<b>6ES7133-6CV15-1AM0</b> <b>6ES7133-6CV20-1AM0</b>
<b>BU15-P16+A0+12D/T</b>	<b>6ES7193-6BP40-0DA1</b>	<b>Shield connection</b>	<b>6ES7193-6SC00-1AM0</b>
BU type A1; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new potential group (max. 10 A)		5 shield supports and 5 shield terminals	
<b>BU15-P16+A0+2D/T</b>	<b>6ES7193-6BP00-0DA1</b>		
BU type A1; BaseUnit (light) with 16 push-in terminals to the module; for starting a new potential group (max. 10 A)			
<b>BU15-P16+A0+12B/T</b>	<b>6ES7193-6BP40-0BA1</b>		
BU type A1; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the potential group			
<b>BU15-P16+A0+2B/T</b>	<b>6ES7193-6BP00-0BA1</b>		
BU type A1; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the potential group			

## Ordering data

## Color-coded labels

- Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units
- Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 50 units
- Color code CC02, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units
- Color code CC02, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 50 units
- Color code CC03, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units
- Color code CC04, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units
- Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units
- Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units
- Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units

## Article No.

6ES7193-6CP01-2MA0

6ES7193-6CP01-4MA0

6ES7193-6CP02-2MA0

6ES7193-6CP02-4MA0

6ES7193-6CP03-2MA0

6ES7193-6CP04-2MA0

6ES7193-6CP71-2AA0

6ES7193-6CP72-2AA0

6ES7193-6CP73-2AA0

## Color-coded labels (continued)

- Color code CC74, for 2x5 additional terminals, 5 x red, 5 x blue, BU type A1 with push-in terminals; 10 units
- Color code CC81, for 4 AUX terminals 1 A to 4 A, yellow/green, for BaseUnit type B0; 10 units
- Color code CC82, for 4 AUX terminals 1 A to 4 A, red, for BaseUnit type B0; 10 units
- Color code CC83, for 4 AUX terminals 1 A to 4 A, blue, for BaseUnit type B0; 10 units
- Color code CC41, module-specific, for 12 push-in terminals; for BaseUnit type B1; 10 units
- Color code CC84, for 2 AUX terminals 1 A to 2 A, yellow/green, for BaseUnit type C0; 10 units
- Color code CC85, for 2 AUX terminals 1 A to 2 A, red, for BaseUnit type C0; 10 units
- Color code CC86, for 2 AUX terminals 1 A to 2 A, blue, for BaseUnit type C0; 10 units

## Article No.

6ES7193-6CP74-2AA0

6ES7193-6CP81-2AB0

6ES7193-6CP82-2AB0

6ES7193-6CP83-2AB0

6ES7193-6CP41-2MB0

6ES7193-6CP84-2AC0

6ES7193-6CP85-2AC0

6ES7193-6CP86-2AC0

## Technical specifications

Article number	6ES7193-6BP20-0DA0	6ES7193-6BP00-0DA0	6ES7193-6BP60-0DA0	6ES7193-6BP20-0BA0	6ES7193-6BP00-0BA0	6ES7193-6BP60-0BA0
	BaseUnit Type A0, BU15-P16+A10+2D	BaseUnit Type A0, BU15-P16+A0+2D	2-slot BU Typ A0, 2BU15-P16+A0+2DB, PU 1	BaseUnit Type A0, BU15-P16+A10+2B	BaseUnit Type A0, BU15-P16+A0+2B	2-slot BU Typ A0, 2BU15-P16+A0+2B, PU 1
<b>General information</b>						
Product type designation	BU type A0	BU type A0	2-fold BU type A0	BU type A0	BU type A0	2-fold BU type A0
<b>Hardware configuration</b>						
<b>Slots</b>						
• Number of slots	1; Type A0	1; Type A0	2; Type A0	1; Type A0	1; Type A0	2; Type A0
<b>Ambient conditions</b>						
<b>Ambient temperature during operation</b>						
• horizontal installation, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>						
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Connection method</b>						
<b>Terminals</b>						
• Terminal type	Push-in terminal	Push-in terminal	Push-in terminal	Push-in terminal	Push-in terminal	Push-in terminal
• Conductor cross-section, min.	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>
• Conductor cross-section, max.	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**BaseUnits****Technical specifications**

Article number	<b>6ES7193-6BP20-0DA0</b> BaseUnit Type A0, BU15-P16+A10+2D	<b>6ES7193-6BP00-0DA0</b> BaseUnit Type A0, BU15-P16+A0+2D	<b>6ES7193-6BP60-0DA0</b> 2-slot BU Typ A0, 2BU15-P16+A0+2DB, PU 1	<b>6ES7193-6BP20-0BA0</b> BaseUnit Type A0, BU15-P16+A10+2B	<b>6ES7193-6BP00-0BA0</b> BaseUnit Type A0, BU15-P16+A0+2B	<b>6ES7193-6BP60-0BA0</b> 2-slot BU Typ A0, 2BU15-P16+A0+2B, PU 1
• Number of process terminals to I/O module	16	16	16; Pro slot	16	16; Pro slot	16; Pro slot
• Number of terminals to AUX bus	10	0	0	10	0	0
• Number of add-on terminals	0	0	0	0	0	0
• Number of terminals with connection to P1 and P2 bus	2	2	2; Pro slot	2	2; Pro slot	2; Pro slot
<b>Dimensions</b>						
Width	15 mm	15 mm	30 mm	15 mm	15 mm	30 mm
Height	141 mm	117 mm	117 mm	141 mm	117 mm	117 mm
Depth	35 mm	35 mm	35 mm	35 mm	35 mm	35 mm
<b>Weights</b>						
Weight, approx.	50 g	40 g	80 g	50 g	40 g	80 g
Article number	<b>6ES7193-6BP20-0BB0</b> BaseUnit Type B0, BU20-P12+A4+0B	<b>6ES7193-6BP20-0BB1</b> BaseUnit Type B1, BU20-P12+A0+4B, PU 1	<b>6ES7193-6BP20-0DC0</b> BaseUnit Type C0, BU20-P6+A2+4D	<b>6ES7193-6BP20-0BC1</b> BaseUnit Type C1, BU20-P6+A2+4B	<b>6ES7193-6BP00-0BD0</b> BaseUnit Type D0, BU20-P12+A0+0B	<b>6ES7193-6BP20-0BF0</b> BaseUnit Type F0, BU20-P6+A4+0B
<b>General information</b>						
Product type designation	BU type B0	BU type B1	BU type C0	BU type C1	BU type D0	BU type F0
<b>Hardware configuration</b>						
<b>Slots</b>						
• Number of slots	1	1	1	1; Type C1	1; Type D0	1; Type F0
<b>Ambient conditions</b>						
<b>Ambient temperature during operation</b>						
• horizontal installation, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>						
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m
<b>Connection method</b>						
<b>Terminals</b>						
• Terminal type	Push-in terminal	Push-in terminal	Push-in terminal	Push-in terminal	Push-in terminal	Push-in terminal
• Conductor cross-section, min.	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>
• Conductor cross-section, max.	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>
• Number of process terminals to I/O module	12; Pro slot	12; Pro slot	12; Pro slot	16; Pro slot	12; Pro slot	12; Pro slot
• Number of terminals to AUX bus	0	0	0	0	0	0
• Number of add-on terminals	0	0	0	0	0	0
• Number of terminals with connection to P1 and P2 bus	0; Pro slot	0; Pro slot	0; Pro slot	2; Pro slot	0; Pro slot	0; Pro slot
<b>Dimensions</b>						
Width	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm
Height	117 mm	117 mm	117 mm	117 mm	117 mm	117 mm
Depth	35 mm	35 mm	35 mm	35 mm	35 mm	35 mm
<b>Weights</b>						
Weight, approx.	48 g	48 g	47 g	47 g	47 g	48 g

### Technical specifications

Article number	6ES7193-6BP40-0DA1 BaseUnit Type A1, BU15-P16+A0+12D/T	6ES7193-6BP00-0DA1 BaseUnit Type A1, BU15-P16+A0+2D/T	6ES7193-6BP40-0BA1 BaseUnit Type A1, BU15-P16+A0+12B/T	6ES7193-6BP00-0BA1 BaseUnit Type A1, BU15-P16+A0+2B/T
<b>General information</b>				
Product type designation	BU type A1	BU type A1	BU type A1	BU type A1
<b>Hardware configuration</b>				
<b>Slots</b>				
• Number of slots	1; Type A1	1; Type A1	1; Type A1	1; Type A1
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Connection method</b>				
<b>Terminals</b>				
• Terminal type	Push-in terminal	Push-in terminal	Push-in terminal	Push-in terminal
• Conductor cross-section, min.	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>	0.14 mm <sup>2</sup>
• Conductor cross-section, max.	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>
• Number of process terminals to I/O module	16	16	16	16
• Number of terminals to AUX bus	0	0	0	0
• Number of add-on terminals	2x5	0	2x5	0
• Number of terminals with connection to P1 and P2 bus	2	2	2	2
<b>Dimensions</b>				
Width	15 mm	15 mm	15 mm	15 mm
Height	141 mm	117 mm	141 mm	117 mm
Depth	35 mm	35 mm	35 mm	35 mm
<b>Weights</b>				
Weight, approx.	50 g	40 g	50 g	40 g
Article number	6ES7193-6BP00-0DU0 BaseUnit Type U0, BU20-P16+A0+2D, PU 1		6ES7193-6BP00-0BU0 BaseUnit Type U0, BU20-P16+A0+2B, PU 1	
<b>General information</b>				
Product type designation	BU type U0		BU type U0	
<b>Hardware configuration</b>				
<b>Slots</b>				
• Number of slots	1		1	
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-30 °C		-30 °C	
• horizontal installation, max.	60 °C		60 °C	
• vertical installation, min.	-30 °C		-30 °C	
• vertical installation, max.	50 °C		50 °C	
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m		2 000 m; On request: Installation altitudes greater than 2 000 m	



**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**BaseUnits****Technical specifications**

Article number	<b>6ES7193-6BP00-0DU0</b> BaseUnit Type U0, BU20-P16+A0+2D, PU 1	<b>6ES7193-6BP00-0BU0</b> BaseUnit Type U0, BU20-P16+A0+2B, PU 1
<b>Connection method</b>		
<b>Terminals</b>		
• Terminal type	Push-in terminal	Push-in terminal
• Conductor cross-section, min.	0.14 mm <sup>2</sup> ; 0.2 mm <sup>2</sup> without wire end ferrule	0.14 mm <sup>2</sup> ; 0.2 mm <sup>2</sup> without wire end ferrule
• Conductor cross-section, max.	2.5 mm <sup>2</sup> ; 1.5 mm <sup>2</sup> with wire end ferrule	2.5 mm <sup>2</sup> ; 1.5 mm <sup>2</sup> with wire end ferrule
• Number of process terminals to I/O module	16	16
• Number of terminals to AUX bus	0	0
• Number of add-on terminals	0	0
• Number of terminals with connection to P1 and P2 bus	2	2
<b>Dimensions</b>		
Width	20 mm	20 mm
Height	117 mm	117 mm
Depth	35 mm	35 mm
<b>Weights</b>		
Weight, approx.	50 g	50 g

Article number	<b>6ES7193-6BN00-0NE0</b> ET 200SP, BaseUnit BU-Send
<b>Hardware configuration</b>	
<b>Slots</b>	
• Number of slots	1
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m
<b>Dimensions</b>	
Width	20 mm
Height	117 mm
Depth	35 mm
<b>Weights</b>	
Weight, approx.	30 g

## Overview



With the BaseUnits, the ET 200SP offers a rugged and service-friendly design with permanent wiring:

- No tools needed for one-handed wiring using push-in terminals
- Outstanding access due to arrangement of measuring tap, spring NC contacts and cable entry in columns, while at the same time reducing the space required by 64%
- Fault-proof color coding of the spring NC contacts for better orientation in the terminal panel
- Replacement of I/O modules during operation without affecting the wiring

- Operation with module gaps (missing I/O module)
- Automatic coding of the I/O modules prevents destruction of the electronics if a module is accidentally inserted in the wrong slot during replacement
- High immunity to electromagnetic interference due to
  - self-assembling shielded backplane bus
  - multi-layer conductor plate with shield levels for interference-free signal transmission from the terminal to the I/O module
  - system-integrated, space-saving shield connection for quick installation
- Self-assembling potential groups without external wiring or jumpers
- Replaceable terminal box
- Side-by-side latching of the BUs for high mechanical load capacity
- Optional module-specific color identification of the terminals according to the color code CC
- Actuation of the spring NC contacts with a standard screwdriver, with a blade width up to 3.5 mm

**Note:**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data	Article No.	Ordering data	Article No.
<b>SIPLUS BaseUnits type A0</b>		<b>SIPLUS BaseUnits type A1 (with temperature detection)</b>	
<b>BU15-P16+A10+2D</b> (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)	<b>6AG1193-6BP20-7DA0</b>	<b>BU15-P16+A0+12D/T</b> (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (light) with 16 process terminals (1...16) to the module and also 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new load group (max. 10 A)	<b>6AG1193-6BP40-7DA1</b>
<b>BU15-P16+A0+2D</b> (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	<b>6AG1193-6BP00-7DA0</b>	<b>BU15-P16+A0+2D/T</b> (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	<b>6AG1193-6BP00-7DA1</b>
<b>BU15-P16+A10+2B</b> (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group	<b>6AG1193-6BP20-7BA0</b>	<b>BU15-P16+A0+12B/T</b> (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (dark) with 16 process terminals (1...16) to the module and also 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the load group	<b>6AG1193-6BP40-7BA1</b>
<b>BU15-P16+A0+2B</b> (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group	<b>6AG1193-6BP00-7BA0</b>	<b>BU15-P16+A0+2B/T</b> (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group	<b>6AG1193-6BP00-7BA1</b>

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### SIPLUS BaseUnits

Ordering data	Article No.	Article No.
<b>SIPLUS BaseUnits type B0</b>		<b>SIPLUS BaseUnits type F0</b>
<b>BU20-P12+A4+0B</b> (Extended temperature range and exposure to environmental substances) BU type B0; BaseUnit (dark) with 12 process terminals (1...12) to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the load group; 1 unit	<b>6AG1193-6BP20-7BB0</b>	<b>BU20-P8+A4+0B</b> (Extended temperature range and exposure to environmental substances) BU type F0; BaseUnit (dark) with 8 process terminals to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the load group
<b>SIPLUS BaseUnits type B1</b>		<b>SIPLUS BaseUnits type U0</b>
<b>BU20-P12+A0+4B</b> (Extended temperature range and exposure to environmental substances) BU type B1; BaseUnit (dark) with 12 process terminals to the module; for continuing the load group; 1 unit	<b>6AG1193-6BP20-7BB1</b>	<b>BU20-P16+A0+2D</b> (Extended temperature range and exposure to environmental substances) BU type U0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)
<b>SIPLUS BaseUnits type C0</b>		<b>BU20-P16+A0+2B</b>
<b>BU20-P6+A2+4D</b> (Extended temperature range and exposure to environmental substances) BU type C0; BaseUnit (light) with 6 push-in terminals (1...6) to the module and 2 AUX terminals; new load group	<b>6AG1193-6BP20-7DC0</b>	<b>6AG1193-6BP00-7BU0</b> (Extended temperature range and exposure to environmental substances) BU type U0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group
<b>SIPLUS BaseUnits type D0</b>		<b>Accessories</b>
<b>BU20-P12+A0+0B</b> (Extended temperature range and exposure to environmental substances) BU type D0; BaseUnit (dark) with 12 push-in terminals, without AUX terminals, bridged to the left	<b>6AG1193-6BP00-7BD0</b>	<b>SIPLUS Mounting Kit ET 200SP</b> Mounting accessories for use with increased mechanical vibration and shock loads. Can be used with SIPLUS BaseUnits with heights up to 117 mm, types A0/A1 without AUX or add-on terminals as well as types B0, B1, C0, C1, D0, U0
		<b>Other accessories</b> See SIMATIC ET 200SP BaseUnits, page 10/240

10

### Technical specifications

Article number	6AG1193-6BP00-7BA0	6AG1193-6BP00-7DA0	6AG1193-6BP20-7BA0	6AG1193-6BP20-7DA0
Based on	6ES7193-6BP00-0BA0 SIPLUS ET 200SP BU15-P16+A0+2B	6ES7193-6BP00-0DA0 SIPLUS ET 200SP BU15-P16+A0+2D	6ES7193-6BP20-0BA0 SIPLUS ET 200SP BU15-P16+A10+2B	6ES7193-6BP20-0DA0 SIPLUS ET 200SP BU15-P16+A10+2D
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation

### Technical specifications

Article number	6AG1193-6BP00-7BA0	6AG1193-6BP00-7DA0	6AG1193-6BP20-7BA0	6AG1193-6BP20-7DA0
Based on	6ES7193-6BP00-0BA0 SIPLUS ET 200SP BU15-P16+A0+2B	6ES7193-6BP00-0DA0 SIPLUS ET 200SP BU15-P16+A0+2D	6ES7193-6BP20-0BA0 SIPLUS ET 200SP BU15-P16+A10+2B	6ES7193-6BP20-0DA0 SIPLUS ET 200SP BU15-P16+A10+2D
<b>Resistance</b>				
<b>Coolants and lubricants</b>				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Usage in industrial process technology</b>				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**SIPLUS BaseUnits****Technical specifications**

Article number	<b>6AG1193-6BP00-7BA1</b>	<b>6AG1193-6BP00-7DA1</b>	<b>6AG1193-6BP40-7BA1</b>	<b>6AG1193-6BP40-7DA1</b>
Based on	<b>6ES7193-6BP00-0BA1</b> SIPLUS ET 200SP BU15-P16+A0+2B/T	<b>6ES7193-6BP00-0DA1</b> SIPLUS ET 200SP BU15-P16+A0+2D/T	<b>6ES7193-6BP40-0BA1</b> SIPLUS ET 200SP BU15-P16+A0+12B/T	<b>6ES7193-6BP40-0DA1</b> SIPLUS ET 200SP BU15-P16+A0+12D/T
<b>General information</b>				
Product type designation	BU type A1	BU type A1	BU type A1	BU type A1
<b>Hardware configuration</b>				
<b>Slots</b>				
• Number of slots	1	1	1	1
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
<b>Resistance</b>				
<b>Coolants and lubricants</b>				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		
<b>Use on ships/at sea</b>				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		

#### Technical specifications

Article number	6AG1193-6BP00-7BA1	6AG1193-6BP00-7DA1	6AG1193-6BP40-7BA1	6AG1193-6BP40-7DA1
Based on	6ES7193-6BP00-0BA1 SIPLUS ET 200SP BU15-P16+A0+2B/T	6ES7193-6BP00-0DA1 SIPLUS ET 200SP BU15-P16+A0+2D/T	6ES7193-6BP40-0BA1 SIPLUS ET 200SP BU15-P16+A0+12B/T	6ES7193-6BP40-0DA1 SIPLUS ET 200SP BU15-P16+A0+12D/T
<b>Usage in industrial process technology</b>				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Article number	6AG1193-6BP20-7BB0	6AG1193-6BP20-7BB1	6AG1193-6BP20-7DC0	6AG1193-6BP00-7BD0
Based on	6ES7193-6BP20-0BB0 SIPLUS ET 200SP BU20-P12+A4+0B	6ES7193-6BP20-0BB1 SIPLUS ET 200SP BU20-P12+A0+4B TYP B1	6ES7193-6BP20-0DC0 SIPLUS ET 200SP BU20-P6+A2+4D	6ES7193-6BP00-0BD0 SIPLUS ET 200SP BU20-P12+A0+0B
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax	60 °C; = Tmax	70 °C; = Tmax
• vertical installation, min.	-40 °C		-40 °C; = Tmin	-40 °C
• vertical installation, max.	50 °C		50 °C; = Tmax	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	3 000 m	3 000 m	3 000 m	3 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... Tmax -5K) at 795 hPa ... 701 hPa (+2 000 m ... +3 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... Tmax -5K) at 795 hPa ... 701 hPa (+2 000 m ... +3 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... Tmax -5K) at 795 hPa ... 701 hPa (+2 000 m ... +3 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... Tmax -5K) at 795 hPa ... 701 hPa (+2 000 m ... +3 000 m)
<b>Relative humidity</b>				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
<b>Resistance</b>				
<b>Coolants and lubricants</b>				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air

**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**SIPLUS BaseUnits****Technical specifications**

Article number	<b>6AG1193-6BP20-7BB0</b>	<b>6AG1193-6BP20-7BB1</b>	<b>6AG1193-6BP20-7DC0</b>	<b>6AG1193-6BP00-7BD0</b>
Based on	<b>6ES7193-6BP20-0BB0</b> SIPLUS ET 200SP BU20-P12+A4+0B	<b>6ES7193-6BP20-0BB1</b> SIPLUS ET 200SP BU20-P12+A0+4B TYP B1	<b>6ES7193-6BP20-0DC0</b> SIPLUS ET 200SP BU20-P6+A2+4D	<b>6ES7193-6BP00-0BD0</b> SIPLUS ET 200SP BU20-P12+A0+0B
<b>Use in stationary industrial systems</b>				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Usage in industrial process technology</b>				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

## Technical specifications

Article number	6AG1193-6BP20-2BF0	6AG1193-6BP00-7BU0	6AG1193-6BP00-7DU0
Based on	6ES7193-6BP20-0BF0	6ES7193-6BP00-0BU0	6ES7193-6BP00-0DU0
	SIPLUS ET 200SP BU20-P8+A4+0B	SIPLUS ET 200SP BU20-P16+A0+2B	SIPLUS ET 200SP BU20-P16+A0+2D
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax
• vertical installation, min.	-40 °C; = Tmin		
• vertical installation, max.	50 °C; = Tmax		
<b>Altitude during operation relating to sea level</b>			
• Installation altitude above sea level, max.	5 000 m	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
<b>Relative humidity</b>			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
<b>Resistance</b>			
<b>Coolants and lubricants</b>			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)



**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**SIPLUS BaseUnits****Technical specifications**

Article number	<b>6AG1193-6BP20-2BF0</b>	<b>6AG1193-6BP00-7BU0</b>	<b>6AG1193-6BP00-7DU0</b>
Based on	<b>6ES7193-6BP20-0BF0</b>	<b>6ES7193-6BP00-0BU0</b>	<b>6ES7193-6BP00-0DU0</b>
	SIPLUS ET 200SP BU20-P8+A4+0B	SIPLUS ET 200SP BU20-P16+A0+2B	SIPLUS ET 200SP BU20-P16+A0+2D
<b>Usage in industrial process technology</b>			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

**Overview**

SIMATIC BusAdapter BA 2xFC for direct laying of the PROFINET cable via FastConnect connection



ET 200SP BusAdapter BA-Send for expansion of an ET 200SP station with ET 200AL modules



SIMATIC BusAdapter BA LC/RJ45 for use as a system-integrated media converter from copper (RJ45) to glass fiber (LC)

For SIMATIC ET 200SP, two types of BusAdapter (BA) are available for selection:

- ET 200SP BusAdapter "BA-Send"  
for expansion of an ET 200SP station with up to 16 modules from the ET 200AL I/O series with IP67 protection via an ET connection
- SIMATIC BusAdapter  
for the free selection of the connection system (pluggable or direct connection) and physical PROFINET connection (copper, POF, HCS or glass fiber) to devices with a SIMATIC BusAdapter interface.  
One further advantage of the SIMATIC BusAdapter: only the adapter needs to be replaced for subsequent conversion to the rugged FastConnect technology or a fiber-optic connection, or to repair defective RJ45 sockets.

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### BusAdapters

Ordering data	Article No.	Ordering data	Article No.
<b>BA 2xRJ45 BusAdapter</b> For IM 155-6PN ST, HF	<b>6ES7193-6AR00-0AA0</b>	<b>BA 2XLC BusAdapter</b> For IM 155-6PN HF; 2 glass FO connections	<b>6ES7193-6AG00-0AA0</b>
<b>BA 2xFC BusAdapter</b> For IM 155-6PN ST, HF; for increased resistance to vibration and EMC loads	<b>6ES7193-6AF00-0AA0</b>	<b>BA LC/RJ45 BusAdapter</b> For IM 155-6PN HF; with media converter glass FO - copper; 1 x LC connection, 1 x RJ45 connection	<b>6ES7193-6AG20-0AA0</b>
<b>BusAdapter BA 2xM12</b> For IM 155-6PN ST, HF; 2 x M12 push-pull sockets, D-coding, also suitable for standard M12. For PROFINET	<b>6ES7193-6AM00-0AA0</b>	<b>BA LC/FC BusAdapter</b> For IM 155-6PN HF; with media converter glass FO - copper; 1 x LC connection, 1 x FastConnect connection	<b>6ES7193-6AG40-0AA0</b>
<b>BA 2xSCRJ BusAdapter</b> For IM 155-6PN HF; fiber-optic connection for POF or PCF cables up to 250 m, with monitoring of damping	<b>6ES7193-6AP00-0AA0</b>	<b>Station expansion with IP67 I/O system ET 200AL</b>	
<b>BA SCRJ/RJ45 BusAdapter</b> For IM 155-6PN HF; with media converter FOC-Cu; 1 x SCRJ FO connection, 1 x RJ45 connection	<b>6ES7193-6AP20-0AA0</b>	<b>ET 200SP BA-Send 1 x FC BusAdapter</b>	<b>6ES7193-6AS00-0AA0</b>
<b>BA SCRJ/FC BusAdapter</b> For IM 155-6PN HF; with media converter FOC-Cu; 1 x SCRJ FO connection, 1 x FastConnect connection	<b>6ES7193-6AP40-0AA0</b>	<b>BaseUnit BU-Send</b>	<b>6ES7193-6BN00-0NE0</b>
		<b>Accessories</b>	
		<b>Equipment labeling plate</b>	<b>6ES7193-6LF30-0AW0</b>
		10 sheets of 16 labels, for printing with thermal transfer card printer or plotter	

### Technical specifications

Article number	<b>6ES7193-6AR00-0AA0</b>	<b>6ES7193-6AF00-0AA0</b>	<b>6ES7193-6AM00-0AA0</b>	<b>6ES7193-6AP00-0AA0</b>	<b>6ES7193-6AP20-0AA0</b>
	ET 200SP, Busadapter BA 2xRJ45	ET 200SP, Busadapter BA 2XFC	SIMATIC Busadapter BA 2xM12	ET 200SP, Busadapter BA 2xSCRJ	ET 200SP, Busadapter BA SCRJ/RJ45
<b>General information</b>					
Product type designation	BA 2x RJ45	BA 2xFC	BA 2x M12 Bus- Adapter	BA 2xSCRJ	BA SCRJ/RJ45
<b>Interfaces</b>					
Number of PROFINET interfaces	1	1	1	1; 2 ports (switch) SCRJ FO	1; 2 ports (SCRJ + RJ45)
<b>Supports protocol for PROFINET IO</b>					
• Number of RJ45 ports	2				1
• Number of FC (FastConnect) connections		2			
• Number of SCRJ ports	0			2	1
• Number of LC ports	0			0	0
• Number of M12 ports			2		
<b>Cable length</b>					
- PCF				100 m	100 m
- Plastic FOC (POF)				50 m	50 m
- PCF-GI				250 m	250 m
- Cu conductors	100 m	100 m	100 m		100 m
<b>Altitude during operation relating to sea level</b>					
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m
<b>Dimensions</b>					
Width	20 mm	20 mm	20 mm	20 mm	20 mm
Height	69.5 mm	69.5 mm	73.5 mm	69.5 mm	
Depth	59 mm	59 mm	59 mm	59 mm	
<b>Weights</b>					
Weight, approx.	46 g	53 g	59 g	50 g	50 g

#### Technical specifications

Article number	<b>6ES7193-6AP40-0AA0</b> ET 200SP, Bus adapter BA SCRJ/FC	<b>6ES7193-6AG00-0AA0</b> SIMATIC Busadapter BA 2xLC	<b>6ES7193-6AG20-0AA0</b> SIMATIC Busadapter BA LC/RJ45	<b>6ES7193-6AG40-0AA0</b> SIMATIC Bus adapter BA LC/FC
<b>General information</b>				
Product type designation	BA SCRJ/FC	BA 2xLC	BA LC/RJ45	BA LC/FC
<b>Interfaces</b>				
Number of PROFINET interfaces	1; 2 ports (SCRJ + FC)	1; 2 ports (switch) LC Multimode Glass Fibre	1; 2 ports (switch) LC / RJ45	1
<b>Supports protocol for PROFINET IO</b>				
• Number of RJ45 ports			1	
• Number of FC (FastConnect) connections	1			1
• Number of SCRJ ports	1	0	0	0
• Number of LC ports	0	2; Wavelength of 1 270 ... 1 380 nm, corresponds to 100BASE-FX	1; Wavelength of 1 270 ... 1 380 nm, corresponds to 100BASE-FX	1; Wavelength of 1 270 ... 1 380 nm, corresponds to 100BASE-FX
<b>Cable length</b>				
- PCF	100 m			
- Plastic FOC (POF)	50 m			
- PCF-GI	250 m			
- Cu conductors	100 m		100 m	100 m
- Multimode graded-index fiber 50/125 µm		3 km	3 km	3 km
- Multimode graded-index fiber 62.5/125 µm		3 km	3 km	3 km
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m
<b>Dimensions</b>				
Width	20 mm	20 mm	20 mm	20 mm
Height	69.5 mm	69.5 mm	69.5 mm	69.5 mm
Depth	59 mm	59 mm	59 mm	59 mm
<b>Weights</b>				
Weight, approx.	50 g	40 g	32 g	50 g
<b>Article number</b>				
<b>6ES7193-6AS00-0AA0</b> ET 200SP, Busadapter BA-Send BA1XFC				
<b>General information</b>				
Product type designation	BA-Send 1xFC			
<b>Interfaces</b>				
<b>Supports protocol for PROFINET IO</b>				
<b>Cable length</b>				
- Cu conductors	15 m; from IM firmware V3.3: between BA-send and the first ET-CONNECTION bus node and between all other bus nodes			
<b>ET-Connection</b>				
• Number of interfaces ET connection	1			
• FC (FastConnect)	Yes			
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m			
<b>Dimensions</b>				
Width	20 mm			
<b>Weights</b>				
Weight, approx.	44 g			

## I/O systems

SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP

### SIPLUS BusAdapters

#### Overview



ET 200SP BusAdapter (RJ45)



BA 2xFC BusAdapter

Some interface modules of the SIPLUS ET 200SP have a universal PROFINET interface for BusAdapters. With the appropriate bus adapter, the type of connection can be adapted to the requirements of the respective application:

- For standard applications with a moderate mechanical and EMC load, the BA 2xRJ45 BusAdapter is used. It offers two sockets for standard RJ45 plugs.
- For machines and systems in which higher mechanical and/or EMC loads act on the devices, the BA 2xFC BusAdapter is recommended. In this case, the bus cables are connected directly by means of FastConnect terminals – similar to the PROFIBUS connector, proven in millions of applications. The technology is extremely quick to assemble and achieves 5 times better vibration resistance and also 5 times greater resistance to electromagnetic interference, when compared to RJ45 plug connectors.
- BusAdapters with connections for fiber-optic cables can be used to cover high potential differences between two stations and/or high EMC loads.

Another advantage of the BusAdapters: In order to repair defective RJ45 sockets or for subsequent conversion to the rugged FastConnect technology or a fiber-optic connection, only the adapter needs to be replaced.

The following interface modules offer a PROFINET connection via BusAdapter:

- SIPLUS IM 155-6PN Standard
- SIPLUS IM 155-6PN High Feature

#### Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

#### Ordering data

#### Article No.

<b>SIPLUS BA 2xRJ45 BusAdapter</b> (Extended temperature range and exposure to environmental substances) for IM 155-6PN ST, HF	<b>6AG1193-6AR00-7AA0</b>
<b>SIPLUS BA 2xFC BusAdapter</b> (Extended temperature range and exposure to environmental substances) for IM 155-6PN ST, HF; for increased resistance to vibration and EMC loads	<b>6AG1193-6AF00-7AA0</b>
<b>SIPLUS BA 2xSCRJ BusAdapter</b> (Extended temperature range and exposure to environmental substances) for IM 155-6PN HF; fiber-optic connection for POF or PCF cables up to 250 m, with monitoring of damping	<b>6AG1193-6AP00-2AA0</b>

#### Article No.

<b>SIPLUS BA 2xLC BusAdapter</b> (Extended temperature range and exposure to environmental substances) For IM 155-6PN HF; 2 glass FO connections	<b>6AG1193-6AG00-2AA0</b>
<b>Equipment labeling plate</b> 10 sheets of 16 plates, for printing with thermal transfer card printer or plotter	<b>6ES7193-6LF30-0AW0</b>
<b>Accessories</b> <b>SIPLUS Mounting Kit ET 200SP</b> Mounting accessories for use with increased mechanical vibration and shock loads. Not approved for SIPLUS BusAdapter BA 2xRJ45	<b>6AG1193-6AA00-0AA0</b>

## Technical specifications

Article number	6AG1193-6AR00-7AA0	6AG1193-6AF00-7AA0	6AG1193-6AP00-2AA0	6AG1193-6AG00-2AA0
Based on	6ES7193-6AR00-0AA0 SIPLUS ET 200SP BA 2XRJ45	6ES7193-6AF00-0AA0 SIPLUS ET 200SP BA 2XFC PN	6ES7193-6AP00-0AA0 SIPLUS ET 200SP BA 2XSCRJ PN	6ES7193-6AG00-0AA0 SIPLUS ET 200SP BA 2XLC
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost)
• max.	70 °C; = Tmax	70 °C; = Tmax	60 °C; = Tmax	60 °C; = Tmax
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Resistance</b>				
<b>Coolants and lubricants</b>				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
<b>Use on ships/at sea</b>				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

**I/O systems**

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

**SIPLUS BusAdapters****Technical specifications**

Article number	<b>6AG1193-6AR00-7AA0</b>	<b>6AG1193-6AF00-7AA0</b>	<b>6AG1193-6AP00-2AA0</b>	<b>6AG1193-6AG00-2AA0</b>
Based on	<b>6ES7193-6AR00-0AA0</b> SIPLUS ET 200SP BA 2xRJ45	<b>6ES7193-6AF00-0AA0</b> SIPLUS ET 200SP BA 2XFC PN	<b>6ES7193-6AP00-0AA0</b> SIPLUS ET 200SP BA 2XSCRJ PN	<b>6ES7193-6AG00-0AA0</b> SIPLUS ET 200SP BA 2XLC
<b>Usage in industrial process technology</b>				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

### Overview Labeling strips

The head-end stations and I/O modules can optionally be equipped with labeling strips (13 x 31 mm) for system-specific marking. The labeling strips can be inscribed mechanically. Labeling strips are available in two versions in the colors light gray and yellow:

- 500 strips on the roll, for printing on thermal transfer printers. Core diameter 40 mm, external diameter 70 mm, width 62 mm
- 10 DIN A4 sheets with 100 strips each, 180 g/sm card, perforated, for printing using a laser printer direct from TIA Portal or via print templates

### Overview Equipment labeling plates



Optionally, one equipment labeling plate each can be plugged onto head-end stations, BusAdapters, BaseUnits, and I/O modules. Equipment labeling plates are supplied in packs of 10 sheets with 16 labels each. The labels can be printed with thermal-transfer card printers or plotters, or stickers can be attached to them. Advantages compared to labels that are attached directly:

- The inscription on the front is not covered
- Simple label replacement when replacing a module
- No parallax errors when marking the BaseUnits on the mounting plate

The size of the labels is 14.8 x 10.5 mm (W x H)

### Overview BU cover

The ET 200SP system can be operated with any number of slot gaps (BU slot without inserted I/O module). Applications for this include:

- Partial commissioning
- Prewired but unequipped options

To protect against damage, such slot gaps must be covered by a BU cover.

Within the BU cover, an equipment labeling plate for identification of the I/O module planned for this slot can be stored.

Versions:

- For BaseUnits with a width of 15 mm (pack containing 5 BU covers)
- For BaseUnits with a width of 20 mm (pack containing 5 BU covers)

### Overview Shield connection

The shield connection permits the low-cost connection of cable shields. Compared to external shield supports, the system offers the following advantages:

- Quick installation without tools by plugging the shield connection element onto the BaseUnit
- Automatic low-impedance connection to the functional ground (mounting rail)
- Optimized EMC properties by separating the signal lines from the voltage supply lines
- Short unshielded cable lengths
- Requires little space

### Overview Color-coded labels

The I/O modules that are plugged onto the BaseUnits determine the potentials connected at the process terminals. The +/- potentials can optionally be identified using module-specific color-coded labels. The potentials of the AUX and add-on terminals can also be marked using color-coded labels. Advantages of the color-coded labels:

- Quick installation (one label for marking 16 terminals)
- Printed terminal numbers
- Avoidance of wiring errors
- Simple detection of potentials during servicing

### Overview Server module

The server module is included in the scope of delivery of all head-end stations (interface module, CPU, Open Controller). It concludes the setup of an ET 200SP station.

### Overview SIPLUS server module

The SIPLUS server module is included in the scope of supply of all head-end stations (interface module, CPU, Open Controller). It concludes the setup of a SIPLUS ET 200SP station.

### Overview e-coding element

The operation of selected modules requires an electronic coding element that is always included in the scope of delivery of the I/O module. Apart from the mechanical coding function, this contains a re-writable memory for the redundant storage of module-specific configuration data (e.g. F target address for fail-safe modules or parameter data in the case of the IO-Link master). In this way, this data is automatically backed up during a module replacement. This saves the user from having to set addresses manually or back up data when replacing modules.

At present, there are two types of electronic coding element:

- e-coding element (Type H), which can be used in the I/O modules:
  - CM IO-Link master
  - F-CM AS-i Safety
- e-coding element (Type F), which can be used in the I/O modules:
  - F-DI 8x24VDC HF
  - F-DQ 4x24VDC/2A PM HF
  - F-PM-E 24VDC/8A PPM ST



**I/O systems**SIMATIC ET 200 systems for the control cabinet  
SIMATIC ET 200SP**Accessories****Ordering data****Article No.****Article No.****Labeling strips**

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

**6ES7193-6LR10-0AA0**

500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer

**6ES7193-6LR10-0AG0**

1000 labeling strips DIN A4, light gray, card, for inscription with laser printer

**6ES7193-6LA10-0AA0**

1000 labeling strips DIN A4, yellow, card, for inscription with laser printer

**6ES7193-6LA10-0AG0****Equipment labeling plates**

10 sheets of 16 plates

**6ES7193-6LF30-0AW0****BU cover**

For covering empty slots (gaps); 5 units

- 15 mm wide
- 20 mm wide

**6ES7133-6CV15-1AM0****6ES7133-6CV20-1AM0****Shield connection**

5 shield supports and 5 shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional ground

**6ES7193-6SC00-1AM0****Module-specific color-coded labels**

(pack containing 10 labels)

Color code CC00, for 16 push-in terminals, for BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16)

**6ES7193-6CP00-2MA0**

Color code CC01, for 16 push-in terminals, for BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16)

**6ES7193-6CP01-2MA0**

Color code CC02, for 16 push-in terminals, for BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16)

**6ES7193-6CP02-2MA0**

Color code CC03, for 16 push-in terminals, for BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 12), gray (terminals 13 to 16)

**6ES7193-6CP03-2MA0**

Color code CC04, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 12), blue (terminals 13 to 16)

**6ES7193-6CP04-2MA0**

Color code CC05, for 16 push-in terminals, for BU type A0, A1, gray (terminals 1 to 12), red (terminals 13 to 14), blue (terminals 15 to 16)

**6ES7193-6CP05-2MA0**

Color code CC41, for 16 push-in terminals; for BU type B1, gray (terminals 1 to 4), red (terminals 5 to 8), blue (terminals 9 to 12)

**6ES7193-6CP41-2MB0**

Color code CC42, for 12 push-in terminals, BU type F0, gray (terminals 1 to 8), red (terminals 9 to 10), blue (terminals 11 to 12)

**6ES7193-6CP42-2MB0****Module-specific color-coded labels (continued)**

Color code CC51, for 6 push-in terminals, for BU type C0, C1, gray (terminals 1 to 4), red (terminal 5), blue (terminal 6)

**6ES7193-6CP51-2MC0**

Color code CC51, for 6 push-in terminals, for BU type C0, gray (terminals 1, 2 and 5), red (terminals 3 and 4), blue (terminal 6)

**6ES7193-6CP52-2MC0**

(pack containing 50 labels)

Color code CC01, for 16 push-in terminals, for BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16)

**6ES7193-6CP01-4MA0**

Color code CC02, for 16 push-in terminals, for BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16)

**6ES7193-6CP02-4MA0****Color-coded labels for additional terminals**

(pack containing 10 labels)

Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A)

**6ES7193-6CP71-2AA0**

Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A)

**6ES7193-6CP72-2AA0**

Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A)

**6ES7193-6CP73-2AA0**

Color code CC74, for 2x5 additional terminals, BU type A1, red (terminals 1B to 5B), blue (terminals 1C to 5C)

**6ES7193-6CP74-2AA0**

Color code CC81, for 4 AUX terminals, BU type B0, yellow/green (terminals 1 A to 4 A)

**6ES7193-6CP81-2AB0**

Color code CC82, for 4 AUX terminals, BU type B0, red (terminals 1 A to 4 A)

**6ES7193-6CP82-2AB0**

Color code CC83, for 4 AUX terminals, BU type B0, blue (terminals 1 A to 4 A)

**6ES7193-6CP83-2AB0**

Color code CC84, for 2 AUX terminals, BU type C0, C1, yellow/green (terminals 1 A to 2 A)

**6ES7193-6CP84-2AC0**

Color code CC85, for 2 AUX terminals, for BU type C0, C1, red (terminals 1 A to 2 A)

**6ES7193-6CP85-2AC0**

Color code CC86, for 2 AUX terminals, for BU type C0, C1, blue (terminals 1 A to 2 A)

**6ES7193-6CP86-2AC0****Server module**

Spare part

**6ES7193-6PA00-0AA0****SIPLUS server module**

(Extended temperature range and exposure to environmental substances)

**6AG1193-6PA00-7AA0**

Spare part

**e-coding element**

Type H; pack containing 5 e-coding elements

**6ES7193-6EH00-1AA0**

Type F; pack containing 5 e-coding elements

**6ES7193-6EF00-1AA0**