

SIMATIC S7-1200 Basic Controllers

**3/2 Introduction**

3/2 S7-1200

3/4 Central processing units3/4 Standard CPUs

3/4 CPU 1211C

3/8 CPU 1212C

3/12 CPU 1214C

3/16 CPU 1215C

3/20 CPU 1217C

3/23 SIPLUS standard CPUs

3/23 SIPLUS CPU 1212C

3/28 SIPLUS CPU 1214C

3/35 SIPLUS CPU 1215C

3/41 Fail-safe CPUs

3/46 SIPLUS fail-safe CPUs

3/49 I/O modules3/49 Digital modules

3/49 SM 1221 digital input modules

3/51 SB 1221 digital input modules

3/53 SM 1222 digital output modules

3/56 SB 1222 digital output modules

3/58 SM 1223 digital input/output modules

3/62 SB 1223 digital input/output modules

3/64 SIPLUS digital modules

3/64 SIPLUS SM 1221 digital input modules

3/66 SIPLUS SB 1221 digital input modules

3/68 SIPLUS SM 1222 digital output modules

3/73 SIPLUS SB 1222 digital output modules

3/75 SIPLUS SM 1223 digital input/output modules

3/80 SIPLUS SB 1223 digital input/output modules

3/82 Analog modules

3/82 SM 1231 analog input modules

3/85 SB 1231 analog input modules

3/86 SM 1232 analog output modules

3/88 SB 1232 analog output modules

3/89 SM 1234 analog input/output modules

3/91 SM 1231 thermocouple module

3/93 SB 1231 thermocouple signal board

3/94 SM 1231 RTD signal module

3/97 SB 1231 RTD signal board

3/98 SM 1238 Energy Meter 480 V AC analog input modules

3/100 SIPLUS analog modules

3/100 SIPLUS SM 1231 analog input modules

3/102 SIPLUS SM 1232 analog output modules

3/104 SIPLUS SB 1232 analog output modules

3/106 SIPLUS SM 1234 analog input/output modules

3/108 SIPLUS SM 1231 thermocouple module

3/110 SIPLUS RTD SM 1231 signal module

3/112 SIPLUS RTD SB 1231 signal board

3/113 Special modules

3/113 SM 1278 4xIO-Link master

3/114 SIPLUS SM 1278 4xIO-Link master

3/116 SIPLUS CMS1200 SM 1281 Condition Monitoring

3/118 Special modules (continued)

3/118 Simulator Module SIM 1274

3/119 BB 1297 battery board

3/120 SIWAREX WP231

3/123 SIWAREX WP241

3/125 SIWAREX WP251

3/128 Communication

3/128 CM 1241 communications module

3/130 CB 1241 RS485 communication board

3/131 CM 1242-5

3/133 AS-Interface communication

3/133 - CM 1243-2

3/135 - DCM 1271 data decoupling module

3/137 CM 1243-5

3/139 CSM 1277 unmanaged

3/141 CP 1243-1

3/143 CP 1242-7 GPRS

3/145 CP 1243-7 LTE

3/148 CP 1243-8 IRC

3/151 SIMATIC RF120C

3/153 SIPLUS communication

3/153 SIPLUS CM 1241 communications modules

3/155 SIPLUS CB 1241 communication board RS485

3/156 SIPLUS CM 1242-5 communications modules

3/157 SIPLUS CM 1243-2 communications modules

3/158 SIPLUS CM 1243-5 communications modules

3/159 SIPLUS CP 1243-1 communications modules

3/161 SIPLUS NET CSM 1277

3/162 Connection system

3/162 System cabling for SIMATIC S7-1500 IO (25 mm), ET 200SP, S7-1200 and LOGO!

3/164 Fail-safe I/O modules

3/164 SM 1226 fail-safe digital input

3/166 SM 1226 fail-safe digital output

3/168 SM 1226 fail-safe relay output

3/170 SIPLUS Fail-safe digital inputs and outputs

3/170 SIPLUS SM 1226 fail-safe digital input

3/171 SIPLUS SM 1226 fail-safe digital output

3/172 SIPLUS SM 1226 fail-safe relay output

3/173 Power supplies

3/173 1-phase, 24 V DC (for S7-1200)

3/175 SIPLUS power supplies

3/175 1-phase, 24 V DC (for SIPLUS S7-1200)

3/177 Operator control and monitoring

3/177 Basic Panels

3/178 Comfort Panels

3/179 SIPLUS operator control and monitoring

3/179 SIPLUS Basic Panels and Comfort Panels

3/182 SIPLUS Basic Panels (1st Generation)

3/184 SIPLUS Comfort Panels Standard

3/189 Starter Kits**3/190 Add-on products from third-party manufacturers**

3/190 SIMATIC S7-1200 CM CANopen

SIMATIC S7-1200 Basic Controllers

Introduction

S7-1200

Overview



- Compact controllers for the low to mid-performance ranges
- Large-scale integration, space-saving, powerful
- With exceptional real-time performance and powerful communication options:
 - Controller with integrated PROFINET IO controller interface for communication between SIMATIC controllers, HMI, programming device or other automation components
- All CPUs can be used in stand-alone mode, in networks and within distributed structures
- Extremely simple installation, programming and operation
- Integrated web server with standard and user-specific web pages
- Data logging functionality for archiving of data at runtime from the user program
- Powerful, integrated technology functions such as counting, measuring, closed-loop control, and Motion Control
- Integrated digital and analog inputs/outputs
- Flexible expansion facilities
 - Signal boards for direct use in a controller
 - Signal modules for expansion of controllers with input/output channels; including an Energy Meter module for recording and preparing energy data
 - Accessories, e.g. power supply, switch module or SIMATIC memory card

Technical specifications

| General technical specifications SIMATIC S7-1200 | |
|--|--|
| Degree of protection | IP20 acc. to IEC 529 |
| Ambient temperature | |
| • Operation (95% humidity) | |
| - Horizontal installation | -20 ... +60 °C |
| - Vertical installation | -20 ... +50 °C |
| • Transportation and storage | |
| - With 95% humidity | 25 ... 55 °C |
| Insulation | |
| • 5/24 V DC circuits | 500 V AC test voltage |
| • 115/230 V AC circuits to ground | 1500 V AC test voltage |
| • 115/230 V AC circuits to 115/230 V AC circuits | 1500 V AC test voltage |
| • 230 V AC circuits to 5/24 V DC circuits | 1500 V AC test voltage |
| • 115 V AC circuits to 5/24 V DC circuits | 1500 V AC test voltage |
| Electromagnetic compatibility | Requirements of the EMC directive |
| • Noise immunity acc. to EN 50082-2 | Test acc. to: IEC 801-2, IEC 801-3, IEC 801-4, EN 50141, EN 50204, IEC 801-5, VDE 0160 |
| • Emitted interference acc. to EN 50081-1 and EN 50081-2 | Test according to EN 55011, Class A, Group 1 |
| Mechanical strength | |
| • Vibrations, test acc. to / tested with | IEC 68, Part 2-6: 10 ... 57 Hz; constant amplitude 0.3 mm; 58 ... 150 Hz; constant acceleration 1 g (mounted on DIN rail) or 2 g (mounted in switchboard); mode of vibration: frequency sweeps with a sweep rate of 1 octave/minute; duration of vibration: 10 frequency sweeps per axis in each direction of the three mutually perpendicular axes |
| • Shocks, test acc. to / tested with | IEC 68, Part 2-27/half-sine: magnitude of shock 15 g (peak value), duration 11 ms, 6 shocks in each of the three mutually perpendicular axes |

| General technical data of SIPLUS S7-1200 | |
|--|---|
| Ambient temperature range | -40/-25/-20 ... +55/+60/+70 °C |
| Conformal coating | Coating of the printed circuit boards and the electronic components |
| Technical specifications | The technical specifications of the standard product apply except for the ambient conditions. |
| Ambient conditions | |
| Extended range of environmental conditions | |
| • with reference to ambient temperature, air pressure and altitude | Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m) |
| • At cold restart, min. | 0° C |
| Relative humidity | |
| • with condensation, max. | 100 %; RH incl. bedewing/frost (no commissioning in bedewed state) |
| Resistance | |
| • to biologically active substances/compliance with EN 60721-3-3 | Yes; Class 3B2 mold and fungal spores (except fauna); the supplied plug covers must remain in place on the unused interfaces during operation. |
| • to chemically active substances/compliance with EN 60721-3-3 | Yes; Class 3C4 (RH < 75%) incl. salt spray in accordance with EN 60068-2-52 (severity 3); the supplied plug covers must remain in place on the unused interfaces during operation. |
| • to mechanically active substances, compliance with EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust; the supplied plug covers must remain in place on unused interfaces during operation. |

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1211C

Overview



- Controller for intro to S7
- Expandable by:
 - 1 signal board (SB), battery board (BB) or communication board (CB)
 - Max. 3 communications modules (CM)

Ordering data

CPU 1211C

Compact CPU, AC/DC/relay;
Integrated program/data memory
50 KB, load memory 1 MB;
Wide-range power supply
85 ... 264 V AC;
Boolean execution times 0.1 μ s
per operation;
6 digital inputs,
4 digital outputs (relays),
2 analog inputs;
Expandable by up to
3 communications modules and
1 signal board/communication
board;
Digital inputs can be used as HSC
at 100 kHz

Article No.

6ES7211-1BE40-0XB0

Compact CPU, DC/DC/DC;
Integrated program/data memory
50 KB, load memory 1 MB;
Supply voltage 24 V DC;
Boolean execution times 0.1 μ s
per operation;
6 digital inputs,
4 digital outputs,
2 analog inputs;
Expandable by up to
3 communications modules and
1 signal board/communication
board;
Digital inputs can be used as HSC
at 100 kHz,
24 V DC digital outputs can be
used as pulse outputs (PTO) or
pulse-width modulated outputs
(PWM) at 100 kHz

6ES7211-1AE40-0XB0

Compact CPU, DC/DC/relay;
Integrated program/data memory
50 KB, load memory 1 MB;
Supply voltage 24 V DC;
Boolean execution times 0.1 μ s
per operation;
6 digital inputs,
4 digital outputs (relays),
2 analog inputs;
Expandable by up to
3 communications modules and
1 signal board/communication
board;
Digital inputs can be used as HSC
at 100 kHz

6ES7211-1HE40-0XB0

Article No.

SB 1221 signal board

4 inputs, 5 V DC, 200 kHz
4 inputs, 24 V DC, 200 kHz

6ES7221-3AD30-0XB0

6ES7221-3BD30-0XB0

SB 1222 signal board

4 outputs, 5 V DC, 0.1 A, 200 kHz
4 outputs, 24 V DC, 0.1 A, 200 kHz

6ES7222-1AD30-0XB0

6ES7222-1BD30-0XB0

SB 1223 signal board

2 inputs, 24 V DC,
IEC type 1 sinking input;
2 x 24 V DC transistor outputs,
0.5 A, 5 W;
can be used as HSC at
up to 30 kHz

6ES7223-0BD30-0XB0

2 inputs, 5 V DC, 200 kHz
2 outputs 5 V DC, 0.1 A, 200 kHz

6ES7223-3AD30-0XB0

2 inputs, 24 V DC, 200 kHz
2 outputs 24 V DC, 0.1 A, 200 kHz

6ES7223-3BD30-0XB0

SB 1231 signal board

1 analog input, ± 10 V with 12 bits or
0 ... 20 mA with 11 bits

6ES7231-4HA30-0XB0

SB 1231 thermocouple signal board

1 input +/- 80 mV, resolution 15 bits
+ sign, thermocouples type J, K

6ES7231-5QA30-0XB0

SB 1231 RTD signal board

1 input for resistance temperature
sensors Pt 100, Pt 200, Pt 500,
Pt 1000, resolution 15 bits + sign

6ES7231-5PA30-0XB0

SB 1232 signal board

1 analog output, ± 10 V with 12 bits
or 0 to 20 mA with 11 bits

6ES7232-4HA30-0XB0

CB 1241 RS485 communication board

For point-to-point connection,
with 1 RS485 interface

6ES7241-1CH30-1XB0

| Ordering data | Article No. | Ordering data | Article No. |
|--|--|---|--|
| BB1297 battery board For long-term backup of real-time clock, can be plugged into the signal board slot; battery (CR1025) is not included in scope of supply | 6ES7297-0AX30-0XA0 | RJ45 cable grip 4 units per pack | |
| Digital input simulator Simulator Module SIM 1274 (optional) 8 input switches, for CPU 1211C / CPU 1212C | 6ES7274-1XF30-0XA0 | Single port | 6ES7290-3AA30-0XA0 |
| Analog input simulator Simulator Module SIM 1274 (optional) 2 potentiometers | 6ES7274-1XA30-0XA0 | Front flap set (spare part) For CPU 1211C/1212C | 6ES7291-1AA30-0XA0 |
| SIMATIC Memory Card (optional) 4 MB 12 MB 24 MB 256 MB 2 GB 32 GB | 6ES7954-8LC03-0AA0 6ES7954-8LE03-0AA0 6ES7954-8LF03-0AA0 6ES7954-8LL03-0AA0 6ES7954-8LP03-0AA0 6ES7954-8LT03-0AA0 | STEP 7 Professional / Basic V17 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) • Windows 10 Home Version 1909, 2004, 20H2 (only STEP 7 Basic) • Windows 10 Professional Version 1909, 2004, 20H2 • Windows 10 Enterprise Version 1909, 2004, 20H2 • Windows 10 IoT Enterprise 2016 LTSC • Windows 10 IoT Enterprise 2019 LTSC Windows Server (64-bit) • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) Type of delivery: 9 languages: de, en, zh included, fr, sp, it, ru, jp, kr as download | |
| Terminal block (spare part) For CPU 1211C AC/DC/relay • For DI, 14-pin, tin-coated, coded; 4 units - Screw-type system - Push-in system • For DO, 8-pin, tin-coated, coded; 4 units - Screw-type system - Push-in system • For AI, 3-pin, gold-plated; 4 units - Screw-type system - Push-in system For CPU 1211C DC/DC/DC • For DI, 14-pin, tin-coated; 4 units - Screw-type system - Push-in system • For DO, 8-pin, tin-coated; 4 units - Screw-type system - Push-in system • For AI, 3-pin, gold-plated; 4 units - Screw-type system - Push-in system For CPU 1211C DC/DC/relay • For DI, 14-pin, tin-coated; 4 units - Screw-type system - Push-in system • For DO, 8-pin, tin-coated, coded; 4 units - Screw-type system - Push-in system • For AI, 3-pin, gold-plated; 4 units - Screw-type system - Push-in system | 6ES7292-1AP40-0XA0 6ES7292-2AP40-0XA0 6ES7292-1AH40-0XA0 6ES7292-2AH40-0XA0 6ES7292-1BC30-0XA0 6ES7292-2BC30-0XA0 6ES7292-1AP30-0XA0 6ES7292-2AP30-0XA0 6ES7292-1AH30-0XA0 6ES7292-2AH30-0XA0 6ES7292-1BC30-0XA0 6ES7292-2BC30-0XA0 6ES7292-1AP30-0XA0 6ES7292-2AP30-0XA0 6ES7292-1AH40-0XA0 6ES7292-2AH40-0XA0 6ES7292-1BC30-0XA0 6ES7292-2BC30-0XA0 | STEP 7 Professional V17, floating license STEP 7 Professional V17, floating license, software download including license key ¹⁾ Email address required for delivery STEP 7 Basic V17, floating license STEP 7 Basic V17, floating license, software download including license key ¹⁾ Email address required for delivery | 6ES7822-1AA07-0YA5 6ES7822-1AE07-0YA5 6ES7822-0AA07-0YA5 6ES7822-0AE07-0YA5 |

¹⁾ For up-to-date information and download availability, see:
<http://www.siemens.com/tia-online-software-delivery>

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1211C

Technical specifications

| Article number | 6ES7211-1HE40-0XB0 CPU 1211C, DC/DC/Relay, 6DI/4DO/2AI | 6ES7211-1BE40-0XB0 CPU 1211C, AC/DC/Relay, 6DI/4DO/2AI | 6ES7211-1AE40-0XB0 CPU 1211C, DC/DC/DC, 6DI/4DO/2AI |
|---|---|---|---|
| General information | | | |
| Product type designation | CPU 1211C DC/DC/relay | CPU 1211C AC/DC/relay | CPU 1211C DC/DC/DC |
| Engineering with | | | |
| • Programming package | STEP 7 V17 or higher | STEP 7 V17 or higher | STEP 7 V17 or higher |
| Supply voltage | | | |
| Rated value (DC) | Yes | Yes | Yes |
| • 24 V DC | | | |
| Rated value (AC) | | | |
| • 120 V AC | Yes | Yes | |
| • 230 V AC | Yes | Yes | |
| Encoder supply | | | |
| 24 V encoder supply | | | |
| • 24 V | L+ minus 4 V DC min. | 20.4 to 28.8V | L+ minus 4 V DC min. |
| Memory | | | |
| Work memory | | | |
| • integrated | 50 kbyte | 50 kbyte | 50 kbyte |
| Load memory | | | |
| • integrated | 1 Mbyte with SIMATIC memory card | 1 Mbyte with SIMATIC memory card | 1 Mbyte with SIMATIC memory card |
| • Plug-in (SIMATIC Memory Card), max. | | | |
| Backup | | | |
| • without battery | Yes | Yes | Yes |
| CPU processing times | | | |
| for bit operations, typ. | 0.08 µs; / instruction | 0.08 µs; / instruction | 0.08 µs; / instruction |
| for word operations, typ. | 1.7 µs; / instruction | 1.7 µs; / instruction | 1.7 µs; / instruction |
| for floating point arithmetic, typ. | 2.3 µs; / instruction | 2.3 µs; / instruction | 2.3 µs; / instruction |
| Data areas and their retentivity | | | |
| Flag | | | |
| • Size, max. | 4 kbyte; Size of bit memory address area | 4 kbyte; Size of bit memory address area | 4 kbyte; Size of bit memory address area |
| Process image | | | |
| • Inputs, adjustable | 1 kbyte | 1 kbyte | 1 kbyte |
| • Outputs, adjustable | 1 kbyte | 1 kbyte | 1 kbyte |
| Time of day | | | |
| Clock | | | |
| • Hardware clock (real-time) | Yes | Yes | Yes |
| Digital inputs | | | |
| Number of digital inputs | 6; Integrated | 6; Integrated | 6; Integrated |
| • of which inputs usable for technological functions | 6; HSC (High Speed Counting) | 6; HSC (High Speed Counting) | 6; HSC (High Speed Counting) |
| Digital outputs | | | |
| Number of digital outputs | 4; Relays | 4; Relays | 4 |
| • of which high-speed outputs | | | 4; 100 kHz Pulse Train Output |
| Analog inputs | | | |
| Number of analog inputs | 2 | 2 | 2 |
| Input ranges | | | |
| • Voltage | Yes | Yes | Yes |
| Analog outputs | | | |
| Number of analog outputs | 0 | 0 | 0 |
| 1. Interface | | | |
| Protocols | | | |
| • PROFINET IO Controller | Yes | Yes | Yes |
| • PROFINET IO Device | Yes | Yes | Yes |
| • SIMATIC communication | Yes | Yes | Yes |
| • Open IE communication | Yes; Optionally also encrypted | Yes; Optionally also encrypted | Yes; Optionally also encrypted |
| • Web server | Yes | Yes | Yes |
| • Media redundancy | No | No | No |

Technical specifications

| Article number | 6ES7211-1HE40-0XB0 CPU 1211C, DC/DC/Relay, 6DI/4DO/2AI | 6ES7211-1BE40-0XB0 CPU 1211C, AC/DC/Relay, 6DI/4DO/2AI | 6ES7211-1AE40-0XB0 CPU 1211C, DC/DC/DC, 6DI/4DO/2AI |
|---|---|---|---|
| Protocols | | | |
| Open IE communication | | | |
| • TCP/IP | Yes | Yes | Yes |
| • ISO-on-TCP (RFC1006) | Yes | Yes | Yes |
| • UDP | Yes | Yes | Yes |
| Web server | | | |
| • supported | Yes | Yes | Yes |
| OPC UA | | | |
| • OPC UA Server | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; Data access (read, write, subscribe), runtime license required |
| Communication functions | | | |
| S7 communication | | | |
| • supported | Yes | Yes | Yes |
| Integrated Functions | | | |
| Frequency measurement | Yes | Yes | Yes |
| controlled positioning | Yes | Yes | Yes |
| Number of position-controlled positioning axes, max. | 8 | 8 | 8 |
| Number of positioning axes via pulse-direction interface | Up to 4 with SB 1222 | Up to 4 with SB 1222 | 4; With integrated outputs |
| PID controller | Yes | Yes | Yes |
| Number of alarm inputs | 4 | 4 | 4 |
| Number of pulse outputs | | | 4 |
| Limit frequency (pulse) | | | 100 kHz |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C | -20 °C | -20 °C |
| • max. | 60 °C | 60 °C | 60 °C |
| Pollutant concentrations | | | |
| • SO ₂ at RH < 60% without condensation | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free |
| Configuration | | | |
| Programming | | | |
| Programming language | | | |
| - LAD | Yes | Yes | Yes |
| - FBD | Yes | Yes | Yes |
| - SCL | Yes | Yes | Yes |
| Dimensions | | | |
| Width | 90 mm | 90 mm | 90 mm |
| Height | 100 mm | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm | 75 mm |
| Weights | | | |
| Weight, approx. | 380 g | 420 g | 370 g |

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1212C

Overview



- Controller for intro to S7 with basic expansion options
- Expandable by:
 - 1 signal board (SB), battery board (BB) or communication board (CB)
 - 2 signal modules (SM)
 - Max. 3 communications modules (CM)

Ordering data

CPU 1212C

Compact CPU, AC/DC/relay;
Integrated program/data memory
75 KB, load memory 2 MB;
Wide-range power supply
85 ... 264 V AC;
Boolean execution times
0.1 µs per operation;
8 digital inputs,
6 digital outputs (relays),
2 analog inputs;
Expandable by up to
3 communications modules,
2 signal modules and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz

Article No.

6ES7212-1BE40-0XB0

Compact CPU, DC/DC/DC;
Integrated program/data memory
75 KB, load memory 2 MB;
Supply voltage 24 V DC;
Boolean execution times
0.1 µs per operation;
8 digital inputs,
6 digital outputs,
2 analog inputs;
Expandable by up to
3 communications modules,
2 signal modules, and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz,
24 V DC digital outputs can be
used as pulse outputs (PTO) or
pulse-width modulated outputs
(PWM) at 100 kHz

6ES7212-1AE40-0XB0

Compact CPU, DC/DC/relay;
Integrated program/data memory
75 KB, load memory 2 MB;
Supply voltage 24 V DC;
Boolean execution times
0.1 µs per operation;
8 digital inputs,
6 digital outputs (relays),
2 analog inputs;
Expandable by up to
3 communications modules,
2 signal modules, and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz

6ES7212-1HE40-0XB0

Article No.

SB 1221 signal board

4 inputs, 5 V DC, 200 kHz
4 inputs, 24 V DC, 200 kHz

6ES7221-3AD30-0XB0

6ES7221-3BD30-0XB0

SB 1222 signal board

4 outputs, 5 V DC, 0.1 A, 200 kHz
4 outputs, 24 V DC, 0.1 A, 200 kHz

6ES7222-1AD30-0XB0

6ES7222-1BD30-0XB0

SB 1223 signal board

2 inputs, 24 V DC,
IEC type 1 sinking input;
2 x 24 V DC transistor outputs,
0.5 A, 5 W;
can be used as HSC at
up to 30 kHz

6ES7223-0BD30-0XB0

2 inputs, 5 V DC, 200 kHz
2 outputs 5 V DC, 0.1 A, 200 kHz

2 inputs, 24 V DC, 200 kHz
2 outputs 24 V DC, 0.1 A, 200 kHz

6ES7223-3AD30-0XB0

6ES7223-3BD30-0XB0

SB 1231 signal board

1 analog input, ±10 V with 12 bits or
0 ... 20 mA with 11 bits

6ES7231-4HA30-0XB0

SB 1231 thermocouple signal board

1 input +/- 80 mV, resolution 15 bits
+ sign, thermocouples type J, K

6ES7231-5QA30-0XB0

SB 1231 RTD signal board

1 input for resistance temperature
sensors Pt 100, Pt 200, Pt 500,
Pt 1000, resolution 15 bits + sign

6ES7231-5PA30-0XB0

SB 1232 signal board

1 analog output, ±10 V with 12 bits
or 0 to 20 mA with 11 bits

6ES7232-4HA30-0XB0

CB 1241 RS485 communication board

For point-to-point connection,
with 1 RS485 interface

6ES7241-1CH30-1XB0

BB1297 battery board

For long-term backup of real-time
clock, can be plugged into
the signal board slot;
battery (CR1025) is not included
in scope of supply

6ES7297-0AX30-0XA0

| Ordering data | Article No. | Article No. |
|--|--|--|
| Digital input simulator Simulator Module SIM 1274 (optional) 8 input switches, for CPU 1211C / CPU 1212C | 6ES7274-1XF30-0XA0 | |
| Analog input simulator Simulator Module SIM 1274 (optional) 2 potentiometers | 6ES7274-1XA30-0XA0 | |
| SIMATIC Memory Card (optional) 4 MB 12 MB 24 MB 256 MB 2 GB 32 GB | 6ES7954-8LC03-0AA0 6ES7954-8LE03-0AA0 6ES7954-8LF03-0AA0 6ES7954-8LL03-0AA0 6ES7954-8LP03-0AA0 6ES7954-8LT03-0AA0 | |
| Extension cable for two-tier configuration For connecting digital/analog signal modules; length 2 m | 6ES7290-6AA30-0XA0 | |
| Starter Kit CPU 1212C AC/DC/relay Complete offer SIMATIC S7-1200, starter box, comprising: CPU 1212C AC/DC/relay, simulator, STEP 7 BASIC, manual CD, SIMATIC OPC UA S7-1200 Basic Runtime license, info material, in Systainer | 6ES7212-1BE34-4YB0 | |
| SIMATIC S7-1200 + KP300 Basic Starter Kit Consisting of: CPU 1212C AC/DC/relay, HMI KP300 Basic mono PN, input simulator, STEP 7 Basic, manual CD, SIMATIC OPC UA S7-1200 Basic Runtime license, Systainer | 6AV6651-7HA02-3AA4 | |
| SIMATIC S7-1200 + KTP400 Basic Starter Kit Consisting of: CPU 1212C AC/DC/relay, HMI KTP400 Basic, input simulator, STEP 7 Basic, manual CD, SIMATIC OPC UA S7-1200 Basic Runtime license, Systainer | 6AV6651-7KA02-3AA4 | |
| SIMATIC S7-1200 + KTP700 Basic Starter Kit Consisting of: CPU 1212C AC/DC/relay, HMI KTP700 Basic, input simulator, STEP 7 Basic, manual CD, SIMATIC OPC UA S7-1200 Basic Runtime license, Systainer | 6AV6651-7DA02-3AA4 | |
| Terminal block (spare part) For CPU 1212C AC/DC/relay <ul style="list-style-type: none"> For DI, 14-pin, tin-coated, coded; 4 units <ul style="list-style-type: none"> Screw-type system Push-in system For DO, 8-pin, tin-coated, coded; 4 units <ul style="list-style-type: none"> Screw-type system Push-in system | 6ES7292-1AP40-0XA0 6ES7292-2AP40-0XA0 6ES7292-1AH40-0XA0 6ES7292-2AH40-0XA0 | |
| Terminal block (spare part) (continued) <ul style="list-style-type: none"> For AI, 3-pin, gold-plated; 4 units <ul style="list-style-type: none"> Screw-type system Push-in system For CPU 1212C DC/DC/DC <ul style="list-style-type: none"> For DI, 14-pin, tin-coated; 4 units <ul style="list-style-type: none"> Screw-type system Push-in system For DO, 8-pin, tin-coated; 4 units <ul style="list-style-type: none"> Screw-type system Push-in system For AI, 3-pin, gold-plated; 4 units <ul style="list-style-type: none"> Screw-type system Push-in system For CPU 1212C DC/DC/relay <ul style="list-style-type: none"> For DI, 14-pin, tin-coated; 4 units <ul style="list-style-type: none"> Screw-type system Push-in system For DO, 8-pin, tin-coated, coded; 4 units <ul style="list-style-type: none"> Screw-type system Push-in system For AI, 3-pin, gold-plated; 4 units <ul style="list-style-type: none"> Screw-type system Push-in system | 6ES7292-1BC30-0XA0 6ES7292-2BC30-0XA0 6ES7292-1AP30-0XA0 6ES7292-2AP30-0XA0 6ES7292-1AH30-0XA0 6ES7292-2AH30-0XA0 6ES7292-1BC30-0XA0 6ES7292-2BC30-0XA0 6ES7292-1AP30-0XA0 6ES7292-2AP30-0XA0 6ES7292-1AH40-0XA0 6ES7292-2AH40-0XA0 6ES7292-1BC30-0XA0 6ES7292-2BC30-0XA0 | |
| RJ45 cable grip 4 units per pack Single port | | 6ES7290-3AA30-0XA0 |
| Front flap set (spare part) For CPU 1211C/1212C | | 6ES7291-1AA30-0XA0 |
| STEP 7 Professional / Basic 17 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> Windows 10 Home Version 1909, 2004, 20H2 (only STEP 7 Basic) Windows 10 Professional Version 1909, 2004, 20H2 Windows 10 Enterprise Version 1909, 2004, 20H2 Windows 10 IoT Enterprise 2016 LTSB Windows 10 IoT Enterprise 2019 LTSC Windows Server (64-bit) <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Type of delivery: 9 languages: de, en, zh included, fr, sp, it, ru, jp, kr as download STEP 7 Professional V17, floating license STEP 7 Professional V17, floating license, software download including license key ¹⁾ Email address required for delivery STEP 7 Basic V17, floating license STEP 7 Basic V17, floating license, software download including license key ¹⁾ Email address required for delivery | | 6ES7822-1AA07-0YA5 6ES7822-1AE07-0YA5 6ES7822-0AA07-0YA5 6ES7822-0AE07-0YA5 |

¹⁾ For up-to-date information and download availability, see:
<http://www.siemens.com/tia-online-software-delivery>

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

Technical specifications

| Article number | 6ES7212-1AE40-0XB0 CPU 1212C ,DC/DC/DC, 8DI/6DO/2AI | 6ES7212-1BE40-0XB0 CPU 1212C, AC/DC/Relay, 8DI/6DO/2AI | 6ES7212-1HE40-0XB0 CPU 1212C, DC/DC/Relay, 8DI/6DO/2AI |
|--|---|--|--|
| General information | | | |
| Product type designation | CPU 1212C DC/DC/DC | CPU 1212C AC/DC/relay | CPU 1212C DC/DC/relay |
| Engineering with | | | |
| • Programming package | STEP 7 V17 or higher | STEP 7 V17 or higher | STEP 7 V17 or higher |
| Supply voltage | | | |
| Rated value (DC) | | | |
| • 24 V DC | Yes | | Yes |
| Rated value (AC) | | | |
| • 120 V AC | | Yes | |
| • 230 V AC | | Yes | |
| Encoder supply | | | |
| 24 V encoder supply | | | |
| • 24 V | L+ minus 4 V DC min. | 20.4 to 28.8V | L+ minus 4 V DC min. |
| Memory | | | |
| Work memory | | | |
| • integrated | 75 kbyte | 75 kbyte | 75 kbyte |
| Load memory | | | |
| • integrated | 2 Mbyte | 2 Mbyte | 2 Mbyte |
| • Plug-in (SIMATIC Memory Card), max. | with SIMATIC memory card | with SIMATIC memory card | with SIMATIC memory card |
| Backup | | | |
| • without battery | Yes | Yes | Yes |
| CPU processing times | | | |
| for bit operations, typ. | 0.08 µs; / instruction | 0.08 µs; / instruction | 0.08 µs; / instruction |
| for word operations, typ. | 1.7 µs; / instruction | 1.7 µs; / instruction | 1.7 µs; / instruction |
| for floating point arithmetic, typ. | 2.3 µs; / instruction | 2.3 µs; / instruction | 2.3 µs; / instruction |
| Data areas and their retentivity | | | |
| Flag | | | |
| • Size, max. | 4 kbyte; Size of bit memory address area | 4 kbyte; Size of bit memory address area | 4 kbyte; Size of bit memory address area |
| Process image | | | |
| • Inputs, adjustable | 1 kbyte | 1 kbyte | 1 kbyte |
| • Outputs, adjustable | 1 kbyte | 1 kbyte | 1 kbyte |
| Time of day | | | |
| Clock | | | |
| • Hardware clock (real-time) | Yes | Yes | Yes |
| Digital inputs | | | |
| Number of digital inputs | 8; Integrated | 8; Integrated | 8; Integrated |
| • of which inputs usable for technological functions | 6; HSC (High Speed Counting) | 6; HSC (High Speed Counting) | 6; HSC (High Speed Counting) |
| Digital outputs | | | |
| Number of digital outputs | 6 | 6; Relays | 6; Relays |
| • of which high-speed outputs | 4; 100 kHz Pulse Train Output | | |
| Analog inputs | | | |
| Number of analog inputs | 2 | 2 | 2 |
| Input ranges | | | |
| • Voltage | Yes | Yes | Yes |
| Analog outputs | | | |
| Number of analog outputs | 0 | 0 | 0 |
| 1. Interface | | | |
| Protocols | | | |
| • PROFINET IO Controller | Yes | Yes | Yes |
| • PROFINET IO Device | Yes | Yes | Yes |
| • SIMATIC communication | Yes | Yes | Yes |
| • Open IE communication | Yes; Optionally also encrypted | Yes; Optionally also encrypted | Yes; Optionally also encrypted |
| • Web server | Yes | Yes | Yes |
| • Media redundancy | No | No | No |

Technical specifications

| Article number | 6ES7212-1AE40-0XB0 CPU 1212C ,DC/DC/DC, 8DI/6DO/2AI | 6ES7212-1BE40-0XB0 CPU 1212C, AC/DC/Relay, 8DI/6DO/2AI | 6ES7212-1HE40-0XB0 CPU 1212C, DC/DC/Relay, 8DI/6DO/2AI |
|---|---|---|---|
| Protocols | | | |
| Open IE communication | | | |
| • TCP/IP | Yes | Yes | Yes |
| • ISO-on-TCP (RFC1006) | Yes | Yes | Yes |
| • UDP | Yes | Yes | Yes |
| Web server | | | |
| • supported | Yes | Yes | Yes |
| OPC UA | | | |
| • OPC UA Server | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; data access (read, write, subscribe), method call, runtime license required |
| Communication functions | | | |
| S7 communication | | | |
| • supported | Yes | Yes | Yes |
| Integrated Functions | | | |
| Frequency measurement | Yes | Yes | Yes |
| controlled positioning | Yes | Yes | Yes |
| Number of position-controlled positioning axes, max. | 8 | 8 | 8 |
| Number of positioning axes via pulse-direction interface | 4; With integrated outputs | Up to 4 with SB 1222 | Up to 4 with SB 1222 |
| PID controller | Yes | Yes | Yes |
| Number of alarm inputs | 4 | 4 | 4 |
| Number of pulse outputs | 4 | | |
| Limit frequency (pulse) | 100 kHz | | |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C | -20 °C | -20 °C |
| • max. | 60 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical | 60 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical | 60 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical |
| Pollutant concentrations | | | |
| • SO ₂ at RH < 60% without condensation | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free |
| Configuration | | | |
| Programming | | | |
| Programming language | | | |
| - LAD | Yes | Yes | Yes |
| - FBD | Yes | Yes | Yes |
| - SCL | Yes | Yes | Yes |
| Dimensions | | | |
| Width | 90 mm | 90 mm | 90 mm |
| Height | 100 mm | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm | 75 mm |
| Weights | | | |
| Weight, approx. | 370 g | 425 g | 385 g |

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1214C

Overview



- Controller for intro to S7 with flexible expansion options
- Expandable by:
 - 1 signal board (SB), battery board (BB) or communication board (CB)
 - 8 signal modules (SM)
 - Max. 3 communications modules (CM)

Ordering data

CPU 1214C

Compact CPU, AC/DC/relay;
Integrated program/data memory
100 KB, load memory 2 MB;
Wide-range power supply
85 ... 264 V AC;
Boolean execution times
0.1 μ s per operation;
14 digital inputs,
10 digital outputs (relays),
2 analog inputs;
Expandable by up to
3 communications modules,
8 signal modules and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz

Article No.

6ES7214-1BG40-0XB0

Compact CPU, DC/DC/DC;
Integrated program/data memory
100 KB, load memory 2 MB;
Supply voltage 24 V DC;
Boolean execution times
0.1 μ s per operation;
14 digital inputs,
10 digital outputs,
2 analog inputs;
Expandable by up to
3 communications modules,
8 signal modules, and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz,
24 V DC digital outputs can be
used as pulse outputs (PTO)
or pulse-width modulated outputs
(PWM) at 100 kHz

6ES7214-1AG40-0XB0

Compact CPU, DC/DC/relay;
Integrated program/data memory
100 KB, load memory 2 MB;
Supply voltage 24 V DC;
Boolean execution times
0.1 μ s per operation;
14 digital inputs,
10 digital outputs (relays),
2 analog inputs;
Expandable by up to
3 communications modules,
8 signal modules, and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz

6ES7214-1HG40-0XB0

Article No.

SB 1221 signal board

4 inputs, 5 V DC, 200 kHz
4 inputs, 24 V DC, 200 kHz

6ES7221-3AD30-0XB0

6ES7221-3BD30-0XB0

SB 1222 signal board

4 outputs, 5 V DC, 0.1 A, 200 kHz
4 outputs, 24 V DC, 0.1 A, 200 kHz

6ES7222-1AD30-0XB0

6ES7222-1BD30-0XB0

SB 1223 signal board

2 inputs, 24 V DC,
IEC type 1 sinking input;
2 x 24 V DC transistor outputs,
0.5 A, 5 W;
can be used as HSC at
up to 30 kHz

6ES7223-0BD30-0XB0

2 inputs, 5 V DC, 200 kHz
2 outputs 5 V DC, 0.1 A, 200 kHz

6ES7223-3AD30-0XB0

2 inputs, 24 V DC, 200 kHz
2 outputs 24 V DC, 0.1 A, 200 kHz

6ES7223-3BD30-0XB0

SB 1231 signal board

1 analog input, ± 10 V with 12 bits or
0 ... 20 mA with 11 bits

6ES7231-4HA30-0XB0

SB 1231 thermocouple signal board

1 input +/- 80 mV, resolution 15 bits
+ sign, thermocouples type J, K

6ES7231-5QA30-0XB0

SB 1231 RTD signal board

1 input for resistance temperature
sensors Pt 100, Pt 200, Pt 500,
Pt 1000, resolution 15 bits + sign

6ES7231-5PA30-0XB0

SB 1232 signal board

1 analog output, ± 10 V with 12 bits
or 0 to 20 mA with 11 bits

6ES7232-4HA30-0XB0

CB 1241 RS485 communication board

For point-to-point connection,
with 1 RS485 interface

6ES7241-1CH30-1XB0

BB1297 battery board

For long-term backup of real-time
clock, can be plugged into the
signal board slot;
battery (CR1025) is not included in
scope of supply

6ES7297-0AX30-0XA0

| Ordering data | Article No. | Ordering data | Article No. |
|--|--|--|--|
| Digital input simulator Simulator Module SIM 1274 (optional) 14 input switches, for CPU 1214C/1215C | 6ES7274-1XH30-0XA0 | RJ45 cable grip 4 units per pack Single port | 6ES7290-3AA30-0XA0 |
| Analog input simulator Simulator Module SIM 1274 (optional) 2 potentiometers | 6ES7274-1XA30-0XA0 | Front flap set (spare part) For CPU 1214C | 6ES7291-1AB30-0XA0 |
| SIMATIC Memory Card (optional) 4 MB 12 MB 24 MB 256 MB 2 GB 32 GB | 6ES7954-8LC03-0AA0 6ES7954-8LE03-0AA0 6ES7954-8LF03-0AA0 6ES7954-8LL03-0AA0 6ES7954-8LP03-0AA0 6ES7954-8LT03-0AA0 | STEP 7 Professional / Basic V17 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) • Windows 10 Home Version 1909, 2004, 20H2 (only STEP 7 Basic) • Windows 10 Professional Version 1909, 2004, 20H2 • Windows 10 Enterprise Version 1909, 2004, 20H2 • Windows 10 IoT Enterprise 2016 LTSC • Windows 10 IoT Enterprise 2019 LTSC Windows Server (64-bit) • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) Type of delivery: 9 languages: de, en, zh included, fr, sp, it, ru, jp, kr as download STEP 7 Professional V17, floating license STEP 7 Professional V17, floating license, software download including license key ¹⁾ Email address required for delivery STEP 7 Basic V17, floating license STEP 7 Basic V17, floating license, software download including license key ¹⁾ Email address required for delivery | |
| Extension cable for two-tier configuration For connecting digital/analog signal modules; length 2 m | 6ES7290-6AA30-0XA0 | | |
| Terminal block (spare part) For CPU 1214C AC/DC/relay • For DI, 20-pin, tin-coated, coded; 4 units - Screw-type system - Push-in system • For DO, 12-pin, tin-coated, coded; 4 units - Screw-type system - Push-in system • For AI, 3-pin, gold-plated; 4 units - Screw-type system - Push-in system For CPU 1214C DC/DC/DC • For DI, 20-pin, tin-coated; 4 units - Screw-type system - Push-in system • For DO, 12-pin, tin-coated; 4 units - Screw-type system - Push-in system • For AI, 3-pin, gold-plated; 4 units - Screw-type system - Push-in system For CPU 1214C DC/DC/relay • For DI, 20-pin, tin-coated; 4 units - Screw-type system - Push-in system • For DO, 12-pin, tin-coated, coded; 4 units - Screw-type system - Push-in system • For AI, 3-pin, gold-plated; 4 units - Screw-type system - Push-in system | 6ES7292-1AV40-0XA0 6ES7292-2AV40-0XA0 6ES7292-1AM40-0XA0 6ES7292-2AM40-0XA0 6ES7292-1BC30-0XA0 6ES7292-2BC30-0XA0 6ES7292-1AV30-0XA0 6ES7292-2AV30-0XA0 6ES7292-1AM30-0XA0 6ES7292-2AM30-0XA0 6ES7292-1BC30-0XA0 6ES7292-2BC30-0XA0 6ES7292-1AV30-0XA0 6ES7292-2AV30-0XA0 6ES7292-1AM40-0XA0 6ES7292-2AM40-0XA0 6ES7292-1BC30-0XA0 6ES7292-2BC30-0XA0 | | 6ES7822-1AA07-0YA5 6ES7822-1AE07-0YA5 6ES7822-0AA07-0YA5 6ES7822-0AE07-0YA5 |

¹⁾ For up-to-date information and download availability, see:
<http://www.siemens.com/tia-online-software-delivery>

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1214C

Technical specifications

| Article number | 6ES7214-1BG40-0XB0 CPU 1214C, AC/DC/Relay, 14DI/10DO/2AI | 6ES7214-1AG40-0XB0 CPU 1214C, DC/DC/DC, 14DI/10DO/2AI | 6ES7214-1HG40-0XB0 CPU 1214C, DC/DC/Relay, 14DI/10DO/2AI |
|--|---|--|---|
| General information | | | |
| Product type designation | CPU 1214C AC/DC/relay | CPU 1214C DC/DC/DC | CPU 1214C DC/DC/relay |
| Engineering with | | | |
| • Programming package | STEP 7 V17 or higher | STEP 7 V17 or higher | STEP 7 V17 or higher |
| Supply voltage | | | |
| Rated value (DC) | | Yes | Yes |
| • 24 V DC | | | |
| Rated value (AC) | Yes | | |
| • 120 V AC | | | |
| • 230 V AC | Yes | | |
| Encoder supply | | | |
| 24 V encoder supply | | | |
| • 24 V | 20.4 to 28.8V | L+ minus 4 V DC min. | L+ minus 4 V DC min. |
| Memory | | | |
| Work memory | | | |
| • integrated | 100 kbyte | 100 kbyte | 100 kbyte |
| Load memory | | | |
| • integrated | 4 Mbyte | 4 Mbyte | 4 Mbyte |
| • Plug-in (SIMATIC Memory Card), max. | with SIMATIC memory card | with SIMATIC memory card | with SIMATIC memory card |
| Backup | | | |
| • without battery | Yes | Yes | Yes |
| CPU processing times | | | |
| for bit operations, typ. | 0.08 µs; / instruction | 0.08 µs; / instruction | 0.08 µs; / instruction |
| for word operations, typ. | 1.7 µs; / instruction | 1.7 µs; / instruction | 1.7 µs; / instruction |
| for floating point arithmetic, typ. | 2.3 µs; / instruction | 2.3 µs; / instruction | 2.3 µs; / instruction |
| Data areas and their retentivity | | | |
| Flag | | | |
| • Size, max. | 8 kbyte; Size of bit memory address area | 8 kbyte; Size of bit memory address area | 8 kbyte; Size of bit memory address area |
| Process image | | | |
| • Inputs, adjustable | 1 kbyte | 1 kbyte | 1 kbyte |
| • Outputs, adjustable | 1 kbyte | 1 kbyte | 1 kbyte |
| Time of day | | | |
| Clock | | | |
| • Hardware clock (real-time) | Yes | Yes | Yes |
| Digital inputs | | | |
| Number of digital inputs | 14; Integrated | 14; Integrated | 14; Integrated |
| • of which inputs usable for technological functions | 6; HSC (High Speed Counting) | 6; HSC (High Speed Counting) | 6; HSC (High Speed Counting) |
| Digital outputs | | | |
| Number of digital outputs | 10; Relays | 10 | 10; Relays |
| • of which high-speed outputs | | 4; 100 kHz Pulse Train Output | |
| Analog inputs | | | |
| Number of analog inputs | 2 | 2 | 2 |
| Input ranges | | | |
| • Voltage | Yes | Yes | Yes |
| Analog outputs | | | |
| Number of analog outputs | 0 | 0 | 0 |
| 1. Interface | | | |
| Protocols | | | |
| • PROFINET IO Controller | Yes | Yes | Yes |
| • PROFINET IO Device | Yes | Yes | Yes |
| • SIMATIC communication | Yes | Yes | Yes |
| • Open IE communication | Yes; Optionally also encrypted | Yes; Optionally also encrypted | Yes; Optionally also encrypted |
| • Web server | Yes | Yes | Yes |
| • Media redundancy | No | No | No |

Technical specifications

| Article number | 6ES7214-1BG40-0XB0 CPU 1214C, AC/DC/Relay, 14DI/10DO/2AI | 6ES7214-1AG40-0XB0 CPU 1214C, DC/DC/DC, 14DI/10DO/2AI | 6ES7214-1HG40-0XB0 CPU 1214C, DC/DC/Relay, 14DI/10DO/2AI |
|---|---|---|---|
| Protocols | | | |
| Open IE communication | | | |
| • TCP/IP | Yes | Yes | Yes |
| • ISO-on-TCP (RFC1006) | Yes | Yes | Yes |
| • UDP | Yes | Yes | Yes |
| Web server | | | |
| • supported | Yes | Yes | Yes |
| OPC UA | | | |
| • OPC UA Server | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; data access (read, write, subscribe), method call, runtime license required |
| Communication functions | | | |
| S7 communication | | | |
| • supported | Yes | Yes | Yes |
| Integrated Functions | | | |
| Frequency measurement | Yes | Yes | Yes |
| controlled positioning | Yes | Yes | Yes |
| Number of position-controlled positioning axes, max. | 8 | 8 | 8 |
| Number of positioning axes via pulse-direction interface | Up to 4 with SB 1222 | 4; With integrated outputs | Up to 4 with SB 1222 |
| PID controller | Yes | Yes | Yes |
| Number of alarm inputs | 4 | 4 | 4 |
| Number of pulse outputs | | 4 | |
| Limit frequency (pulse) | | 100 kHz | |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C | -20 °C | -20 °C |
| • max. | 60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical | 60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical | 60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical |
| Pollutant concentrations | | | |
| • SO ₂ at RH < 60% without condensation | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free |
| Configuration | | | |
| Programming | | | |
| Programming language | | | |
| - LAD | Yes | Yes | Yes |
| - FBD | Yes | Yes | Yes |
| - SCL | Yes | Yes | Yes |
| Dimensions | | | |
| Width | 110 mm | 110 mm | 110 mm |
| Height | 100 mm | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm | 75 mm |
| Weights | | | |
| Weight, approx. | 455 g | 415 g | 435 g |

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1215C

Overview



- Powerful controller with enhanced networking option
- Expandable by:
 - 1 signal board (SB), battery board (BB) or communication board (CB)
 - 8 signal modules (SM)
 - Max. 3 communications modules (CM)

Ordering data

CPU 1215C

Compact CPU, AC/DC/relay;
Integrated program/data memory 125 KB, load memory 4 MB;
Wide-range power supply 85 ... 264 V AC;
Boolean execution times 0.085 µs per operation;
14 digital inputs,
10 digital outputs (relays),
2 analog inputs,
2 analog outputs;
Expandable by up to 3 communications modules,
8 signal modules and 1 signal board/communication board;
Digital inputs can be used as HSC at 100 kHz

Article No.

6ES7215-1BG40-0XB0

Compact CPU, DC/DC/DC;
Integrated program/data memory 125 KB, load memory 4 MB;
Supply voltage 24 V DC;
Boolean execution times 0.085 µs per operation;
14 digital inputs,
10 digital outputs,
2 analog inputs,
2 analog outputs;
Expandable by up to 3 communications modules,
8 signal modules, and 1 signal board/communication board;
Digital inputs can be used as HSC at 100 kHz,
24 V DC digital outputs can be used as pulse outputs (PTO) or pulse-width modulated outputs (PWM) at 100 kHz

6ES7215-1AG40-0XB0

Compact CPU, DC/DC/relay;
Integrated program/data memory 125 KB, load memory 4 MB;
Supply voltage 24 V DC;
Boolean execution times 0.085 µs per operation;
14 digital inputs,
10 digital outputs (relays),
2 analog inputs,
2 analog outputs;
Expandable by up to 3 communications modules,
8 signal modules, and 1 signal board/communication board;
Digital inputs can be used as HSC at 100 kHz

6ES7215-1HG40-0XB0

Article No.

SB 1221 signal board

4 inputs, 5 V DC, 200 kHz
4 inputs, 24 V DC, 200 kHz

6ES7221-3AD30-0XB0

6ES7221-3BD30-0XB0

SB 1222 signal board

4 outputs, 5 V DC, 0.1 A, 200 kHz
4 outputs, 24 V DC, 0.1 A, 200 kHz

6ES7222-1AD30-0XB0

6ES7222-1BD30-0XB0

SB 1223 signal board

2 inputs, 24 V DC,
IEC type 1 sinking input;
2 x 24 V DC transistor outputs,
0.5 A, 5 W;
can be used as HSC at up to 30 kHz

6ES7223-0BD30-0XB0

2 inputs, 5 V DC, 200 kHz
2 outputs 5 V DC, 0.1 A, 200 kHz

6ES7223-3AD30-0XB0

2 inputs, 24 V DC, 200 kHz
2 outputs 24 V DC, 0.1 A, 200 kHz

6ES7223-3BD30-0XB0

SB 1231 signal board

1 analog input, ±10 V with 12 bits or 0 ... 20 mA with 11 bits

6ES7231-4HA30-0XB0

SB 1231 thermocouple signal board

1 input +/- 80 mV, resolution 15 bits + sign, thermocouples type J, K

6ES7231-5QA30-0XB0

SB 1231 RTD signal board

1 input for resistance temperature sensors Pt 100, Pt 200, Pt 500, Pt 1000, resolution 15 bits + sign

6ES7231-5PA30-0XB0

SB 1232 signal board

1 analog output, ±10 V with 12 bits or 0 to 20 mA with 11 bits

6ES7232-4HA30-0XB0

CB 1241 RS485 communication board

For point-to-point connection, with 1 RS485 interface

6ES7241-1CH30-1XB0

| Ordering data | Article No. | Ordering data | Article No. |
|--|--|---|--|
| BB 1297 battery board For long-term backup of real-time clock; can be plugged into the signal board slot; battery (CR1025) is not included | 6ES7297-0AX30-0XA0 | Front flap set (spare part) For CPU 1215C | 6ES7291-1AC30-0XA0 |
| Digital input simulator Simulator Module SIM 1274 (optional) 14 input switches, for CPU 1214C/1215C | 6ES7274-1XH30-0XA0 | RJ45 cable grip 4 units per pack Dual port | 6ES7290-3AB30-0XA0 |
| Analog input simulator Simulator Module SIM 1274 (optional) 2 potentiometers | 6ES7274-1XA30-0XA0 | STEP 7 Professional / Basic V17 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) • Windows 10 Home Version 1909, 2004, 20H2 (only STEP 7 Basic) • Windows 10 Professional Version 1909, 2004, 20H2 • Windows 10 Enterprise Version 1909, 2004, 20H2 • Windows 10 IoT Enterprise 2016 LTSC • Windows 10 IoT Enterprise 2019 LTSC Windows Server (64-bit) • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) Type of delivery: 9 languages: de, en, zh included, fr, sp, it, ru, jp, kr as download | |
| SIMATIC Memory Card (optional) 4 MB 12 MB 24 MB 256 MB 2 GB 32 GB | 6ES7954-8LC03-0AA0 6ES7954-8LE03-0AA0 6ES7954-8LF03-0AA0 6ES7954-8LL03-0AA0 6ES7954-8LP03-0AA0 6ES7954-8LT03-0AA0 | STEP 7 Professional V17, floating license STEP 7 Professional V17, floating license, software download including license key ¹⁾ Email address required for delivery STEP 7 Basic V17, floating license STEP 7 Basic V17, floating license, software download including license key ¹⁾ Email address required for delivery | 6ES7822-1AA07-0YA5 6ES7822-1AE07-0YA5 6ES7822-0AA07-0YA5 6ES7822-0AE07-0YA5 |
| Extension cable for two-tier configuration For connecting digital/analog signal modules; length 2 m | 6ES7290-6AA30-0XA0 | | |
| Terminal block (spare part) For CPU 1215C AC/DC/relay • For DI, 20-pin, tin-coated, coded; 4 units - Screw-type system - Push-in system • For DO, 12-pin, tin-coated, coded; 4 units - Screw-type system - Push-in system • For analog signals, 6-pin, gold-plated; 4 units - Screw-type system - Push-in system For CPU 1215C DC/DC/DC • For DI, 20-pin, tin-coated; 4 units - Screw-type system - Push-in system • For DO, 12-pin, tin-plated, coded; tin-plated; 4 units - Screw-type system - Push-in system • For analog signals, 6-pin, gold-plated; 4 units - Screw-type system - Push-in system For CPU 1215C DC/DC/relay • For DI, 20-pin, tin-coated; 4 units - Screw-type system - Push-in system • For DO, 12-pin, tin-coated, coded; 4 units - Screw-type system - Push-in system • For analog signals, 6-pin, gold-plated; 4 units - Screw-type system - Push-in system | 6ES7292-1AV40-0XA0 6ES7292-2AV40-0XA0 6ES7292-1AM40-0XA0 6ES7292-2AM40-0XA0 6ES7292-1BF30-0XB0 6ES7292-2BF30-0XB0 6ES7292-1AV30-0XA0 6ES7292-2AV30-0XA0 6ES7292-1AM30-0XA0 6ES7292-2AM30-0XA0 6ES7292-1BF30-0XB0 6ES7292-2BF30-0XB0 6ES7292-1AV30-0XA0 6ES7292-2AV30-0XA0 6ES7292-1AM40-0XA0 6ES7292-2AM40-0XA0 6ES7292-1BF30-0XB0 6ES7292-2BF30-0XB0 | | |

¹⁾ For up-to-date information and download availability, see:
<http://www.siemens.com/tia-online-software-delivery>

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1215C

Technical specifications

| Article number | 6ES7215-1AG40-0XB0 CPU 1215C, DC/DC/DC, 14DI/10DO/2AI/2AO | 6ES7215-1BG40-0XB0 CPU 1215C, AC/DC/RLY, 14DI/10DO/2AI/2AO | 6ES7215-1HG40-0XB0 CPU 1215C, DC/DC/RLY, 14DI/10DO/2AI/2AO |
|--|--|---|---|
| General information | | | |
| Product type designation | CPU 1215C DC/DC/DC | CPU 1215C AC/DC/relay | CPU 1215C DC/DC/relay |
| Engineering with | | | |
| • Programming package | STEP 7 V17 or higher | STEP 7 V17 or higher | STEP 7 V17 or higher |
| Supply voltage | | | |
| Rated value (DC) | Yes | Yes | Yes |
| • 24 V DC | | | |
| Rated value (AC) | | | |
| • 120 V AC | Yes | Yes | |
| • 230 V AC | Yes | Yes | |
| Encoder supply | | | |
| 24 V encoder supply | | | |
| • 24 V | L+ minus 4 V DC min. | 20.4 to 28.8V | L+ minus 4 V DC min. |
| Memory | | | |
| Work memory | | | |
| • integrated | 125 kbyte | 125 kbyte | 125 kbyte |
| Load memory | | | |
| • integrated | 4 Mbyte | 4 Mbyte | 4 Mbyte |
| • Plug-in (SIMATIC Memory Card), max. | with SIMATIC memory card | with SIMATIC memory card | with SIMATIC memory card |
| Backup | | | |
| • without battery | Yes | Yes | Yes |
| CPU processing times | | | |
| for bit operations, typ. | 0.08 µs; / instruction | 0.08 µs; / instruction | 0.08 µs; / instruction |
| for word operations, typ. | 1.7 µs; / instruction | 1.7 µs; / instruction | 1.7 µs; / instruction |
| for floating point arithmetic, typ. | 2.3 µs; / instruction | 2.3 µs; / instruction | 2.3 µs; / instruction |
| Data areas and their retentivity | | | |
| Flag | | | |
| • Size, max. | 8 kbyte; Size of bit memory address area | 8 kbyte; Size of bit memory address area | 8 kbyte; Size of bit memory address area |
| Process image | | | |
| • Inputs, adjustable | 1 kbyte | 1 kbyte | 1 kbyte |
| • Outputs, adjustable | 1 kbyte | 1 kbyte | 1 kbyte |
| Time of day | | | |
| Clock | | | |
| • Hardware clock (real-time) | Yes | Yes | Yes |
| Digital inputs | | | |
| Number of digital inputs | 14; Integrated | 14; Integrated | 14; Integrated |
| • of which inputs usable for technological functions | 6; HSC (High Speed Counting) | 6; HSC (High Speed Counting) | 6; HSC (High Speed Counting) |
| Digital outputs | | | |
| Number of digital outputs | 10 | 10; Relays | 10; Relays |
| • of which high-speed outputs | 4; 100 kHz Pulse Train Output | | |
| Analog inputs | | | |
| Number of analog inputs | 2 | 2 | 2 |
| Input ranges | | | |
| • Voltage | Yes | Yes | Yes |
| Analog outputs | | | |
| Number of analog outputs | 2 | 2 | 2 |
| Output ranges, current | | | |
| • 0 to 20 mA | Yes | Yes | Yes |

Technical specifications

| Article number | 6ES7215-1AG40-0XB0 | 6ES7215-1BG40-0XB0 | 6ES7215-1HG40-0XB0 |
|---|---|---|---|
| | CPU 1215C, DC/DC/DC, 14DI/10DO/2AI/2AO | CPU 1215C, AC/DC/RLY, 14DI/10DO/2AI/2AO | CPU 1215C, DC/DC/RLY, 14DI/10DO/2AI/2AO |
| 1. Interface | | | |
| Protocols | | | |
| • PROFINET IO Controller | Yes | Yes | Yes |
| • PROFINET IO Device | Yes | Yes | Yes |
| • SIMATIC communication | Yes | Yes | Yes |
| • Open IE communication | Yes; Optionally also encrypted | Yes; Optionally also encrypted | Yes; Optionally also encrypted |
| • Web server | Yes | Yes | Yes |
| • Media redundancy | Yes | Yes | Yes |
| Protocols | | | |
| Open IE communication | | | |
| • TCP/IP | Yes | Yes | Yes |
| • ISO-on-TCP (RFC1006) | Yes | Yes | Yes |
| • UDP | Yes | Yes | Yes |
| Web server | | | |
| • supported | Yes | Yes | Yes |
| OPC UA | | | |
| • OPC UA Server | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; data access (read, write, subscribe), method call, runtime license required |
| Communication functions | | | |
| S7 communication | | | |
| • supported | Yes | Yes | Yes |
| Integrated Functions | | | |
| Frequency measurement | Yes | Yes | Yes |
| controlled positioning | Yes | Yes | Yes |
| Number of position-controlled positioning axes, max. | 8 | 8 | 8 |
| Number of positioning axes via pulse-direction interface | 4; With integrated outputs | Up to 4 with SB 1222 | Up to 4 with SB 1222 |
| PID controller | Yes | Yes | Yes |
| Number of alarm inputs | 4 | 4 | 4 |
| Number of pulse outputs | 4 | | |
| Limit frequency (pulse) | 100 kHz | | |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C | -20 °C | -20 °C |
| • max. | 60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical | 60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical | 60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical |
| Pollutant concentrations | | | |
| • SO ₂ at RH < 60% without condensation | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free |
| Configuration | | | |
| Programming | | | |
| Programming language | | | |
| - LAD | Yes | Yes | Yes |
| - FBD | Yes | Yes | Yes |
| - SCL | Yes | Yes | Yes |
| Dimensions | | | |
| Width | 130 mm | 130 mm | 130 mm |
| Height | 100 mm | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm | 75 mm |
| Weights | | | |
| Weight, approx. | 500 g | 550 g | 585 g |

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1217C

Overview



- Powerful controller for extremely fast signal processing
- Expandable by:
 - 1 signal board (SB), battery board (BB) or communication board (CB)
 - 8 signal modules (SM)
 - Max. 3 communications modules (CM)

Ordering data

CPU 1217C

Compact CPU, DC/DC/DC;
Integrated program/data memory
150 KB, load memory 4 MB;
Supply voltage 24 V DC;
Boolean execution times
0.085 µs per operation;
14 digital inputs
(10 digital 24 V DC inputs,
4 digital 1.5 V DC differential
inputs), 10 digital outputs
(6 digital 24 V DC outputs,
4 digital 1.5 V DC differential
outputs), 2 analog inputs,
2 analog outputs;
Expandable by up to
3 communications modules,
8 signal modules, and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 1 MHz,
24 V DC digital outputs can be
used as pulse outputs (PTO) or
pulse-width modulated outputs
(PWM) at 100 kHz

Article No.

6ES7217-1AG40-0XB0

SB 1221 signal board

4 inputs, 5 V DC, 200 kHz
4 inputs, 24 V DC, 200 kHz

6ES7221-3AD30-0XB0

6ES7221-3BD30-0XB0

SB 1222 signal board

4 outputs, 5 V DC, 0.1 A, 200 kHz
4 outputs, 24 V DC, 0.1 A, 200 kHz

6ES7222-1AD30-0XB0

6ES7222-1BD30-0XB0

SB 1223 signal board

2 inputs, 24 V DC,
IEC type 1 sinking input;
2 x 24 V DC transistor outputs,
0.5 A, 5 W;
can be used as HSC at up to
30 kHz

6ES7223-0BD30-0XB0

2 inputs, 5 V DC, 200 kHz
2 outputs 5 V DC, 0.1 A, 200 kHz

6ES7223-3AD30-0XB0

2 inputs, 24 V DC, 200 kHz
2 outputs 24 V DC, 0.1 A, 200 kHz

6ES7223-3BD30-0XB0

Article No.

SB 1231 signal board

1 analog input, ±10 V with 12 bits or
0 ... 20 mA with 11 bits

6ES7231-4HA30-0XB0

SB 1231 thermocouple signal board

1 input +/- 80 mV, resolution 15 bits
+ sign, thermocouples type J, K

6ES7231-5QA30-0XB0

SB 1231 RTD signal board

1 input for resistance temperature
sensors Pt 100, Pt 200, Pt 500,
Pt 1000, resolution 15 bits + sign

6ES7231-5PA30-0XB0

SB 1232 signal board

1 analog output, ±10 V with 12 bits
or 0 to 20 mA with 11 bits

6ES7232-4HA30-0XB0

CB 1241 RS485 communication board

For point-to-point connection,
with 1 RS485 interface

6ES7241-1CH30-1XB0

BB 1297 battery board

For long-term backup of real-time
clock; can be plugged into the
signal board slot;
battery (CR1025) is not included

6ES7297-0AX30-0XA0

| Ordering data | Article No. | Article No. |
|--|--|--|
| Digital input simulator Simulator Module SIM 1274 (optional) 14 input switches, for CPU 1217C | 6ES7274-1XK30-0XA0 | STEP 7 Professional / Basic V17 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> • Windows 10 Home Version 1909, 2004, 20H2 (only STEP 7 Basic) • Windows 10 Professional Version 1909, 2004, 20H2 • Windows 10 Enterprise Version 1909, 2004, 20H2 • Windows 10 IoT Enterprise 2016 LTSC • Windows 10 IoT Enterprise 2019 LTSC Windows Server (64-bit) <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) Type of delivery: 9 languages: de, en, zh included, fr, sp, it, ru, jp, kr as download STEP 7 Professional V17, floating license STEP 7 Professional V17, floating license, software download including license key ¹⁾ Email address required for delivery STEP 7 Basic V17, floating license STEP 7 Basic V17, floating license, software download including license key ¹⁾ Email address required for delivery |
| Analog input simulator Simulator Module SIM 1274 (optional) 2 potentiometers | 6ES7274-1XA30-0XA0 | |
| SIMATIC Memory Card (optional) 4 MB | 6ES7954-8LC03-0AA0 | |
| 12 MB | 6ES7954-8LE03-0AA0 | |
| 24 MB | 6ES7954-8LF03-0AA0 | |
| 256 MB | 6ES7954-8LL03-0AA0 | |
| 2 GB | 6ES7954-8LP03-0AA0 | |
| 32 GB | 6ES7954-8LT03-0AA0 | |
| Extension cable for two-tier configuration For connecting digital/analog signal modules; length 2 m | 6ES7290-6AA30-0XA0 | |
| Terminal block (spare part) For CPU 1217C <ul style="list-style-type: none"> • For DI, 10-pin, tin-coated; 4 units <ul style="list-style-type: none"> - Screw-type system - Push-in system • For DI, 16-pin, tin-coated; 4 units <ul style="list-style-type: none"> - Screw-type system - Push-in system • For DO, 18-pin, tin-coated; 4 units <ul style="list-style-type: none"> - Screw-type system - Push-in system • For analog signals, 6-pin, gold-plated; 4 units <ul style="list-style-type: none"> - Screw-type system - Push-in system | 6ES7292-1AK30-0XA0 6ES7292-2AK30-0XA0 6ES7292-1AR30-0XA0 6ES7292-2AR30-0XA0 6ES7292-1AT30-0XA0 6ES7292-2AT30-0XA0 6ES7292-1BF30-0XB0 6ES7292-2BF30-0XB0 | |
| Front flap set (spare part) For CPU 1217C | 6ES7291-1AD30-0XA0 | |
| RJ45 cable grip 4 units per pack Dual port | 6ES7290-3AB30-0XA0 | |

¹⁾ For up-to-date information and download availability, see:
<http://www.siemens.com/tia-online-software-delivery>

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1217C

Technical specifications

| | |
|--|--|
| Article number | 6ES7217-1AG40-0XB0 CPU 1217C, DC/DC/DC, 14DI/10DQ/2AI/2AQ |
| General information | |
| Product type designation | CPU 1217C DC/DC/DC |
| Engineering with | |
| • Programming package | STEP 7 V17 or higher |
| Supply voltage | |
| Rated value (DC) | |
| • 24 V DC | Yes |
| Encoder supply | |
| 24 V encoder supply | |
| • 24 V | L+ minus 4 V DC min. |
| Memory | |
| Work memory | |
| • integrated | 150 kbyte |
| Load memory | |
| • integrated | 4 Mbyte |
| • Plug-in (SIMATIC Memory Card), max. | with SIMATIC memory card |
| Backup | |
| • without battery | Yes |
| CPU processing times | |
| for bit operations, typ. | 0.08 µs; / instruction |
| for word operations, typ. | 1.7 µs; / instruction |
| for floating point arithmetic, typ. | 2.3 µs; / Operation |
| Data areas and their retentivity | |
| Flag | |
| • Size, max. | 8 kbyte; Size of bit memory address area |
| Process image | |
| • Inputs, adjustable | 1 kbyte |
| • Outputs, adjustable | 1 kbyte |
| Time of day | |
| Clock | |
| • Hardware clock (real-time) | Yes |
| Digital inputs | |
| Number of digital inputs | 14; Integrated |
| • of which inputs usable for technological functions | 6; HSC (High Speed Counting) |
| Digital outputs | |
| Number of digital outputs | 10 |
| • of which high-speed outputs | 4; 100 kHz Pulse Train Output |
| Analog inputs | |
| Number of analog inputs | 2 |
| Input ranges | |
| • Voltage | Yes |
| Analog outputs | |
| Number of analog outputs | 2 |
| Output ranges, current | |
| • 0 to 20 mA | Yes |
| 1. Interface | |
| Protocols | |
| • PROFINET IO Controller | Yes |
| • PROFINET IO Device | Yes |
| • SIMATIC communication | Yes |
| • Open IE communication | Yes; Optionally also encrypted |
| • Web server | Yes |
| • Media redundancy | Yes |

| | |
|--|---|
| Article number | 6ES7217-1AG40-0XB0 CPU 1217C, DC/DC/DC, 14DI/10DQ/2AI/2AQ |
| Protocols | |
| Open IE communication | |
| • TCP/IP | Yes |
| • ISO-on-TCP (RFC1006) | Yes |
| • UDP | Yes |
| Web server | |
| • supported | Yes |
| OPC UA | |
| • OPC UA Server | Yes; data access (read, write, subscribe), method call, runtime license required |
| Communication functions | |
| S7 communication | |
| • supported | Yes |
| Integrated Functions | |
| Frequency measurement | Yes |
| controlled positioning | Yes |
| Number of position-controlled positioning axes, max. | 8 |
| Number of positioning axes via pulse-direction interface | 4; With integrated outputs |
| PID controller | Yes |
| Number of alarm inputs | 4 |
| Number of pulse outputs | 4 |
| Limit frequency (pulse) | 1 MHz |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -20 °C |
| • max. | 60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical |
| Pollutant concentrations | |
| • SO ₂ at RH < 60% without condensation | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free |
| Configuration | |
| Programming | |
| Programming language | |
| - LAD | Yes |
| - FBD | Yes |
| - SCL | Yes |
| Dimensions | |
| Width | 150 mm |
| Height | 100 mm |
| Depth | 75 mm |
| Weights | |
| Weight, approx. | 530 g |

Overview

- The superior compact solution
- With 14 integral input/outputs
- Expandable with:
 - 1 signal board (SB) or communication board (CB);
not possible with: 6AG1212-1AE40-2XB0, 6AG1212-1BE40-2XB0, 6AG1212-1HE40-2XB0
 - 2 signal modules (SM)
 - Max. 3 communications modules (CM)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****Article No.****SIPLUS CPU 1212C compact CPU, AC/DC/relay**

(Extended temperature range and exposure to media)

Integrated program/data memory
75 KB, load memory 1 MB;
Wide-range power supply
85 ... 264 V AC;
Boolean execution times
0.1 µs per operation;
8 digital inputs,
6 digital outputs (relays),
2 analog inputs;
Expandable by up to
3 communications modules,
2 signal modules and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz

- For areas with extreme exposure to media (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +70 °C

6AG1212-1BE40-4XB0**6AG1212-1BE40-2XB0****SIPLUS CPU 1212C compact CPU, DC/DC/DC**

(Extended temperature range and exposure to media)

Integrated program/data memory
75 KB, load memory 1 MB;
Power supply 24 V DC;
Boolean execution times
0.1 µs per operation;
8 digital inputs,
6 digital outputs,
2 analog inputs;
Expandable by up to
3 communications modules,
2 signal modules, and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz,
24 V DC digital outputs can be
used as pulse outputs (PTO)
or pulse-width modulated outputs
(PWM) at 100 kHz

- For areas with extreme exposure to media (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +70 °C

6AG1212-1AE40-4XB0**6AG1212-1AE40-2XB0**

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1212C

Ordering data

Article No.

Article No.

SIPLUS CPU 1212C compact CPU, DC/DC/relay

(Extended temperature range and exposure to media)

Integrated program/data memory 75 KB, load memory 1 MB;
Power supply 24 V DC;
Boolean execution times 0.1 µs per operation;
8 digital inputs,
6 digital outputs (relays),
2 analog inputs;
Expandable by up to 3 communications modules, 2 signal modules, and 1 signal board/communication board;
Digital inputs can be used as HSC at 100 kHz

- For areas with extreme exposure to media (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +70 °C

6AG1212-1HE40-4XB0

6AG1212-1HE40-2XB0

Accessories

SIPLUS SB 1221 digital input signal board

(Extended temperature range and exposure to media; cannot be used with 6AG1212-1.....-2XB0)

4 inputs, 5 V DC, 200 kHz, sourcing input

6AG1221-3AD30-5XB0

4 inputs, 24 V DC, 200 kHz, sourcing input

6AG1221-3BD30-5XB0

SIPLUS SB 1222 digital output signal board

(Extended temperature range and exposure to media; cannot be used with 6AG1212-1.....-2XB0)

4 outputs, 5 V DC, 0.1 A, 200 kHz

6AG1222-1AD30-5XB0

4 outputs, 24 V DC, 0.1 A, 200 kHz

6AG1222-1BD30-5XB0

SIPLUS SB 1223 digital input/output signal board

(Extended temperature range and exposure to media; cannot be used with 6AG1212-1.....-2XB0)

2 inputs, 24 V DC,
IEC type 1 sinking input;
2 transistor outputs 24 V DC, 0.5 A, 5 W;
can be used as HSC at up to 30 kHz

- Suitable for areas with extreme exposure to media (conformal coating)
- Ambient temperature -25 ... +55 °C

2 inputs, 5 V DC, 200 kHz
2 outputs 5 V DC, 0.1 A, 200 kHz

6AG1223-0BD30-4XB0

6AG1223-0BD30-5XB0

6AG1223-3AD30-5XB0

6AG1223-3BD30-5XB0

SIPLUS SB 1232 analog output signal board

(Extended temperature range and exposure to media; cannot be used with 6AG1212-1.....-2XB0)

Ambient temperature range
-25 ... +55 °C

1 analog output, ±10 V with 12 bits or 0 ... 20 mA with 11 bits

6AG1232-4HA30-5XB0

Ambient temperature range
0 ... +55 °C

1 analog output, ±10 V with 12 bits or 0 ... 20 mA with 11 bits

6AG1232-4HA30-4XB0

SIPLUS CB 1241 RS 485 communication board

(Extended temperature range and exposure to media; cannot be used with 6AG1212-1.....-2XB0)

For point-to-point connection, with 1 RS 485 interface

6AG1241-1CH30-5XB1

Additional accessories

See SIMATIC S7-1200 CPU 1212C page 3/9

Technical specifications

| Article number | 6AG1212-1AE40-4XB0 | 6AG1212-1AE40-2XB0 |
|---|---|---|
| Based on | 6ES7212-1AE40-0XB0 SIPLUS S7-1200 CPU 1212C DC/DC/DC | 6ES7212-1AE40-0XB0 SIPLUS S7-1200 CPU 1212C DC/DC/DC |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| <ul style="list-style-type: none"> min. max. | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C 60 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C 70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 4, digital outputs 3, analog inputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 3, digital outputs 2, analog inputs 0 (no adjacent points) with horizontal mounting position |
| <ul style="list-style-type: none"> At cold restart, min. | 0 °C | -25 °C |
| Altitude during operation relating to sea level | | |
| <ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude | 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | |
| <ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | |
| Coolants and lubricants | | |
| <ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | |
| <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | |
| <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | |
| <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1212C

Technical specifications

| Article number | 6AG1212-1BE40-4XB0 | 6AG1212-1BE40-2XB0 |
|---|---|---|
| Based on | 6ES7212-1BE40-0XB0 SIPLUS S7-1200 CPU 1212C AC/DC/RLY | 6ES7212-1BE40-0XB0 SIPLUS S7-1200 CPU 1212C AC/DC/RLY |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| • min. | -20 °C; = Tmin; Startup @ 0 °C | -40 °C; = Tmin; Startup @ -25 °C |
| • max. | 60 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical | 70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 4, digital outputs 3, analog inputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 3, digital outputs 2, analog inputs 0 (no adjacent points) with horizontal mounting position |
| • At cold restart, min. | 0 °C | -25 °C |
| Altitude during operation relating to sea level | | |
| • Installation altitude above sea level, max. | 2 000 m | 2 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC |
| Relative humidity | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | |
| Coolants and lubricants | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

Technical specifications

| Article number | 6AG1212-1HE40-4XB0 | 6AG1212-1HE40-2XB0 |
|---|--|---|
| Based on | 6ES7212-1HE40-0XB0 | 6ES7212-1HE40-0XB0 |
| | SIPLUS S7-1200 CPU 1212C DC/DC/RLY | SIPLUS S7-1200 CPU 1212C DC/DC/RLY |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| <ul style="list-style-type: none"> min. max. | -20 °C; = Tmin; Startup @ 0 °C 60 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical | -40 °C; = Tmin; Startup @ -25 °C 70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 4, digital outputs 3, analog inputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 3, digital outputs 2, analog inputs 0 (no adjacent points) with horizontal mounting position |
| <ul style="list-style-type: none"> At cold restart, min. | 0 °C | -25 °C |
| Altitude during operation relating to sea level | | |
| <ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude | 2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | 2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC |
| Relative humidity | | |
| <ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | |
| Coolants and lubricants | | |
| <ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | |
| <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | |
| <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | |
| <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1214C

Overview



- The compact high-performance CPU
- With 24 integrated I/Os
- Expandable with:
 - 1 signal board (SB) or communication board (CB);
not possible with: 6AG1214-1AG40-2XB0, 6AG1214-1BG40-2XB0, 6AG1214-1HG40-2XB0
 - 8 signal modules (SM)
 - Max. 3 communications modules (CM)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

Article No.

SIPLUS CPU 1214C compact CPU, AC/DC/relay

(Extended temperature range and exposure to media)

Integrated program/data memory 100 KB, load memory 2 MB;
Wide-range power supply 85 ... 264 V AC;
Boolean execution times 0.1 µs per operation;
14 digital inputs, 10 digital outputs (relays), 2 analog inputs;
Expandable by up to 3 communications modules, 8 signal modules and 1 signal board/communication board;
Digital inputs can be used as HSC at 100 kHz

- For areas with extreme exposure to media (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +70 °C

6AG1214-1BG40-4XB0

6AG1214-1BG40-5XB0

6AG1214-1BG40-2XB0

SIPLUS CPU 1214C compact CPU, DC/DC/DC

(Extended temperature range and exposure to media)

Integrated program/data memory 100 KB, load memory 2 MB;
Power supply 24 V DC;
Boolean execution times 0.1 µs per operation;
14 digital inputs, 10 digital outputs, 2 analog inputs;
expandable by up to 3 communications modules, 8 signal modules, and 1 signal board/communication board;
Digital inputs can be used as HSC at 100 kHz,
24 V DC digital outputs can be used as pulse outputs (PTO) or pulse-width modulated outputs (PWM) at 100 kHz

- For areas with extreme exposure to media (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +70 °C

6AG1214-1AG40-4XB0

6AG1214-1AG40-5XB0

6AG1214-1AG40-2XB0

| Ordering data | Article No. | Article No. |
|--|---|--|
| SIPLUS CPU 1214C compact CPU, DC/DC/relay (Extended temperature range and exposure to media) Integrated program/data memory 100 KB, load memory 2 MB; Power supply 24 V DC; Boolean execution times 0.1 µs per operation; 14 digital inputs, 10 digital outputs (relays), 2 analog inputs; Expandable by up to 3 communications modules, 8 signal modules, and 1 signal board/communication board; Digital inputs can be used as HSC at 100 kHz <ul style="list-style-type: none"> For areas with extreme exposure to media (conformal coating); ambient temperature -20 ... +60 °C For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +60 °C For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +70 °C | 6AG1214-1HG40-4XB0 6AG1214-1HG40-5XB0 6AG1214-1HG40-2XB0 | SIPLUS SB 1223 digital input/output signal board (Extended temperature range and exposure to media; cannot be used with 6AG1214-1.....-2XB0) 2 inputs, 24 V DC, IEC type 1 sinking input; 2 transistor outputs 24 V DC, 0.5 A, 5 W; can be used as HSC at up to 30 kHz <ul style="list-style-type: none"> Suitable for areas with extreme exposure to media (conformal coating) Ambient temperature -25 ... +55 °C 2 inputs, 5 V DC, 200 kHz 2 outputs 5 V DC, 0.1 A, 200 kHz 2 inputs, 24 V DC, 200 kHz 2 outputs 24 V DC, 0.1 A, 200 kHz |
| Accessories SIPLUS SB 1221 digital input signal board (Extended temperature range and exposure to media; cannot be used with 6AG1214-1.....-2XB0) 4 inputs, 5 V DC, 200 kHz, sourcing input 4 inputs, 24 V DC, 200 kHz, sourcing input | 6AG1221-3AD30-5XB0 6AG1221-3BD30-5XB0 | SIPLUS SB 1232 analog output signal board (Extended temperature range and exposure to media; cannot be used with 6AG1214-1.....-2XB0) <u>Ambient temperature range</u> -25 ... +55 °C 1 analog output, ±10 V with 12 bits or 0 ... 20 mA with 11 bits <u>Ambient temperature range</u> 0 ... +55 °C 1 analog output, ±10 V with 12 bits or 0 ... 20 mA with 11 bits |
| SIPLUS SB 1222 digital output signal board (Extended temperature range and exposure to media; cannot be used with 6AG1214-1.....-2XB0) 4 outputs, 5 V DC, 0.1 A, 200 kHz 4 outputs, 24 V DC, 0.1 A, 200 kHz | 6AG1222-1AD30-5XB0 6AG1222-1BD30-5XB0 | SIPLUS CB 1241 RS 485 communication board (Extended temperature range and exposure to media; cannot be used with 6AG1214-1.....-2XB0) For point-to-point connection, with 1 RS 485 interface |
| | | 6AG1232-4HA30-5XB0 6AG1232-4HA30-4XB0 6AG1241-1CH30-5XB1 Additional accessories See SIMATIC S7-1200 CPU 1214C page 3/13 |

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1214C

Technical specifications

| Article number | 6AG1214-1AG40-4XB0 | 6AG1214-1AG40-5XB0 | 6AG1214-1AG40-2XB0 |
|---|---|---|---|
| Based on | 6ES7214-1AG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/DC | 6ES7214-1AG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/DC | 6ES7214-1AG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/DC |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C; = Tmin; Startup @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C |
| • max. | 60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical | 60 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2 (no adjacent points) with horizontal mounting position | 70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 1 (no adjacent points) with horizontal mounting position |
| • At cold restart, min. | 0 °C | -25 °C | -25 °C |
| Altitude during operation relating to sea level | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | |
| Coolants and lubricants | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |

Technical specifications

| Article number | 6AG1214-1AG40-4XB0 | 6AG1214-1AG40-5XB0 | 6AG1214-1AG40-2XB0 |
|---|---|---|---|
| Based on | 6ES7214-1AG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/DC | 6ES7214-1AG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/DC | 6ES7214-1AG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/DC |
| Usage in industrial process technology | <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 |
| Remark | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A |
| Article number | 6AG1214-1BG40-4XB0 | 6AG1214-1BG40-5XB0 | 6AG1214-1BG40-2XB0 |
| Based on | 6ES7214-1BG40-0XB0 SIPLUS S7-1200 CPU 1214C AC/DC/RLY | 6ES7214-1BG40-0XB0 SIPLUS S7-1200 CPU 1214C AC/DC/RLY | 6ES7214-1BG40-0XB0 SIPLUS S7-1200 CPU 1214C AC/DC/RLY |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C |
| • max. | 60 °C; = Tmax | 60 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2 (no adjacent points) with horizontal mounting position | 70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 1 (no adjacent points) with horizontal mounting position |
| • At cold restart, min. | 0 °C | -25 °C | -25 °C |
| Altitude during operation relating to sea level | | | |
| • Installation altitude above sea level, max. | 2 000 m | 2 000 m | 2 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC |
| Relative humidity | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1214C

Technical specifications

| Article number | 6AG1214-1BG40-4XB0 | 6AG1214-1BG40-5XB0 | 6AG1214-1BG40-2XB0 |
|---|---|---|---|
| Based on | 6ES7214-1BG40-0XB0 SIPLUS S7-1200 CPU 1214C AC/DC/RLY | 6ES7214-1BG40-0XB0 SIPLUS S7-1200 CPU 1214C AC/DC/RLY | 6ES7214-1BG40-0XB0 SIPLUS S7-1200 CPU 1214C AC/DC/RLY |
| Resistance | | | |
| Coolants and lubricants | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

Technical specifications

| Article number | 6AG1214-1HG40-4XB0 | 6AG1214-1HG40-5XB0 | 6AG1214-1HG40-2XB0 |
|---|---|---|---|
| Based on | 6ES7214-1HG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/RLY | 6ES7214-1HG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/RLY | 6ES7214-1HG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/RLY |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C |
| • max. | 60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical | 60 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2 (no adjacent points) with horizontal mounting position | 70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 1 (no adjacent points) with horizontal mounting position |
| • At cold restart, min. | 0 °C | -25 °C | -25 °C |
| Altitude during operation relating to sea level | | | |
| • Installation altitude above sea level, max. | 2 000 m | 2 000 m | 2 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC |
| Relative humidity | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | |
| Coolants and lubricants | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1214C

Technical specifications

| Article number | 6AG1214-1HG40-4XB0 | 6AG1214-1HG40-5XB0 | 6AG1214-1HG40-2XB0 |
|---|---|---|---|
| Based on | 6ES7214-1HG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/RLY | 6ES7214-1HG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/RLY | 6ES7214-1HG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/RLY |
| Usage in industrial process technology | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

Overview

- The compact high-performance CPU
- With 24 integrated I/Os
- Expandable with:
 - 1 signal board (SB) or communication board (CB);
not possible with: 6AG1215-1AG40-2XB0, 6AG1215-1BG40-2XB0, 6AG1215-1HG40-2XB0
 - 8 signal modules (SM)
 - Max. 3 communications modules (CM)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****Article No.****SIPLUS CPU 1215C compact CPU, AC/DC/relay**

(Extended temperature range and exposure to media)

Integrated program and data memory 125 KB, load memory 4 MB;
wide-range power supply 85 ... 264 V AC;
Boolean execution times 0.085 µs per operation;
14 digital inputs,
10 digital outputs (relay),
2 analog inputs,
2 analog outputs;
expandable by up to 3 communications modules,
8 signal modules and 1 signal board/communication board;
digital inputs usable as HSC with 100 kHz

- For areas with extreme exposure to media (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +70 °C

6AG1215-1BG40-4XB0**6AG1215-1BG40-5XB0****6AG1215-1BG40-2XB0****SIPLUS CPU 1215C compact CPU, DC/DC/DC**

(Extended temperature range and exposure to media)

Integrated program and data memory 125 KB, load memory 4 MB;
power supply 24 V DC;
Boolean execution times 0.085 µs per operation;
14 digital inputs,
10 digital outputs,
2 analog inputs,
2 analog outputs;
expandable by up to 3 communications modules,
8 signal modules and 1 signal board/communication board;
digital inputs usable as HSC with 100 kHz;
24 V DC digital outputs usable as pulse outputs (PTO) or pulse-width-modulated outputs (PWM) with 100 kHz

- For areas with extreme exposure to media (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +70 °C

6AG1215-1AG40-4XB0**6AG1215-1AG40-5XB0****6AG1215-1AG40-2XB0**

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1215C

Ordering data

Article No.

Article No.

SIPLUS CPU 1215C compact CPU, DC/DC/relay

(Extended temperature range and exposure to media)

Integrated program and data memory 125 KB, load memory 4 MB;
power supply 24 V DC;
Boolean execution times 0.085 µs per operation;
14 digital inputs,
10 digital outputs (relay),
2 analog inputs,
2 analog outputs;
expandable by up to
3 communications modules,
8 signal modules and 1 signal board/communication board;
digital inputs usable as HSC with 100 kHz

- For areas with extreme exposure to media (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +70 °C

6AG1215-1HG40-4XB0

6AG1215-1HG40-5XB0

6AG1215-1HG40-2XB0

Accessories

SIPLUS SB 1221 digital input signal board

(Extended temperature range and exposure to media; cannot be used with 6AG1215-1.....-2XB0)

4 inputs, 5 V DC, 200 kHz, sourcing input

6AG1221-3AD30-5XB0

4 inputs, 24 V DC, 200 kHz, sourcing input

6AG1221-3BD30-5XB0

SIPLUS SB 1222 digital output signal board

(Extended temperature range and exposure to media; cannot be used with 6AG1215-1.....-2XB0)

4 outputs, 5 V DC, 0.1 A, 200 kHz

6AG1222-1AD30-5XB0

4 outputs, 24 V DC, 0.1 A, 200 kHz

6AG1222-1BD30-5XB0

SIPLUS SB 1223 digital input/output signal board

(Extended temperature range and exposure to media; cannot be used with 6AG1215-1.....-2XB0)

2 inputs, 24 V DC,
IEC type 1 sinking input;
2 transistor outputs 24 V DC,
0.5 A, 5 W;
can be used as HSC at up to 30 kHz

- Suitable for areas with extreme exposure to media (conformal coating)
- Ambient temperature -25 ... +55 °C

6AG1223-0BD30-4XB0

6AG1223-0BD30-5XB0

2 inputs, 5 V DC, 200 kHz
2 outputs 5 V DC, 0.1 A, 200 kHz

6AG1223-3AD30-5XB0

2 inputs, 24 V DC, 200 kHz
2 outputs 24 V DC, 0.1 A, 200 kHz

6AG1223-3BD30-5XB0

SIPLUS SB 1232 analog output signal board

(Extended temperature range and exposure to media; cannot be used with 6AG1215-1.....-2XB0)

Ambient temperature range
-25 ... +55 °C

1 analog output, ±10 V with 12 bits or 0 ... 20 mA with 11 bits

6AG1232-4HA30-5XB0

Ambient temperature range
0 ... +55 °C

1 analog output, ±10 V with 12 bits or 0 ... 20 mA with 11 bits

6AG1232-4HA30-4XB0

SIPLUS CB 1241 RS 485 communication board

(Extended temperature range and exposure to media; cannot be used with 6AG1215-1.....-2XB0)

for point-to-point connection, with 1 RS 485 interface

6AG1241-1CH30-5XB1

Additional accessories

See SIMATIC S7-1200 CPU 1215C, page 3/17

Technical specifications

| Article number | 6AG1215-1AG40-4XB0 | 6AG1215-1AG40-5XB0 | 6AG1215-1AG40-2XB0 |
|---|---|---|---|
| Based on | 6ES7215-1AG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/DC | 6ES7215-1AG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/DC | 6ES7215-1AG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/DC |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C |
| • max. | 60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical | 60 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2, analog outputs 2 (no adjacent points) with horizontal mounting position | 70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2, analog outputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 1, analog outputs 1 (no adjacent points) with horizontal mounting position |
| • At cold restart, min. | 0 °C | -25 °C | -25 °C |
| Altitude during operation relating to sea level | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa |
| Relative humidity | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | |
| Coolants and lubricants | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1215C

Technical specifications

| Article number | 6AG1215-1AG40-4XB0 | 6AG1215-1AG40-5XB0 | 6AG1215-1AG40-2XB0 |
|---|---|---|---|
| Based on | 6ES7215-1AG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/DC | 6ES7215-1AG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/DC | 6ES7215-1AG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/DC |
| Conformal coating | | | |
| <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | <ul style="list-style-type: none"> Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | <ul style="list-style-type: none"> Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | <ul style="list-style-type: none"> Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A |
| Article number | 6AG1215-1BG40-4XB0 | 6AG1215-1BG40-5XB0 | 6AG1215-1BG40-2XB0 |
| Based on | 6ES7215-1BG40-0XB0 SIPLUS S7-1200 CPU 1215C AC/DC/RLY | 6ES7215-1BG40-0XB0 SIPLUS S7-1200 CPU 1215C AC/DC/RLY | 6ES7215-1BG40-0XB0 SIPLUS S7-1200 CPU 1215C AC/DC/RLY |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| <ul style="list-style-type: none"> min. max. At cold restart, min. | <ul style="list-style-type: none"> -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C 60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical 0 °C | <ul style="list-style-type: none"> -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C 60 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2, analog outputs 2 (no adjacent points) with horizontal mounting -25 °C | <ul style="list-style-type: none"> -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C 70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2, analog outputs 2 (no adjacent points) with horizontal mounting position; -25 °C |
| Altitude during operation relating to sea level | | | |
| <ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude | <ul style="list-style-type: none"> 2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa | <ul style="list-style-type: none"> 2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa | <ul style="list-style-type: none"> 2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa |
| Relative humidity | | | |
| <ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. | <ul style="list-style-type: none"> 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | <ul style="list-style-type: none"> 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | <ul style="list-style-type: none"> 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | |
| Coolants and lubricants | | | |
| <ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants | <ul style="list-style-type: none"> Yes; Incl. diesel and oil droplets in the air | <ul style="list-style-type: none"> Yes; Incl. diesel and oil droplets in the air | <ul style="list-style-type: none"> Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 | <ul style="list-style-type: none"> Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | <ul style="list-style-type: none"> Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | <ul style="list-style-type: none"> Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * |

Technical specifications

| Article number | 6AG1215-1BG40-4XB0 6ES7215-1BG40-0XB0 | 6AG1215-1BG40-5XB0 6ES7215-1BG40-0XB0 | 6AG1215-1BG40-2XB0 6ES7215-1BG40-0XB0 |
|---|--|--|---|
| Based on | SIPLUS S7-1200 CPU 1215C AC/DC/RLY | SIPLUS S7-1200 CPU 1215C AC/DC/RLY | SIPLUS S7-1200 CPU 1215C AC/DC/RLY |
| Use on ships/at sea | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |
| Article number | 6AG1215-1HG40-4XB0 6ES7215-1HG40-0XB0 | 6AG1215-1HG40-5XB0 6ES7215-1HG40-0XB0 | 6AG1215-1HG40-2XB0 6ES7215-1HG40-0XB0 |
| Based on | SIPLUS S7-1200 CPU 1215C DC/DC/RLY | SIPLUS S7-1200 CPU 1215C DC/DC/RLY | SIPLUS S7-1200 CPU 1215C DC/DC/RLY |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C |
| • max. | 60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical | 60 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2, analog outputs 2 (no adjacent points) with horizontal mounting position | 70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2, analog outputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 1, analog outputs 1 (no adjacent points) with horizontal mounting position |
| • At cold restart, min. | 0 °C | -25 °C | -25 °C |
| Altitude during operation relating to sea level | | | |
| • Installation altitude above sea level, max. | 2 000 m | 2 000 m | 2 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 95 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC |

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1215C

Technical specifications

| Article number | 6AG1215-1HG40-4XB0 | 6AG1215-1HG40-5XB0 | 6AG1215-1HG40-2XB0 |
|---|--|--|--|
| Based on | 6ES7215-1HG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/RLY | 6ES7215-1HG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/RLY | 6ES7215-1HG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/RLY |
| Relative humidity | | | |
| <ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | |
| Coolants and lubricants | | | |
| <ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | |
| <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | |
| <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | |
| <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A |

Overview



The fail-safe SIMATIC S7-1200 Controllers are based on the S7-1200 standard CPUs and offer additional safety-related functions.

They can be used for safety-oriented tasks according to IEC 61508 up to SIL 3 and ISO 13849-1 up to PL e.

Safety-related programs are created in the TIA Portal. The STEP 7 Safety engineering tool offers commands, operations and blocks for safety-related programs in the LAD and FBD languages. To this end, there is a library with pre-configured, TÜV-approved blocks for safety-related functions.

- Standard controller with integrated safety functions:
 - Standardized and convenient diagnostic functions for standard and safety
 - Uniform symbols, data consistency, ...
- Modular system with scalable range of CPUs and expandable I/O quantity structure:
 - One engineering for standard and fail-safe automation
 - Use of the standard I/O modules together with the fail-safe I/O modules in the central system
 - Integrated standard PROFINET functionalities for PROFINET controllers and PROFINET iDevice services
 - Connection of distributed standard I/O via field bus such as PROFINET or PROFIBUS
 - F-library certified by the German Technical Inspectorate (TÜV) for all common safety functions
 - Free programming of the safety logic using FBD and LAD
 - Standard-compliant printout of the F-program
- One integrated engineering for both standard and safety from S7-1200 to S7-300/400/1500 and WinAC RTX F:
 - STEP 7 Safety Basic for easy engineering of the CPU 1200 FC
 - STEP 7 Safety Advanced for the entire fail-safe SIMATIC S7 portfolio
- Integrated system diagnosis of the CPUs, for standard and safety:
 - Consistent plain text display of system diagnostic information in the TIA Portal, HMI and web server
 - Messages are updated even if the CPU is in STOP state
 - System diagnostics integrated in the CPU firmware. Configuration by user not required
 - The diagnostics is automatically updated on configuration changes.
- 2 fail-safe compact controllers with graded performances in the versions DC/DC/DC and DC/DC/relay

| Characteristics | CPU 1212 FC | CPU 1214 FC | CPU 1215 FC |
|---|---|---|---|
| Variants | DC/DC/DC, DC/DC/relay | DC/DC/DC, DC/DC/relay | DC/DC/DC, DC/DC/relay |
| Main memory, integrated | 100 KB | 125 KB | 150 KB |
| Load memory, integrated | 2 MB | 4 MB | 4 MB |
| Memory card | SIMATIC Memory Card (optional) | SIMATIC Memory Card (optional) | SIMATIC Memory Card (optional) |
| Standard digital inputs/outputs, integrated | 8/6 | 14/10 | 14/10 |
| Standard analog inputs, integrated | 2 | 2 | 2 |
| Standard analog outputs, integrated | - | - | 2 |
| Process image | 1024 bytes for inputs, 1024 bytes for outputs | 1024 bytes for inputs, 1024 bytes for outputs | 1024 bytes for inputs, 1024 bytes for outputs |
| Expansion by signal board | Max. 1 | Max. 1 | Max. 1 |
| Expansion by signal modules | Max. 2 | Max. 8 | Max. 8 |
| Expansion by communications modules | Max. 3 | Max. 3 | Max. 3 |

SIMATIC S7-1200 Basic Controllers

Central processing units

Fail-safe CPUs

Ordering data

Article No.

Article No.

CPU 1212FC

Fail-safe compact CPU, DC/DC/DC;

integrated program/data memory 100 KB, load memory 2 MB; supply voltage 24 V DC; Boolean execution times 0.085 µs per operation; 8 digital inputs, 6 digital outputs, 2 analog inputs; expandable by up to 3 communications modules, 2 signal modules, and 1 signal board/communication board; digital inputs can be used as HSC at 100 kHz, 24 V DC digital outputs can be used as pulse outputs (PTO) or pulse-width modulated outputs (PWM) at 100 kHz

6ES7212-1AF40-0XB0

Fail-safe compact CPU, DC/DC/relay;

integrated program/data memory 125 KB, load memory 2 MB; supply voltage 24 V DC; Boolean execution times 0.085 µs per operation; 8 digital inputs, 6 digital outputs (relays), 2 analog inputs; expandable by up to 3 communications modules, 2 signal modules, and 1 signal board/communication board; digital inputs can be used as HSC at 100 kHz

6ES7212-1HF40-0XB0

CPU 1214FC

Fail-safe compact CPU, DC/DC/DC;

integrated program/data memory 125 KB, load memory 4 MB; supply voltage 24 V DC; Boolean execution times 0.085 µs per operation; 14 digital inputs, 10 digital outputs, 2 analog inputs; expandable by up to 3 communications modules, 8 signal modules, and 1 signal board/communication board; digital inputs can be used as HSC at 100 kHz, 24 V DC digital outputs can be used as pulse outputs (PTO) or pulse-width modulated outputs (PWM) at 100 kHz

6ES7214-1AF40-0XB0

Fail-safe compact CPU, DC/DC/relay;

integrated program/data memory 125 KB, load memory 4 MB; supply voltage 24 V DC; Boolean execution times 0.085 µs per operation; 14 digital inputs, 10 digital outputs (relays), 2 analog inputs; expandable by up to 3 communications modules, 8 signal modules, and 1 signal board/communication board; digital inputs can be used as HSC at 100 kHz

6ES7214-1HF40-0XB0

CPU 1215FC

Fail-safe compact CPU, DC/DC/DC;

integrated program/data memory 150 KB, load memory 4 MB; supply voltage 24 V DC; Boolean execution times 0.085 µs per operation; 14 digital inputs, 10 digital outputs, 2 analog inputs; 2 analog outputs; expandable by up to 3 communications modules, 8 signal modules, and 1 signal board/communication board; digital inputs can be used as HSC at 100 kHz, 24 V DC digital outputs can be used as pulse outputs (PTO) or pulse-width modulated outputs (PWM) at 100 kHz

6ES7215-1AF40-0XB0

Fail-safe compact CPU, DC/DC/relay;

integrated program/data memory 150 KB, load memory 4 MB; supply voltage 24 V DC; Boolean execution times 0.085 µs per operation; 14 digital inputs, 10 digital outputs (relays), 2 analog inputs; 2 analog outputs; expandable by up to 3 communications modules, 8 signal modules, and 1 signal board/communication board; Digital inputs can be used as HSC at 100 kHz

6ES7215-1HF40-0XB0

Accessories

SIMATIC S7-1200 Fail-Safe Starter Kit

With CPU 1212 FC DC/DC/relay; also includes: F-digital input SM 1226 16 x 24 V DC, F-digital output SM 1226 4 x 24 V DC, input simulator, STEP 7 Basic and STEP 7 Safety Basic V16, SIMATIC OPC UA S7-1200 Basic, info material; in Systainer

6ES7212-1HF41-4YB1

With CPU 1214 FC DC/DC/relay; also includes: F-digital input SM 1226 16 x 24 V DC, F-digital output SM 1226 4 x 24 V DC, input simulator, STEP 7 Safety Basic, SIMATIC OPC UA S7-1200 Basic, info material; in Systainer

6ES7212-1HF42-4YB1

Simulator (optional)

14 incoming circuit breakers

6ES7274-1XH30-0XA0

SIMATIC Memory Card (optional)

4 MB

6ES7954-8LC03-0AA0

12 MB

6ES7954-8LE03-0AA0

24 MB

6ES7954-8LF03-0AA0

256 MB

6ES7954-8LL03-0AA0

2 GB

6ES7954-8LP03-0AA0

32 GB

6ES7954-8LT03-0AA0

| Ordering data | Article No. | Article No. |
|---|--|--|
| Extension cable for two-tier configuration For connecting digital/analog signal modules; length 2 m | 6ES7290-6AA30-0XA0 | STEP 7 Safety Advanced V17 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V17 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case. Floating license for 1 user; license key on USB flash drive Floating license for 1 user; license key for download ¹⁾ ; Email address required for delivery |
| Terminal block (spare part) For CPU 1214FC, DC/DC/DC <ul style="list-style-type: none"> For DI, with 20 screws, tin-coated; 4 units For DO, with 12 screws, tin-coated; 4 units For AI, with 3 screws, gold-plated; 4 units For CPU 1214FC, DC/DC/relay <ul style="list-style-type: none"> For DI, with 20 screws, tin-coated; 4 units For DO, with 12 screws, tin-coated, coded; 4 units For AI, with 3 screws, gold-plated; 4 units For CPU 1215FC, DC/DC/DC <ul style="list-style-type: none"> For DI, with 20 screws, tin-coated; 4 units For DO, with 12 screws, tin-coated; 4 units For AI, with 6 screws, gold-plated; 4 units For CPU 1215FC, DC/DC/relay <ul style="list-style-type: none"> For DI, with 20 screws, tin-coated; 4 units For DO, with 12 screws, tin-coated, coded; 4 units For AI, with 6 screws, gold-plated; 4 units | 6ES7292-1AV30-0XA0 6ES7292-1AM30-0XA0 6ES7292-1BC30-0XA0 6ES7292-1AV30-0XA0 6ES7292-1AM40-0XA0 6ES7292-1BC30-0XA0 6ES7292-1AV30-0XA0 6ES7292-1AM30-0XA0 6ES7292-1BF30-0XB0 6ES7292-1AV30-0XA0 6ES7292-1AM40-0XA0 6ES7292-1BF30-0XB0 | |
| Front flap set (spare part) For CPU 1214FC For CPU 1215FC | 6ES7291-1AB30-0XA0 6ES7291-1AC30-0XA0 | |
| RJ45 cable grip 4 units per pack Single port Dual port | 6ES7290-3AA30-0XA0 6ES7290-3AB30-0XA0 | |
| | STEP 7 Safety Basic V17 Task: Engineering tool for configuring fail-safe user programs for SIMATIC S7-1200 FC Requirement: STEP 7 Basic V17 and higher Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case. Floating license for 1 user; license key on USB flash drive Floating license for 1 user; license key for download ¹⁾ ; email address required for delivery | |
| | 6ES7833-1FA17-0YA5 6ES7833-1FA17-0YH5 6ES7833-1FB17-0YA5 6ES7833-1FB17-0YH5 | |

¹⁾ For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

Technical specifications

| Article number | 6ES7212-1AF40-0XB0 | 6ES7212-1HF40-0XB0 | 6ES7214-1AF40-0XB0 | 6ES7214-1HF40-0XB0 | 6ES7215-1AF40-0XB0 | 6ES7215-1HF40-0XB0 |
|----------------------------|-----------------------------------|--------------------------------------|--------------------------------------|---|--|---|
| | CPU 1212FC, DC/DC/DC, 8DI/6DO/2AI | CPU 1212FC, DC/DC/Relay, 8DI/6DO/2AI | CPU 1214 FC, DC/DC/DC, 14DI/10DO/2AI | CPU 1214 FC, DC/DC/Relay, 14DI/10DO/2AI | CPU 1215 FC, DC/DC/DC, 14DI/10DO/2AI/2AO | CPU 1215 FC, DC/DC/RLY, 14DI/10DO/2AI/2AO |
| General information | | | | | | |
| Product type designation | CPU 1212FC DC/DC/DC | CPU 1212FC DC/DC/relay | CPU 1214FC DC/DC/DC | CPU 1214FC DC/DC/Relay | CPU 1215FC DC/DC/DC | CPU 1215FC DC/DC/relay |
| Engineering with | | | | | | |
| • Programming package | STEP 7 V17 or higher | STEP 7 V17 or higher | STEP 7 V17 or higher | STEP 7 V17 or higher | STEP 7 V17 or higher | STEP 7 V17 or higher |
| Supply voltage | | | | | | |
| Rated value (DC) | | | | | | |
| • 24 V DC | Yes | Yes | Yes | Yes | Yes | Yes |

SIMATIC S7-1200 Basic Controllers

Central processing units

Fail-safe CPUs

Technical specifications

| Article number | 6ES7212-1AF40-0XB0 | 6ES7212-1HF40-0XB0 | 6ES7214-1AF40-0XB0 | 6ES7214-1HF40-0XB0 | 6ES7215-1AF40-0XB0 | 6ES7215-1HF40-0XB0 |
|--|--|--|--|--|--|---|
| | CPU 1212FC, DC/DC/DC, 8DI/6DO/2AI | CPU 1212FC, DC/DC/Relay, 8DI/6DO/2AI | CPU 1214 FC, DC/DC/DC, 14DI/10DO/2AI | CPU 1214 FC, DC/DC/Relay, 14DI/10DO/2AI | CPU 1215 FC, DC/DC/DC, 14DI/10DO/2AI/2AO | CPU 1215 FC, DC/DC/RLY, 14DI/10DO/2AI/2AO |
| Encoder supply | | | | | | |
| 24 V encoder supply | | | | | | |
| • 24 V | L+ minus 4 V DC min. | L+ minus 4 V DC min. | L+ minus 4 V DC min. | L+ minus 4 V DC min. | L+ minus 4 V DC min. | L+ minus 4 V DC min. |
| Memory | | | | | | |
| Work memory | | | | | | |
| • integrated | 100 kbyte | 100 kbyte | 125 kbyte | 125 kbyte | 150 kbyte | 150 kbyte |
| Load memory | | | | | | |
| • integrated | 2 Mbyte | 2 Mbyte | 4 Mbyte | 4 Mbyte | 4 Mbyte | 4 Mbyte |
| • Plug-in (SIMATIC Memory Card), max. | with SIMATIC memory card | with SIMATIC memory card | with SIMATIC memory card | with SIMATIC memory card | with SIMATIC memory card | with SIMATIC memory card |
| Backup | | | | | | |
| • without battery | Yes | Yes | Yes | Yes | Yes | Yes |
| CPU processing times | | | | | | |
| for bit operations, typ. | 0.08 µs; / instruction | 0.08 µs; / instruction | 0.08 µs; / instruction | 0.08 µs; / instruction | 0.08 µs; / instruction | 0.08 µs; / instruction |
| for word operations, typ. | 1.7 µs; / instruction | 1.7 µs; / instruction | 1.7 µs; / instruction | 1.7 µs; / instruction | 1.7 µs; / instruction | 1.7 µs; / instruction |
| for floating point arithmetic, typ. | 2.3 µs; / instruction | 2.3 µs; / instruction | 2.3 µs; / instruction | 2.3 µs; / instruction | 2.3 µs; / instruction | 2.3 µs; / instruction |
| Data areas and their retentivity | | | | | | |
| Flag | | | | | | |
| • Size, max. | 4 kbyte; Size of bit memory address area | 4 kbyte; Size of bit memory address area | 8 kbyte; Size of bit memory address area | 8 kbyte; Size of bit memory address area | 8 kbyte; Size of bit memory address area | 8 kbyte; Size of bit memory address area |
| Process image | | | | | | |
| • Inputs, adjustable | 1 kbyte | 1 kbyte | 1 kbyte | 1 kbyte | 1 kbyte | 1 kbyte |
| • Outputs, adjustable | 1 kbyte | 1 kbyte | 1 kbyte | 1 kbyte | 1 kbyte | 1 kbyte |
| Time of day | | | | | | |
| Clock | | | | | | |
| • Hardware clock (real-time) | Yes | Yes | Yes | Yes | Yes | Yes |
| Digital inputs | | | | | | |
| Number of digital inputs | 8; Integrated | 8; Integrated | 14; Integrated | 14; Integrated | 14; Integrated | 14; Integrated |
| • of which inputs usable for technological functions | 4; HSC (High Speed Counting) | 4; HSC (High Speed Counting) | 6; HSC (High Speed Counting) | 6; HSC (High Speed Counting) | 6; HSC (High Speed Counting) | 6; HSC (High Speed Counting) |
| Digital outputs | | | | | | |
| Number of digital outputs | 6 | 6; Relays | 10 | 10; Relays | 10 | 10; Relays |
| • of which high-speed outputs | 4; 100 kHz Pulse Train Output | | 4; 100 kHz Pulse Train Output | | 4; 100 kHz Pulse Train Output | |
| Analog inputs | | | | | | |
| Number of analog inputs | 2 | 2 | 2 | 2 | 2 | 2 |
| Input ranges | | | | | | |
| • Voltage | Yes | Yes | Yes | Yes | Yes | Yes |
| Analog outputs | | | | | | |
| Number of analog outputs | 0 | 0 | | 0 | 2 | 2 |
| Output ranges, current | | | | | | |
| • 0 to 20 mA | | | | | Yes | Yes |
| 1. Interface | | | | | | |
| Protocols | | | | | | |
| • PROFINET IO Controller | Yes | Yes | Yes | Yes | Yes | Yes |
| • PROFINET IO Device | Yes | Yes | Yes | Yes | Yes | Yes |
| • SIMATIC communication | Yes | Yes | Yes | Yes | Yes | Yes |
| • Open IE communication | Yes; Optionally also encrypted | Yes; Optionally also encrypted | Yes; Optionally also encrypted | Yes; Optionally also encrypted | Yes; Optionally also encrypted | Yes; Optionally also encrypted |
| • Web server | Yes | Yes | Yes | Yes | Yes | Yes |
| • Media redundancy | No | No | No | No | Yes; as MRP client | Yes |

Technical specifications

| Article number | 6ES7212-1AF40-0XB0 | 6ES7212-1HF40-0XB0 | 6ES7214-1AF40-0XB0 | 6ES7214-1HF40-0XB0 | 6ES7215-1AF40-0XB0 | 6ES7215-1HF40-0XB0 |
|--|---|---|---|---|---|---|
| | CPU 1212FC, DC/DC/DC, 8DI/6DO/2AI | CPU 1212FC, DC/DC/Relay, 8DI/6DO/2AI | CPU 1214 FC, DC/DC/DC, 14DI/10DO/2AI | CPU 1214 FC, DC/DC/Relay, 14DI/10DO/2AI | CPU 1215 FC, DC/DC/DC, 14DI/10DO/2AI/2AO | CPU 1215 FC, DC/DC/RLY, 14DI/10DO/2AI/2AO |
| Protocols | | | | | | |
| Open IE communication | | | | | | |
| • TCP/IP | Yes | Yes | Yes | Yes | Yes | Yes |
| • ISO-on-TCP (RFC1006) | Yes | Yes | Yes | Yes | Yes | Yes |
| • UDP | Yes | Yes | Yes | Yes | Yes | Yes |
| Web server | | | | | | |
| • supported | Yes | Yes | Yes | Yes | Yes | Yes |
| OPC UA | | | | | | |
| • OPC UA Server | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; data access (read, write, subscribe), method call, runtime license required | Yes; data access (read, write, subscribe), method call, runtime license required |
| Communication functions | | | | | | |
| S7 communication | | | | | | |
| • supported | Yes | Yes | Yes | Yes | Yes | Yes |
| Integrated Functions | | | | | | |
| Frequency measurement | Yes | Yes | Yes | Yes | Yes | Yes |
| controlled positioning | Yes | Yes | Yes | Yes | Yes | Yes |
| Number of position-controlled positioning axes, max. | 8 | 8 | 8 | 8 | 8 | 8 |
| Number of positioning axes via pulse-direction interface | Up to 4 with SB 1222 | Up to 4 with SB 1222 | 4; With integrated outputs | Up to 4 with SB 1222 | 4; With integrated outputs | Up to 4 with SB 1222 |
| PID controller | Yes | Yes | Yes | Yes | Yes | Yes |
| Number of alarm inputs | 4 | 4 | 4 | 4 | 4 | 4 |
| Number of pulse outputs | 4 | | 4 | | 4 | |
| Limit frequency (pulse) | 100 kHz | | 100 kHz | | 100 kHz | |
| Ambient conditions | | | | | | |
| Ambient temperature during operation | | | | | | |
| • min. | 0 °C | 0 °C | 0 °C | 0 °C | 0 °C | 0 °C |
| • max. | 55 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical | 55 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical | 55 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical | 55 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical | 55 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical | 55 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical |
| Pollutant concentrations | | | | | | |
| • SO ₂ at RH < 60% without condensation | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free |
| Configuration | | | | | | |
| Programming | | | | | | |
| Programming language | | | | | | |
| - LAD | Yes; incl. failsafe | Yes; incl. failsafe | Yes; incl. failsafe | Yes; incl. failsafe | Yes; incl. failsafe | Yes; incl. failsafe |
| - FBD | Yes; incl. failsafe | Yes; incl. failsafe | Yes; incl. failsafe | Yes; incl. failsafe | Yes; incl. failsafe | Yes; incl. failsafe |
| - SCL | Yes | Yes | Yes | Yes | Yes | Yes |
| Dimensions | | | | | | |
| Width | 90 mm | 90 mm | 110 mm | 110 mm | 130 mm | 130 mm |
| Height | 100 mm | 100 mm | 100 mm | 100 mm | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm | 75 mm | 75 mm | 75 mm | 75 mm |
| Weights | | | | | | |
| Weight, approx. | 370 g | 385 g | 415 g | 435 g | 500 g | 585 g |

SIMATIC S7-1200 Basic Controllers

Central processing units

SIPLUS fail-safe CPUs

Overview



The fail-safe SIPLUS S7-1200 Controllers are based on the SIPLUS S7-1200 standard CPUs and offer additional safety-related functions.

They can be used for safety-oriented tasks according to IEC 61508 up to SIL 3 and ISO 13849-1 up to PL e.

Safety-related programs are created in the TIA Portal engineering framework. The STEP 7 Safety engineering tool offers commands, operations and blocks for safety-related programs in the LAD and FBD languages. To this end, there is a library with pre-configured blocks for safety-related functions certified by the German Technical Inspectorate (TÜV).

- Standard controller with integrated safety functions:
 - Standardized and convenient diagnostic functions for standard and safety
 - Uniform symbols, data consistency, ...
- Modular system with scalable range of CPUs and expandable I/O quantity structure:
 - One engineering for standard and fail-safe automation
 - Use of the standard I/O modules together with the fail-safe I/O modules in the central system
 - Integrated standard PROFINET functionalities for PROFINET controllers and PROFINET iDevice services
 - Connection of distributed standard I/O via fieldbus such as PROFINET or PROFIBUS
 - TÜV-approved F-library for all common safety functions
 - Free programming of the safety logic using FBD and LAD
 - Standard-compliant printout of the F-program
- One integrated engineering for both standard and safety from S7-1200 to S7-300/400/1500 and WinAC RTX F:
 - STEP 7 Safety Basic for easy engineering of the CPU 1200 FC
 - STEP 7 Safety Advanced for the entire fail-safe SIMATIC S7 portfolio
- Integrated system diagnosis of the CPUs, for standard and safety:
 - Consistent plain text display of system diagnostic information in the TIA Portal, HMI and web server
 - Messages are updated even if the CPU is in STOP state
 - System diagnostics integrated in the CPU firmware. Configuration by user not required
 - The diagnostics is automatically updated on configuration changes.
- 2 fail-safe compact controllers with graded performances in the versions DC/DC/DC and DC/DC/relay

| Characteristics | SIPLUS CPU 1214 FC | SIPLUS CPU 1215 FC |
|---|---|---|
| Variants | DC/DC/DC, DC/DC/relay | DC/DC/DC |
| Work memory, integrated | 125 KB | 150 KB |
| Load memory, integrated | 4 MB | 4 MB |
| Memory card | SIMATIC Memory Card (optional) | SIMATIC Memory Card (optional) |
| Standard digital inputs/outputs, integrated | 14/10 | 14/10 |
| Standard analog inputs, integrated | 2 | 2 |
| Standard analog outputs, integrated | - | 2 |
| Process image | 1024 bytes for inputs, 1024 bytes for outputs | 1024 bytes for inputs, 1024 bytes for outputs |
| Expansion by signal board | Max. 1 | Max. 1 |
| Expansion by signal modules | Max. 8 | Max. 8 |
| Expansion by communications modules | Max. 3 | Max. 3 |

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

| Ordering data | Article No. | Ordering data | Article No. |
|---|---------------------------|---|---|
| <p>CPU 1214 FC (Extended temperature range and exposure to media)</p> <p>Fail-safe compact CPU, DC/DC/DC; Integrated program/data memory 125 KB, load memory 4 MB; supply voltage 24 V DC; Boolean execution times 0.085 µs per operation; 14 digital inputs, 10 digital outputs, 2 analog inputs; expandable by up to 3 communications modules, 8 signal modules, and 1 signal board/communication board; digital inputs can be used as HSC at 100 kHz, 24 V DC digital outputs can be used as pulse outputs (PTO) or pulse-width modulated outputs (PWM) at 100 kHz</p> | 6AG1214-1AF40-5XB0 | <p>CPU 1215 FC (Extended temperature range and exposure to media)</p> <p>Fail-safe compact CPU, DC/DC/DC Integrated program/data memory 150 KB, load memory 4 MB Power supply 24 V DC Boolean execution times 0.085 µs per operation 14 digital inputs, 10 digital outputs 2 analog inputs; 2 analog outputs Expandable by up to 3 communications modules, 8 signal modules, and 1 signal board/communication board Digital inputs can be used as HSC at 100 kHz 24 V DC digital outputs can be used as pulse outputs (PTO) or pulse-width modulated outputs (PWM) at 100 kHz</p> | 6AG1215-1AF40-5XB0 |
| <p>Fail-safe compact CPU, DC/DC/relay Integrated program/data memory 125 KB, load memory 4 MB; power supply 24 V DC Boolean execution times 0.085 µs per operation 14 digital inputs, 10 digital outputs (relays) 2 analog inputs Expandable by up to 3 communications modules, 8 signal modules, and 1 signal board/communication board Digital inputs can be used as HSC at 100 kHz</p> | 6AG1214-1HF40-5XB0 | <p>Accessories</p> | See SIMATIC CPU 121x FC, page 3/42 |

SIMATIC S7-1200 Basic Controllers

Central processing units

SIPLUS fail-safe CPUs

Technical specifications

| Article number | 6AG1214-1AF40-5XB0 | 6AG1214-1HF40-5XB0 | 6AG1215-1AF40-5XB0 |
|---|---|---|---|
| Based on | 6ES7214-1AF40-0XB0 SIPLUS S7-1200 CPU 1214FC DC/DC/DC | 6ES7214-1HF40-0XB0 SIPLUS S7-1200 CPU 1214FC DC/DC/RLY | 6ES7215-1AF40-0XB0 SIPLUS S7-1200 CPU 1215FC DC/DC/DC |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -25 °C; = Tmin | -25 °C; = Tmin | -25 °C; = Tmin |
| • max. | 55 °C; = Tmax | 55 °C; = Tmax | 55 °C; = Tmax |
| Altitude during operation relating to sea level | | | |
| • Installation altitude above sea level, max. | 2 000 m | 2 000 m | 2 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) |
| Relative humidity | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; incl. condensation / frost permitted (no commissioning under condensation conditions) |
| Resistance | | | |
| Coolants and lubricants | | | |
| - Resistant to commercially available coolants and lubricants | Yes | Yes | Yes |
| Use in stationary industrial systems | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

Overview



- Digital inputs as supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the relevant task
- For subsequent expansion of the system with additional inputs

Ordering data

Article No.

SM 1221 digital input signal module

8 inputs, 24 V DC, isolated, switching to P/M potential

6ES7221-1BF32-0XB0

16 inputs, 24 V DC, isolated, switching to P/M potential

6ES7221-1BH32-0XB0

Extension cable for two-tier configuration

For connecting digital/analog signal modules; length 2 m

6ES7290-6AA30-0XA0

Terminal block (spare part)

For 6ES7221-1BF32-0XB0, 6ES7221-1BH32-0XB0

- 7-pin, tin-coated; 4 units
- Screw-type system
- Push-in system

6ES7292-1AG30-0XA0

6ES7292-2AG30-0XA0

Front flap set (spare part)

For modules with a width of 45 mm

6ES7291-1BA30-0XA0

Technical specifications

| Article number | 6ES7221-1BF32-0XB0 | 6ES7221-1BH32-0XB0 |
|---|------------------------------------|-------------------------------------|
| | Digital Input SM 1221, 8DI, 24V DC | Digital Input SM 1221, 16DI, 24V DC |
| General information | | |
| Product type designation | SM 1221, DI 8x24 V DC | SM 1221, DI 16x24 V DC |
| Supply voltage | | |
| Rated value (DC) | 24 V | 24 V |
| Input current | | |
| from backplane bus 5 V DC, max. | 105 mA | 130 mA |
| Digital inputs | | |
| • from load voltage L+ (without load), max. | 4 mA; per channel | 4 mA; per channel |
| Output voltage | | |
| Power supply to the transmitters | | |
| • present | Yes | Yes |
| Digital inputs | | |
| Number of digital inputs | 8 | 16 |
| • in groups of | 2 | 4 |
| Input characteristic curve in accordance with IEC 61131, type 1 | Yes | Yes |
| Number of simultaneously controllable inputs | | |
| all mounting positions | | |
| - up to 40 °C, max. | 8 | 16 |
| horizontal installation | | |
| - up to 40 °C, max. | 8 | 16 |
| - up to 50 °C, max. | 8 | 16 |
| vertical installation | | |
| - up to 40 °C, max. | 8 | 16 |
| Input voltage | | |
| • Rated value (DC) | 24 V | 24 V |
| • for signal "0" | 5 V DC at 1 mA | 5 V DC at 1 mA |
| • for signal "1" | 15 V DC at 2.5 mA | 15 V DC at 2.5 mA |

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SM 1221 digital input modules

Technical specifications

| Article number | 6ES7221-1BF32-0XB0 Digital Input SM 1221, 8DI, 24V DC | 6ES7221-1BH32-0XB0 Digital Input SM 1221, 16DI, 24V DC |
|---|---|---|
| Input current | | |
| • for signal "0", max. (permissible quiescent current) | 1 mA | 1 mA |
| • for signal "1", min. | 2.5 mA | 2.5 mA |
| • for signal "1", typ. | 4 mA | 4 mA |
| Input delay (for rated value of input voltage) for standard inputs | | |
| - parameterizable | Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four | Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four |
| for interrupt inputs | | |
| - parameterizable | Yes | Yes |
| Interrupts/diagnostics/ status information | | |
| Alarms | | |
| • Diagnostic alarm | Yes | Yes |
| Diagnostics indication LED | | |
| • for status of the inputs | Yes | Yes |
| Potential separation | | |
| Potential separation digital inputs | | |
| • between the channels, in groups of | 2 | 4 |
| Standards, approvals, certificates | | |
| CE mark | Yes | Yes |
| CSA approval | Yes | Yes |
| UL approval | Yes | Yes |
| cULus | Yes | Yes |
| FM approval | Yes | Yes |
| RCM (formerly C-TICK) | Yes | Yes |
| KC approval | Yes | Yes |
| Marine approval | Yes | Yes |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| • min. | -20 °C | -20 °C |
| • max. | 60 °C | 60 °C |
| Connection method | | |
| required front connector | Yes | Yes |
| Mechanics/material | | |
| Enclosure material (front) | | |
| • Plastic | Yes | Yes |
| Dimensions | | |
| Width | 45 mm | 45 mm |
| Height | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm |
| Weights | | |
| Weight, approx. | 170 g | 210 g |

Overview



- Digital inputs as a supplement to the integral I/O of SIMATIC S7-1200 CPUs
- Can be plugged directly into the CPU

Ordering data

Article No.

SB 1221 Signal Board digital input modules

4 inputs, 5 V DC, 200 kHz, sourcing input

6ES7221-3AD30-0XB0

4 inputs, 24 V DC, 200 kHz, sourcing input

6ES7221-3BD30-0XB0**Terminal block (spare part)**

for Signal Board

with 6 screws, gold-plated; 4 pcs.

6ES7292-1BF30-0XA0

Technical specifications

| Article number | 6ES7221-3AD30-0XB0 | 6ES7221-3BD30-0XB0 |
|--|--|--|
| | Signal Board SB 1221, 4 DI 5VDC 200KHz | Signal Board SB 1221, 4 DI 24VDC 200KHz |
| General information | | |
| Product type designation | SB 1221, DI 4x5 V DC 200 kHz | SB 1221, DI 4x24 V DC 200 kHz |
| Input current | | |
| from backplane bus 5 V DC, typ. | 40 mA | 40 mA |
| Digital inputs | | |
| Number of digital inputs | 4; Current-sourcing | 4; Current-sourcing |
| • in groups of | 4 | 4 |
| Input voltage | | |
| • Type of input voltage | DC | DC |
| • Rated value (DC) | 5 V | 24 V |
| • for signal "0" | (L+ minus 1.0 V DC) ... L+ (2.2 ... 0 mA) | (L+ minus 5.0 V DC) ... L+ (1.4 ... 0 mA) |
| • for signal "1" | 0 V ... (L+ minus 2.0 V DC (20 ... 5.1 mA)) | 0 V ... (L+ minus 10 V DC (10 ... 2.9 mA)) |
| Input current | | |
| • for signal "0", max. (permissible quiescent current) | 2.2 mA | 1.4 mA |
| • for signal "1", min. | 5.1 mA | 2.9 mA |
| • for signal "1", typ. | | 7 mA |
| Input delay (for rated value of input voltage) | | |
| for standard inputs | | |
| - parameterizable | Yes; 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 μs; 0.05 / 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 ms | Yes; 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 μs; 0.05 / 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 ms |
| for interrupt inputs | | |
| - parameterizable | Yes | Yes |
| for technological functions | | |
| - parameterizable | Yes | Yes |
| Diagnostics indication LED | | |
| • for status of the inputs | Yes | Yes |

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SB 1221 digital input modules**Technical specifications**

| Article number | 6ES7221-3AD30-0XB0 | 6ES7221-3BD30-0XB0 |
|---|--|---|
| | Signal Board SB 1221, 4 DI 5VDC 200KHz | Signal Board SB 1221, 4 DI 24VDC 200KHz |
| Standards, approvals, certificates | | |
| CE mark | Yes | Yes |
| CSA approval | Yes | Yes |
| UL approval | Yes | Yes |
| cULus | Yes | Yes |
| FM approval | Yes | Yes |
| RCM (formerly C-TICK) | Yes | Yes |
| KC approval | Yes | Yes |
| Marine approval | Yes | Yes |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| • min. | -20 °C | -20 °C |
| • max. | 60 °C | 60 °C |
| Mechanics/material | | |
| Enclosure material (front) | | |
| • Plastic | Yes | Yes |
| Dimensions | | |
| Width | 38 mm | 38 mm |
| Height | 62 mm | 62 mm |
| Depth | 21 mm | 21 mm |
| Weights | | |
| Weight, approx. | 35 g | 35 g |

Overview



- Digital outputs as supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the relevant task
- For subsequent expansion of the system with additional outputs

Ordering data

Article No.

SM 1222 digital output signal module

8 outputs, 24 V DC; 0.5 A, 5 W, isolated

6ES7222-1BF32-0XB0

16 outputs, 24 V DC; 0.5 A, 5 W, isolated

6ES7222-1BH32-0XB0

16 outputs, 24 V DC; 0.5 A, 5 W, isolated, switching to P potential

6ES7222-1BH32-1XB0

8 relay outputs, 5 ... 30 V DC / 5 ... 250 V AC, 2 A, 30 W DC / 200 W AC

6ES7222-1HF32-0XB0

8 relay outputs, changeover contact, 5 ... 30 V DC / 5 ... 250 V AC, 2 A, 30 W DC / 200 W AC

6ES7222-1XF32-0XB0

16 relay outputs, 5 ... 30 V DC / 5 ... 250 V AC, 2 A, 30 W DC / 200 W AC

6ES7222-1HH32-0XB0

Extension cable for two-tier configuration

6ES7290-6AA30-0XA0

For connecting digital/analog signal modules; length 2 m

Terminal block (spare part)

For 6ES7222-1BF32-0XB0, 6ES7222-1BH32-0XB0

- 7-pin, tin-coated; 4 units
 - Screw-type system
 - Push-in system

6ES7292-1AG30-0XA0
6ES7292-2AG30-0XA0

For 6ES7222-1HF32-0XB0

- 7-pin, tin-coated, left coded; 4 units
 - Screw-type system
 - Push-in system

6ES7292-1AG40-0XA1
6ES7292-2AG40-0XA1

For 6ES7222-1HH32-0XB0

- 7-pin, tin-coated, right coded; 4 units
 - Screw-type system
 - Push-in system

6ES7292-1AG40-0XA0
6ES7292-2AG40-0XA0

For 6ES7222-1XF32-0XB0

- 11-pin, tin-coated, right coded; 4 units
 - Screw-type system
 - Push-in system

6ES7292-1AL40-0XA0
6ES7292-2AL40-0XA0

Front flap set (spare part)

For modules with a width of 45 mm

6ES7291-1BA30-0XA0

For modules with a width of 70 mm

6ES7291-1BB30-0XA0

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SM 1222 digital output modules

Technical specifications

| Article number | 6ES7222-1BF32-0XB0 | 6ES7222-1BH32-0XB0 | 6ES7222-1BH32-1XB0 | 6ES7222-1HF32-0XB0 | 6ES7222-1HH32-0XB0 | 6ES7222-1XF32-0XB0 |
|---|-------------------------------------|--------------------------------------|--|--|--|--|
| | Digital Output SM1222, 8 DO, 24V DC | Digital Output SM1222, 16 DO, 24V DC | Digital Output SM1222, 16DO, 24V DC sink | Digital Output SM 1222, 8 DO, Relay | Digital Output SM1222, 16 DO, Relay | Digital Output SM 1222, 8 DO, Changeover |
| General information | | | | | | |
| Product type designation | SM 1222, DQ 8x24 V DC/0.5 A | SM 1222, DQ 16x24 V DC/0.5 A | SM 1222, DO 16x 24 V DC/0.5 A Sink | SM 1222, DQ 8x relay/2 A | SM 1222, DQ 16x relay/2 A | SM 1222, DQ 8x relay/2 A |
| Input current | | | | | | |
| from backplane bus 5 V DC, max. | 120 mA | 140 mA | 140 mA | 120 mA | 135 mA | 140 mA |
| Digital outputs | | | | | | |
| • from load voltage L+, max. | | | | 11 mA/relay coil | 11 mA/relay coil | 16.7 mA/relay coil |
| Digital outputs | | | | | | |
| Number of digital outputs | 8 | 16 | 16 | 8 | 16 | 8 |
| • in groups of | 1 | 1 | 1 | 2 | 1 | 1 |
| Current-sinking | | | Yes | | | |
| Short-circuit protection | No; to be provided externally | No; to be provided externally | No; to be provided externally | No; to be provided externally | No; to be provided externally | No; to be provided externally |
| Limitation of inductive shutdown voltage to | typ. (L+) -48 V | typ. (L+) -48 V | Typ 45 V | | | |
| Switching capacity of the outputs | | | | | | |
| • with resistive load, max. | 0.5 A | 0.5 A | 0.5 A | 2 A | 2 A | 2 A |
| • on lamp load, max. | 5 W | 5 W | 5 W | 30 W with DC, 200 W with AC | 30 W with DC, 200 W with AC | 30 W with DC, 200 W with AC |
| Output voltage | | | | | | |
| • Rated value (DC) | 24 V | 24 V | 24 V | 5 V DC to 30 V DC | 5 V DC to 30 V DC | 5 V DC to 30 V DC |
| • Rated value (AC) | | | | 5 V AC to 250 V AC | 5 V AC to 250 V AC | 5 V AC to 250 V AC |
| • for signal "0", max. | 0.1 V; with 10 kOhm load | 0.1 V; with 10 kOhm load | L+ minus 0.75 V DC with 10k Load | | | |
| • for signal "1", min. | 20 V DC | 20 V DC | | | | |
| Output current | | | | | | |
| • for signal "1" rated value | 0.5 A | 0.5 A | 0.5 A | 2 A | 2 A | 2 A |
| • for signal "0" residual current, max. | 10 µA | 10 µA | 75 µA | | | |
| Output delay with resistive load | | | | | | |
| • "0" to "1", max. | 50 µs | 50 µs | 20 µs | 10 ms | 10 ms | 10 ms |
| • "1" to "0", max. | 200 µs | 200 µs | 350 µs | 10 ms | 10 ms | 10 ms |
| Total current of the outputs (per group) | | | | | | |
| horizontal installation | | | | | | |
| - up to 50 °C, max. | 4 A; Current per mass | 8 A; Current per mass | 8 A; Current per mass | 10 A; Current per mass | 10 A; Current per mass | 2 A; Current per mass |
| Relay outputs | | | | | | |
| • Number of relay outputs | | | | 8 | 16 | 8 |
| • Rated supply voltage of relay coil L+ (DC) | | | | 24 V | 24 V | 24 V |
| • Number of operating cycles, max. | | | | mechanically 10 million, at rated load voltage 100 000 | mechanically 10 million, at rated load voltage 100 000 | mechanically 10 million, at rated load voltage 100 000 |
| Switching capacity of contacts | | | | | | |
| - with inductive load, max. | 0.5 A | 0.5 A | 0.5 A | 2 A | 2 A | 2 A |
| - on lamp load, max. | 5 W | 5 W | 5 W | 30 W with DC, 200 W with AC | 30 W with DC, 200 W with AC | 30 W with DC, 200 W with AC |
| - with resistive load, max. | 0.5 A | 0.5 A | 0.5 A | 2 A | 2 A | 2 A |

Technical specifications

| Article number | 6ES7222-1BF32-0XB0 | 6ES7222-1BH32-0XB0 | 6ES7222-1BH32-1XB0 | 6ES7222-1HF32-0XB0 | 6ES7222-1HH32-0XB0 | 6ES7222-1XF32-0XB0 |
|--|-------------------------------------|--------------------------------------|--|-------------------------------------|---|--|
| | Digital Output SM1222, 8 DO, 24V DC | Digital Output SM1222, 16 DO, 24V DC | Digital Output SM1222, 16DO, 24V DC sink | Digital Output SM 1222, 8 DO, Relay | Digital Output SM1222, 16 DO, Relay | Digital Output SM 1222, 8 DO, Changeover |
| Interrupts/diagnostics/status information | | | | | | |
| Alarms | | | | | | |
| • Diagnostic alarm | Yes | Yes | Yes | Yes | Yes | Yes |
| Diagnostics indication LED | | | | | | |
| • for status of the outputs | Yes | Yes | Yes | Yes | Yes | Yes |
| Potential separation | | | | | | |
| Potential separation digital outputs | | | | | | |
| • between the channels | | | | Relays | Relays | Relays |
| • between the channels, in groups of | 1 | 1 | 1 | 2 | 4 | 1 |
| • between the channels and backplane bus | 500 V AC | 500 V AC | 500 V AC | 1 500 V AC for 1 minute | 1 500 V AC for 1 minute | 1 500 V AC for 1 minute |
| Standards, approvals, certificates | | | | | | |
| CE mark | Yes | Yes | Yes | Yes | Yes | Yes |
| CSA approval | Yes | Yes | Yes | Yes | Yes | Yes |
| UL approval | Yes | Yes | Yes | Yes | Yes | Yes |
| cULus | Yes | Yes | Yes | Yes | Yes | Yes |
| FM approval | Yes | Yes | Yes | Yes | Yes | Yes |
| RCM (formerly C-TICK) | Yes | Yes | Yes | Yes | Yes | Yes |
| KC approval | Yes | Yes | Yes | Yes | Yes | Yes |
| Marine approval | Yes | Yes | Yes | Yes | Yes | Yes |
| Ambient conditions | | | | | | |
| Ambient temperature during operation | | | | | | |
| • min. | -20 °C | -20 °C | -20 °C | -20 °C | -20 °C | -20 °C |
| • max. | 60 °C | 60 °C | 60 °C | 60 °C | 60 °C; Number of simultaneously activated outputs: 8 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 16 at 55 °C horizontal or 45 °C vertical | 60 °C; Number of simultaneously activated outputs: 4 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 at 55 °C horizontal or 45 °C vertical |
| Connection method | | | | | | |
| required front connector | Yes | Yes | Yes | Yes | Yes | Yes |
| Mechanics/material | | | | | | |
| Enclosure material (front) | | | | | | |
| • Plastic | Yes | Yes | Yes | Yes | Yes | Yes |
| Dimensions | | | | | | |
| Width | 45 mm | 45 mm | 45 mm | 45 mm | 45 mm | 70 mm |
| Height | 100 mm | 100 mm | 100 mm | 100 mm | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm | 75 mm | 75 mm | 75 mm | 75 mm |
| Weights | | | | | | |
| Weight, approx. | 180 g | 220 g | 220 g | 190 g | 260 g | 310 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SB 1222 digital output modules

Overview



- Digital outputs as a supplement to the integral I/O of SIMATIC S7-1200 CPUs
- Can be plugged directly into the CPU

Ordering data

Article No.

SB 1222 Signal Board digital output modules

4 outputs, 5 V DC, 0.1 A, 200 kHz

6ES7222-1AD30-0XB0

4 outputs, 24 V DC, 0.1 A, 200 kHz

6ES7222-1BD30-0XB0

Terminal block (spare part)

for Signal Board

with 6 screws, gold-plated; 4 pcs.

6ES7292-1BF30-0XA0

Technical specifications

| Article number | 6ES7222-1AD30-0XB0 Signal Board SB1222, 4 DQ 5VDC 200KHz | 6ES7222-1BD30-0XB0 Signal Board SB1222, 4 DQ 24VDC 200KHz |
|---|---|--|
| General information | | |
| Product type designation | SB 1222, DQ 4x5 V DC 200 kHz | SB 1222, DQ 4x24 V DC 200 kHz |
| Input current | | |
| from backplane bus 5 V DC, typ. | 35 mA | 35 mA |
| Digital outputs | | |
| Number of digital outputs | 4; MOSFET, solid-state (current-sinking/current-sourcing) | 4; MOSFET, solid-state (current-sinking/current-sourcing) |
| • in groups of | 4 | 4 |
| Short-circuit protection | No | No |
| Switching capacity of the outputs | | |
| • with resistive load, max. | 0.1 A | 0.1 A |
| Load resistance range | | |
| • upper limit | 7 Ω | 11 Ω |
| Output voltage | | |
| • Rated value (DC) | 5 V | 24 V |
| • for signal "0", max. | 0.2 V | 1 V; with 10 kOhm load |
| • for signal "1", min. | L+ minus 0.7 V DC | L+ (-1.5 V) |
| • for signal "1", max. | 6 V | |
| Output current | | |
| • for signal "1" permissible range, max. | 0.1 A | 0.1 A |
| Diagnostics indication LED | | |
| • for status of the outputs | Yes | Yes |
| Standards, approvals, certificates | | |
| CE mark | Yes | Yes |
| CSA approval | Yes | Yes |
| UL approval | Yes | Yes |
| cULus | Yes | Yes |
| FM approval | Yes | Yes |
| RCM (formerly C-TICK) | Yes | Yes |
| KC approval | Yes | Yes |
| Marine approval | Yes | Yes |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| • min. | -20 °C | -20 °C |
| • max. | 60 °C | 60 °C |
| Mechanics/material | | |
| Enclosure material (front) | | |
| • Plastic | Yes | Yes |
| Dimensions | | |
| Width | 38 mm | 38 mm |
| Height | 62 mm | 62 mm |
| Depth | 21 mm | 21 mm |
| Weights | | |
| Weight, approx. | 35 g | 35 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SM 1223 digital input/output modules

Overview



- Digital inputs and outputs as supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the relevant task
- For subsequent expansion of the system with additional inputs and outputs

Ordering data

Article No.

SM 1223 digital input/output signal module

8 inputs, 24 V DC,
IEC type 1 sinking input;
8 x 24 V DC transistor outputs,
0.5 A, 5 W

6ES7223-1BH32-0XB0

16 inputs, 24 V DC,
IEC type 1 sinking input;
16 x 24 V DC transistor outputs,
0.5 A, 5 W

6ES7223-1BL32-0XB0

16 inputs, 24 V DC,
IEC type 1 sinking input;
16 x 24 V DC transistor outputs,
0.5 A, 5 W, switching to P potential

6ES7223-1BL32-1XB0

8 inputs, 24 V DC,
IEC type 1 sinking input;
8 relay outputs,
5 ... 30 V DC/5 ... 250 V AC, 2 A,
30 W DC/200 W AC

6ES7223-1PH32-0XB0

16 inputs, 24 V DC,
IEC type 1 sinking input;
16 relay outputs,
5 ... 30 V DC/5 ... 250 V AC, 2 A,
30 W DC/200 W AC

6ES7223-1PL32-0XB0

8 inputs, 120/230 V AC;
8 relay outputs,
5 ... 30 V DC/5 ... 250 V AC, 2 A,
30 W DC/200 W AC

6ES7223-1QH32-0XB0

Extension cable for two-tier configuration

For connecting digital/analog signal modules; length 2 m

6ES7290-6AA30-0XA0

Terminal block (spare part)

For 6ES7223-1BH32-0XB0

- 7-pin, tin-coated; 4 units
 - Screw-type system
 - Push-in system

6ES7292-1AG30-0XA0
6ES7292-2AG30-0XA0

For 6ES7223-1BL32-0XB0

- 11-pin, tin-coated; 4 units
 - Screw-type system
 - Push-in system

6ES7292-1AL30-0XA0
6ES7292-2AL30-0XA0

For 6ES7223-1PH32-0XB0

- 7-pin, tin-coated; 4 units
 - Screw-type system
 - Push-in system

6ES7292-1AG30-0XA0
6ES7292-2AG30-0XA0

- 7-pin, tin-coated, right coded; 4 units

- Screw-type system
- Push-in system

6ES7292-1AG40-0XA0
6ES7292-2AG40-0XA0

For 6ES7223-1PL32-0XB0

- 11-pin, tin-coated; 4 units
 - Screw-type system
 - Push-in system

6ES7292-1AL30-0XA0
6ES7292-2AL30-0XA0

- 11-pin, tin-coated, coded; 4 units

- Screw-type system
- Push-in system

6ES7292-1AL40-0XA0
6ES7292-2AL40-0XA0

For 6ES7223-1QH32-0XB0

- 7-pin, tin-coated, right coded; 4 units

- Screw-type system
- Push-in system

6ES7292-1AG40-0XA0
6ES7292-2AG40-0XA0

Front flap set (spare part)

For modules with a width of 45 mm

6ES7291-1BA30-0XA0

For modules with a width of 70 mm

6ES7291-1BB30-0XA0

Technical specifications

| Article number | 6ES7223-1BH32-0XB0 | 6ES7223-1BL32-0XB0 | 6ES7223-1BL32-1XB0 | 6ES7223-1PH32-0XB0 | 6ES7223-1PL32-0XB0 | 6ES7223-1QH32-0XB0 |
|---|---|---|---|---|---|---|
| | Digital I/O SM 1223, 8 DI/8 DO | Digital I/O SM 1223, 16DI/16DO | Digital I/O SM 1223, 16DI/16DO sink | Digital I/O SM 1223, 8DI/8DO | Digital I/O SM 1223, 16DI/16DO | Digital I/O SM 1223, 8DI AC/ 8DO Rly |
| General information | | | | | | |
| Product type designation | SM 1223, DI 8x24 V DC, DQ 8x24 V DC | SM 1223, DI 16x24 V DC, DQ 16x24 V DC | SM 1223, DI 16x24 V DC, DO 16x 24 V DC Sink | SM 1223, DI 8x24 V DC, DQ 8x relay | SM 1223, DI 16x24 V DC, DQ 16x relay | SM 1223, DI 8x120/230 V AC, DQ 8x relay |
| Supply voltage | | | | | | |
| Rated value (DC) | 24 V | 24 V | 24 V | 24 V | 24 V | 24 V |
| Input current | | | | | | |
| from backplane bus 5 V DC, max. | 145 mA | 185 mA | 185 mA | 145 mA | 180 mA | 120 mA |
| Digital inputs | | | | | | |
| • from load voltage L+ (without load), max. | 4 mA; per channel | 4 mA; per channel | 4 mA; per channel | 4 mA/input 11 mA/relay | 4 mA/input 11 mA/relay | |
| Output voltage | | | | | | |
| Power supply to the transmitters | | | | | | |
| • present | Yes | Yes | Yes | Yes | Yes | Yes |
| Digital inputs | | | | | | |
| Number of digital inputs | 8 | 16 | 16 | 8 | 16 | 8 |
| • in groups of | 2 | 2 | 2 | 2 | 2 | 4 |
| Input characteristic curve in accordance with IEC 61131, type 1 | Yes | Yes | Yes | Yes | Yes | Yes |
| Number of simultaneously controllable inputs | | | | | | |
| all mounting positions | | | | | | |
| - up to 40 °C, max. | 8 | 16 | 16 | 8 | 16 | 8 |
| horizontal installation | | | | | | |
| - up to 40 °C, max. | 8 | 16 | 16 | 8 | 16 | 8 |
| - up to 50 °C, max. | 8 | 16 | 16 | 8 | 16 | 8 |
| vertical installation | | | | | | |
| - up to 40 °C, max. | 8 | 16 | 16 | 8 | 16 | 8 |
| Input voltage | | | | | | |
| • Type of input voltage | DC | DC | DC | DC | DC | AC |
| • Rated value (DC) | 24 V | 24 V | 24 V | 24 V | 24 V | |
| • Rated value (AC) | | | | | | 120/230 V AC |
| • for signal *0* | 5 V DC at 1 mA | 5 V DC at 1 mA | 5 V DC at 1 mA | 5 V DC at 1 mA | 5 V DC at 1 mA | 20 V AC at 1 mA |
| • for signal *1* | 15 V DC at 2.5 mA | 15 V DC at 2.5 mA | 15 V DC at 2.5 mA | 15 V DC at 2.5 mA | 15 V DC at 2.5 mA | 79 V AC at 2.5 mA |
| Input current | | | | | | |
| • for signal *0*, max. (permissible quiescent current) | 1 mA | 1 mA | 1 mA | 1 mA | 1 mA | 1 mA |
| • for signal *1*, min. | 2.5 mA | 2.5 mA | 2.5 mA | 2.5 mA | 2.5 mA | 2.5 mA |
| • for signal *1*, typ. | 4 mA | 4 mA | 4 mA | 4 mA | 4 mA | 9 mA |
| Input delay (for rated value of input voltage) | | | | | | |
| for standard inputs | | | | | | |
| - parameterizable | Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four | Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four | Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four | Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four | Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four | Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four |
| for interrupt inputs | | | | | | |
| - parameterizable | Yes | Yes | Yes | Yes | Yes | Yes |

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SM 1223 digital input/output modules

Technical specifications

| Article number | 6ES7223-1BH32-0XB0 | 6ES7223-1BL32-0XB0 | 6ES7223-1BL32-1XB0 | 6ES7223-1PH32-0XB0 | 6ES7223-1PL32-0XB0 | 6ES7223-1QH32-0XB0 |
|---|--------------------------------------|--------------------------------------|--|---|---|---|
| | Digital I/O SM 1223, 8 DI/8 DO | Digital I/O SM 1223, 16DI/16DO | Digital I/O SM 1223, 16DI/16DO sink | Digital I/O SM 1223, 8DI/8DO | Digital I/O SM 1223, 16DI/16DO | Digital I/O SM 1223, 8DI AC/ 8DO Rly |
| Digital outputs | | | | | | |
| Number of digital outputs | 8 | 16 | 16; Transistor sinking input | 8 | 16 | 8 |
| • in groups of | 1 | 1 | 1 | 2 | 4 | 4 |
| Short-circuit protection | No; to be provided externally | No; to be provided externally | Yes; 1 to 3.5 A | No; to be provided externally | No; to be provided externally | No; to be provided externally |
| Limitation of inductive shutdown voltage to | L+ (-48 V) | L+ (-48 V) | Typ 45 V | | | |
| Switching capacity of the outputs | | | | | | |
| • with resistive load, max. | 0.5 A | 0.5 A | 0.5 A | 2 A | 2 A | 2 A |
| • on lamp load, max. | 5 W | 5 W | 5 W | 30 W with DC, 200 W with AC | 30 W with DC, 200 W with AC | 30 W with DC, 200 W with AC |
| Output voltage | | | | | | |
| • Rated value (DC) | 24 V | 24 V | 24 V | 5 V DC to 30 V DC | 5 V DC to 30 V DC | 5 V DC to 30 V DC |
| • Rated value (AC) | | | | 5 V AC to 250 V AC | 5 V AC to 250 V AC | 5 V AC to 250 V AC |
| • for signal "0", max. | 0.1 V; with 10 kOhm load | 0.1 V; with 10 kOhm load | L+ minus 0.75 V DC with 10k Load | | | |
| • for signal "1", min. | 20 V DC | 20 V DC | | | | |
| Output current | | | | | | |
| • for signal "1" rated value | 0.5 A | 0.5 A | 0.5 A | 2 A | 2 A | 2 A |
| • for signal "0" residual current, max. | 10 µA | 10 µA | 75 µA | | | |
| Output delay with resistive load | | | | | | |
| • "0" to "1", max. | 50 µs | 50 µs | 20 µs | 10 ms | 10 ms | 10 ms |
| • "1" to "0", max. | 200 µs | 200 µs | 350 µs | 10 ms | 10 ms | 10 ms |
| Total current of the outputs (per group) | | | | | | |
| horizontal installation | | | | | | |
| - up to 50 °C, max. | 4 A; Current per mass | 8 A; Current per mass | 8 A; Current per mass | 10 A; Current per mass | 8 A; Current per mass | 8 A; Current per mass |
| Relay outputs | | | | | | |
| • Number of relay outputs | | | | 8 | 16 | 8 |
| • Rated supply voltage of relay coil L+ (DC) | | | | 24 V | 24 V | 24 V |
| • Number of operating cycles, max. | | | | mechanically 10 million, at rated load voltage 100 000 | mechanically 10 million, at rated load voltage 100 000 | mechanically 10 million, at rated load voltage 100 000 |
| Switching capacity of contacts | | | | | | |
| - with inductive load, max. | | 0.5 A | 0.5 A | 2 A | 2 A | 2 A |
| - on lamp load, max. | | 5 W | 5 W | 30 W with DC, 200 W with AC | 30 W with DC, 200 W with AC | 30 W with DC, 200 W with AC |
| - with resistive load, max. | | 0.5 A | 0.5 A | 2 A | 2 A | 2 A |
| Interrupts/diagnostics/ status information | | | | | | |
| Alarms | | | | | | |
| • Diagnostic alarm | Yes | Yes | Yes | Yes | Yes | Yes |
| Diagnostics indication LED | | | | | | |
| • for status of the inputs | Yes | Yes | Yes | Yes | Yes | Yes |
| • for status of the outputs | Yes | Yes | Yes | Yes | Yes | Yes |

Technical specifications

| Article number | 6ES7223-1BH32-0XB0 | 6ES7223-1BL32-0XB0 | 6ES7223-1BL32-1XB0 | 6ES7223-1PH32-0XB0 | 6ES7223-1PL32-0XB0 | 6ES7223-1QH32-0XB0 |
|---|--------------------------------------|--------------------------------------|--|------------------------------------|---|--|
| | Digital I/O SM 1223, 8 DI/8 DO | Digital I/O SM 1223, 16DI/16DO | Digital I/O SM 1223, 16DI/16DO sink | Digital I/O SM 1223, 8DI/8DO | Digital I/O SM 1223, 16DI/16DO | Digital I/O SM 1223, 8DI AC/ 8DO Rly |
| Potential separation | | | | | | |
| Potential separation digital inputs | | | | | | |
| • between the channels, in groups of | 2 | 2 | 2 | 2 | 2 | 2 |
| Potential separation digital outputs | | | | | | |
| • between the channels | | | | Relays | Relays | Relays |
| • between the channels, in groups of | 1 | 1 | 1 | 2 | 4 | 2 |
| • between the channels and backplane bus | 500 V AC | 500 V AC | 500 V AC | 1 500 V AC for 1 minute | 1 500 V AC for 1 minute | 1 500 V AC for 1 minute |
| Standards, approvals, certificates | | | | | | |
| CE mark | Yes | Yes | Yes | Yes | Yes | Yes |
| CSA approval | Yes | Yes | Yes | Yes | Yes | Yes |
| UL approval | Yes | Yes | Yes | Yes | Yes | Yes |
| cULus | Yes | Yes | Yes | Yes | Yes | Yes |
| FM approval | Yes | Yes | Yes | Yes | Yes | Yes |
| RCM (formerly C-TICK) | Yes | Yes | Yes | Yes | Yes | Yes |
| KC approval | Yes | Yes | Yes | Yes | Yes | Yes |
| Marine approval | Yes | Yes | Yes | Yes | Yes | Yes |
| Ambient conditions | | | | | | |
| Ambient temperature during operation | | | | | | |
| • min. | -20 °C | -20 °C | -20 °C | -20 °C | -20 °C | -20 °C |
| • max. | 60 °C | 60 °C | 60 °C | 60 °C | 60 °C; Number of simultaneously activated outputs: 8 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 16 at 55 °C horizontal or 45 °C vertical | 60 °C; Number of simultaneously activated outputs: 4 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 at 55 °C horizontal or 45 °C vertical |
| Connection method | | | | | | |
| required front connector | Yes | Yes | Yes | Yes | Yes | Yes |
| Mechanics/material | | | | | | |
| Enclosure material (front) | | | | | | |
| • Plastic | Yes | Yes | Yes | Yes | Yes | Yes |
| Dimensions | | | | | | |
| Width | 45 mm | 70 mm | 70 mm | 45 mm | 70 mm | 45 mm |
| Height | 100 mm | 100 mm | 100 mm | 100 mm | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm | 75 mm | 75 mm | 75 mm | 75 mm |
| Weights | | | | | | |
| Weight, approx. | 210 g | 310 g | 310 g | 230 g | 350 g | 230 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SB 1223 digital input/output modules

Overview



- Digital inputs and outputs as supplement to the integral I/O of the SIMATIC S7-1200 CPUs
- Can be plugged direct into the CPU

Ordering data

Article No.

SB 1223 digital input/output signal board

2 inputs, 24 V DC, IEC type 1 sinking input; 2 x 24 V DC transistor outputs, 0.5 A, 5 W; can be used as HSC at up to 30 kHz

6ES7223-0BD30-0XB0

2 inputs, 5 V DC, 200 kHz
2 outputs 5 V DC, 0.1 A, 200 kHz

6ES7223-3AD30-0XB0

2 inputs, 24 V DC, 200 kHz
2 outputs 24 V DC, 0.1 A, 200 kHz

6ES7223-3BD30-0XB0

Terminal block (spare part)

for signal board

with 6 screws, gold-plated; 4 pcs.

6ES7292-1BF30-0XA0

Technical specifications

| Article number | 6ES7223-0BD30-0XB0 | 6ES7223-3AD30-0XB0 | 6ES7223-3BD30-0XB0 |
|---|---|--|--|
| | Signal Board SB1223, 2 DI/2 DO | Signal Board SB 1223, 2DI/2DQ 5V 200KHz | Signal Board SB 1223, 2DI/2DQ 24V 200KHz |
| General information | | | |
| Product type designation | SB 1223, DI 2x24 V DC/ DQ 2x24 V DC | SB 1223, DI 2x5 V DC/ DQ 2x5 V DC 200 kHz | SB 1223, DI 2x24 V DC/ DQ 2x24 V DC 200 kHz |
| Input current | | | |
| from backplane bus 5 V DC, typ. | 50 mA | 35 mA | 35 mA |
| Output voltage | | | |
| Power supply to the transmitters | | | |
| • Supply current, max. | 4 mA; per channel | | |
| Digital inputs | | | |
| Number of digital inputs | 2; Current-sinking | 2; Current-sourcing | 2; Current-sourcing |
| • in groups of | 1 | 2 | 2 |
| Input characteristic curve in accordance with IEC 61131, type 1 | Yes | | |
| Number of simultaneously controllable inputs | | | |
| all mounting positions | | | |
| - up to 40 °C, max. | 2 | | 2 |
| Input voltage | | | |
| • Type of input voltage | DC | DC | DC |
| • Rated value (DC) | 24 V | 5 V | 24 V |
| • for signal "0" | 0 to 5 V | (L+ minus 1.0 V DC) ... L+ | (L+ minus 5.0 V DC) ... L+ |
| • for signal "1" | +15 to +30 V | 0 V ... (L+ minus 2.0 V DC) | 0 V ... (L+ minus 10 V DC) |
| Input current | | | |
| • for signal "0", max. (permissible quiescent current) | 1 mA | 2.2 mA | 1.4 mA |
| • for signal "1", min. | | 5.1 mA | 2.9 mA |
| • for signal "1", typ. | 0.5 A | | 7 mA |
| Input delay (for rated value of input voltage) | | | |
| for standard inputs | | | |
| - parameterizable | Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four | Yes; 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 μs; 0.05 / 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 ms | Yes; 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 μs; 0.05 / 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 ms |
| for interrupt inputs | | | |
| - parameterizable | Yes | Yes | Yes |
| for technological functions | | | |
| - parameterizable | Yes | Yes | Yes |

Technical specifications

| Article number | 6ES7223-0BD30-0XB0 Signal Board SB1223, 2 DI/2 DO | 6ES7223-3AD30-0XB0 Signal Board SB 1223, 2DI/2DQ 5V 200KHz | 6ES7223-3BD30-0XB0 Signal Board SB 1223, 2DI/2DQ 24V 200KHz |
|---|--|---|--|
| Digital outputs | | | |
| Number of digital outputs | 2; MOSFET, solid-state (current-sinking/current-sourcing) | 2; MOSFET, solid-state (current-sinking/current-sourcing) | 2; MOSFET, solid-state (current-sinking/current-sourcing) |
| • in groups of | 1 | 2 | 2 |
| Short-circuit protection | No | No | No |
| Switching capacity of the outputs | | | |
| • with resistive load, max. | 0.5 A | 0.1 A | 0.1 A |
| • on lamp load, max. | 5 W | | |
| Load resistance range | | | |
| • upper limit | 0.6 Ω | 7 Ω | |
| Output voltage | | | |
| • Rated value (DC) | 24 V | 5 V | 24 V |
| • for signal "0", max. | 0.1 V; with 10 kOhm load | 0.2 V | 1 V |
| • for signal "1", min. | 20 V | L+ minus 0.7 V DC | L+ (-1.5 V) |
| • for signal "1", max. | | 6 V | |
| Output current | | | |
| • for signal "1" permissible range, max. | 0.5 A | 0.1 A | 0.1 A |
| • for signal "0" residual current, max. | 10 μ A | | |
| Interrupts/diagnostics/ status information | | | |
| Alarms | Yes | | |
| Diagnostics function | Yes | | |
| Diagnostics indication LED | | | |
| • for status of the inputs | Yes | Yes | Yes |
| • for status of the outputs | Yes | Yes | Yes |
| Standards, approvals, certificates | | | |
| CE mark | Yes | Yes | Yes |
| CSA approval | Yes | Yes | Yes |
| UL approval | Yes | Yes | Yes |
| cULus | Yes | Yes | Yes |
| FM approval | Yes | Yes | Yes |
| RCM (formerly C-TICK) | Yes | Yes | Yes |
| KC approval | Yes | Yes | Yes |
| Marine approval | Yes | Yes | Yes |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C | -20 °C | -20 °C |
| • max. | 60 °C | 60 °C | 60 °C |
| Mechanics/material | | | |
| Enclosure material (front) | | | |
| • Plastic | Yes | Yes | Yes |
| Dimensions | | | |
| Width | 38 mm | 38 mm | 38 mm |
| Height | 62 mm | 62 mm | 62 mm |
| Depth | 21 mm | 21 mm | 21 mm |
| Weights | | | |
| Weight, approx. | 40 g | 35 g | 35 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 1221 digital input modules

Overview



- Digital inputs as supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional inputs
- From +60 °C to +70 °C, max. 50% of the inputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

Digital input SIPLUS signal module SM 1221

(Extended temperature range and exposure to media)

8 inputs, 24 V DC, isolated, switching to P/M potential

- Suitable for areas with extreme exposure to media (conformal coating)

6AG1221-1BF32-4XB0

- -25 ... +70 °C, from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50 %

6AG1221-1BF32-2XB0

16 inputs, 24 V DC, isolated, switching to P/M potential

- Suitable for areas with extreme exposure to media (conformal coating)

6AG1221-1BH32-4XB0

- -25 ... +70 °C, from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50 %

6AG1221-1BH32-2XB0

Accessories

See SIMATIC S7-1200 SM 1221 digital input modules, page 3/49

Technical specifications

| Article number | 6AG1221-1BF32-2XB0 | 6AG1221-1BF32-4XB0 | 6AG1221-1BH32-2XB0 | 6AG1221-1BH32-4XB0 |
|---|---|---|---|---|
| Based on | 6ES7221-1BF32-0XB0 SIPLUS S7-1200 SM 1221 8DI | 6ES7221-1BF32-0XB0 SIPLUS S7-1200 SM 1221 8DI | 6ES7221-1BH32-0XB0 SIPLUS S7-1200 SM 1221 16DI | 6ES7221-1BH32-0XB0 SIPLUS S7-1200 SM 1221 16DI |
| Ambient conditions | | | | |
| Ambient temperature during operation | | | | |
| • min. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C |
| • max. | 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated inputs 4 (no adjacent points) for horizontal mounting position | 60 °C; = Tmax | 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated inputs 8 (no adjacent points) for horizontal mounting position | 60 °C; = Tmax |
| • At cold restart, min. | -25 °C | 0 °C | -25 °C | 0 °C |
| Altitude during operation relating to sea level | | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |

Technical specifications

| Article number | 6AG1221-1BF32-2XB0 | 6AG1221-1BF32-4XB0 | 6AG1221-1BH32-2XB0 | 6AG1221-1BH32-4XB0 |
|---|---|---|---|---|
| Based on | 6ES7221-1BF32-0XB0 SIPLUS S7-1200 SM 1221 8DI | 6ES7221-1BF32-0XB0 SIPLUS S7-1200 SM 1221 8DI | 6ES7221-1BH32-0XB0 SIPLUS S7-1200 SM 1221 16DI | 6ES7221-1BH32-0XB0 SIPLUS S7-1200 SM 1221 16DI |
| Resistance | | | | |
| Coolants and lubricants | | | | |
| - Resistant to commercially available coolants and lubricants | Yes | Yes | Yes | Yes |
| Use in stationary industrial systems | | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * |
| Use on ships/at sea | | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SB 1221 digital input modules

Overview



- Digital inputs as a supplement to the integral I/O of SIMATIC S7-1200 CPUs
- Can be plugged directly into the CPU

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SB 1221 digital input signal board

(extended temperature range and exposure to media)

4 inputs, 5 V DC, 200 kHz, sourcing input

6AG1221-3AD30-5XB0

4 inputs, 24 V DC, 200 kHz, sourcing input

6AG1221-3BD30-5XB0

Accessories

See SIMATIC S7-1200 digital input SB 1221, page 3/51

Technical specifications

| Article number | 6AG1221-3AD30-5XB0 | 6AG1221-3BD30-5XB0 |
|---|---|---|
| Based on | 6ES7221-3AD30-0XB0 SIPLUS S7-1200 SB 1221 4DI 5VDC | 6ES7221-3BD30-0XB0 SIPLUS S7-1200 SB 1221 4DI 24VDC |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| • min. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C |
| • max. | 60 °C; = Tmax | 60 °C; = Tmax |
| Altitude during operation relating to sea level | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation | 100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation |
| Resistance | | |
| Coolants and lubricants | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |

Technical specifications

| Article number | 6AG1221-3AD30-5XB0 | 6AG1221-3BD30-5XB0 |
|---|---|---|
| Based on | 6ES7221-3AD30-0XB0 SIPLUS S7-1200 SB 1221 4DI 5VDC | 6ES7221-3BD30-0XB0 SIPLUS S7-1200 SB 1221 4DI 24VDC |
| Use on ships/at sea | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 1222 digital output modules**Overview**

- Digital outputs as a supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional outputs
- From +60 °C to +70 °C, max. 50% of the inputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS SM 1222 digital output signal module**

(Extended temperature range and exposure to media)

8 outputs, 24 V DC; 0.5 A, 5 W, isolated

- For areas with exceptional exposure to media (conformal coating)
- -25 ... +70 °C, from +60 ... +70°C number of simultaneously controllable inputs and outputs max. 50%

6AG1222-1BF32-4XB0**6AG1222-1BF32-2XB0**

16 outputs, 24 V DC; 0.5 A, 5 W, isolated

- For areas with exceptional exposure to media (conformal coating)
- -25 ... +70 °C, from +60 ... +70°C number of simultaneously controllable inputs and outputs max. 50%

6AG1222-1BH32-4XB0**6AG1222-1BH32-2XB0**

8 outputs, 5 ... 30 V DC / 5 ... 250 V AC, relay 2 A, 30 W DC/200 W AC

- For areas with exceptional exposure to media (conformal coating)
- -25 ... +70 °C, from +60 ... +70°C number of simultaneously controllable inputs and outputs max. 50%

6AG1222-1HF32-4XB0**6AG1222-1HF32-2XB0**

8 relay outputs, changeover contact, 5 ... 30 V DC / 5 ... 250 V AC, 2 A, 30 W DC / 200 W AC

- For areas with exceptional exposure to media (conformal coating)
- -40 ... +70 °C, from +60 ... +70°C number of simultaneously controllable inputs and outputs max. 50%

6AG1222-1XF32-4XB0**6AG1222-1XF32-2XB0**

16 outputs, 5 ... 30 V DC / 5 ... 250 V AC, relay 2 A, 30 W DC/200 W AC

- For areas with exceptional exposure to media (conformal coating)
- -25 ... +70 °C, from +60 ... +70°C number of simultaneously controllable inputs and outputs max. 50%

6AG1222-1HH32-4XB0**6AG1222-1HH32-2XB0****Accessories**

See SIMATIC S7-1200 digital output SM 1222, page 3/53

Technical specifications

| Article number | 6AG1222-1BF32-2XB0 | 6AG1222-1BF32-4XB0 | 6AG1222-1BH32-2XB0 | 6AG1222-1BH32-4XB0 |
|---|---|---|---|---|
| Based on | 6ES7222-1BF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ | 6ES7222-1BF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ | 6ES7222-1BH32-0XB0 SIPLUS S7-1200 SM 1222 16DQ | 6ES7222-1BH32-0XB0 SIPLUS S7-1200 SM 1222 16DQ |
| Ambient conditions | | | | |
| Ambient temperature during operation | | | | |
| • min. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C |
| • max. | 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 4 (no adjacent points) for horizontal mounting position | 60 °C; = Tmax | 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 8 (no adjacent points) for horizontal mounting position | 60 °C; = Tmax |
| • At cold restart, min. | -25 °C | 0 °C | -25 °C | 0 °C |
| Altitude during operation relating to sea level | | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | | |
| Coolants and lubricants | | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 1222 digital output modules

Technical specifications

| Article number | 6AG1222-1BF32-2XB0 | 6AG1222-1BF32-4XB0 | 6AG1222-1BH32-2XB0 | 6AG1222-1BH32-4XB0 |
|---|---|---|---|---|
| Based on | 6ES7222-1BF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ | 6ES7222-1BF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ | 6ES7222-1BH32-0XB0 SIPLUS S7-1200 SM 1222 16DQ | 6ES7222-1BH32-0XB0 SIPLUS S7-1200 SM 1222 16DQ |
| Usage in industrial process technology | <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 |
| Remark | <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 |
| Conformal coating | <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A |
| Article number | 6AG1222-1HF32-2XB0 | 6AG1222-1HF32-4XB0 | 6AG1222-1XF32-2XB0 | 6AG1222-1XF32-4XB0 |
| Based on | 6ES7222-1HF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ RLY | 6ES7222-1HF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ RLY | 6ES7222-1XF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ RLY | 6ES7222-1XF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ RLY |
| Ambient conditions | | | | |
| Ambient temperature during operation | | | | |
| • min. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C |
| • max. | 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 4 (no adjacent points) for horizontal mounting position | 60 °C; = Tmax | 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 4 (no adjacent points) for horizontal mounting position | 60 °C; = Tmax |
| • At cold restart, min. | -25 °C | 0 °C | -25 °C | 0 °C |
| Altitude during operation relating to sea level | | | | |
| • Installation altitude above sea level, max. | 2 000 m | 2 000 m | 2 000 m | 2 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC |
| Relative humidity | | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | | |
| Coolants and lubricants | | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |

Technical specifications

| Article number | 6AG1222-1HF32-2XB0 | 6AG1222-1HF32-4XB0 | 6AG1222-1XF32-2XB0 | 6AG1222-1XF32-4XB0 |
|---|---|---|---|---|
| Based on | 6ES7222-1HF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ RLY | 6ES7222-1HF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ RLY | 6ES7222-1XF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ RLY | 6ES7222-1XF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ RLY |
| Use in stationary industrial systems | | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * |
| Use on ships/at sea | | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 1222 digital output modules**Technical specifications**

| Article number | 6AG1222-1HH32-2XB0 | 6AG1222-1HH32-4XB0 |
|---|--|--|
| Based on | 6ES7222-1HH32-0XB0 SIPLUS S7-1200 SM 1222 16DQ RLY | 6ES7222-1HH32-0XB0 SIPLUS S7-1200 SM 1222 16DQ RLY |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| <ul style="list-style-type: none"> min. max. At cold restart, min. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 8 (no adjacent points) for horizontal mounting position -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C 60 °C; = Tmax 0 °C |
| Altitude during operation relating to sea level | | |
| <ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude | 2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | 2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC |
| Relative humidity | | |
| <ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | |
| Coolants and lubricants | | |
| <ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | |
| <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | |
| <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | |
| <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A |

Overview

- Digital outputs as a supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the respective task
- For subsequent expansion of the system with additional outputs
- Can be plugged directly into the CPU
- From +60 °C to +70 °C, max. 50% of the inputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data**Article No.****SIPLUS SB 1222 digital output signal board**

(Extended temperature range and exposure to media)

4 outputs, 5 V DC, 0.1 A, 200 kHz

6AG1222-1AD30-5XB0

4 outputs, 24 V DC, 0.1 A, 200 kHz

6AG1222-1BD30-5XB0

Accessories

See SIMATIC S7-1200 digital output module SB 1222, page 3/56

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SB 1222 digital output modules**Technical specifications**

| Article number | 6AG1222-1AD30-5XB0 | 6AG1222-1BD30-5XB0 |
|---|--|--|
| Based on | 6ES7222-1AD30-0XB0 SIPLUS S7-1200 SB 1222 4DQ 5VDC | 6ES7222-1BD30-0XB0 SIPLUS S7-1200 SB 1222 4DQ 24VDC |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| <ul style="list-style-type: none"> min. max. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C 60 °C; = Tmax | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C 60 °C; = Tmax |
| Altitude during operation relating to sea level | | |
| <ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude | 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | |
| <ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation | 100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation |
| Resistance | | |
| Coolants and lubricants | | |
| <ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | |
| <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | |
| <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | |
| <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A |

Overview



- Digital inputs and outputs as supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional inputs and outputs
- From +60 °C to +70 °C, max. 50% of the inputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SM 1223 digital input/output signal module

(Extended temperature range and exposure to media)

8 inputs, 24 V DC,
IEC type 1 sinking input;
8 x 24 V DC transistor outputs,
0.5 A, 5 W

- For areas with exceptional exposure to media (conformal coating)
- -25 ... +70 °C, from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50 %

6AG1223-1BH32-4XB0**6AG1223-1BH32-2XB0**

16 inputs, 24 V DC,
IEC type 1 sinking input;
16 x 24 V DC transistor outputs,
0.5 A, 5 W

- For areas with exceptional exposure to media (conformal coating)
- -25 ... +70 °C, from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50 %

6AG1223-1BL32-4XB0**6AG1223-1BL32-2XB0**

8 inputs, 24 V DC,
IEC type 1 sinking input;
8 relay outputs, 5 ... 30 V DC /
5 ... 250 V AC, 2 A, 30 W DC /
200 W AC

- For areas with exceptional exposure to media (conformal coating)
- -25 ... +70 °C, from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50 %

6AG1223-1PH32-4XB0**6AG1223-1PH32-2XB0**

16 inputs, 24 V DC,
IEC type 1 sinking input;
16 relay outputs, 5 ... 30 V DC /
5 ... 250 V AC, 2 A, 30 W DC /
200 W AC

- For areas with exceptional exposure to media (conformal coating)
- -25 ... +70 °C, from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50 %

6AG1223-1PL32-4XB0**6AG1223-1PL32-2XB0**

8 inputs, 120/230 V AC;
8 relay outputs, 5 ... 30 V DC /
5 ... 250 V AC, 2 A, 30 W DC /
200 W AC

- For areas with exceptional exposure to media (conformal coating)

6AG1223-1QH32-4XB0**6AG1223-1QH32-2XB0**

-40 ... +70 °C, from +60 ... +70 °C
number of simultaneously controllable inputs and outputs max. 50%

Accessories

See SIMATIC S7-1200 SM 1223 digital input/output modules, page 3/58

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 1223 digital input/output modules

Technical specifications

| Article number | 6AG1223-1BH32-2XB0 | 6AG1223-1BH32-4XB0 | 6AG1223-1PH32-2XB0 | 6AG1223-1PH32-4XB0 |
|---|---|---|---|--|
| Based on | 6ES7223-1BH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ | 6ES7223-1BH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ | 6ES7223-1PH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ RLY | 6ES7223-1PH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ RLY |
| Ambient conditions | | | | |
| Ambient temperature during operation | | | | |
| • min. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C |
| • max. | 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 4, inputs 4 (no adjacent points) for horizontal mounting position | 60 °C; = Tmax | 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 4, inputs 4 (no adjacent points) for horizontal mounting position | 60 °C; = Tmax |
| • At cold restart, min. | -25 °C | 0 °C | -25 °C | 0 °C |
| Altitude during operation relating to sea level | | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 2 000 m | 2 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC |
| Relative humidity | | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | | |
| Coolants and lubricants | | | | |
| - Resistant to commercially available coolants and lubricants | Yes | Yes | Yes | Yes |
| Use in stationary industrial systems | | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * |
| Use on ships/at sea | | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |

Technical specifications

| Article number | 6AG1223-1BH32-2XB0 | 6AG1223-1BH32-4XB0 | 6AG1223-1PH32-2XB0 | 6AG1223-1PH32-4XB0 |
|---|---|---|---|---|
| Based on | 6ES7223-1BH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ | 6ES7223-1BH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ | 6ES7223-1PH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ RLY | 6ES7223-1PH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ RLY |
| Usage in industrial process technology | <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 |
| Remark | - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 |
| Conformal coating | <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A |
| Article number | 6AG1223-1PL32-2XB0 | 6AG1223-1PL32-4XB0 | 6AG1223-1BL32-2XB0 | 6AG1223-1BL32-4XB0 |
| Based on | 6ES7223-1PL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ RLY | 6ES7223-1PL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ RLY | 6ES7223-1BL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ | 6ES7223-1BL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ |
| Ambient conditions | | | | |
| Ambient temperature during operation | | | | |
| • min. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C |
| • max. | 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 8, inputs 8 (no adjacent points) for horizontal mounting position | 60 °C; = Tmax | 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 8, inputs 8 (no adjacent points) for horizontal mounting position | 60 °C; = Tmax |
| • At cold restart, min. | -25 °C | 0 °C | -25 °C | 0 °C |
| Altitude during operation relating to sea level | | | | |
| • Installation altitude above sea level, max. | 2 000 m | 2 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | | |
| Coolants and lubricants | | | | |
| - Resistant to commercially available coolants and lubricants | Yes | Yes | Yes | Yes |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 1223 digital input/output modules

Technical specifications

| Article number | 6AG1223-1PL32-2XB0 | 6AG1223-1PL32-4XB0 | 6AG1223-1BL32-2XB0 | 6AG1223-1BL32-4XB0 |
|---|---|---|---|---|
| Based on | 6ES7223-1PL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ RLY | 6ES7223-1PL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ RLY | 6ES7223-1BL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ | 6ES7223-1BL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ |
| Use in stationary industrial systems | | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * |
| Use on ships/at sea | | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

Technical specifications

| Article number | 6AG1223-1QH32-2XB0 | 6AG1223-1QH32-4XB0 |
|---|--|--|
| Based on | 6ES7223-1QH32-0XB0 SIPLUS S7-1200 SM 1223 8DI AC/8DQ RLY | 6ES7223-1QH32-0XB0 SIPLUS S7-1200 SM 1223 8DI AC/8DQ RLY |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| <ul style="list-style-type: none"> min. max. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 4, inputs 4 (no adjacent points) for horizontal mounting position | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C 60 °C; = Tmax |
| Altitude during operation relating to sea level | | |
| <ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude | 5 000 m Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | |
| <ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | |
| Coolants and lubricants | | |
| <ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust, * | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust, * |
| Usage in industrial process technology | | |
| <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | |
| <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | |
| <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SB 1223 digital input/output modules

Overview



- Digital inputs and outputs as supplement to the integral I/O of the SIPLUS S7-1200 CPUs
- Can be plugged directly into the CPU (cannot be used for +70 °C version)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Digital input/output SIPLUS signal board SB 1223

(Extended temperature range and exposure to media)

2 inputs, 24 V DC,
IEC type 1 sinking input;
2 x 24 V DC transistor outputs,
0.5 A, 5 W;
can be used as HSC at up to
30 kHz

- Suitable for areas with extreme exposure to media (conformal coating)
- Ambient temperature
-25 ... +55 °C

2 inputs, 5 V DC, 200 kHz
2 outputs 5 V DC, 0.1 A, 200 kHz

2 inputs, 24 V DC, 200 kHz
2 outputs 24 V DC, 0.1 A, 200 kHz

Accessories

Article No.

6AG1223-0BD30-4XB0

6AG1223-0BD30-5XB0

6AG1223-3AD30-5XB0

6AG1223-3BD30-5XB0

See SIMATIC S7-1200 digital input/output SB 1223, page 3/62

Technical specifications

| Article number | 6AG1223-0BD30-4XB0 | 6AG1223-0BD30-5XB0 | 6AG1223-3AD30-5XB0 | 6AG1223-3BD30-5XB0 |
|---|---|---|---|---|
| Based on | 6ES7223-0BD30-0XB0 SIPLUS S7-1200 SB 1223 2DI/2DQ 24VDC | 6ES7223-0BD30-0XB0 SIPLUS S7-1200 SB 1223 2DI/2DQ 24VDC | 6ES7223-3AD30-0XB0 SIPLUS S7-1200 SB 1223 2DI/2DQ 5VDC | 6ES7223-3BD30-0XB0 SIPLUS S7-1200 SB 1223 2DI/2DQ, 24VDC |
| Ambient conditions | | | | |
| Ambient temperature during operation | | | | |
| • min. | -20 °C; = Tmin (incl. condensation/frost) | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C |
| • max. | 60 °C; = Tmax | 60 °C; = Tmax | 60 °C; = Tmax | 60 °C; = Tmax |
| Altitude during operation relating to sea level | | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost permitted (no commissioning in bedewed state) | 100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation | 100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation | 100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation |

Technical specifications

| Article number | 6AG1223-0BD30-4XB0 | 6AG1223-0BD30-5XB0 | 6AG1223-3AD30-5XB0 | 6AG1223-3BD30-5XB0 |
|---|---|---|---|---|
| Based on | 6ES7223-0BD30-0XB0 SIPLUS S7-1200 SB 1223 2DI/2DQ 24VDC | 6ES7223-0BD30-0XB0 SIPLUS S7-1200 SB 1223 2DI/2DQ 24VDC | 6ES7223-3AD30-0XB0 SIPLUS S7-1200 SB 1223 2DI/2DQ 5VDC | 6ES7223-3BD30-0XB0 SIPLUS S7-1200 SB 1223 2DI/2DQ, 24VDC |
| Resistance | | | | |
| Coolants and lubricants | | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * |
| Use on ships/at sea | | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1231 analog input modules

Overview



- Analog inputs for SIMATIC S7-1200
- Extremely short conversion times
- For the connection of analog sensors without additional amplifiers
- For solving even more complex automation tasks

Ordering data

Article No.

SM 1231 analog input signal module

4 analog inputs, $\pm 10V$, $\pm 5V$, $\pm 2.5V$, or 0 ... 20 mA, 16 bits

6ES7231-5ND32-0XB0

4 analog inputs, $\pm 10V$, $\pm 5V$, $\pm 2.5V$, or 0 ... 20 mA, 12 bits + sign

6ES7231-4HD32-0XB0

8 analog inputs, $\pm 10V$, $\pm 5V$, $\pm 2.5V$, or 0 ... 20 mA, 12 bits + sign

6ES7231-4HF32-0XB0

Extension cable for two-tier configuration

6ES7290-6AA30-0XA0

For connecting digital/analog signal modules; length 2 m

Terminal block (spare part)

For 6ES7231-5ND32-0XB0, 6ES7231-4HD32-0XB0, 6ES7231-4HF32-0XB0

- 7-pin, gold-plated; 4 units
- Screw-type system
- Push-in system

6ES7292-1BG30-0XA0
6ES7292-2BG30-0XA0

Front flap set (spare part)

For modules with a width of 45 mm

6ES7291-1BA30-0XA0

Technical specifications

| Article number | 6ES7231-4HD32-0XB0 | 6ES7231-4HF32-0XB0 | 6ES7231-5ND32-0XB0 |
|---|---|---|---|
| | Analog Input SM 1231, 4AI | Analog Input SM 1231, 8AI | Analog Input SM 1231, 4AI 16bit |
| General information | | | |
| Product type designation | SM 1231, AI 4x13 bit | SM 1231, AI 8x13 bit | SM 1231, AI 4x16 bit |
| Supply voltage | | | |
| Rated value (DC) | 24 V | 24 V | 24 V |
| Input current | | | |
| Current consumption, typ. | 45 mA | 45 mA | 65 mA |
| from backplane bus 5 V DC, typ. | 80 mA | 90 mA | 80 mA |
| Analog inputs | | | |
| Number of analog inputs | 4; Current or voltage differential inputs | 8; Current or voltage differential inputs | 4; Current or voltage differential inputs |
| permissible input voltage for voltage input (destruction limit), max. | 35 V | 35 V | $\pm 35 V$ |
| permissible input current for current input (destruction limit), max. | 40 mA | 40 mA | 40 mA |
| Cycle time (all channels) max. | 625 μs | 625 μs | 100 μs |
| Input ranges | | | |
| • Voltage | Yes; $\pm 10V$, $\pm 5V$, $\pm 2.5V$ | Yes; $\pm 10V$, $\pm 5V$, $\pm 2.5V$ | Yes; $\pm 10V$, $\pm 5V$, $\pm 2.5V$ or $\pm 1.25V$ |
| • Current | Yes; 4 to 20 mA, 0 to 20 mA | Yes; 4 to 20 mA, 0 to 20 mA | Yes; 4 to 20 mA, 0 to 20 mA |
| • Thermocouple | No | No | No |
| • Resistance thermometer | No | No | No |
| • Resistance | No | Yes | No |
| Input ranges (rated values), voltages | | | |
| • -1.25 V to +1.25 V | | | Yes |
| • -10 V to +10 V | Yes | Yes | Yes |
| • -2.5 V to +2.5 V | Yes | Yes | Yes |
| • -5 V to +5 V | Yes | Yes | Yes |
| Input ranges (rated values), currents | | | |
| • 0 to 20 mA | Yes | Yes | Yes |
| • 4 mA to 20 mA | Yes | Yes | Yes |
| Thermocouple (TC) | | | |
| Temperature compensation | | | |
| - parameterizable | | No | |

Technical specifications

| Article number | 6ES7231-4HD32-0XB0 | 6ES7231-4HF32-0XB0 | 6ES7231-5ND32-0XB0 |
|---|---|---|---|
| | Analog Input SM 1231, 4AI | Analog Input SM 1231, 8AI | Analog Input SM 1231, 4AI 16bit |
| Analog value generation for the inputs | | | |
| Integration and conversion time/resolution per channel | | | |
| • Resolution with overrange (bit including sign), max. | 12 bit; + sign | 12 bit; + sign | 15 bit; + sign |
| • Integration time, parameterizable | Yes | Yes | Yes |
| • Interference voltage suppression for interference frequency f_1 in Hz | 40 dB, DC to 60 V for interference frequency 50 / 60 Hz | 40 dB, DC to 60 V for interference frequency 50 / 60 Hz | 40 dB, DC to 60 V for interference frequency 50 / 60 Hz |
| Smoothing of measured values | | | |
| • parameterizable | Yes | Yes | Yes |
| Errors/accuracies | | | |
| Temperature error (relative to input range), (+/-) | 25 °C \pm 0.1%, to 55 °C \pm 0.2% total measurement range | 25 °C \pm 0.1%, to 55 °C \pm 0.2% total measurement range | 25 °C \pm 0.1% / \pm 0.3% total measurement range |
| Basic error limit (operational limit at 25 °C) | | | |
| • Voltage, relative to input range, (+/-) | 0.1 % | 0.1 % | 0.1 % |
| • Current, relative to input range, (+/-) | 0.1 % | 0.1 % | 0.1 % |
| Interference voltage suppression for $f = n \times (f_1 \pm 1 \%)$, $f_1 =$ interference frequency | | | |
| • Common mode voltage, max. | 12 V | 12 V | 12 V |
| Interrupts/diagnostics/status information | | | |
| Alarms | Yes | Yes | Yes |
| Diagnostics function | Yes | Yes | Yes |
| Alarms | | | |
| • Diagnostic alarm | Yes | Yes | Yes |
| Diagnoses | | | |
| • Monitoring the supply voltage | Yes | Yes | Yes |
| • Wire-break | Yes | Yes | Yes |
| Diagnostics indication LED | | | |
| • for status of the inputs | Yes | Yes | Yes |
| • for maintenance | Yes | Yes | Yes |
| Standards, approvals, certificates | | | |
| CE mark | Yes | Yes | Yes |
| CSA approval | Yes | Yes | Yes |
| UL approval | Yes | Yes | Yes |
| cULus | Yes | Yes | Yes |
| FM approval | Yes | Yes | Yes |
| RCM (formerly C-TICK) | Yes | Yes | Yes |
| KC approval | Yes | Yes | Yes |
| Marine approval | Yes | Yes | Yes |

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1231 analog input modules**Technical specifications**

| Article number | 6ES7231-4HD32-0XB0 | 6ES7231-4HF32-0XB0 | 6ES7231-5ND32-0XB0 |
|--|--|--|--|
| | Analog Input SM 1231, 4AI | Analog Input SM 1231, 8AI | Analog Input SM 1231, 4AI 16bit |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C | -20 °C | -20 °C |
| • max. | 60 °C | 60 °C | 60 °C |
| Pollutant concentrations | | | |
| • SO ₂ at RH < 60% without condensation | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free |
| Connection method | | | |
| required front connector | Yes | Yes | Yes |
| Mechanics/material | | | |
| Enclosure material (front) | | | |
| • Plastic | Yes | Yes | Yes |
| Dimensions | | | |
| Width | 45 mm | 45 mm | 45 mm |
| Height | 100 mm | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm | 75 mm |
| Weights | | | |
| Weight, approx. | 180 g | 180 g | 180 g |

3

Overview

- Analog input for SIMATIC S7-1200
- Extremely short conversion times
- For the connection of analog sensors without additional amplifiers
- For solving even more complex automation tasks
- Can be plugged directly into the CPU

Ordering data**Article No.****SB 1231 signal board analog input module**

1 analog input, ± 10 V with 12 bits or 0... 20 mA with 11 bits

6ES7231-4HA30-0XB0**Terminal block (spare part)**

for signal board
with 6 screws, gold-plated; 4 pcs.

6ES7292-1BF30-0XA0**Technical specifications**

| | |
|--|---|
| Article number | 6ES7231-4HA30-0XB0 Signal Board SB 1231, 1 AI |
| General information | |
| Product type designation | SB 1231, AI 1x12 bit |
| Supply voltage | |
| Rated value (DC) | 24 V |
| Input current | |
| from backplane bus 5 V DC, typ. | 55 mA |
| Analog inputs | |
| Number of analog inputs | 1; Current or voltage differential inputs |
| permissible input voltage for current input (destruction limit), max. | ± 35 V |
| permissible input voltage for voltage input (destruction limit), max. | 35 V |
| permissible input current for voltage input (destruction limit), max. | 40 mA |
| permissible input current for current input (destruction limit), max. | 40 mA |
| Cycle time (all channels) max. | 156.25 μ s; 400 Hz suppression |
| Input ranges | |
| • Voltage | Yes; ± 10 V, ± 5 V, ± 2.5 V |
| • Current | Yes; 0 to 20 mA |
| • Thermocouple | No |
| • Resistance thermometer | No |
| • Resistance | No |
| Input ranges (rated values), voltages | |
| • -10 V to +10 V | Yes |
| • -2.5 V to +2.5 V | Yes |
| • -5 V to +5 V | Yes |
| Input ranges (rated values), currents | |
| • 0 to 20 mA | Yes |
| Analog outputs | |
| Number of analog outputs | 0 |
| Cable length | |
| • shielded, max. | 100 m; shielded, twisted pair |
| Analog value generation for the inputs | |
| Integration and conversion time/resolution per channel | |
| • Resolution with overrange (bit including sign), max. | 11 bit; + sign |
| • Integration time, parameterizable | Yes |
| • Interference voltage suppression for interference frequency f1 in Hz | 40 dB, DC to 60 Hz |
| Smoothing of measured values | |
| • parameterizable | Yes |

| | |
|--|--|
| Article number | 6ES7231-4HA30-0XB0 Signal Board SB 1231, 1 AI |
| Errors/accuracies | |
| Temperature error (relative to input range), (+/-) | 25 °C $\pm 0.3\%$, to 55 °C $\pm 0.6\%$ total measurement range |
| Interrupts/diagnostics/status information | |
| Alarms | Yes |
| Diagnostics function | Yes |
| Alarms | |
| • Diagnostic alarm | Yes |
| Diagnoses | |
| • Wire-break | No |
| Diagnostics indication LED | |
| • for status of the inputs | Yes |
| • for maintenance | Yes |
| Standards, approvals, certificates | |
| CE mark | Yes |
| CSA approval | Yes |
| UL approval | Yes |
| cULus | Yes |
| FM approval | Yes |
| RCM (formerly C-TICK) | Yes |
| KC approval | Yes |
| Marine approval | Yes |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -20 °C |
| • max. | 60 °C |
| Pollutant concentrations | |
| • SO ₂ at RH < 60% without condensation | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free |
| Connection method | |
| required front connector | Yes |
| Mechanics/material | |
| Enclosure material (front) | |
| • Plastic | Yes |
| Dimensions | |
| Width | 38 mm |
| Height | 62 mm |
| Depth | 21 mm |
| Weights | |
| Weight, approx. | 35 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1232 analog output modules

Overview



- Analog outputs for SIMATIC S7-1200
- Extremely short conversion times
- For connecting analog actuators without additional amplifiers
- For solving even more complex automation tasks

Ordering data

Article No.

SM 1232 analog output signal module

2 analog outputs, ± 10 V with 14 bits or 0 ... 20 mA with 13 bits

6ES7232-4HB32-0XB0

4 analog outputs, ± 10 V with 14 bits or 0 ... 20 mA with 13 bits

6ES7232-4HD32-0XB0

Terminal block (spare part)

For 6ES7232-4HB32-0XB0, 6ES7232-4HD32-0XB0

- 7-pin, gold-plated; 4 units
 - Screw-type system
 - Push-in system

6ES7292-1BG30-0XA0
6ES7292-2BG30-0XA0

Extension cable for two-tier configuration

For connecting digital/analog signal modules; length 2 m

6ES7290-6AA30-0XA0

Front flap set (spare part)

For modules with a width of 45 mm

6ES7291-1BA30-0XA0

Technical specifications

| Article number | 6ES7232-4HB32-0XB0 Analog Output SM 1232, 2AO | 6ES7232-4HD32-0XB0 Analog Output SM 1232, 4AO |
|---|--|--|
| General information | | |
| Product type designation | SM 1232, AQ 2x14 bit | SM 1232, AQ 4x14 bit |
| Supply voltage | | |
| Rated value (DC) | 24 V | 24 V |
| Input current | | |
| Current consumption, typ. | 45 mA | 45 mA |
| from backplane bus 5 V DC, typ. | 80 mA | 80 mA |
| Analog outputs | | |
| Number of analog outputs | 2; Current or voltage | 4; Current or voltage |
| Output ranges, voltage | | |
| • -10 V to +10 V | Yes | Yes |
| Output ranges, current | | |
| • 0 to 20 mA | Yes | Yes |
| Load impedance (in rated range of output) | | |
| • with voltage outputs, min. | 1 000 Ω | 1 000 Ω |
| • with current outputs, max. | 600 Ω | 600 Ω |
| Cable length | | |
| • shielded, max. | 100 m; shielded, twisted pair | 100 m; shielded, twisted pair |
| Analog value generation for the outputs | | |
| Integration and conversion time/resolution per channel | | |
| • Resolution with overrange (bit including sign), max. | 14 bit; Voltage: 14 bit; Current : 13 bit | 14 bit; Voltage: 14 bit; Current : 13 bit |
| Errors/accuracies | | |
| Temperature error (relative to output range), (+/-) | 25 °C $\pm 0.3\%$, to 55 °C $\pm 0.6\%$ total measurement range | 25 °C $\pm 0.3\%$, to 55 °C $\pm 0.6\%$ total measurement range |
| Basic error limit (operational limit at 25 °C) | | |
| • Voltage, relative to output range, (+/-) | 0.3 % | 0.3 % |
| • Current, relative to output range, (+/-) | 0.3 % | 0.3 % |
| Interference voltage suppression for $f = n \times (f_1 \pm 1 \%)$, $f_1 =$ interference frequency | | |
| • Common mode voltage, max. | 12 V | 12 V |

Technical specifications

| Article number | 6ES7232-4HB32-0XB0 | 6ES7232-4HD32-0XB0 |
|--|---|---|
| | Analog Output SM 1232, 2AO | Analog Output SM 1232, 4AO |
| Interrupts/diagnostics/status information | | |
| Alarms | Yes | Yes |
| Diagnostics function | Yes | Yes |
| Alarms | | |
| • Diagnostic alarm | Yes | Yes |
| Diagnoses | | |
| • Monitoring the supply voltage | Yes | Yes |
| • Wire-break | Yes | Yes |
| • Short-circuit | Yes | Yes |
| Diagnostics indication LED | | |
| • for status of the outputs | Yes | Yes |
| • for maintenance | Yes | Yes |
| Standards, approvals, certificates | | |
| CE mark | Yes | Yes |
| CSA approval | Yes | Yes |
| UL approval | Yes | Yes |
| cULus | Yes | Yes |
| FM approval | Yes | Yes |
| RCM (formerly C-TICK) | Yes | Yes |
| KC approval | Yes | Yes |
| Marine approval | Yes | Yes |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| • min. | -20 °C | -20 °C |
| • max. | 60 °C | 60 °C |
| Pollutant concentrations | | |
| • SO ₂ at RH < 60% without condensation | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free |
| Connection method | | |
| required front connector | Yes | Yes |
| Mechanics/material | | |
| Enclosure material (front) | | |
| • Plastic | Yes | Yes |
| Dimensions | | |
| Width | 45 mm | 45 mm |
| Height | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm |
| Weights | | |
| Weight, approx. | 180 g | 180 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SB 1232 analog output modules

Overview



- Analog output for SIMATIC S7-1200
- Can be plugged directly into the CPU

Ordering data

Article No.

SB 1232 analog output signal board

1 analog output, ± 10 V with 12 bits or 0 ... 20 mA with 11 bits

6ES7232-4HA30-0XB0

Terminal block (spare part)

for signal board
with 6 screws, gold-plated; 4 pcs.

6ES7292-1BF30-0XA0

Technical specifications

| | |
|---|---|
| Article number | 6ES7232-4HA30-0XB0 Signal Board SB 1232, 1 AO |
| General information | |
| Product type designation | SB 1232, AQ 1x12 bit |
| Input current | |
| from backplane bus 5 V DC, typ. | 15 mA |
| Output voltage | |
| Power supply to the transmitters | |
| • Supply current, max. | 25 mA |
| Analog inputs | |
| Number of analog inputs | 0 |
| Analog outputs | |
| Number of analog outputs | 1 |
| Cycle time (all channels) max. | Voltage: 300 μ S (R), 750 μ S (1 μ F) Current: 600 ms (1 mH); 2 ms (10 mH) |
| Output ranges, voltage | |
| • -10 V to +10 V | Yes |
| Output ranges, current | |
| • 0 to 20 mA | Yes |
| Load impedance (in rated range of output) | |
| • with voltage outputs, min. | 1 000 Ω |
| • with current outputs, max. | 600 Ω |
| Cable length | |
| • shielded, max. | 100 m; shielded, twisted pair |
| Analog value generation for the outputs | |
| Conversion principle | Differential |
| Integration and conversion time/resolution per channel | |
| • Resolution with overrange (bit including sign), max. | 12 bit |
| Errors/accuracies | |
| Temperature error (relative to output range), (+/-) | 25 °C $\pm 0.5\%$, to 55 °C $\pm 1\%$ |

| | |
|--|---|
| Article number | 6ES7232-4HA30-0XB0 Signal Board SB 1232, 1 AO |
| Interrupts/diagnostics/status information | |
| Alarms | Yes |
| Diagnostics function | Yes |
| Diagnostics indication LED | |
| • for status of the outputs | Yes |
| Standards, approvals, certificates | |
| CE mark | Yes |
| CSA approval | Yes |
| UL approval | Yes |
| cULus | Yes |
| FM approval | Yes |
| RCM (formerly C-TICK) | Yes |
| KC approval | Yes |
| Marine approval | Yes |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -20 °C |
| • max. | 60 °C |
| Pollutant concentrations | |
| • SO ₂ at RH < 60% without condensation | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free |
| Mechanics/material | |
| Enclosure material (front) | |
| • Plastic | Yes |
| Dimensions | |
| Width | 38 mm |
| Height | 62 mm |
| Depth | 21 mm |
| Weights | |
| Weight, approx. | 40 g |

Overview



- Analog inputs and outputs for the SIMATIC S7-1200
- Extremely short conversion times
- For connecting analog actuators and sensors without additional amplifiers
- For solving even more complex automation tasks

Ordering data

Article No.

SM 1234 analog input/output signal module

4 analog inputs, ± 10 V, ± 5 V, ± 2.5 V, or 0 ... 20 mA, 12 bits + sign;
2 analog outputs, ± 10 V with 14 bits or 0 ... 20 mA with 13 bits

6ES7234-4HE32-0XB0**Terminal block (spare part)**

For 6ES7234-4HE32-0XB0
• 7-pin, gold-plated; 4 units
- Screw-type system
- Push-in system

6ES7292-1BG30-0XA0
6ES7292-2BG30-0XA0**Extension cable for two-tier configuration**

For connecting digital/analog signal modules; length 2 m

6ES7290-6AA30-0XA0**Front flap set (spare part)**

For modules with a width of 45 mm

6ES7291-1BA30-0XA0

Technical specifications

| | |
|---|---|
| Article number | 6ES7234-4HE32-0XB0 |
| | Analog I/O SM 1234, 4AI/2AO |
| General information | |
| Product type designation | SM 1234, AI 4x13 bit/AQ 2x14 bit |
| Supply voltage | |
| Rated value (DC) | 24 V |
| Input current | |
| Current consumption, typ. | 60 mA |
| from backplane bus 5 V DC, typ. | 80 mA |
| Analog inputs | |
| Number of analog inputs | 4; Current or voltage differential inputs |
| permissible input voltage for voltage input (destruction limit), max. | 35 V |
| permissible input current for current input (destruction limit), max. | 40 mA |
| Cycle time (all channels) max. | 625 μ s |
| Input ranges | |
| • Voltage | Yes; ± 10 V, ± 5 V, ± 2.5 V |
| • Current | Yes; 4 to 20 mA, 0 to 20 mA |
| Input ranges (rated values), voltages | |
| • -10 V to +10 V | Yes |
| • -2.5 V to +2.5 V | Yes |
| • -5 V to +5 V | Yes |
| Input ranges (rated values), currents | |
| • 0 to 20 mA | Yes |
| • 4 mA to 20 mA | Yes |

| | |
|--|---|
| Article number | 6ES7234-4HE32-0XB0 |
| | Analog I/O SM 1234, 4AI/2AO |
| Analog outputs | |
| Number of analog outputs | 2; Current or voltage |
| Output ranges, voltage | |
| • -10 V to +10 V | Yes |
| Output ranges, current | |
| • 0 to 20 mA | Yes |
| • 4 mA to 20 mA | Yes |
| Load impedance (in rated range of output) | |
| • with voltage outputs, min. | 1 000 Ω |
| • with current outputs, max. | 600 Ω |
| Cable length | |
| • shielded, max. | 100 m; shielded, twisted pair |
| Analog value generation for the inputs | |
| Integration and conversion time/resolution per channel | |
| • Resolution with overrange (bit including sign), max. | 12 bit; + sign |
| • Integration time, parameterizable | Yes |
| • Interference voltage suppression for interference frequency f1 in Hz | 40 dB, DC to 60 V for interference frequency 50 / 60 Hz |
| Smoothing of measured values | |
| • parameterizable | Yes |
| Analog value generation for the outputs | |
| Integration and conversion time/resolution per channel | |
| • Resolution with overrange (bit including sign), max. | 14 bit; Voltage: 14 bit; Current : 13 bit |

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1234 analog input/output modules

Technical specifications

| | |
|---|--|
| Article number | 6ES7234-4HE32-0XB0 Analog I/O SM 1234, 4AI/2AO |
| Errors/accuracies | |
| Temperature error (relative to input range), (+/-) | 25 °C ±0.1%, to 55 °C ±0.2% total measurement range |
| Temperature error (relative to output range), (+/-) | 25 °C ±0.3%, to 55 °C ±0.6% total measurement range |
| Basic error limit (operational limit at 25 °C) | |
| • Voltage, relative to input range, (+/-) | 0.1 % |
| • Current, relative to input range, (+/-) | 0.1 % |
| • Voltage, relative to output range, (+/-) | 0.3 % |
| • Current, relative to output range, (+/-) | 0.3 % |
| Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, $f1 =$ interference frequency | |
| • Common mode voltage, max. | 12 V |
| Interrupts/diagnostics/status information | |
| Alarms | Yes |
| Diagnostics function | Yes |
| Alarms | |
| • Diagnostic alarm | Yes |
| Diagnoses | |
| • Monitoring the supply voltage | Yes |
| • Wire-break | Yes |
| • Short-circuit | Yes |
| Diagnostics indication LED | |
| • for status of the inputs | Yes |
| • for status of the outputs | Yes |
| • for maintenance | Yes |
| Potential separation analog outputs | |
| • between the channels and the power supply of the electronics | No |

| | |
|--|--|
| Article number | 6ES7234-4HE32-0XB0 Analog I/O SM 1234, 4AI/2AO |
| Standards, approvals, certificates | |
| CE mark | Yes |
| CSA approval | Yes |
| UL approval | Yes |
| cULus | Yes |
| FM approval | Yes |
| RCM (formerly C-TICK) | Yes |
| KC approval | Yes |
| Marine approval | Yes |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -20 °C |
| • max. | 60 °C |
| Pollutant concentrations | |
| • SO ₂ at RH < 60% without condensation | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free |
| Connection method | |
| required front connector | Yes |
| Mechanics/material | |
| Enclosure material (front) | |
| • Plastic | Yes |
| Dimensions | |
| Width | 45 mm |
| Height | 100 mm |
| Depth | 75 mm |
| Weights | |
| Weight, approx. | 220 g |

Overview

- For the convenient recording of temperatures with great accuracy
- 7 common thermocouple types can be used
- Also for the measurement of analog signals with a low level (± 80 mV)
- Can easily be retrofitted to existing plant

Ordering data

| Ordering data | Article No. | Article No. |
|---|---------------------------|--|
| SM 1231 thermocouple module | | Accessories |
| 4 inputs +/- 80 mV, resolution 15 bits + sign, thermocouple types J, K, S, T, R, E, N | 6ES7231-5QD32-0XB0 | Terminal block (spare part) |
| 8 inputs +/- 80 mV, resolution 15 bits + sign, thermocouple types J, K, T, E, R, S, N, C, TXK/XK(L) | 6ES7231-5QF32-0XB0 | For 6ES7231-5QD32-0XB0, 6ES7231-5QF32-0XB0 |
| | | • 7-pin, gold-plated; 4 units |
| | | - Screw-type system |
| | | - Push-in system |
| | | 6ES7292-1BG30-0XA0 |
| | | 6ES7292-2BG30-0XA0 |
| | | Extension cable for two-tier configuration |
| | | 6ES7290-6AA30-0XA0 |
| | | For connecting digital/analog signal modules; length 2 m |
| | | Front flap set (spare part) |
| | | For modules with a width of 45 mm |
| | | 6ES7291-1BA30-0XA0 |

Technical specifications

| Article number | 6ES7231-5QD32-0XB0 | 6ES7231-5QF32-0XB0 |
|---|--|--|
| | S7-1200, analog Input SM 1231 TC, 4 AI | S7-1200, analog Input SM 1231 TC, 8 AI |
| General information | | |
| Product type designation | SM 1231, AI 4x16 bit TC | SM 1231, AI 8x16 bit TC |
| Supply voltage | | |
| Rated value (DC) | 24 V | 24 V |
| Input current | | |
| Current consumption, typ. | 40 mA | 40 mA |
| from backplane bus 5 V DC, typ. | 80 mA | 80 mA |
| Analog inputs | | |
| Number of analog inputs | 4; Thermocouples | 8; Thermocouples |
| Technical unit for temperature measurement adjustable | Degrees Celsius/degrees Fahrenheit | Degrees Celsius/degrees Fahrenheit |
| Input ranges | | |
| • Voltage | Yes | Yes |
| • Current | No | No |
| • Thermocouple | Yes; J, K, T, E, R, S, N, C, TXK/XK(L); voltage range: ± 80 mV | Yes; J, K, T, E, R & S, B, N, C, TXK/XK(L); voltage range: ± 80 mV |
| • Resistance thermometer | No | No |
| • Resistance | No | No |
| Input ranges (rated values), voltages | | |
| • -80 mV to +80 mV | Yes | Yes |
| Input ranges (rated values), thermocouples | | |
| • Type B | Yes | Yes |
| • Type C | Yes | Yes |
| • Type E | Yes | Yes |
| • Type J | Yes | Yes |
| • Type K | Yes | Yes |
| • Type N | Yes | Yes |
| • Type R | Yes | Yes |
| • Type S | Yes | Yes |
| • Type T | Yes | Yes |
| • Type TXK/TXK(L) to GOST | Yes | Yes |
| Thermocouple (TC) | | |
| Temperature compensation | | |
| - parameterizable | No | No |

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1231 thermocouple module

Technical specifications

| Article number | 6ES7231-5QD32-0XB0 | 6ES7231-5QF32-0XB0 |
|---|--|--|
| | S7-1200, analog Input SM 1231 TC, 4 AI | S7-1200, analog Input SM 1231 TC, 8 AI |
| Analog value generation for the inputs | | |
| Integration and conversion time/resolution per channel | | |
| <ul style="list-style-type: none"> Resolution with overrange (bit including sign), max. Integration time, parameterizable Interference voltage suppression for interference frequency f1 in Hz | 15 bit; + sign No 85 dB at 50 / 60 / 400 Hz | 15 bit; + sign No 85 dB at 50 / 60 / 400 Hz |
| Smoothing of measured values | | |
| <ul style="list-style-type: none"> parameterizable | Yes | Yes |
| Errors/accuracies | | |
| Temperature error (relative to input range), (+/-) | 25 °C ±0.1%, to 55 °C ±0.2% total measurement range | 25 °C ±0.1%, to 55 °C ±0.2% total measurement range |
| Repeat accuracy in steady state at 25 °C (relative to output range), (+/-) | 0.5 % | 0.5 % |
| Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, f1 = interference frequency | | |
| <ul style="list-style-type: none"> Common mode interference, min. | 120 dB | 120 dB |
| Interrupts/diagnostics/status information | | |
| Alarms | Yes | Yes |
| Diagnostics function | Yes; Can be read out | Yes; Can be read out |
| Alarms | | |
| <ul style="list-style-type: none"> Diagnostic alarm | Yes | Yes |
| Diagnoses | | |
| <ul style="list-style-type: none"> Monitoring the supply voltage Wire-break | Yes Yes | Yes Yes |
| Diagnostics indication LED | | |
| <ul style="list-style-type: none"> for status of the inputs for maintenance | Yes Yes | Yes Yes |
| Standards, approvals, certificates | | |
| CE mark | Yes | Yes |
| CSA approval | Yes | Yes |
| UL approval | Yes | Yes |
| cULus | Yes | Yes |
| FM approval | Yes | Yes |
| RCM (formerly C-TICK) | Yes | Yes |
| KC approval | Yes | Yes |
| Marine approval | Yes | Yes |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| <ul style="list-style-type: none"> min. max. | -20 °C 60 °C | -20 °C 60 °C |
| Pollutant concentrations | | |
| <ul style="list-style-type: none"> SO2 at RH < 60% without condensation | SO2: < 0.5 ppm; H2S: < 0.1 ppm; RH < 60% condensation-free | SO2: < 0.5 ppm; H2S: < 0.1 ppm; RH < 60% condensation-free |
| Connection method | | |
| required front connector | Yes | Yes |
| Mechanics/material | | |
| Enclosure material (front) | | |
| <ul style="list-style-type: none"> Plastic | Yes | Yes |
| Dimensions | | |
| Width | 45 mm | 45 mm |
| Height | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm |
| Weights | | |
| Weight, approx. | 180 g | 220 g |

Overview

- For the convenient recording of temperatures with great accuracy
- 1 input with 16-bit resolution
- Common thermocouple types can be used
- Also for the measurement of analog signals with a low level (± 80 mV)
- Can easily be retrofitted to existing plant
- Can be plugged directly into the CPU

Ordering data**Article No.****SB 1231 thermocouple signal board****6ES7231-5QA30-0XB0**

1 input +/- 80 mV,
resolution 15 bits + sign,
thermocouples type J, K

Accessories**Terminal block (spare part)**

for signal board
with 6 screws, gold-plated; 4 pcs.

6ES7292-1BF30-0XA0**Technical specifications**

| | |
|--|--|
| Article number | 6ES7231-5QA30-0XB0 Signal Board SB 1231 TC, 1 AI |
| General information | |
| Product type designation | SB 1231, AI 1x16 bit TC |
| Supply voltage | |
| Rated value (DC) | 24 V |
| Input current | |
| Current consumption, typ. | 5 mA |
| from backplane bus 5 V DC, typ. | 20 mA |
| Analog inputs | |
| Number of analog inputs | 1; Thermocouples |
| permissible input voltage for current input (destruction limit), max. | ± 35 V |
| Technical unit for temperature measurement adjustable | Degrees Celsius/degrees Fahrenheit |
| Input ranges | |
| • Voltage | Yes |
| • Current | No |
| • Thermocouple | Yes; J, K, T, E, R & S, B, N, C, TXK/XK(L); voltage range: ± 80 mV |
| • Resistance thermometer | No |
| • Resistance | No |
| Input ranges (rated values), voltages | |
| • -80 mV to +80 mV | Yes |
| Input ranges (rated values), thermocouples | |
| • Type J | Yes |
| • Type K | Yes |
| Thermocouple (TC) | |
| Temperature compensation | |
| - parameterizable | No |
| Analog outputs | |
| Number of analog outputs | 0 |
| Cable length | |
| • shielded, max. | 100 m; shielded, twisted pair |
| Analog value generation for the inputs | |
| Integration and conversion time/resolution per channel | |
| • Resolution with overrange (bit including sign), max. | 15 bit; + sign |
| • Integration time, parameterizable | No |
| • Interference voltage suppression for interference frequency f1 in Hz | 85 dB at 10 / 50 / 60 / 400 Hz |
| Smoothing of measured values | |
| • parameterizable | Yes |

| | |
|--|--|
| Article number | 6ES7231-5QA30-0XB0 Signal Board SB 1231 TC, 1 AI |
| Errors/accuracies | |
| Temperature error (relative to input range), (+/-) | 25 °C $\pm 0.1\%$, to 55 °C $\pm 0.2\%$ total measurement range |
| Repeat accuracy in steady state at 25 °C (relative to output range), (+/-) | 0.5 % |
| Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, f1 = interference frequency | |
| • Common mode interference, min. | 120 dB |
| Interrupts/diagnostics/status information | |
| Alarms | Yes |
| Diagnostics function | Yes; Can be read out |
| Alarms | |
| • Diagnostic alarm | Yes |
| Diagnoses | |
| • Wire-break | Yes |
| Diagnostics indication LED | |
| • for status of the inputs | Yes |
| • for maintenance | Yes |
| Standards, approvals, certificates | |
| CE mark | Yes |
| CSA approval | Yes |
| UL approval | Yes |
| cULus | Yes |
| FM approval | Yes |
| RCM (formerly C-TICK) | Yes |
| KC approval | Yes |
| Marine approval | Yes |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -20 °C |
| • max. | 60 °C |
| Pollutant concentrations | |
| • SO2 at RH < 60% without condensation | SO2: < 0.5 ppm; H2S: < 0.1 ppm; RH < 60% condensation-free |
| Connection method | |
| required front connector | Yes |
| Mechanics/material | |
| Enclosure material (front) | |
| • Plastic | Yes |
| Dimensions | |
| Width | 38 mm |
| Height | 62 mm |
| Depth | 21 mm |
| Weights | |
| Weight, approx. | 35 g |

Technical specifications

| Article number | 6ES7231-5PD32-0XB0 | 6ES7231-5PF32-0XB0 |
|--|---|---|
| | S7-1200, analog Input SM 1231 RTD, 4 AI | S7-1200, analog Input SM 1231 RTD, 8 AI |
| Input ranges (rated values), resistance thermometer | | |
| • Cu 10 | Yes | Yes |
| • Ni 100 | Yes | Yes |
| • Ni 1000 | Yes | Yes |
| • LG-Ni 1000 | Yes | Yes |
| • Ni 120 | Yes | Yes |
| • Ni 200 | Yes | Yes |
| • Ni 500 | Yes | Yes |
| • Pt 100 | Yes | Yes |
| • Pt 1000 | Yes | Yes |
| • Pt 200 | Yes | Yes |
| • Pt 500 | Yes | Yes |
| Input ranges (rated values), resistors | | |
| • 0 to 150 ohms | Yes | Yes |
| • 0 to 300 ohms | Yes | Yes |
| • 0 to 600 ohms | Yes | Yes |
| Thermocouple (TC) | | |
| Temperature compensation | | |
| - parameterizable | No | No |
| Analog value generation for the inputs | | |
| Integration and conversion time/resolution per channel | | |
| • Resolution with overrange (bit including sign), max. | 15 bit; + sign | 15 bit; + sign |
| • Integration time, parameterizable | No | No |
| • Interference voltage suppression for interference frequency f1 in Hz | 85 dB at 50 / 60 / 400 Hz | 85 dB at 50 / 60 / 400 Hz |
| Errors/accuracies | | |
| Temperature error (relative to input range), (+/-) | 25 °C ±0.1%, to 55 °C ±0.2% total measurement range | 25 °C ±0.1%, to 55 °C ±0.2% total measurement range |
| Repeat accuracy in steady state at 25 °C (relative to output range), (+/-) | 0.05 % | 0.05 % |
| Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, f1 = interference frequency | | |
| • Common mode interference, min. | 120 dB | 120 dB |
| Interrupts/diagnostics/status information | | |
| Alarms | Yes | Yes |
| Diagnostics function | Yes; Can be read out | Yes; Can be read out |
| Alarms | | |
| • Diagnostic alarm | Yes | Yes |
| Diagnoses | | |
| • Monitoring the supply voltage | Yes | Yes |
| • Wire-break | Yes | Yes |
| Diagnostics indication LED | | |
| • for status of the inputs | Yes | Yes |
| • for maintenance | Yes | Yes |

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1231 RTD signal module**Technical specifications**

| Article number | 6ES7231-5PD32-0XB0 | 6ES7231-5PF32-0XB0 |
|--|---|---|
| | S7-1200, analog Input SM 1231 RTD, 4 AI | S7-1200, analog Input SM 1231 RTD, 8 AI |
| Standards, approvals, certificates | | |
| CE mark | Yes | Yes |
| CSA approval | Yes | Yes |
| UL approval | Yes | Yes |
| cULus | Yes | Yes |
| FM approval | Yes | Yes |
| RCM (formerly C-TICK) | Yes | Yes |
| KC approval | Yes | Yes |
| Marine approval | Yes | Yes |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| • min. | -20 °C | -20 °C |
| • max. | 60 °C | 60 °C |
| Pollutant concentrations | | |
| • SO ₂ at RH < 60% without condensation | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free | SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free |
| Connection method | | |
| required front connector | Yes | Yes |
| Mechanics/material | | |
| Enclosure material (front) | | |
| • Plastic | Yes | Yes |
| Dimensions | | |
| Width | 45 mm | 70 mm |
| Height | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm |
| Weights | | |
| Weight, approx. | 220 g | 220 g |

3

Overview

- For the convenient recording of temperatures with great accuracy
- 1 input with 16-bit resolution
- Common resistance-type temperature sensors can be used
- Can easily be retrofitted to existing plant
- Can be plugged directly into the CPU

Ordering data**Article No.****RTD signal board SB 1231****6ES7231-5PA30-0XB0**

1 input for resistance temperature sensors Pt 100, Pt 200, Pt 500, Pt 1000, resolution 15 bits + sign

Accessories**Terminal block (spare part)**

for signal board
with 6 screws, gold-plated; 4 pcs.

6ES7292-1BF30-0XA0**Technical specifications**

| | |
|--|---|
| Article number | 6ES7231-5PA30-0XB0 Signal Board SB 1231 RTD |
| General information | |
| Product type designation | SB 1231, AI 1x16 bit RTD |
| Supply voltage | |
| Rated value (DC) | 24 V |
| Input current | |
| Current consumption, typ. | 5 mA |
| from backplane bus 5 V DC, typ. | 20 mA |
| Analog inputs | |
| Number of analog inputs | 1; Resistance thermometer |
| permissible input voltage for current input (destruction limit), max. | ±35 V |
| Technical unit for temperature measurement adjustable | Degrees Celsius/degrees Fahrenheit |
| Input ranges | |
| • Voltage | Yes |
| • Current | No |
| • Thermocouple | No |
| • Resistance thermometer | Yes; Platinum (Pt) |
| • Resistance | Yes; 150 Ω, 300 Ω, 600 Ω |
| Input ranges (rated values), resistance thermometer | |
| • Pt 100 | Yes |
| • Pt 1000 | Yes |
| • Pt 200 | Yes |
| • Pt 500 | Yes |
| Input ranges (rated values), resistors | |
| • 0 to 150 ohms | Yes |
| • 0 to 300 ohms | Yes |
| • 0 to 600 ohms | Yes |
| Thermocouple (TC) | |
| Temperature compensation | |
| - parameterizable | No |
| Analog outputs | |
| Number of analog outputs | 0 |
| Cable length | |
| • shielded, max. | 100 m; shielded, twisted pair |
| Analog value generation for the inputs | |
| Integration and conversion time/resolution per channel | |
| • Resolution with overrange (bit including sign), max. | 15 bit; + sign |
| • Integration time, parameterizable | No |
| • Interference voltage suppression for interference frequency f1 in Hz | 85 dB at 10 / 50 / 60 / 400 Hz |

| | |
|---|--|
| Article number | 6ES7231-5PA30-0XB0 Signal Board SB 1231 RTD |
| Errors/accuracies | |
| Temperature error (relative to input range), (+/-) | 25 °C ±0.1%, to 55 °C ±0.2% total measurement range |
| Repeat accuracy in steady state at 25 °C (relative to output range), (+/-) | 0.05 % |
| Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, $f1 =$ interference frequency | |
| • Common mode interference, min. | 120 dB |
| Interrupts/diagnostics/status information | |
| Alarms | Yes |
| Diagnostics function | Yes; Can be read out |
| Alarms | |
| • Diagnostic alarm | Yes |
| Diagnoses | |
| • Wire-break | Yes |
| Diagnostics indication LED | |
| • for status of the inputs | Yes |
| • for maintenance | Yes |
| Standards, approvals, certificates | |
| CE mark | Yes |
| CSA approval | Yes |
| UL approval | Yes |
| cULus | Yes |
| FM approval | Yes |
| RCM (formerly C-TICK) | Yes |
| KC approval | Yes |
| Marine approval | Yes |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -20 °C |
| • max. | 60 °C |
| Pollutant concentrations | |
| • SO2 at RH < 60% without condensation | SO2: < 0.5 ppm; H2S: < 0.1 ppm; RH < 60% condensation-free |
| Connection method | |
| required front connector | Yes |
| Mechanics/material | |
| Enclosure material (front) | |
| • Plastic | Yes |
| Dimensions | |
| Width | 38 mm |
| Height | 62 mm |
| Depth | 21 mm |
| Weights | |
| Weight, approx. | 35 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1238 Energy Meter 480 V AC analog input modules

Overview

- Energy management based on SIMATIC S7-1200
- Data acquisition of electrical characteristics in 1 and 3-phase networks up to 480 V AC
- Direct connection of voltage inputs
- Current measurement performed by 1 A and 5 A current transformers
- Can be used in TN and TT networks
- Data backup of measurement data in the event of a power failure

Ordering data

Article No.

SM 1238 Energy Meter 480 V AC analog input

Energy measurement module for data acquisition in 1 and 3-phase networks (TN, TT) up to 480 V AC; current range: 1 A, 5 A; recording of voltage, current, phase angles, power ratings, energy values, frequencies; with channel diagnostics

6ES7238-5XA32-0XB0

Extension cable for two-tier configuration

For connecting digital/analog signal modules; length 2 m

6ES7290-6AA30-0XA0

Terminal block (spare part)

- For voltage input (top), 7-pin, tin-coated, coded in middle
 - Screw-type system
 - Push-in system

6ES7292-1AG40-0XA2
6ES7292-2AG40-0XA2

For current input (bottom), 7-pin, tin-coated

- Screw-type system
- Push-in system

6ES7292-1AG30-0XA0
6ES7292-2AG30-0XA0

Front flap set (spare part)

For modules with a width of 45 mm

6ES7291-1BA30-0XA0

Technical specifications

| | |
|--|---|
| Article number | 6ES7238-5XA32-0XB0 SM 1238 Energy Meter 480V AC |
| General information | |
| Product type designation | SM 1238, AI energy meter 480 V AC |
| Product function | |
| • Voltage measurement | Yes |
| - with voltage transformer | Yes |
| • Current measurement | Yes |
| - without current transformer | No |
| - with current transformer | Yes |
| • Energy measurement | Yes |
| • Frequency measurement | Yes |
| • Power measurement | Yes |
| • Active power measurement | Yes |
| • Reactive power measurement | Yes |
| • I&M data | Yes; I&M 0 |
| • Isochronous mode | No |
| Engineering with | |
| • STEP 7 TIA Portal configurable/integrated from version | V13 SP1 |
| Operating mode | |
| • cyclic measurement | Yes |
| • acyclic measurement | Yes |
| • Acyclic measured value access | Yes |
| • Fixed measured value sets | Yes |
| • Freely definable measured value sets | No |

| | |
|--|---|
| Article number | 6ES7238-5XA32-0XB0 SM 1238 Energy Meter 480V AC |
| Installation type/mounting | |
| Mounting position | Horizontal, vertical |
| Supply voltage | |
| Design of the power supply | from CPU |
| Type of supply voltage | DC |
| Input current | |
| Current consumption, max. | 180 mA |
| Analog inputs | |
| Cycle time (all channels), typ. | 50 ms; Time for consistent update of all measured and calculated values (cyclic und acyclic data) |
| Interrupts/diagnostics/status information | |
| Alarms | |
| • Diagnostic alarm | Yes |
| • Limit value alarm | Yes |
| • Hardware interrupt | No |
| Diagnostics indication LED | |
| • Monitoring of the supply voltage (PWR-LED) | Yes |
| • Channel status display | Yes; green LED |
| • for channel diagnostics | Yes; red Fn LED |
| • for module diagnostics | Yes; green/red DIAG LED |

Technical specifications

| | |
|---|--|
| Article number | 6ES7238-5XA32-0XB0 SM 1238 Energy Meter 480V AC |
| Integrated Functions | |
| Measuring functions | |
| • Measuring procedure for voltage measurement | TRMS |
| • Measuring procedure for current measurement | TRMS |
| • Type of measured value acquisition | seamless |
| • Curve shape of voltage | Sinusoidal or distorted |
| • Buffering of measured variables | Yes |
| • Parameter length | 74 byte |
| • Bandwidth of measured value acquisition | 2 kHz; Harmonics: 39 / 50 Hz, 32 / 60 Hz |
| Measuring range | |
| - Frequency measurement, min. | 45 Hz |
| - Frequency measurement, max. | 65 Hz |
| Measuring inputs for voltage | |
| - Measurable line voltage between phase and neutral conductor | 277 V |
| - Measurable line voltage between the line conductors | 480 V |
| - Measurable line voltage between phase and neutral conductor, min. | 0 V |
| - Measurable line voltage between phase and neutral conductor, max. | 293 V |
| - Measurable line voltage between the line conductors, min. | 0 V |
| - Measurable line voltage between the line conductors, max. | 508 V |
| - Internal resistance line conductor and neutral conductor | 3.4 MΩ |
| - Power consumption per phase | 20 mW |
| - Impulse voltage resistance 1,2/50μs | 1 kV |
| - Measurement category for voltage measurement in accordance with IEC 61010-2-030 | CAT II; CAT III in case of guaranteed protection level of 1.5 kV |
| Measuring inputs for current | |
| - measurable relative current (AC), min. | 1 %; Relative to the secondary rated current 5 A |
| - measurable relative current (AC), max. | 100 %; Relative to the secondary rated current 5 A |
| - Continuous current with AC, maximum permissible | 5 A |
| - Apparent power consumption per phase for measuring range 5 A | 0.6 V·A |
| - Rated value short-time withstand current restricted to 1 s | 100 A |
| - Input resistance measuring range 0 to 5 A | 25 mΩ; At the terminal |
| - Surge strength | 10 A; for 1 minute |
| - Zero point suppression | Parameterizable: 2 ... 250 mA, default 50 mA |

| | |
|---|--|
| Article number | 6ES7238-5XA32-0XB0 SM 1238 Energy Meter 480V AC |
| Accuracy class according to IEC 61557-12 | |
| - Measured variable apparent power | 0.5 |
| - Measured variable active power | 0.5 |
| - Measured variable power factor | 0.5 |
| - Measured variable active energy | 0.5 |
| - Measured variable neutral current | 0.5; calculated |
| - Measured variable phase angle | ±1 °; not covered by IEC 61557-12 |
| - Measured variable frequency | 0.05 |
| Potential separation | |
| Potential separation channels | |
| • between the channels and backplane bus | Yes; 3 700V AC (type test) CAT III |
| Standards, approvals, certificates | |
| CE mark | Yes |
| CSA approval | Yes |
| UL approval | Yes |
| cULus | Yes |
| FM approval | Yes |
| RCM (formerly C-TICK) | Yes |
| KC approval | Yes |
| Marine approval | Yes |
| Dimensions | |
| Width | 45 mm |
| Height | 100 mm |
| Depth | 75 mm |
| Weights | |
| Weight, approx. | 165 g |
| Data for selecting a current transformer | |
| • Burden power current transformer x/1A, min. | As a function of cable length and cross section, see device manual |
| • Burden power current transformer x/5A, min. | As a function of cable length and cross section, see device manual |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS SM 1231 analog input modules**Overview**

- Analog inputs for SIPLUS S7-1200
- With extremely short conversion times
- For connecting analog actuators and sensors without additional amplifiers
- Even solves more complex automation tasks
- From +60 °C to +70 °C, max. 50% of the inputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS SM 1231 analog input signal module**

(Extended temperature range and exposure to media)

Ambient temperature range
0 ... +55 °C

4 analog inputs, ± 10 V, ± 5 V, ± 2.5 V, or 0 ... 20 mA, 16-bit

6AG1231-5ND32-4XB0

4 analog inputs ± 10 V, ± 5 V, ± 2.5 V, or 0 ... 20 mA; 12-bit + sign

6AG1231-4HD32-4XB0

8 analog inputs, ± 10 V, ± 5 V, ± 2.5 V, or 0 ... 20 mA, 12-bit + sign

6AG1231-4HF32-4XB0**Accessories**

See SIMATIC S7-1200 analog input SM 1231 page 3/82

Technical specifications

| Article number | 6AG1231-4HD32-4XB0 | 6AG1231-4HF32-4XB0 | 6AG1231-5ND32-4XB0 |
|---|---|---|---|
| Based on | 6ES7231-4HD32-0XB0 | 6ES7231-4HF32-0XB0 | 6ES7231-5ND32-0XB0 |
| | SIPLUS S7-1200 SM 1231 4AI 13Bit | SIPLUS S7-1200 SM 1231 8AI 13Bit | SIPLUS S7-1200 SM 1231 4AI 16Bit |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C |
| • max. | 60 °C; = Tmax | 60 °C; = Tmax | 60 °C; = Tmax |
| Altitude during operation relating to sea level | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |

Technical specifications

| Article number | 6AG1231-4HD32-4XB0 | 6AG1231-4HF32-4XB0 | 6AG1231-5ND32-4XB0 |
|---|---|---|---|
| Based on | 6ES7231-4HD32-0XB0 SIPLUS S7-1200 SM 1231 4AI 13Bit | 6ES7231-4HF32-0XB0 SIPLUS S7-1200 SM 1231 8AI 13Bit | 6ES7231-5ND32-0XB0 SIPLUS S7-1200 SM 1231 4AI 16Bit |
| Resistance | | | |
| Coolants and lubricants | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS SM 1232 analog output modules**Overview**

- Analog outputs for SIPLUS S7-1200
- With extremely short conversion times
- For connecting analog actuators without additional amplifiers
- Even solves more complex automation tasks
- From +60 °C to +70 °C, max. 50% of the outputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS SM 1232 analog output signal module**

(Extended temperature range and exposure to media)

Ambient temperature range
-20 ... +60 °C

2 analog outputs, ±10 V with 14-bit or 0 ... 20 mA with 13-bit

6AG1232-4HB32-4XB0

4 analog outputs, ±10 V with 14-bit or 0 ... 20 mA with 13-bit

6AG1232-4HD32-4XB0

Ambient temperature range
-40 ... +70 °C

4 analog outputs, ±10 V with 14-bit or 0 ... 20 mA with 13-bit

6AG1232-4HD32-2XB0**Accessories**

See SIMATIC S7-1200 analog output SM 1232 page 3/86

Technical specifications

| Article number | 6AG1232-4HB32-4XB0 | 6AG1232-4HD32-2XB0 | 6AG1232-4HD32-4XB0 |
|---|---|---|---|
| Based on | 6ES7232-4HB32-0XB0 | 6ES7232-4HD32-0XB0 | 6ES7232-4HD32-0XB0 |
| | SIPLUS S7-1200 SM 1232 2AQ 13Bit | SIPLUS S7-1200 SM 1232 4AQ 14Bit | SIPLUS S7-1200 SM 1232 4AQ 14Bit |
| Ambient conditions | | | |
| Ambient temperature during operation | | | |
| • min. | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C |
| • max. | 60 °C; = Tmax | 70 °C; = Tmax | 60 °C; = Tmax |
| Altitude during operation relating to sea level | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |

Technical specifications

| Article number | 6AG1232-4HB32-4XB0 | 6AG1232-4HD32-2XB0 | 6AG1232-4HD32-4XB0 |
|---|---|---|---|
| Based on | 6ES7232-4HB32-0XB0 | 6ES7232-4HD32-0XB0 | 6ES7232-4HD32-0XB0 |
| | SIPLUS S7-1200 SM 1232 2AQ 13Bit | SIPLUS S7-1200 SM 1232 4AQ 14Bit | SIPLUS S7-1200 SM 1232 4AQ 14Bit |
| Resistance | | | |
| Coolants and lubricants | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS SB 1232 analog output modules

Overview



- Analog output for SIPLUS S7-1200
- Can be plugged directly into the CPU (cannot be used for +70 °C version)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SB 1232 analog output signal board

(Extended temperature range and exposure to media)

Ambient temperature range
-25 ... +55 °C

1 analog output, ±10 V with 12 bits
or 0 ... 20 mA with 11 bits

6AG1232-4HA30-5XB0

Ambient temperature range
0 ... +55 °C

1 analog output, ±10 V with 12 bits
or 0 ... 20 mA with 11 bits

6AG1232-4HA30-4XB0

Accessories

See SIMATIC S7-1200
analog output SB 1232
page 3/88

Technical specifications

| Article number | 6AG1232-4HA30-4XB0 | 6AG1232-4HA30-5XB0 |
|---|--|--|
| Based on | 6ES7232-4HA30-0XB0 SIPLUS S7-1200 SB 1232 1AQ | 6ES7232-4HA30-0XB0 SIPLUS S7-1200 SB 1232 1AQ |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| • min. | -20 °C; = Tmin (incl. condensation/frost) | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C |
| • max. | 60 °C; = Tmax | 60 °C; = Tmax |
| Altitude during operation relating to sea level | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | |
| Coolants and lubricants | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |

Technical specifications

| Article number | 6AG1232-4HA30-4XB0 | 6AG1232-4HA30-5XB0 |
|---|---|---|
| Based on | 6ES7232-4HA30-0XB0 SIPLUS S7-1200 SB 1232 1AQ | 6ES7232-4HA30-0XB0 SIPLUS S7-1200 SB 1232 1AQ |
| Usage in industrial process technology | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS SM 1234 analog input/output modules**Overview**

- Analog inputs and outputs for SIPLUS S7-1200
- With extremely short conversion times
- For connecting analog actuators and sensors without additional amplifiers
- Even solves more complex automation tasks
- From +60 °C to +70 °C, max. 50% of the inputs and outputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**SIPLUS SM 1234 analog input/output signal module**

(Extended temperature range and exposure to media)

Ambient temperature range

-25 ... +70 °C,

from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50%

4 analog inputs, ±10 V, ±5 V, ±2.5 V, or 0 ... 20 mA, 12-bit + sign;
2 analog outputs, ±10 V with 14-bit or 0 ... 20 mA with 13-bit

Ambient temperature range

0 ... +55 °C

4 analog inputs, ±10 V, ±5 V, ±2.5 V, or 0 ... 20 mA, 12-bit + sign;
2 analog outputs, ±10 V with 14-bit or 0 ... 20 mA with 13-bit

Accessories**Article No.****6AG1234-4HE32-2XB0****6AG1234-4HE32-4XB0**

See SIMATIC S7-1200 analog input/output SM 1234 page 3/89

Technical specifications

| Article number | 6AG1234-4HE32-2XB0 | 6AG1234-4HE32-4XB0 |
|---|---|---|
| Based on | 6ES7234-4HE32-0XB0 SIPLUS S7-1200 SM 1234 4AI/2AQ | 6ES7234-4HE32-0XB0 SIPLUS S7-1200 SM 1234 4AI/2AQ 13Bit |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| • min. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C |
| • max. | 70 °C; = Tmax; Tmax > +60 °C number of simultaneously used outputs 1, inputs 2 (no adjacent points) for horizontal mounting position | 60 °C; = Tmax |
| Altitude during operation relating to sea level | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |

Technical specifications

| Article number | 6AG1234-4HE32-2XB0 | 6AG1234-4HE32-4XB0 |
|---|---|---|
| Based on | 6ES7234-4HE32-0XB0 SIPLUS S7-1200 SM 1234 4AI/2AQ | 6ES7234-4HE32-0XB0 SIPLUS S7-1200 SM 1234 4AI/2AQ 13Bit |
| Resistance | | |
| Coolants and lubricants | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS SM 1231 thermocouple module

Overview

- For the convenient recording of temperatures with great accuracy
- 7 common thermocouple types can be used
- Also for the measurement of analog signals with a low level (± 80 mV)
- Can easily be retrofitted to existing plant

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

SIPLUS SM 1231 thermocouple module

(Extended temperature range and exposure to environmental substances)

Ambient temperature range
-40 ... +70 °C

8 inputs +/- 80 mV, resolution 15-bit + sign, thermocouple types J, K, T, E, R, S, N, C, TXK/XK(L)

4 inputs +/- 80 mV, resolution 15-bit + sign, thermocouple types J, K, T, E, R, S, N, C, TXK/XK(L)

Accessories

Article No.

6AG1231-5QF32-4XB0

6AG1231-5QD32-4XB0

See SIMATIC S7-1200 thermocouple module SM 1231, page 3/91

Technical specifications

| Article number | 6AG1231-5QF32-4XB0 | 6AG1231-5QD32-4XB0 |
|---|---|---|
| Based on | 6ES7231-5QF32-0XB0 SIPLUS S7-1200 SM 1231 8AI TC 16Bit | 6ES7231-5QD32-0XB0 SIPLUS S7-1200 SM 1231 4AI TC 16Bit |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| • min. | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C |
| • max. | 60 °C; = Tmax | 60 °C; = Tmax |
| Altitude during operation relating to sea level | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | |
| Coolants and lubricants | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |

Technical specifications

| Article number | 6AG1231-5QF32-4XB0 | 6AG1231-5QD32-4XB0 |
|---|---|---|
| Based on | 6ES7231-5QF32-0XB0 SIPLUS S7-1200 SM 1231 8AI TC 16Bit | 6ES7231-5QD32-0XB0 SIPLUS S7-1200 SM 1231 4AI TC 16Bit |
| Usage in industrial process technology | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS RTD SM 1231 signal module

Overview

- For the convenient recording of temperatures with great accuracy
- 4 inputs
- Most popular resistance temperature detectors can be used
- Can easily be retrofitted to existing plant

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

Article No.

SIPLUS RTD SM 1231 signal module

(Extended temperature range and exposure to media)

4 inputs for resistance temperature detectors
Pt10/50/100/200/500/1000,
Ni100/120/200/500/1000,
Cu10/50/100, LG-Ni1000;
resistance 150/300/600 Ohm,
resolution 15-bit + sign

- For areas with extreme exposure to media (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +70 °C

6AG1231-5PD32-4XB0

6AG1231-5PD32-2XB0

8 inputs for resistance temperature detectors
Pt10/50/100/200/500/1000,
Ni100/120/200/500/1000,
Cu10/50/100, LG-Ni1000;
resistance 150/300/600 Ohm,
resolution 15-bit + sign

- For areas with extreme exposure to media (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to media (conformal coating); ambient temperature -40 ... +70 °C

6AG1231-5PF32-4XB0

6AG1231-5PF32-2XB0

Accessories

See SIMATIC S7-1200
RTD SM 1231 signal module
page 3/94

Technical specifications

| Article number | 6AG1231-5PD32-4XB0 | 6AG1231-5PD32-2XB0 | 6AG1231-5PF32-4XB0 | 6AG1231-5PF32-2XB0 |
|---|---|---|---|---|
| Based on | 6ES7231-5PD32-0XB0 SIPLUS S7-1200 SM 1231 4AI RTD 16Bit | 6ES7231-5PD32-0XB0 SIPLUS S7-1200 SM 1231 4AI RTD 16Bit | 6ES7231-5PF32-0XB0 SIPLUS S7-1200 SM 1231 8AI RTD 16Bit | 6ES7231-5PF32-0XB0 SIPLUS S7-1200 SM 1231 8AI RTD 16Bit |
| Ambient conditions | | | | |
| Ambient temperature during operation | | | | |
| • min. | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C |
| • max. | 60 °C; = Tmax | 70 °C; = Tmax | 60 °C; = Tmax | 70 °C; = Tmax |
| Altitude during operation relating to sea level | | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | | |
| Coolants and lubricants | | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |

Technical specifications

| Article number | 6AG1231-5PD32-4XB0 | 6AG1231-5PD32-2XB0 | 6AG1231-5PF32-4XB0 | 6AG1231-5PF32-2XB0 |
|---|---|---|---|---|
| Based on | 6ES7231-5PD32-0XB0 SIPLUS S7-1200 SM 1231 4AI RTD 16Bit | 6ES7231-5PD32-0XB0 SIPLUS S7-1200 SM 1231 4AI RTD 16Bit | 6ES7231-5PF32-0XB0 SIPLUS S7-1200 SM 1231 8AI RTD 16Bit | 6ES7231-5PF32-0XB0 SIPLUS S7-1200 SM 1231 8AI RTD 16Bit |
| Use in stationary industrial systems | | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * |
| Use on ships/at sea | | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS RTD SB 1231 signal board

Overview

- For the convenient recording of temperatures with great accuracy
- 1 input with 16-bit resolution
- Common resistance-type temperature detectors can be used
- Can easily be retrofitted to existing plant
- Can be plugged directly into the CPU

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

SIPLUS RTD SB 1231 signal board

(Extended temperature range and exposure to media)

1 input for resistance temperature sensors Pt 100, Pt 200, Pt 500, Pt 1000, resolution 15-bit + sign

Accessories

Article No.

6AG1231-5PA30-5XB0

See SIMATIC S7-1200 RTD SB 1231 signal board page 3/97

Technical specifications

| | |
|---|---|
| Article number | 6AG1231-5PA30-5XB0 |
| Based on | 6ES7231-5PA30-0XB0 SIPLUS S7-1200 SB 1231 1AI RTD |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C |
| • max. | 60 °C; = Tmax |
| Altitude during operation relating to sea level | |
| • Installation altitude above sea level, max. | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation |
| Resistance | |
| Coolants and lubricants | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * |

| | |
|---|---|
| Article number | 6AG1231-5PA30-5XB0 |
| Based on | 6ES7231-5PA30-0XB0 SIPLUS S7-1200 SB 1231 1AI RTD |
| Use on ships/at sea | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A |

Overview



- Module for connecting up to 4 IO-Link devices according to IO Link Specification V1.1. The IO-Link parameters are configured using the Port Configuration Tool (PCT), version V3.2 and higher.

Ordering data

Article No.

SM 1278 4xIO-Link-Master signal module**6ES7278-4BD32-0XB0**

for the connection of up to 4 IO-Link devices according to IO Link Specification V1.1

Terminal block (spare part)

- 7-pin, tin-coated; 4 units
- Screw-type system
- Push-in system

6ES7292-1AG30-0XA0**6ES7292-2AG30-0XA0**

Technical specifications

| | |
|--|--|
| Article number | 6ES7278-4BD32-0XB0 |
| | S7-1200, SM1278, 4 X IO-Link Master |
| General information | |
| Product type designation | SM 1278 4xIO-Link master |
| Supply voltage | |
| Rated value (DC) | 24 V |
| Interrupts/diagnostics/status information | |
| Diagnostics function | Yes |
| Standards, approvals, certificates | |
| CE mark | Yes |
| CSA approval | Yes |
| UL approval | Yes |
| cULus | Yes |
| FM approval | Yes |
| RCM (formerly C-TICK) | Yes |
| KC approval | Yes |
| Marine approval | Yes |

| | |
|---|--|
| Article number | 6ES7278-4BD32-0XB0 |
| | S7-1200, SM1278, 4 X IO-Link Master |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -20 °C |
| • max. | 60 °C |
| Connection method | |
| required front connector | Yes |
| Dimensions | |
| Width | 45 mm |
| Height | 100 mm |
| Depth | 75 mm |
| Weights | |
| Weight, approx. | 150 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIPLUS SM 1278 4xIO-Link master

Overview



- Module for connecting up to 4 IO-Link devices according to IO Link Specification V1.1. The IO-Link parameters are configured using the Port Configuration Tool (PCT), version V3.2 and higher.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SM 1278 4xIO-Link master signal module

(Extended temperature range and exposure to media)

- For areas with extreme exposure to media (conformal coating)
- -25 ... +70 °C, from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50%

6AG1278-4BD32-4XB0

6AG1278-4BD32-2XB0

Technical specifications

| Article number | 6AG1278-4BD32-2XB0 | 6AG1278-4BD32-4XB0 |
|---|---|---|
| Based on | 6ES7278-4BD32-0XB0 SIPLUS S7-1200 SM 1278 IO-Link Master | 6ES7278-4BD32-0XB0 SIPLUS S7-1200 SM 1278 IO-Link Master |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| • min. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C |
| • max. | 70 °C; = Tmax | 60 °C; = Tmax |
| • At cold restart, min. | -25 °C | 0 °C |
| Altitude during operation relating to sea level | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | |
| Coolants and lubricants | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |

Technical specifications

| Article number | 6AG1278-4BD32-2XB0 | 6AG1278-4BD32-4XB0 |
|---|---|---|
| Based on | 6ES7278-4BD32-0XB0 SIPLUS S7-1200 SM 1278 IO-Link Master | 6ES7278-4BD32-0XB0 SIPLUS S7-1200 SM 1278 IO-Link Master |
| Use on ships/at sea | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIPLUS CMS1200 SM 1281 Condition Monitoring

Overview



SIPLUS CMS1200 SM 1281 Condition Monitoring forms part of SIMATIC S7-1200 and is used for the:

- Monitoring of motors, generators, pumps, fans, or other mechanical components
- Recording and analysis of vibrations
- Expansion capability of up to 7 modules

Ordering data

Article No.

| | |
|--|---------------------------|
| SIPLUS CMS1200 SM 1281 Condition Monitoring Module for SIMATIC S7-1200 for monitoring vibrations in mechanical components based on characteristic values and frequency-selective analysis functions. | 6AT8007-1AA10-0AA0 |
| Accessories | |
| SIPLUS CMS1200, SM 1281 shield clamp set For EMC-compliant connection of signal and encoder cables to SIPLUS CMS1200 SM 1281 Condition Monitoring. | 6AT8007-1AA20-0AA0 |
| SIPLUS VIB-SENSOR S01 Piezoelectric sensor for connection to SIPLUS CMS1200 SM 1281 Condition Monitoring. | 6AT8002-4AB00 |
| SIPLUS CABLE-MIL For connection of VIB-SENSOR S01, S02 and S03 vibration sensor to SIPLUS CMS1200 SM 1281 Condition Monitoring. | |
| SIPLUS CABLE-MIL-300; length 3 m | 6AT8002-4AC03 |
| SIPLUS CABLE-MIL-1000; length 10 m | 6AT8002-4AC10 |

Technical specifications

| | |
|-------------------------------------|---|
| Article number | 6AT8007-1AA10-0AA0 SM1281_Condition_Monitoring |
| General information | |
| Product type designation | SM1281 |
| Product description | S7-1200 module for the monitoring of vibrations on mechanical components based on parameters and frequency-selective analysis functions |
| Installation type/mounting | |
| Mounting type | Rail or wall mounting |
| Mounting position | Horizontal, vertical |
| Recommended mounting position | Horizontal |
| Supply voltage | |
| Type of supply voltage | DC |
| Rated value (DC) | 24 V |
| permissible range, lower limit (DC) | 20.4 V |
| permissible range, upper limit (DC) | 28.8 V |
| Input current | |
| Current consumption, typ. | 200 mA |
| Current consumption, max. | 250 mA |
| from backplane bus 5 V DC, typ. | 80 mA |
| from backplane bus 5 V DC, max. | 85 mA |

| | |
|----------------------------------|---|
| Article number | 6AT8007-1AA10-0AA0 SM1281_Condition_Monitoring |
| Power loss | |
| Power loss, typ. | 4.8 W |
| Memory | |
| Total memory capacity | 1 Gbyte |
| Hardware configuration | |
| Design of hardware configuration | Modular, up to 7 modules per CPU |
| Speed input | |
| Number of speed inputs | 1 |
| Input voltage | |
| • 24 V DC digital | Yes |
| Sensor input | |
| Number of IEPE sensor inputs | 4 |
| Sampling frequency, max. | 46 875 Hz |
| Interfaces | |
| Type of data transmission | Export of raw data as WAV file for further analysis (e.g. using CMS X-Tools) can be downloaded via browser/FTP, online data transfer to CMS X-Tools |
| Ethernet interface | Yes |
| Protocols | |
| Bus communication | Yes |
| Web server | |
| • HTTP | Yes |

Technical specifications


| | |
|---|--|
| Article number | 6AT8007-1AA10-0AA0 SM1281_Condition_Monitoring |
| Interrupts/diagnostics/ status information | |
| Alarms | |
| • Diagnostic alarm | Yes |
| Diagnostics indication LED | |
| • for status of the inputs | Yes |
| • for maintenance | Yes |
| • Status indicator digital input (green) | No |
| Integrated Functions | |
| Monitoring functions | |
| • Monitoring of the sensor inputs | Yes; Cable break and short-circuit |
| • Vibration characteristic monitoring via RMS value of the vibration speed | Yes |
| • Vibration characteristic monitoring via RMS value of the vibration acceleration | Yes |
| • Vibration characteristic monitoring via diagnostic characteristic value | Yes |
| • Frequency-selective monitoring via vibration speed spectrum | Yes |
| • Frequency-selective monitoring via vibration acceleration spectrum | Yes |
| • Frequency-selective monitoring via envelope curve analysis | Yes |
| Measuring functions | |
| • Physical measuring principle | Vibration acceleration |
| Measuring range | |
| - Measurement range vibration frequency, min. | 0.1 Hz |
| - Measurement range vibration frequency, max. | 10 000 Hz |

| | |
|---|--|
| Article number | 6AT8007-1AA10-0AA0 SM1281_Condition_Monitoring |
| Standards, approvals, certificates | |
| Certificate of suitability | CE |
| Ambient conditions | |
| Free fall | |
| • Fall height, max. | 0.3 m; five times, in product package |
| Software | |
| Browser software required | Web browser Mozilla Firefox (ESR31) or Microsoft Internet Explorer (10/11) |
| Connection method | |
| required front connector | Yes |
| Design of electrical connection | Screw connection |
| Mechanics/material | |
| Material of housing | Plastic: polycarbonate, abbreviation: PC- GF 10 FR |
| Dimensions | |
| Width | 70 mm |
| Height | 112 mm |
| Depth | 75 mm |
| Weights | |
| Weight, approx. | 260 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

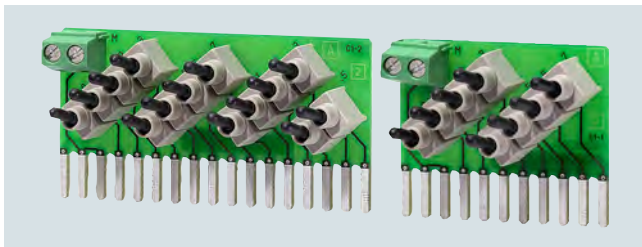Simulator Module SIM 1274**Overview**

- Simulator module for program testing during commissioning and ongoing operation
- Simulation of 8 or 14 inputs

Ordering data**Article No.****Digital input simulator
Simulator Module SIM 1274**with 8 input switches,
for CPU 1211C/1212C**6ES7274-1XF30-0XA0**with 14 input switches,
for CPU 1214C/1215C**6ES7274-1XH30-0XA0**with 14 input switches,
for CPU 1217C**6ES7274-1XK30-0XA0****Analog input simulator
Simulator Module SIM 1274**

2 potentiometers

6ES7274-1XA30-0XA0**Technical specifications**

| Article number | 6ES7274-1XF30-0XA0 | 6ES7274-1XH30-0XA0 |
|----------------------------|---|--|
| | S7-1200 Simulator Module SIM1274, 8 Inp | S7-1200 Simulator Module SIM1274, 14 Inp |
| General information | | |
| Product type designation | SIM 1274, 8DI | SIM 1274, 14 DI |
| Supply voltage | | |
| Rated value (DC) | 24 V | 24 V |
| Digital inputs | | |
| Number of digital inputs | 8 | 14 |
| Digital outputs | | |
| Number of digital outputs | 0 | 0 |
| Dimensions | | |
| Width | 43 mm | 67 mm |
| Height | 35 mm | 35 mm |
| Depth | 23 mm | 23 mm |

Overview

- Battery board for extending the power reserve for the S7-1200 real-time clock

Ordering data**Article No.****BB 1297 battery board****6ES7297-0AX30-0XA0**

For long-term backup of real-time clock; can be plugged into the signal board slot of an S7-1200 CPU in FW version 3.0 or higher; battery (CR 1025) is not included

Terminal block (spare part)

For signal board
with 6 screws, gold-plated; 4 units

6ES7292-1BF30-0XA0**Technical specifications**

| | |
|--|--|
| Article number | 6ES7297-0AX30-0XA0 Battery Board BB 1297 f. CPU 12xx |
| General information | |
| Product type designation | BB 1297 |
| Interrupts/diagnostics/status information | |
| Alarms | Yes |
| Diagnostics function | Yes |
| Diagnostics indication LED | |
| • for maintenance | Yes; The maintenance LED (MAINT) of the PLC signals that the battery needs to be replaced. |
| Standards, approvals, certificates | |
| CE mark | Yes |
| CSA approval | Yes |
| FM approval | Yes |
| RCM (formerly C-TICK) | Yes |
| Marine approval | Yes |

| | |
|--|--|
| Article number | 6ES7297-0AX30-0XA0 Battery Board BB 1297 f. CPU 12xx |
| Ambient conditions | |
| Free fall | |
| • Fall height, max. | 0.3 m; five times, in product package |
| Ambient temperature during operation | |
| • min. | -20 °C |
| • max. | 60 °C |
| Ambient temperature during storage/transportation | |
| • min. | -40 °C |
| • max. | 70 °C |
| Air pressure acc. to IEC 60068-2-13 | |
| • Operation, min. | 795 hPa |
| • Operation, max. | 1 080 hPa |
| • Storage/transport, min. | 660 hPa |
| • Storage/transport, max. | 1 080 hPa |
| Relative humidity | |
| • Operation at 25 ° without condensation, max. | 95 % |
| Mechanics/material | |
| Enclosure material (front) | |
| • Plastic | Yes |
| Dimensions | |
| Width | 38 mm |
| Height | 62 mm |
| Depth | 21 mm |
| Weights | |
| Weight, approx. | 40 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIWAREX WP231

Overview



SIWAREX WP231 is a versatile, legal for trade weighing module for all simple weighing and force measuring tasks. The compact module is easy to install in the SIMATIC S7-1200 automation system. It can also be operated without a SIMATIC CPU.

Ordering data

SIWAREX WP231 weighing module

Single-channel, legal-for-trade, for NAWI non-automatic weighing instruments (e.g. platform scales or hopper scales) with analog load cells (1–4 mV/V), 1 x LC, 4 x DQ, 4 x DI, 1 x AQ, 1 RS 485, Ethernet port.

SIWAREX S7-1200 Equipment Manual

Available in a range of languages

Free download on the Internet at: <http://www.siemens.com/weighing/documentation>

SIWAREX WP231 "Ready for Use"

Complete software package for non-automatic weighing instrument (for S7-1200 and a directly connected operator panel).

Free download on the Internet at: <http://www.siemens.com/weighing/documentation>

SIWAREX WP231 "Ready for Use - legal-for-trade"

Software package for non-automatic weighing instruments for S7-1200 requiring official calibration.

Free download on the Internet at: <http://www.siemens.com/weighing/documentation>

Software SecureDisplay

Software for a legal trade display on Windows CE-based Panel. SIMATIC Basic and Key Panels are excluded.

<http://www.siemens.com/weighing/documentation>

Free download on the Internet at: <http://www.siemens.com/weighing/documentation>

Article No.

7MH4960-2AA01

Article No.

SIWATOOL V4 & V7

Service and commissioning software for SIWAREX weighing modules

Calibration set for SIWAREX WP2xx

Valid for SIWAREX WP231 and SIWAREX WP251.

For verification of up to 3 scales, comprising:

- 3 x inscription foils for ID label
- 1 x protective film
- 3 x calibration protection plates
- Guidelines for verification, certificates and approvals, editable label, SIWAREX WP

Ethernet cable patch cord 2 m (7 ft)

For connecting SIWAREX WP231 to a PC (SIWATOOL), SIMATIC CPU, panel, etc.

Remote display (optional)

The digital remote displays can be connected directly to the SIWAREX WP231 via the RS 485 interface.

Suitable remote display: S102
Siebert Industrieelektronik GmbH
PO Box 1180
D-66565 Eppelborn
Tel.: +49 6806/980-0
Fax: +49 6806/980-999

Internet: <https://www.siebert-group.com/en/>

Detailed information is available from the manufacturer.

7MH4900-1AK01

7MH4960-0AY10

6XV1850-2GH20

| Ordering data | Article No. | Article No. |
|--|----------------------------|--|
| Accessories | | |
| SIWAREX JB junction box, aluminum housing For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes. | 7MH5001-0AA20 | |
| SIWAREX JB junction box, stainless steel housing For connecting up to 4 load cells in parallel. | 7MH5001-0AA00 | |
| SIWAREX JB junction box, stainless steel housing (ATEX) For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate). | 7MH5001-0AA01 | |
| SIWAREX DB digital terminal box For enhanced diagnostic and monitoring options in conjunction with SIWAREX WP electronics | 7MH5001-0AD20 | |
| SIWAREX IS Ex interface For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately. • Short-circuit current < 199 mA DC • Short-circuit current < 137 mA DC | 7MH4710-5BA 7MH4710-5CA | |
| | | Cable (optional) |
| | | Cable Li2Y 1 × 2 × 0.75 ST + 2 × (2 × 0.34 ST) – CY For connecting SIWAREX electronic weighing systems to junction box (JB), extension box (EB) and Ex interface or between two EBs. For permanent installation. Occasional bending is possible. External diameter: approx. 10.8 mm (0.43 inch) Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F) Sold by the meter. • Sheath color: orange • For hazardous atmospheres. Sheath color: blue. |
| | | Ground terminal for connecting the load cell cable shield to the grounded DIN rail |
| | | Commissioning |
| | | Commissioning charge for one static scale with SIWAREX module (Flat charge for travel and setup must be ordered separately) Scope: • Recording of data • Checking of mechanical installation of the scale • Checking of electrical wiring and function • Static adjustment of the scale Requirements: • Mechanical design functional • Modules electrically wired and tested • Calibration weights available • Free access to scale |
| | | Flat charge for travel and setup in Germany |
| | | 7MH4702-8AG 7MH4702-8AF 6ES5728-8MA11 9LA1110-8SN50-0AA0 9LA1110-8RA10-0AA0 |

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIWAREX WP231

Technical specifications

| SIWAREX WP231 | |
|--|--|
| Integration in automation systems | |
| S7-1200 | SIMATIC S7-1200 system bus |
| Operator panel and/or automation systems from other vendors | Via Ethernet (Modbus TCP/IP) or RS 485 (Modbus RTU) |
| Communication interfaces | <ul style="list-style-type: none"> • SIMATIC S7-1200 backplane bus • RS 485 (Modbus RTU, Siebert remote display) • Ethernet (SIWATOOL V7, Modbus TCP/IP) • Analog output 0/4 - 20 mA • 4 × digital outputs 24 V DC, floating, short-circuit proof • 4 × digital inputs 24 V DC, floating |
| Commissioning options | <ul style="list-style-type: none"> • Using SIWATOOL V7 • Using function block in SIMATIC S7-1200 CPU / Touch Panel • Using Modbus TCP/IP • Using Modbus RTU |
| Measuring accuracy | |
| EU type approval as non-automatic weighing instrument, trade class III | $3000 d \geq 0.5 \mu\text{V/e}$ |
| Error limit according to DIN 1319-1 of full-scale value at $20\text{ °C} \pm 10\text{ K}$ ($68\text{ °F} \pm 10\text{ K}$) | 0.05% |
| Internal resolution | Up to ± 4 million parts |
| Measuring frequency | 100 / 120 Hz |
| Digital filter | Variable adjustable low-pass and average filter |
| Typical applications | <ul style="list-style-type: none"> • Non-automatic weighing instruments • Force measurements • Fill-level monitoring • Belt tension monitors |
| Weighing functions | |
| Weight values | <ul style="list-style-type: none"> • Gross • Net • Tare |
| Limit values | <ul style="list-style-type: none"> • $2 \times \text{min/max}$ • Empty |
| Zeroing | Per command |
| Tare | Per command |
| Tare specification | Per command |

| SIWAREX WP231 | |
|--|---|
| Load cells | Full-bridge strain gauges in 4-wire or 6-wire system |
| Load cell powering | |
| Supply voltage (regulated via feedback) | 4.85 V DC |
| Permissible load resistance | |
| • $R_{L\text{min}}$ | $> 40\ \Omega$ |
| • $R_{L\text{max}}$ | $< 4\ 100\ \Omega$ |
| With SIWAREX IS Ex interface | |
| • $R_{L\text{min}}$ | $> 50\ \Omega$ |
| • $R_{L\text{max}}$ | $< 4\ 100\ \Omega$ |
| Load cell characteristic | 1 ... 4 mV/V |
| Permissible range of the measurement signal (with 4 mV/V sensors) | -21.3 ... +21.3 mV |
| Max. distance of load cells | 500 m (229.66 ft) |
| Connection to load cells in Ex zone 1 | Optionally via SIWAREX IS Ex interface (compatibility of the load cells must be checked) |
| Approvals/certificates | <ul style="list-style-type: none"> • ATEX Zone 2 • UL • EAC • KCC • RCM • OIML R76 • Design approval 2009/23/EC (NAWI) |
| Calibration approval | EU type approval OIML R76 |
| Auxiliary power supply | |
| Rated voltage | 24 V DC |
| Max. power consumption | 200 mA |
| Max. power consumption SIMATIC Bus | 3 mA |
| IP degree of protection to DIN EN 60529; IEC 60529 | IP20 |
| Climatic requirements | |
| $T_{\text{min(IND)}} \dots T_{\text{max(IND)}}$ (operating temperature) | |
| • Vertical installation | -10 ... +40 °C (14 ... 104 °F) |
| • Horizontal installation | -10 ... +55 °C (14 ... 131 °F) |
| EMC requirements | According to EN 45501 |
| Dimensions | 70 × 75 × 100 mm (2.76 × 2.95 × 3.94 inch) |

Overview



SIWAREX WP241 is a flexible weighing module for belt scales. The compact module is easy to install in the SIMATIC S7-1200 automation system. It can also be operated as a stand-alone module, i.e. without a SIMATIC CPU.

3

| Ordering data | Article No. | Ordering data | Article No. |
|---|---------------|--|----------------------------|
| SIWAREX WP241 weighing module Single-channel, for belt scales with analog load cells / full-bridge strain gauge (1 - 4 mV/V), 1 × LC, 4 × DQ, 4 × DI, 1 × AQ, 1 × RS 485, Ethernet port. | 7MH4960-4AA01 | Accessories SIWAREX JB junction box, aluminum housing For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes. | 7MH5001-0AA20 |
| SIWAREX S7-1200 Equipment Manual Available in a range of languages Free download on the Internet at: http://www.siemens.com/weighing/documentation | | SIWAREX JB junction box, stainless steel housing For connecting up to 4 load cells in parallel. | 7MH5001-0AA00 |
| SIWAREX WP241 "Ready for use" Complete software package for belt scale (for S7-1200 and a directly connected operator panel) Free download on the Internet at: http://www.siemens.com/weighing/documentation | | SIWAREX JB junction box, stainless steel housing (ATEX) For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate). | 7MH5001-0AA01 |
| SIWATOOL V4 & V7 Service and commissioning software for SIWAREX weighing modules | 7MH4900-1AK01 | SIWAREX IS Ex interface For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately. <ul style="list-style-type: none"> • Short-circuit current < 199 mA DC • Short-circuit current < 137 mA DC | 7MH4710-5BA 7MH4710-5CA |
| Ethernet cable patch cord 2 m (7 ft) For connecting SIWAREX WP241 to a PC (SIWATOOL), SIMATIC CPU, panel, etc. | 6XV1850-2GH20 | Cable (optional) Cable Li2Y 1 × 2 × 0.75 ST + 2 × (2 × 0.34 ST) – CY For connecting SIWAREX electronic weighing systems to junction box (JB), extension box (EB) and Ex interface or between two EBs. For permanent installation. Occasional bending is possible. External diameter: approx. 10.8 mm (0.43 inch) Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F) Sold by the meter. <ul style="list-style-type: none"> • Sheath color: orange • For hazardous atmospheres. Sheath color: blue. | 7MH4702-8AG 7MH4702-8AF |
| | | Ground terminal for connecting the load cell cable shield to the grounded DIN rail | 6ES5728-8MA11 |

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIWAREX WP241

Ordering data

Commissioning

Commissioning charge for one belt scale with SIWAREX module

(Flat charge for travel and setup must be ordered separately)

Scope:

- Recording of data
- Checking of mechanical installation of the scale
- Checking of electrical wiring and function
- Dynamic adjustment of the scale

Requirements:

- Mechanical design functional
- Modules electrically wired and tested
- Calibration weights available
- Free access to scale

Article No.

9LA1110-8SM50-0AA0

Article No.

Flat charge for travel and setup in Germany

9LA1110-8RA10-0AA0

Technical specifications

SIWAREX WP241

Integration in automation systems

S7-1200 SIMATIC S7-1200 system bus

Operator panel and/or automation systems from other vendors Via Ethernet (Modbus TCP/IP) or RS 485 (Modbus RTU)

Communication interfaces

- SIMATIC S7-1200 backplane bus
- RS 485 (Modbus RTU)
- Ethernet (SIWATOOL V7, Modbus TCP/IP)
- Analog output 0/4 - 20 mA
- 4 × digital outputs, 24 V DC, floating, short-circuit proof
- 4 × digital inputs 24 V DC, floating

Commissioning options

- Using SIWATOOL V7
- Using function block in SIMATIC S7-1200 CPU / Touch Panel
- Using Modbus TCP/IP
- Using Modbus RTU

Measuring accuracy

Error limit according to DIN 1319-1 of full-scale value at 20 °C ± 10 K (68 °F ± 10 K) 0.05%

Internal resolution Up to ± 4 million parts

Measuring frequency 100 / 120 Hz

Digital filter

Separate, variable adjustable low-pass and average filter for loading and speed

Filter for conveyor load Low-pass filter (limit frequency 0.05 ... 50 Hz)

Filter for belt speed Low-pass filter (limit frequency 0.05 ... 50 Hz)

Weighing functions

Readout data

- Weight
- Belt load
- Material flow rate
- Accumulated total
- Main total
- Free totals 1 ... 4
- Belt speed

Limits (min/max)

- Belt load
- Material flow rate
- Belt speed

SIWAREX WP241

Load cells

Full-bridge strain gauges in 4-wire or 6-wire system

Load cell powering

Supply voltage (regulated via feedback) 4.85 V DC

Permissible load resistance

- R_{Lmin} > 40 Ω
- R_{Lmax} < 4 100 Ω

With SIWAREX IS Ex interface

- R_{Lmin} > 50 Ω
- R_{Lmax} < 4 100 Ω

Load cell characteristic 1 ... 4 mV/V

Permissible measurement signal range -21.3 ... +21.3 mV

Max. distance of load cells 500 m (229.66 ft)

Connection to load cells in Ex zone 1 Optionally via SIWAREX IS Ex interface (compatibility of the load cells must be checked)

Approvals/certificates

- ATEX Zone 2
- UL
- EAC
- KCC
- RCM

Auxiliary power supply

Rated voltage 24 V DC

Max. power consumption 200 mA

Max. power consumption SIMATIC Bus 3 mA

IP degree of protection to DIN EN 60529; IEC 60529

IP20

Climatic requirements

 $T_{min(IND)} \dots T_{max(IND)}$
(operating temperature)

- Vertical installation -10 ... +40 °C (14 ... 104 °F)
- Horizontal installation -10 ... +55 °C (14 ... 131 °F)

EMC requirements

According to EN 45501

Dimensions

70 × 75 × 100 mm
(2.76 × 2.95 × 3.94 inch)

Overview



SIWAREX WP251 is a flexible weighing module for dosing and filling processes. The compact module can be installed seamlessly in the SIMATIC S7-1200 automation system. It can also be used without a SIMATIC CPU in stand-alone mode.

3

Ordering data

SIWAREX WP251 weighing module

Single-channel, legal-for-trade, for automatic dosing and filling scales (AGFI, ACI, NAWI) with analog load cells / full-bridge strain gauges (1 - 4 mV/V), 1 × LC, 4 × DQ, 4 × DI, 1 × AQ, 1 × RS 485, Ethernet port.

SIWAREX WP251 Equipment Manual

Available in a range of languages
Free download on the Internet at:
<http://www.siemens.com/weighing/documentation>

SIWAREX WP251 "Ready for Use"

Free download on the Internet at:
<http://www.siemens.com/weighing/documentation>

SIWATOOL V4 & V7

Service and commissioning software for SIWAREX weighing modules

Calibration set for SIWAREX WP2xx

Valid for SIWAREX WP231 and SIWAREX WP251.

For verification of up to 3 scales, comprising:

- 3 × inscription foils for ID label
- 1 × protective film
- 3 × calibration protection plates
- Guidelines for verification, certificates and approvals, editable label, SIWAREX WP

Article No.

7MH4960-6AA01

7MH4900-1AK01

7MH4960-0AY10

Article No.

Ethernet cable patch cord 2 m (7 ft)

For connecting SIWAREX WP251 to a PC (SIWATOOL), SIMATIC CPU, panel, etc.

Remote display (optional)

The digital remote displays can be connected directly to the SIWAREX WP251 via the RS 485 interface

Suitable remote display: S102
Siebert Industrieelektronik GmbH
PO Box 1180
D-66565 Eppelborn
Tel.: +49 6806/980-0
Fax: +49 6806/980-999

Internet: <https://www.siebert-group.com>

Detailed information is available from the manufacturer.

6XV1850-2GH20

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIWAREX WP251

| Ordering data | Article No. | Commissioning | Article No. |
|--|--------------------------------|--|--------------------|
| Accessories | | Commissioning | |
| SIWAREX JB junction box, aluminum housing For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes. | 7MH5001-0AA20 | Commissioning charge for one static scale with SIWAREX module (Flat charge for travel and setup must be ordered separately) Scope: <ul style="list-style-type: none"> • Recording of data • Checking of mechanical installation of the scale • Checking of electrical wiring and function • Static adjustment of the scale Requirements: <ul style="list-style-type: none"> • Mechanical design functional • Modules electrically wired and tested • Calibration weights available • Free access to scale | 9LA1110-8SN50-0AA0 |
| SIWAREX JB junction box, stainless steel housing For connecting up to 4 load cells in parallel. | 7MH5001-0AA00 | | |
| SIWAREX JB junction box, stainless steel housing (ATEX) For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate). | 7MH5001-0AA01 | | |
| SIWAREX IS Ex interface For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately. <ul style="list-style-type: none"> • Short-circuit current < 199 mA DC • Short-circuit current < 137 mA DC | 7MH4710-5BA 7MH4710-5CA | Flat charge for travel and setup in Germany | 9LA1110-8RA10-0AA0 |
| Cable (optional) Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) – CY For connecting SIWAREX electronic weighing systems to junction box (JB), extension box (EB) and Ex interface or between two EBs. For permanent installation. Occasional bending is possible. External diameter: approx. 10.8 mm (0.43 inch) Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F) Sold by the meter. <ul style="list-style-type: none"> • Sheath color: orange • For hazardous atmospheres. Sheath color: blue. | 7MH4702-8AG 7MH4702-8AF | | |
| Ground terminal for connecting the load cell cable shield to the grounded DIN rail | 6ES5728-8MA11 | | |

3

Technical specifications

| SIWAREX WP251 | | SIWAREX WP251 | |
|--|---|--|--|
| Weighing modes | <ul style="list-style-type: none"> Non automatic weighing instrument (NAWI) (filling + removal) (legal-for-trade in accordance with OIML R76) Catchweighing instrument (CWI) (filling + removal) (legal-for-trade in accordance with OIML R51) Gravimetric filling instrument (GFI) (legal-for-trade in accordance with OIML R61) Discontinuous totalizing automatic weighing instrument (DTI) - (legal-for-trade in accordance with OIML R107) | Number of measurements/second | 100 or 120 (selectable) |
| Integration in automation systems | | Filter | <ul style="list-style-type: none"> Low-pass filter 0.1 ... 50 Hz Average value filter |
| S7-1200 | SIMATIC S7-1200 system bus | Load cells | Strain gauges in 4-wire or 6-wire system |
| Operator panel and/or automation systems from other vendors | Via Ethernet (Modbus TCP/IP) or RS 485 (Modbus RTU) | Load cell powering | |
| Ports | <ul style="list-style-type: none"> 1 × SIMATIC S7-1200 system bus 1 × Ethernet (SIWATOOL and Modbus TCP/IP) 1 × RS 485 (Modbus RTU or remote display) 1 × analog output (0/4 - 20 mA) 4 × digital inputs (24 V DC, floating) 4 × digital outputs (24 V DC, floating, short-circuit proof) | Supply voltage (regulated via feedback) | 4.85 V DC |
| Functions | <ul style="list-style-type: none"> 3 limits Tare Tare specification Zeroing Zero adjustment Statistics Automatic correction of the shut-off points Internal protocol memory for 550 000 entries Trace function for signal analysis Internal restore point Stand-alone mode or SIMATIC S7-1200 integrated | Permissible load resistance | <ul style="list-style-type: none"> R_{Lmin} > 40 Ω R_{Lmax} < 4 100 Ω |
| Parameter assignment | <ul style="list-style-type: none"> Full access using function block in SIMATIC S7-1200 Full access using Modbus TCP/IP Full access using Modbus RTU | With SIWAREX IS Ex interface | <ul style="list-style-type: none"> R_{Lmin} > 50 Ω R_{Lmax} < 4 100 Ω |
| Remote display | | Load cell characteristic | 1 ... 4 mV/V |
| Connection | Via RS 485 | Permissible range of the measurement signal (with 4 mV/V sensors) | -21.3 ... +21.3 mV |
| Scale adjustment | PC software SIWATOOL (Ethernet), S7-1200 function block and touch panel or directly connected operator panel (Modbus) | Max. distance of load cells | 500 m (229.66 ft) |
| Measuring accuracy | | Connection to load cells in Ex zone 1 | Optionally via SIWAREX IS Ex interface |
| Error limit according to DIN 1319-1 of full-scale value at 20 °C ± 10 K (68 °F ± 10 K) | 0.05% | Certificates | <ul style="list-style-type: none"> ATEX Zone 2 UL KCC EAC RCM |
| Internal resolution | Up to ± 4 million parts | Calibration approvals | <ul style="list-style-type: none"> EU type-examination certificate 2014/31/EU (NAWI) according to OIML R76 EU type-examination certificate 2014/32/EU (MID) according to OIML R61 and OIML R51 EU type-examination certificates 2014/32/EU (MID) according to OIML R107 |
| | | Auxiliary power supply | |
| | | Rated voltage | 24 V DC |
| | | Max. power consumption | 200 mA |
| | | Max. power consumption SIMATIC Bus | 3 mA |
| | | IP degree of protection to DIN EN 60529; IEC 60529 | IP20 |
| | | Climatic requirements | |
| | | $T_{min(IND)} \dots T_{max(IND)}$ (operating temperature) | |
| | | • Vertical installation | -10 ... +40 °C (14 ... 104 °F) |
| | | • Horizontal installation | -10 ... +55 °C (14 ... 131 °F) |
| | | EMC requirements | According to EN 45501 |
| | | Dimensions | 70 × 75 × 100 mm (2.76 × 2.95 × 3.94 inch) |

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CM 1241 communications module**Overview**

- For quick, high-performance serial data exchange via point-to-point connection
- Implemented protocols: ASCII, USS drive protocol, Modbus RTU, 3964(R)
- Additional protocols can also be loaded
- Simple parameterization with STEP 7 Basic

Ordering data**Article No.****CM 1241 communications module**

Communications module for point-to-point connection, with one RS 422/485 interface

6ES7241-1CH32-0XB0

Communications module for point-to-point connection, with one RS 232 interface

6ES7241-1AH32-0XB0**Accessories****Front flap set (spare part)**

For communications modules

6ES7291-1CC30-0XA0**Technical specifications**

| Article number | 6ES7241-1CH32-0XB0 | 6ES7241-1AH32-0XB0 |
|-----------------------------------|--|--------------------------------------|
| | Communications Module cm 1241, RS422/485 | Communications Module cm 1241, RS232 |
| General information | | |
| Product type designation | CM 1241 RS 422 / 485 | CM 1241 RS 232 |
| Supply voltage | | |
| Rated value (DC) | 24 V | 24 V |
| Input current | | |
| Current consumption, max. | 220 mA; From backplane bus 5 V DC | 200 mA; From backplane bus 5 V DC |
| Interfaces | | |
| Interfaces/bus type | | RS 232C (V.24) |
| Number of interfaces | 1 | 1 |
| Point-to-point connection | | |
| • Cable length, max. | 1 000 m | 10 m |
| Integrated protocol driver | | |
| - Freeport | Yes | Yes |
| - ASCII | Yes; Available as library function | Yes; Available as library function |
| - Modbus RTU master | Yes | Yes |
| - MODBUS RTU slave | Yes | Yes |
| - USS | Yes; Available as library function | |

Technical specifications

| Article number | 6ES7241-1CH32-0XB0 | 6ES7241-1AH32-0XB0 |
|--|---|---|
| | Communications Module cm 1241, RS422/485 | Communications Module cm 1241, RS232 |
| Protocols | | |
| Integrated protocols | | |
| Freeport | | |
| - Telegram length, max. | 1 kbyte | 1 kbyte |
| - Parity | No parity (standard); even, uneven, mark (parity bit always 1); space (parity bit always 0) | No parity (standard); even, uneven, mark (parity bit always 1); space (parity bit always 0) |
| 3964 (R) | | |
| - Telegram length, max. | 1 kbyte | 1 kbyte |
| - Parity | No parity (standard); even, uneven, mark (parity bit always 1); space (parity bit always 0) | No parity (standard); even, uneven, mark (parity bit always 1); space (parity bit always 0) |
| Modbus RTU master | | |
| - Address area | 1 through 49 999 (Standard Modbus addressing) | 1 through 49 999 (Standard Modbus addressing) |
| - Number of slaves, max. | 247; slave numbers 1 through 247, per MODBUS network segment maximum 32 devices, additional repeaters needed to expand the network to maximum configuration | 247; slave numbers 1 through 247, per MODBUS network segment maximum 32 devices, additional repeaters needed to expand the network to maximum configuration |
| MODBUS RTU slave | | |
| - Address area | 1 through 49 999 (Standard Modbus addressing) | 1 through 49 999 (Standard Modbus addressing) |
| Interrupts/diagnostics/status information | | |
| Diagnostics function | Yes | Yes |
| Diagnostics indication LED | | |
| • for status of the outputs | Yes | Yes |
| Standards, approvals, certificates | | |
| CE mark | Yes | Yes |
| CSA approval | Yes | Yes |
| UL approval | Yes | Yes |
| cULus | Yes | Yes |
| FM approval | Yes | Yes |
| RCM (formerly C-TICK) | Yes | Yes |
| KC approval | Yes | Yes |
| Marine approval | Yes | Yes |
| Ambient conditions | | |
| Ambient temperature during operation | | |
| • min. | -20 °C | -20 °C |
| • max. | 60 °C | 60 °C |
| Dimensions | | |
| Width | 30 mm | 30 mm |
| Height | 100 mm | 100 mm |
| Depth | 75 mm | 75 mm |
| Weights | | |
| Weight, approx. | 155 g | 150 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CB 1241 RS485 communication board

Overview

- For fast, high-performance serial data exchange via point-to-point connection
- Implemented protocols: ASCII, USS drive protocol, Modbus RTU
- Additional protocols can be loaded later
- Simple parameterization with STEP 7 Basic
- Can be plugged directly into the CPU

Ordering data

Article No.

Communication board CB 1241 RS485

6ES7241-1CH30-1XB0

for point-to-point connection, with 1 RS485 interface

Accessories

Terminal block (spare part)

for signal board with 6 screws, gold-plated; 4 pcs.

6ES7292-1BF30-0XA0

Technical specifications

| | |
|-----------------------------------|---|
| Article number | 6ES7241-1CH30-1XB0 Communication Board CB 1241, RS485 |
| General information | |
| Product type designation | CB 1241 RS 485 |
| Input current | |
| from backplane bus 5 V DC, typ. | 50 mA |
| Interfaces | |
| Point-to-point connection | |
| • Cable length, max. | 1 000 m |
| Integrated protocol driver | |
| - Freeport | Yes |
| - ASCII | Yes; Available as library function |
| - Modbus RTU master | Yes |
| - MODBUS RTU slave | Yes |
| - USS | Yes; Available as library function |
| Protocols | |
| Integrated protocols | |
| Freeport | |
| - Telegram length, max. | 1 kbyte |
| - Parity | No parity (standard); even, uneven, mark (parity bit always 1); space (parity bit always 0) |
| 3964 (R) | |
| - Telegram length, max. | 1 kbyte |
| - Parity | No parity (standard); even, uneven, mark (parity bit always 1); space (parity bit always 0) |
| Modbus RTU master | |
| - Address area | 1 through 49 999 (Standard Modbus addressing) |
| - Number of slaves, max. | 247; slave numbers 1 through 247, per MODBUS network segment maximum 32 devices, additional repeaters needed to expand the network to maximum configuration |
| MODBUS RTU slave | |
| - Address area | 1 through 49 999 (Standard Modbus addressing) |

| | |
|--|---|
| Article number | 6ES7241-1CH30-1XB0 Communication Board CB 1241, RS485 |
| Interrupts/diagnostics/status information | |
| Diagnostics function | Yes |
| Standards, approvals, certificates | |
| CE mark | Yes |
| CSA approval | Yes |
| UL approval | Yes |
| cULus | Yes |
| FM approval | Yes |
| RCM (formerly C-TICK) | Yes |
| KC approval | Yes |
| Marine approval | Yes |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -20 °C |
| • max. | 60 °C |
| Dimensions | |
| Width | 38 mm |
| Height | 62 mm |
| Depth | 21 mm |
| Weights | |
| Weight, approx. | 40 g |

Overview



| DP-M | DP-S | FMS | PG/OP | S7 |
|------|------|-----|-------|----|
| | ● | | | |

The CM 1242-5 communications module is used to connect a SIMATIC S7-1200 to PROFIBUS as a DP slave and has the following characteristics:

- PROFIBUS DPV1 slave in accordance with IEC 61158
- Module replacement without PG supported
- Power is supplied via the backplane bus so that no extra cabling is required
- Support of all standard baud rates from 9.6 kbps to 12 Mbps
- Compact industry-standard enclosure in S7-1200 design for mounting on a DIN rail
- Fast commissioning thanks to easy configuration using STEP 7 without additional programming overhead

The CM 1242-5 is intended for use in factory automation. Low-cost PROFIBUS-based automation solutions can be created on the basis of the SIMATIC S7-1200 for optimal production.

Ordering data

Article No.

CM 1242-5 communications module

Communications module for electrical connection of SIMATIC S7-1200 to PROFIBUS as a DP slave module

6GK7242-5DX30-0XE0**Accessories****PROFIBUS FastConnect connection plug RS485**

With 90° cable outlet; insulation displacement technology, max. transmission rate 12 Mbps

- Without programming device
- With programming device

6ES7972-0BA52-0XA0
6ES7972-0BB52-0XA0**PROFIBUS FC Standard Cable**

2-core bus cable, shielded, special design for fast mounting, sold by the meter; delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter

6XV1830-0EH10**PROFIBUS FastConnect Stripping Tool**

Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable

6GK1905-6AA00**PROFIBUS bus terminal 12M**

Bus terminal for connection of PROFIBUS nodes at up to 12 Mbps with connecting cable

6GK1500-0AA10

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication


CM 1242-5

Technical specifications

| | |
|--|----------------------------|
| Article number | 6GK7242-5DX30-0XE0 |
| product type designation | CM 1242-5 |
| transfer rate | |
| transfer rate | |
| • at the 1st interface acc. to PROFIBUS | 9.6 kbit/s ... 12 Mbit/s |
| interfaces | |
| number of interfaces acc. to Industrial Ethernet | 0 |
| number of electrical connections | |
| • at the 1st interface acc. to PROFIBUS | 1 |
| • for power supply | 0 |
| type of electrical connection | |
| • at the 1st interface acc. to PROFIBUS | 9-pin Sub-D socket (RS485) |
| supply voltage, current consumption, power loss | |
| type of voltage of the supply voltage | DC |
| supply voltage 1 from backplane bus | 5 V |
| consumed current | |
| • from backplane bus at DC at 5 V typical | 0.15 A |
| power loss [W] | 0.75 W |
| ambient conditions | |
| ambient temperature | |
| • for vertical installation during operation | 0 ... 45 °C |
| • for horizontally arranged busbars during operation | 0 ... 55 °C |
| • during storage | -40 ... +70 °C |
| • during transport | -40 ... +70 °C |
| relative humidity | |
| • at 25 °C without condensation during operation maximum | 95 % |
| protection class IP | IP20 |

| | |
|--|-------------------------------------|
| Article number | 6GK7242-5DX30-0XE0 |
| product type designation | CM 1242-5 |
| design, dimensions and weights | |
| module format | Compact module S7-1200 single width |
| width | 30 mm |
| height | 100 mm |
| depth | 75 mm |
| net weight | 0.115 kg |
| fastening method | |
| • 35 mm top hat DIN rail mounting | Yes |
| • S7-300 rail mounting | No |
| • wall mounting | Yes |
| product features, product functions, product components general | |
| number of units | |
| • per CPU maximum | 3 |
| performance data PROFIBUS DP | |
| service as DP slave | |
| • DPV0 | Yes |
| • DPV1 | Yes |
| data volume | |
| • of the address range of the inputs as DP slave total | 240 byte |
| • of the address range of the outputs as DP slave total | 240 byte |
| performance data telecontrol | |
| protocol is supported | |
| • TCP/IP | No |
| product functions management, configuration, engineering | |
| configuration software | |
| • required | STEP 7 Basic/Professional |

3

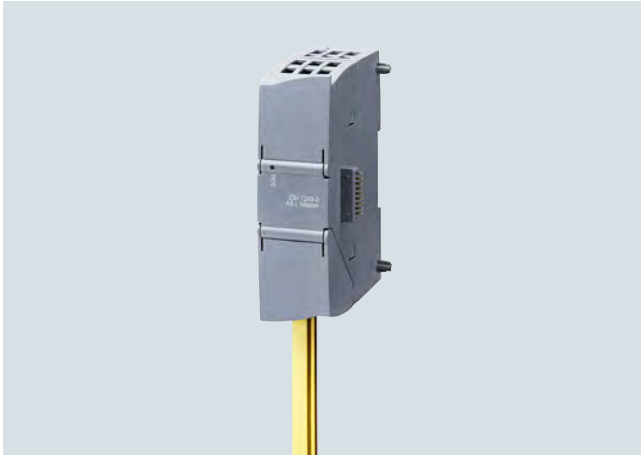Overview

The CM 1243-2 communications module is the AS-Interface master for the SIMATIC S7-1200 and has the following features:

- As many as 62 AS-Interface slaves can be connected
- Integrated analog value transmission
- Supports all AS-Interface master functions in accordance with the AS-Interface Specification V3.0
- Indication of the operating state on the front of the device displayed via LED
- Display of operating mode, AS-Interface voltage faults, configuration faults and peripheral faults via LED behind the front panel
- Compact enclosure in the design of the SIMATIC S7-1200
- Suitable for AS-Interface with 30 V voltage and AS-i Power24V: In combination with the optional DCM 1271 data decoupling module, a standard 24 V power supply unit can be used
- Configuration and diagnostics via the TIA Portal

Design

The CM 1243-2 communications module is positioned to the left of the S7-1200 CPU and linked to the S7-1200 via lateral contacts.

It has:

- Terminals for two AS-i cables (internally jumpered) via two screw terminals each
- One terminal for connection to the functional ground
- LEDs for indication of the operating state and fault statuses of the connected slaves

The screw terminals (included in scope of supply) can be removed to facilitate installation.

Function

The CM 1243-2 supports all specified functions of the AS-Interface Specification V3.0.

The values of the digital AS-i slaves can be activated via the process image of the S7-1200. During configuration of the slaves in the TIA Portal, the values of the analog AS-i slaves can also be accessed directly in the process image.

If required, master calls can be performed with the data record interface, e.g. read/write parameters, read/write configuration.

Changeover of the operating mode, automatic application of the slave configuration and the re-addressing of a connected AS-i slave can be implemented via the control panel of the CM 1243-2 in the TIA Portal.

The optional DCM 1271 data decoupling module has an integrated detection unit for detecting ground faults on the AS-Interface cable. The integrated overload protection also disconnects the AS-Interface cable if the drive current required exceeds 4 A.

For more information on DCM 1271, see page 3/135

Notes on security

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens products and solutions only represent one component of such a concept.

For more information on Industrial Security, see <http://www.siemens.com/industrialsecurity>.

Configuration

The TIA Portal enables user-friendly configuration and diagnostics of the AS-i master and any connected slaves.

When operating on a S7-1200 CPU with firmware V4.0 or higher, firmware V1.1 (or higher) is required for the CM 1243-2 module.

Benefits

- More flexibility and versatility in the use of SIMATIC S7-1200 as the result of a significant increase in the number of digital and analog inputs/outputs available
- Very easy configuration and diagnostics of the AS-Interface via the TIA Portal
- Simple operation with AS-Interface power supply unit (see <https://mall.industry.siemens.com/mall/en/ww/Catalog/Products/8200165?tree=CatalogTree>) without restrictions
- Alternatively: No need for the AS-i power supply unit with AS-i Power24V. The AS-Interface cable is powered through an existing 24 V DC PELV power supply unit. For decoupling, the AS-i DCM 1271 data decoupling module is required, see page 3/135
- LEDs for indication of fault statuses for fast diagnostics
- Monitoring of AS-Interface voltage facilitates diagnostics

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

AS-Interface communication >CM 1243-2 AS-i Master

Application

The CM 1243-2 is the AS-Interface master connection for the 12x CPUs of the SIMATIC S7-1200. Through connection to AS-Interface, the number of digital inputs and outputs available for the S7-1200 is greatly increased (max. 496 DI / 496 DQ on the AS-Interface per CM).

The integrated analog value processing also makes the analog values available at the AS-Interface for the S7-1200. Up to 31 analog slaves with a standard address (each with up to four channels) or up to 62 analog slaves with an A/B address (each with up to two channels) are possible per CM.

Operating conditions

- The CM 1243-2 communications module exchanges data with the S7-1200 CPU with a cycle time of 10 ms.
- The AS-i cycle time depends on the AS-i bus capacity and is up to 5 ms in the case of 31 slave addresses; for more information, see manual AS-i Master CM 1243-2 and AS-i DCM 1271 data decoupling module for SIMATIC S7-1200, <https://support.industry.siemens.com/cs/ww/en/view/57358958>.
- For calculation of the maximum switching frequency at inputs/outputs of AS-i slaves, these cycle times and the runtime of the user program must be added up.

Ordering data

Article No.

CM 1243-2 communications module 3RK7243-2AA30-0XB0

- AS-Interface master for SIMATIC S7-1200
- Corresponds to AS-Interface Specification V3.0
- With screw terminals, removable terminals (included in the scope of supply)
- Dimensions (W × H × D / mm): 30 × 100 × 75

Note:

The CM 1243-2 communications module is available as a SIPLUS version under Article No. 6AG1243-2AA30-7XB0 in the extended temperature range (from -25 to 70 °C) and for use in harsh environmental conditions (coated according to environment standard IEC 60721). For more information, see [page 3/157](#)

Accessories

Screw terminals (replacement)

- For screw terminals, 5-pole For AS-i Master CM 1243-2 and AS-i DCM 1271 data decoupling module

3RK1901-3MA00

AS-interface addressing unit V3.0

- For AS-Interface modules and sensors and actuators with integrated AS-Interface according to AS-i Specification V3.0
- For setting the AS-i address of standard slaves, and slaves with extended addressing mode (A/B slaves)
- With input/output test function and many other commissioning functions
- Battery operation with four type AA batteries (IEC LR6, NEDA 15)
- Degree of protection IP40
- Dimensions (W × H × D / mm): 84 × 195 × 35
- Scope of supply:
 - Addressing unit with four batteries
 - Addressing cable, with M12 plug to addressing plug (hollow plug), length 1.5 m

3RK1904-2AB02

More information

More information

Manuals, see <https://support.industry.siemens.com/cs/ww/en/ps/15750/man>

Overview

With the aid of the DCM 1271 data decoupling module, the AS-Interface network can also be supplied with 24 V DC or 30 V DC from a standard power supply unit and the transmission of data and power can be implemented on one cable.

The DCM 1271 data decoupling module has the same type of enclosure as an S7-1200 module and can therefore be perfectly combined with the AS-i Master CM 1243-2.

The DCM 1271 data decoupling module has no connection to the backplane bus of the SIMATIC S7-1200 and is therefore not counted as a communications module for the calculation of the maximum configuration.

Features of the DCM 1271 data decoupling module

- Design: S7-1200, 30 mm wide, degree of protection IP20
- Detachable terminals (included in delivery)
- Single data decoupling
- Supply of several AS-i networks with a single power supply unit
- Operation with 24 V DC or 30 V DC, grounded or non-grounded
- Current limitation at 4 A
- Integrated ground-fault detection
- Diagnostic LEDs for ground faults and overloads
- Signaling contact for ground-fault detection

Ground-fault detection

The integrated ground fault detection functions with grounded and non-grounded power supply: The connection of negative pole and ground (upstream from the data decoupling module) customary with 24 V DC power supplies is permitted. A ground fault to the negative or positive pole on the AS-Interface network (behind the data decoupling module) is identified and signaled via LED and a transistor output.

Benefits

- An existing standard power supply unit with 24 V DC or 30 V DC can be used for supplying AS-i networks
- The AS-Interface system can also be used in tightly budgeted applications because no AS-Interface power supply unit needs to be purchased
- Applications benefit in addition from the advantages of a modern bus system:
 - High level of standardization
 - Additional diagnostics and maintenance information
 - Faster commissioning

Application

The AS-Interface data decoupling module is designed for AS-Interface networks with 30 V or 24 V supply (AS-i Power24V).

Operation of an AS-i network with the data decoupling module and a 30 V standard power supply unit is technically equivalent to the use of an AS-Interface power supply unit and offers the service-proven features of AS-Interface for all applications.

AS-i Power24V uses a 24 V power supply unit in conjunction with a data decoupling module and is particularly suitable for

- Compact machines using AS-Interface input/output modules
- Applications in the control cabinet for AS-Interface integration of SIRIUS 3RT2 contactors using 3RA27 function modules

Note:

The power supply units must comply with the standard ES1 (IEC 62368-1) or PELV (Protective Extra Low Voltage) or SELV (Safety Extra Low Voltage), have a residual ripple of < 250 mV_{SS}, and in the event of a fault must limit the output voltage to a maximum of 40 V.

Recommended


- SITOP-power supplies, see <https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/10244081?tree=CatalogTree> or <https://support.industry.siemens.com/cs/ww/en/view/109745655>
- PSN130S 30 V power supply units, see <https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/10174512?tree=CatalogTree>.

Note on AS-i Power24V:

The length of an AS-i Power24V network is restricted to 50 m in order to limit the voltage drop along the cable.

AS-i Masters, AS-i slaves and the sensors and actuators supplied through the AS-i cable must be designed for the reduced voltage. Sensors and actuators for the standard voltage range of 10 to 30 V can be supplied with sufficient voltage.

Please also observe the requirements specified under "AS-i Power24V" for the operation of a AS-i Power24V network, see <https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/10057530?tree=CatalogTree>.

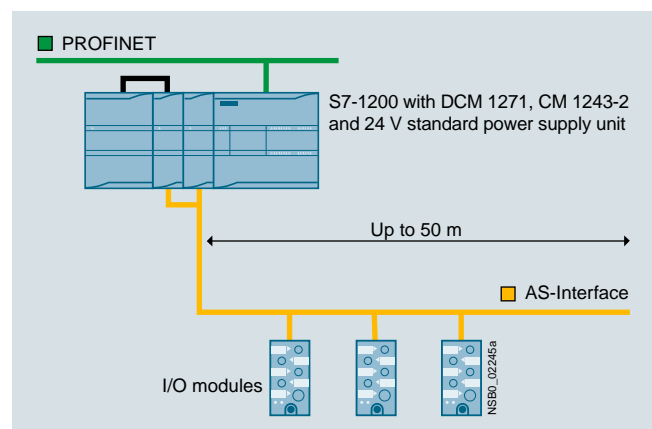

Configuration of an AS-i Power24V network with AS-Interface DCM 1271 data decoupling module

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

AS-Interface communication > DCM 1271 data decoupling module**Ordering data****Article No.****DCM 1271 data decoupling module****3RK7271-1AA30-0AA0**

- With screw terminals, removable terminals (included in the scope of supply)
- Current max.: 1 x 4 A
- Dimensions (W x H x D / mm): 30 x 100 x 75

Accessories**Screw terminals (replacement)**

- With screw terminals, 5-pole
For AS-i Master CM 1243-2 and AS-i DCM 1271 data decoupling module
- With screw terminals, 3-pole
for AS-i DCM 1271 data decoupling module for connecting the power supply unit

3RK1901-3MA00**3RK1901-3MB00****CM 1243-2 communications module****3RK7243-2AA30-0XB0**

- AS-Interface master for SIMATIC S7-1200
- Corresponds to AS-Interface Specification V3.0
- With screw terminals, removable terminals (included in the scope of supply)
- Dimensions (W x H x D / mm): 30 x 100 x 75

More information**More information**

Manual for AS-i Master CM 1234-2 and AS-i DCM 1271 data decoupling module, see
<https://support.industry.siemens.com/cs/ww/en/view/57358958>

More information on AS-i Power24V, see "System Manual AS-Interface",
<https://support.industry.siemens.com/cs/ww/en/view/26250840>

3

Overview



| DP-M | DP-S | FMS | PG/OP | S7 |
|------|------|-----|-------|----|
| ● | | | ● | ● |

The CM 1243-5 communications module is used to connect a SIMATIC S7-1200 to PROFIBUS as a DP master and has the following characteristics:

- PROFIBUS DPV1 master in accordance with IEC 61158
- Support of up to 16 PROFIBUS DP slaves
- Communication with other S7 controllers based on S7 communication
- Allows programming devices and operator panels with PROFIBUS interfaces to be connected to the SIMATIC S7-1200
- Module replacement without programming device supported
- Support of all standard baud rates from 9.6 kbps to 12 Mbps
- Compact industrial enclosure in SIMATIC S7-1200 design for mounting on a DIN rail
- Fast commissioning thanks to easy configuration using STEP 7 without additional programming overhead

The CM 1243-5 is intended for use in factory automation. Low-cost PROFIBUS-based automation solutions can be created on the basis of the SIMATIC S7-1200 for optimal production.

Ordering data

Article No.

CM 1243-5 communications module

Communications module for electrical connection of SIMATIC S7-1200 to PROFIBUS as a DPV1 master

6GK7243-5DX30-0XE0**Accessories****PROFIBUS FastConnect connection plug RS485**

With 90° cable outlet; insulation displacement technology, max. transmission rate 12 Mbps

- Without programming device
- With programming device

6ES7972-0BA52-0XA0
6ES7972-0BB52-0XA0**PROFIBUS FC Standard Cable**

2-core bus cable, shielded, special design for fast mounting, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter

6XV1830-0EH10**PROFIBUS FastConnect Stripping Tool**

Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable

6GK1905-6AA00**PROFIBUS bus terminal 12M**

Bus terminal for connection of PROFIBUS nodes up to 12 Mbps with connecting cable

6GK1500-0AA10

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CM 1243-5

Technical specifications

| | |
|--|-------------------------------------|
| Article number | 6GK7243-5DX30-0XE0 |
| product type designation | CM 1243-5 |
| transfer rate | |
| transfer rate | |
| • at the 1st interface acc. to PROFIBUS | 9.6 kbit/s ... 12 Mbit/s |
| interfaces | |
| number of interfaces acc. to Industrial Ethernet | 0 |
| number of electrical connections | |
| • at the 1st interface acc. to PROFIBUS | 1 |
| • for power supply | 1 |
| type of electrical connection | |
| • at the 1st interface acc. to PROFIBUS | 9-pin Sub-D socket (RS485) |
| • for power supply | 3-pole terminal block |
| supply voltage, current consumption, power loss | |
| type of voltage of the supply voltage | DC |
| supply voltage external | 24 V |
| supply voltage external at DC rated value | 24 V |
| relative positive tolerance at DC at 24 V | 20 % |
| relative negative tolerance at DC at 24 V | 20 % |
| consumed current | |
| • from external supply voltage at DC at 24 V typical | 0.1 A |
| power loss [W] | 2.4 W |
| ambient conditions | |
| ambient temperature | |
| • for vertical installation during operation | 0 ... 45 °C |
| • for horizontally arranged busbars during operation | 0 ... 55 °C |
| • during storage | -40 ... +70 °C |
| • during transport | -40 ... +70 °C |
| relative humidity | |
| • at 25 °C without condensation during operation maximum | 95 % |
| protection class IP | IP20 |
| design, dimensions and weights | |
| module format | Compact module S7-1200 single width |
| width | 30 mm |
| height | 100 mm |
| depth | 75 mm |
| net weight | 0.134 kg |
| fastening method | |
| • 35 mm top hat DIN rail mounting | Yes |
| • S7-300 rail mounting | No |
| • wall mounting | Yes |

| | |
|--|--|
| Article number | 6GK7243-5DX30-0XE0 |
| product type designation | CM 1243-5 |
| product features, product functions, product components general | |
| number of units | |
| • per CPU maximum | 3 |
| performance data PROFIBUS DP | |
| service as DP master | |
| • DPV1 | Yes |
| number of DP slaves | |
| • on DP master operable | 32 |
| data volume | |
| • of the address range of the inputs as DP master total | 512 byte |
| • of the address range of the outputs as DP master total | 512 byte |
| • of the address range of the inputs per DP slave | 244 byte |
| • of the address range of the outputs per DP slave | 244 byte |
| • of the address range of the diagnostic data per DP slave | 240 byte |
| service as DP slave | |
| • DPV0 | No |
| • DPV1 | No |
| performance data S7 communication | |
| number of possible connections for S7 communication | |
| • maximum | 8; max. 4 connections to other S7 stations |
| • with PG connections maximum | 1 |
| • with PG/OP connections maximum | 3 |
| performance data multi-protocol mode | |
| number of active connections with multi-protocol mode | |
| • without DP maximum | 8 |
| • with DP maximum | 8 |
| performance data telecontrol | |
| protocol is supported | |
| • TCP/IP | No |
| product functions management, configuration, engineering | |
| configuration software | |
| • required | STEP 7 Basic/Professional |

3

Overview



- Unmanaged switch for connecting a SIMATIC S7-1200 to an Industrial Ethernet network with a line, tree or star topology
- Multiplication of Ethernet interfaces on a SIMATIC S7-1200 for additional connection of up to three programming devices, operator controls, and further Ethernet nodes
- Simple, space-saving mounting on the SIMATIC S7-1200 DIN rail
- Low-cost solution for implementing small, local Ethernet networks
- Connection without any problems using RJ45 standard plug connectors
- Simple and fast status display via LEDs on the device
- Integral autocrossover function permits use of uncrossed connecting cables

Ordering data

Article No.

CSM 1277 compact switch module

Unmanaged switch for connecting a SIMATIC S7-1200 and up to three further nodes to Industrial Ethernet with 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, diagnostics on LEDs, S7-1200 module including electronic manual on CD-ROM

6GK7277-1AA10-0AA0**SIPLUS NET CSM 1277 compact switch module**

Unmanaged switch for connection of SIPLUS S7-1200 and up to three further stations to Industrial Ethernet with 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, LED diagnostics, S7-1200 module including electronic manual on CD-ROM

6AG1277-1AA10-4AA0**Accessories****IE FC TP trailing cable 2 x 2 (Type C)**

4-core, shielded TP installation cable for connection to IE FC outlet RJ45/ IE FC RJ45 plug 180/90 for use as trailing cable; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m

6XV1840-3AH10**IE FC RJ45 plug 180 2 x 2**

RJ45 plug connector for Industrial Ethernet with a rugged metal housing and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0
6GK1901-1BB10-2AB0
6GK1901-1BB10-2AE0

IE FC outlet RJ45

For connection of Industrial Ethernet FC cables and TP cords; graduated prices for 10 and 50 units or more

6GK1901-1FC00-0AA0**IE TP cord RJ45/RJ45**

- TP cord pre-assembled with 2 RJ45 plug connectors; length: 0.5 m
- TP cable 4 x 2 with 2 RJ45 plug connectors; length: 0.5 m

6XV1850-2GE50**6XV1870-3QE50**

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CSM 1277 unmanaged

Technical specifications

| | |
|--|-------------------------------|
| Article number | 6GK7277-1AA10-0AA0 |
| product type designation | SCALANCE CSM 1277 |
| transfer rate | |
| transfer rate | 10 Mbit/s, 100 Mbit/s |
| interfaces for communication integrated | |
| number of electrical connections | 4 |
| • for network components or terminal equipment | |
| number of 100 Mbit/s SC ports | 0 |
| • for multimode | |
| number of 1000 Mbit/s LC ports | 0 |
| • for multimode | |
| • for single mode (LD) | 0 |
| interfaces other | |
| number of electrical connections | |
| • for power supply | 1 |
| type of electrical connection | |
| • for power supply | 3-pole terminal block |
| supply voltage, current consumption, power loss | |
| type of voltage 1 of the supply voltage | DC |
| • supply voltage 1 rated value | 24 V |
| • power loss [W] 1 rated value | 1.6 W |
| • supply voltage 1 rated value | 19.2 ... 28.8 V |
| • consumed current 1 maximum | 0.07 A |
| • type of electrical connection 1 for power supply | 3-pole terminal block |
| • product component 1 fusing at power supply input | Yes |
| ambient conditions | |
| ambient temperature | |
| • during operation | 0 ... 60 °C |
| • during storage | -40 ... +70 °C |
| • during transport | -40 ... +70 °C |
| relative humidity | |
| • at 25 °C without condensation during operation maximum | 95 % |
| protection class IP | IP20 |
| design, dimensions and weights | |
| design | SIMATIC S7-1200 device design |
| width | 45 mm |
| height | 100 mm |
| depth | 75 mm |
| net weight | 0.15 kg |
| fastening method | |
| • 35 mm top hat DIN rail mounting | Yes |
| • wall mounting | Yes |
| • S7-300 rail mounting | No |
| • S7-1500 rail mounting | No |

| | |
|---|---|
| Article number | 6GK7277-1AA10-0AA0 |
| product functions management, configuration, engineering | |
| product function | |
| • multiport mirroring | No |
| product function switch-managed | No |
| product functions redundancy | |
| product function | |
| • Parallel Redundancy Protocol (PRP)/operation in the PRP-network | Yes |
| • Parallel Redundancy Protocol (PRP)/Redundant Network Access (RNA) | No |
| standards, specifications, approvals | |
| standard | |
| • for FM | FM3611: Class 1, Division 2, Group A, B, C, D / T... CL.1, Zone 2, GP. IIC, T. Ta |
| • for safety from CSA and UL | UL 508, CSA C22.2 No. 142 |
| • for emitted interference | EN 61000-6-4 (Class A) |
| • for interference immunity | EN 61000-6-2 |
| MTBF | 273 y |
| standards, specifications, approvals CE | |
| certificate of suitability CE marking | Yes |
| standards, specifications, approvals hazardous environments | |
| standard for hazardous zone | EN 600079-15:2005, EN 600079-0:2006, II 3 G Ex nA II T4, KEMA 08 ATEX 0003 X |
| certificate of suitability | |
| • CCC for hazardous zone according to GB standard | Yes |
| standards, specifications, approvals other | |
| certificate of suitability | EN 61000-6-2, EN 61000-6-4 |
| • C-Tick | Yes |
| • KC approval | No |
| standards, specifications, approvals marine classification | |
| Marine classification association | |
| • American Bureau of Shipping Europe Ltd. (ABS) | Yes |
| • French marine classification society (BV) | Yes |
| • Det Norske Veritas (DNV) | Yes |
| • Germanische Lloyd (GL) | No |
| • Lloyds Register of Shipping (LRS) | Yes |
| • Nippon Kaiji Kyokai (NK) | Yes |
| • Polski Rejestr Statkow (PRS) | No |
| • Royal Institution of Naval Architects (RINA) | No |

More information

Selection Tool:

To support the selection of SCALANCE network components, the TIA Selection Tool is available at:

<http://www.siemens.com/tst>

Overview



The CP 1243-1 communications processor is used for connecting the SIMATIC S7-1200 to telecontrol centers via remote networks and telecontrol protocols (DNP3, IEC 60870-5-104, TeleControl Basic), and for safe communication via IP-based networks.

The CP has the following features:

- Ethernet-based connection to TeleControl Server Basic, e.g. via Internet
- Data transfer of measured values, control variables, or alarms optimized for telecontrol systems
- Automatic sending of alert emails
- Data buffering of up to 64,000 values ensures a secure database even with temporary connection failures
- Secure communication via VPN connections based on IPsec
- Access protection via stateful inspection firewall
- Support of SINEMA Remote Connect with autoconfiguration
- Clearly laid out LED signaling for fast and easy diagnostics
- Compact industrial enclosure in S7-1200 design for mounting on a DIN rail
- Fast commissioning thanks to easy configuration using STEP 7

Ordering data

Article No.

CP 1243-1 communications processor

CP 1243-1 communications processor for connecting SIMATIC S7-1200 as an additional Ethernet interface and for connection to control centers via telecontrol protocols (DNP3, IEC 60870, TeleControl Basic), security (firewall, VPN)

6GK7243-1BX30-0XE0**Accessories****Compact Switch Module CSM 1277**

Unmanaged switch for connecting a SIMATIC S7-1200 and up to three further nodes to Industrial Ethernet with 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, LED diagnostics, S7-1200 module including electronic device manual on CD-ROM

6GK7277-1AA10-0AA0**IE FC RJ45 plugs**

RJ45 connectors for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables

IE FC RJ45 plug 180

180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0
6GK1901-1BB10-2AB0
6GK1901-1BB10-2AE0

IE FC TP standard cable GP 2 x 2 (Type A)

4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE F RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. length 1 000 m, minimum order quantity 20 m

6XV1840-2AH10**IE FC Stripping Tool**

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

Technical specifications

| | |
|--|---------------------------|
| Article number | 6GK7243-1BX30-0XE0 |
| product type designation | CP 1243-1 |
| transfer rate | |
| transfer rate | |
| • at the 1st interface | 10 ... 100 Mbit/s |
| interfaces | |
| number of interfaces acc. to Industrial Ethernet | 1 |
| number of electrical connections | |
| • at the 1st interface acc. to Industrial Ethernet | 1 |
| • for power supply | 0 |
| type of electrical connection | |
| • at the 1st interface acc. to Industrial Ethernet | RJ45 port |

| | |
|--|---------------------------|
| Article number | 6GK7243-1BX30-0XE0 |
| product type designation | CP 1243-1 |
| supply voltage, current consumption, power loss | |
| type of voltage of the supply voltage | DC |
| supply voltage 1 from backplane bus | 5 V |
| consumed current | |
| • from backplane bus at DC at 5 V typical | 0.25 A |
| power loss [W] | 1.25 W |

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CP 1243-1

Technical specifications

| | |
|---|--|
| Article number | 6GK7243-1BX30-0XE0 |
| product type designation | CP 1243-1 |
| ambient conditions | |
| ambient temperature | |
| • for vertical installation during operation | -20 ... +60 °C |
| • for horizontally arranged busbars during operation | -20 ... +70 °C |
| • during storage | -40 ... +70 °C |
| • during transport | -40 ... +70 °C |
| relative humidity | |
| • at 25 °C without condensation during operation maximum | 95 % |
| protection class IP | IP20 |
| design, dimensions and weights | |
| module format | Compact module S7-1200 single width |
| width | 30 mm |
| height | 110 mm |
| depth | 75 mm |
| net weight | 0.122 kg |
| fastening method | |
| • 35 mm top hat DIN rail mounting | Yes |
| • wall mounting | Yes |
| product features, product functions, product components general | |
| number of units | |
| • per CPU maximum | 3 |
| performance data open communication | |
| number of possible connections for open communication | |
| • by means of T blocks maximum | like CPU |
| performance data S7 communication | |
| number of possible connections for S7 communication | |
| • maximum | like CPU |
| performance data IT functions | |
| number of possible connections | |
| • as email client maximum | 1 |
| performance data telecontrol | |
| suitability for use | |
| • node station | No |
| • substation | Yes |
| • TIM control center | No |
| control center connection | For use with TeleControl Server Basic, WinCC and PCS7 |
| • by means of a permanent connection | supported |
| • note | Connection to SCADA system via Telecontrol Server Basic and Standard Telecontrol protocols |
| protocol is supported | |
| • DNP3 | Yes |
| • IEC 60870-5 | Yes |
| product function data buffering if connection is aborted | Yes; 64,000 events |
| number of data points per station maximum | 500 |
| number of stations for direct communication with Telecontrol Server Basic | |
| • in send direction maximum | 3 |
| • in receive direction maximum | 15 |

| | |
|---|---|
| Article number | 6GK7243-1BX30-0XE0 |
| product type designation | CP 1243-1 |
| performance data teleservice | |
| diagnostics function online diagnostics with SIMATIC STEP 7 | Yes |
| product function | |
| • program download with SIMATIC STEP 7 | Yes |
| • remote firmware update | Yes |
| product functions management, configuration, engineering | |
| configuration software | |
| • required | STEP 7 Basic/Professional |
| product functions diagnostics | |
| product function web-based diagnostics | Yes |
| product functions security | |
| firewall version | stateful inspection |
| product function with VPN connection | IPsec, SINEMA RC |
| type of encryption algorithms with VPN connection | AES-256, AES-192, AES-128, 3DES-168 |
| type of authentication procedure with VPN connection | Preshared key (PSK), X.509v3 certificates |
| type of hashing algorithms with VPN connection | MD5, SHA-1, SHA-2 |
| number of possible connections with VPN connection | 8 |
| product function | |
| • password protection for Web applications | No |
| • password protection for teleservice access | No |
| • encrypted data transmission | Yes |
| • ACL - IP-based | No |
| • ACL - IP-based for PLC/routing | No |
| • switch-off of non-required services | Yes |
| • blocking of communication via physical ports | No |
| • log file for unauthorized access | No |
| product functions time | |
| protocol is supported | |
| • NTP | Yes |
| • NTP (secure) | Yes |
| time synchronization | |
| • from NTP-server | Yes |
| • from control center | Yes |

Overview



The CP 1242-7 GPRS V2 communications processor is used to connect a SIMATIC S7-1200 to the globally available GSM/GPRS mobile radio network and has the following characteristics:

- Worldwide wireless exchange of data between S7-1200 controllers and/or between S7-1200 controllers and control centers with an Internet connection
- Communication based on the GPRS (**G**eneral **P**acket **R**adio **S**ervice) mobile wireless service with data transmission speeds of up to 86 kbps in the downlink and 43 kbps in the uplink
- GPRS mode with fixed IP addresses and dynamic IP addresses with standard mobile phone contract
- Time synchronization based on NTP (**N**etwork **T**ime **P**rotocol)
- Sending and receiving of text messages
- LED signaling for fast diagnostics
- Compact industrial enclosure in S7-1200 design for mounting on a DIN rail
- Fast commissioning thanks to easy configuration using STEP 7

In conjunction with the TeleControl Server Basic software, the CP 1242-7 forms a telecontrol system with additional properties:

- Connection of up to 5000 telecontrol stations to the control center via an OPC interface
- Data buffering in the substations in the event of connection failures
- Central status monitoring of the substations
- No special provider services required for fixed IP addresses
- Teleservice access with STEP 7 to the substations via the Internet

The CP 1242-7 V2 is a new product version of the CP 1242-7. The concept for process data transmission has been expanded with a simple data point configuration, which enables substantially easier commissioning without high programming overhead and minimizes susceptibility to errors during the projects implementation phase. CP 1242-7 has also been equipped with new functions, such as access to the internal web server of the S7-1200. This opens up numerous new application areas.

Ordering data

Article No.

Communications processor CP 1242-7 GPRS¹⁾

Communications processor CP 1242-7 GPRS V2 for connecting SIMATIC S7-1200 to TeleControl Server Basic via GSM/GPRS mobile radio network

6GK7242-7KX31-0XE0**Accessories****ANT794-4MR antenna**

Omnidirectional antenna for GSM (2G), UMTS (3G) and LTE (4G) networks; omnidirectional; weatherproof for indoor and outdoor use; 5 m cable with fixed connection to antenna; SMA connector; including mounting bracket, screws, wall plugs

6NH9860-1AA00**ANT794-3M antenna**

Flat panel antenna for GSM (2G) networks, for triband with 900/1 800/1 900 MHz; weatherproof for indoor/outdoor use, 1.2 m cable with fixed connection to antenna; SMA connector, incl. assembly adhesive tape

6NH9870-1AA00

¹⁾ Please note country approvals under:
www.siemens.com/mobilenetwork-approvals

Technical specifications

| | |
|--|---------------------------|
| Article number | 6GK7242-7KX31-0XE0 |
| product type designation | CP 1242-7 V2 |
| transfer rate | |
| transfer rate | |
| • for GPRS transmission | |
| - with downlink maximum | 86 kbit/s |
| - with uplink maximum | 43 kbit/s |
| interfaces | |
| number of interfaces acc. to Industrial Ethernet | 0 |
| number of electrical connections | |
| • for external antenna(s) | 1 |
| • for power supply | 1 |
| number of slots | |
| • for SIM cards | 1 |
| type of electrical connection | |
| • for external antenna(s) | SMA socket (50 ohms) |
| • for power supply | 3-pole terminal block |
| slot version | |
| • for SIM card | Standard |

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CP 1242-7 GPRS

Technical specifications

| | |
|--|-------------------------------------|
| Article number | 6GK7242-7KX31-0XE0 |
| product type designation | CP 1242-7 V2 |
| wireless technology | |
| type of mobile wireless service | |
| • is supported SMS | Yes |
| • is supported GPRS | Yes |
| • note | GPRS (Multislot Class 10) |
| type of wireless network is supported | |
| • GSM | Yes |
| • UMTS | No |
| • LTE | No |
| operating frequency | |
| • 850 MHz | Yes |
| • 900 MHz | Yes |
| • 1800 MHz | Yes |
| • 1900 MHz | Yes |
| transmit power | |
| • at operating frequency 900 MHz | 2 W |
| • at operating frequency 1800 MHz | 1 W |
| • at operating frequency 1900 MHz | 1 W |
| supply voltage, current consumption, power loss | |
| type of voltage of the supply voltage | DC |
| supply voltage external | 24 V |
| supply voltage external at DC rated value | 24 V |
| relative positive tolerance at DC at 24 V | 20 % |
| relative negative tolerance at DC at 24 V | 20 % |
| consumed current | |
| • from external supply voltage at DC at 24 V typical | 0.1 A |
| • from external supply voltage at DC at 24 V maximum | 0.22 A |
| power loss [W] | 2.4 W |
| ambient conditions | |
| ambient temperature | |
| • for vertical installation during operation | -20 ... +60 °C |
| • for horizontally arranged busbars during operation | -20 ... +70 °C |
| • during storage | -40 ... +70 °C |
| • during transport | -40 ... +70 °C |
| relative humidity | |
| • at 25 °C without condensation during operation maximum | 95 % |
| protection class IP | IP20 |
| design, dimensions and weights | |
| module format | Compact module S7-1200 single width |
| width | 30 mm |
| height | 100 mm |
| depth | 75 mm |
| net weight | 0.133 kg |
| fastening method | |
| • 35 mm top hat DIN rail mounting | Yes |
| • S7-300 rail mounting | No |
| • wall mounting | Yes |

| | |
|---|--|
| Article number | 6GK7242-7KX31-0XE0 |
| product type designation | CP 1242-7 V2 |
| product features, product functions, product components general | |
| number of units | |
| • per CPU maximum | 3 |
| performance data | |
| number of users/telephone numbers definable maximum | 10 |
| performance data open communication | |
| number of possible connections for open communication | |
| • by means of T blocks maximum | like CPU |
| performance data IT functions | |
| number of possible connections | |
| • as email client maximum | 1 |
| performance data telecontrol | |
| control center connection | Telecontrol Server Basic supported |
| • by means of a permanent connection | supported |
| • by means of demand-oriented connection | supported |
| • note | Connection to SCADA system using OPC interface |
| protocol is supported | |
| • DNP3 | No |
| • IEC 60870-5 | No |
| product function data buffering if connection is aborted | Yes; 64,000 events |
| number of stations for direct communication with Telecontrol Server Basic | |
| • in send direction maximum | 3 |
| • in receive direction maximum | 15 |
| performance data teleservice | |
| diagnostics function online diagnostics with SIMATIC STEP 7 | Yes |
| product function | |
| • program download with SIMATIC STEP 7 | Yes |
| • remote firmware update | Yes |
| product functions management, configuration, engineering | |
| configuration software | |
| • required | STEP 7 Basic/Professional |
| product functions diagnostics | |
| product function web-based diagnostics | Yes |
| product functions security | |
| product function | |
| • password protection for teleservice access | Yes |
| • encrypted data transmission | Yes |
| product functions time | |
| protocol is supported | |
| • NTP | Yes |
| time synchronization | |
| • from control center | Yes |

Overview



CP 1243-7 LTE is used to connect the S7-1200 to a mobile wireless 4th Generation LTE (Long Term Evolution) network. The increased data rates compared to GPRS and widespread introduction of LTE open up new areas of application. The CP1243-7 is characterized by the following properties:

- 1 connection to LTE (4G) mobile wireless network (various versions for EU and North America)
- Data transfer of measured values, control variables, or alarms optimized for telecontrol systems
- Operation with fixed IP addresses and dynamic IP addresses with standard cellular phone contract
- Time synchronization based on NTP (Network Time Protocol)
- "On-demand" connection setup via voice call or SMS
- Sending and receiving of SMS
- Teleservice access with STEP 7 to substations via mobile wireless networks
- Compact industrial enclosure in S7-1200 design for mounting on a DIN rail
- Temperature range in operation: -20°C to +70°C
- DIN rail mounting
- Diagnostics LEDs (overall status and details)
- Integrated security functions (VPN and firewall)
- Access to the CPU web server
- Fast commissioning due to simplified configuration with STEP 7
- Data buffering of up to 64 000 values ensures a secure database even with temporary connection failures
- Support of SINEMA Remote Connect with autoconfiguration

Ordering data

Article No.

**Communication processor
CP 1243-7 LTE**

Communication processor for connecting SIMATIC S7-1200 to TeleControl Server Basic via LTE mobile wireless network

- **CP 1243-7 LTE EU**
Frequencies in European band: 700, 1 700 MHz

6GK7243-7KX30-0XE0

Frequencies in European band: 700, 1 700 MHz

- **CP 1243-7 LTE US**
Frequencies in North American band: 800, 1 800, 2 600 MHz

6GK7243-7SX30-0XE0**Accessories****ANT794-4MR antenna**

Omnidirectional antenna for GSM (2G), UMTS (3G) and LTE (4G) networks; omnidirectional; weatherproof for indoor and outdoor use; 5 m cable with fixed connection to antenna; SMA connector; including mounting bracket, screws, wall plugs

6NH9860-1AA00

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CP 1243-7 LTE

Technical specifications

| Article number | 6GK7243-7KX30-0XE0 | 6GK7243-7SX30-0XE0 |
|--|--|---|
| product type designation | CP 1243-7 LTE EU | CP 1243-7 LTE US |
| transfer rate | | |
| transfer rate | | |
| • for LTE transmission | | |
| - with downlink maximum | 42 Mbit/s | 42 Mbit/s |
| - with uplink maximum | 5.76 Mbit/s | 5.76 Mbit/s |
| interfaces | | |
| number of interfaces acc. to Industrial Ethernet | 0 | 0 |
| number of electrical connections | | |
| • for external antenna(s) | 1 | 1 |
| • for power supply | 1 | 1 |
| number of slots | | |
| • for SIM cards | 1 | 1 |
| type of electrical connection | | |
| • for external antenna(s) | SMA socket (50 ohms) | SMA socket (50 ohms) |
| • for power supply | 3-pole terminal block | 3-pole terminal block |
| slot version | | |
| • for SIM card | Standard | Standard |
| wireless technology | | |
| type of mobile wireless service | | |
| • is supported SMS | Yes | Yes |
| • is supported GPRS | Yes | Yes |
| • note | GPRS (Multislot Class 10) | GPRS (Multislot Class 10) |
| type of wireless network is supported | | |
| • GSM | Yes | Yes |
| • UMTS | Yes | Yes |
| • LTE | Yes | Yes |
| operating frequency | | |
| • 850 MHz | | Yes |
| • 1900 MHz | | Yes |
| operating frequency for GSM transmission | operating frequency for GSM transmission 900 MHz, operating frequency for GSM transmission 1800 MHz | |
| operating frequency with UMTS transmission | operating frequency with UMTS transmission 900 MHz, operating frequency with UMTS transmission 2100 MHz | |
| operating frequency for LTE transmission | operating frequency for LTE transmission 800 MHz, operating frequency for LTE transmission 1800 MHz, operating frequency for LTE transmission 2600 MHz | operating frequency for LTE transmission 700 MHz, operating frequency for LTE transmission 1700 MHz |

| Article number | 6GK7243-7KX30-0XE0 | 6GK7243-7SX30-0XE0 |
|--|-------------------------------------|-------------------------------------|
| product type designation | CP 1243-7 LTE EU | CP 1243-7 LTE US |
| supply voltage, current consumption, power loss | | |
| type of voltage of the supply voltage | DC | DC |
| supply voltage external | 24 V | 24 V |
| supply voltage external at DC rated value | 24 V | 24 V |
| relative positive tolerance at DC at 24 V | 20 % | 20 % |
| relative negative tolerance at DC at 24 V | 20 % | 20 % |
| consumed current | | |
| • from external supply voltage at DC at 24 V typical | 0.1 A | 0.1 A |
| • from external supply voltage at DC at 24 V maximum | 0.22 A | 0.22 A |
| ambient conditions | | |
| ambient temperature | | |
| • for vertical installation during operation | -20 ... +60 °C | -20 ... +60 °C |
| • for horizontally arranged busbars during operation | -20 ... +70 °C | -20 ... +70 °C |
| • during storage | -40 ... +70 °C | -40 ... +70 °C |
| • during transport | -40 ... +70 °C | -40 ... +70 °C |
| relative humidity | | |
| • at 25 °C without condensation during operation maximum | 95 % | 95 % |
| protection class IP | IP20 | IP20 |
| design, dimensions and weights | | |
| module format | Compact module S7-1200 single width | Compact module S7-1200 single width |
| width | 30 mm | 30 mm |
| height | 100 mm | 100 mm |
| depth | 75 mm | 75 mm |
| net weight | 0.133 kg | 0.133 kg |
| fastening method | | |
| • 35 mm top hat DIN rail mounting | Yes | Yes |
| • S7-300 rail mounting | No | No |
| • wall mounting | Yes | Yes |
| product features, product functions, product components general | | |
| number of units | | |
| • per CPU maximum | 3 | 3 |

Technical specifications

| Article number | 6GK7243-7KX30-0XE0 | 6GK7243-7SX30-0XE0 |
|---|--|--|
| product type designation | CP 1243-7 LTE EU | CP 1243-7 LTE US |
| performance data | | |
| number of users/telephone numbers definable maximum | 10 | 10 |
| performance data open communication | | |
| number of possible connections for open communication | | |
| • by means of T blocks maximum | like CPU | like CPU |
| performance data IT functions | | |
| number of possible connections | | |
| • as email client maximum | 1 | 1 |
| performance data telecontrol | | |
| suitability for use | | |
| • substation | Yes | Yes |
| control center connection | Telecontrol Server Basic | Telecontrol Server Basic |
| • by means of a permanent connection | supported | supported |
| • by means of demand-oriented connection | supported | supported |
| • note | Connection to SCADA system using OPC interface | Connection to SCADA system using OPC interface |
| protocol is supported | | |
| • DNP3 | No | No |
| • IEC 60870-5 | No | No |
| product function data buffering if connection is aborted | Yes; 64,000 events | Yes; 64,000 events |
| number of stations for direct communication with Telecontrol Server Basic | | |
| • in send direction maximum | 3 | 3 |
| • in receive direction maximum | 15 | 15 |
| performance data teleservice | | |
| diagnostics function online diagnostics with SIMATIC STEP 7 | Yes | Yes |
| product function | | |
| • program download with SIMATIC STEP 7 | Yes | Yes |
| • remote firmware update | Yes | Yes |

| Article number | 6GK7243-7KX30-0XE0 | 6GK7243-7SX30-0XE0 |
|---|---|---|
| product type designation | CP 1243-7 LTE EU | CP 1243-7 LTE US |
| product functions management, configuration, engineering | | |
| configuration software | | |
| • required | STEP 7 Basic/Professional | STEP 7 Basic/Professional |
| product functions diagnostics | | |
| product function web-based diagnostics | Yes | Yes |
| product functions security | | |
| firewall version | stateful inspection | stateful inspection |
| product function with VPN connection | IPsec, SINEMA RC | IPsec, SINEMA RC |
| type of encryption algorithms with VPN connection | AES-256, AES-192, AES-128, 3DES-168, DES-56 | AES-256, AES-192, AES-128, 3DES-168, DES-56 |
| type of authentication procedure with VPN connection | Preshared key (PSK), X.509v3 certificates | Preshared key (PSK), X.509v3 certificates |
| type of hashing algorithms with VPN connection | MD5, SHA-1 | MD5, SHA-1 |
| number of possible connections with VPN connection | 1 | 1 |
| product function | | |
| • password protection for teleservice access | Yes | Yes |
| • encrypted data transmission | Yes | Yes |
| product functions time | | |
| protocol is supported | | |
| • NTP | Yes | Yes |
| time synchronization | | |
| • from control center | Yes | Yes |

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CP 1243-8 IRC

Overview



The CP 1243-8 IRC (Industrial Remote Communication) communications processor is used for connecting a SIMATIC S7-1200 via the SINAUT ST7 telecontrol protocol to higher-level ST7 stations or to an ST7 control center. The CP 1243-8 IRC (as of HW2 and firmware V3.0) also offers connection to a DNP3 or IEC-capable control center via a corresponding open DNP3 or IEC 60870-5-104 telecontrol protocol. The CP 1243-8 IRC (as of HW2 and firmware V3.0) also offers connection to a DNP3 or IEC-capable control center via a corresponding open DNP3 or IEC 60870-5-104 telecontrol protocol.

The CP has the following features:

- Support for telecontrol protocol SINAUT ST7, DNP3, IEC 60870-5-104
- Two WAN connections for selecting the communication paths:
 - Ethernet-based connection: RJ45 port on the module for connecting external routers, e.g. SCALANCE M
 - Additional connection configurable via plug-in TS modules
- Both WAN interfaces can also be operated simultaneously: Route redundancy
- Data transfer of measured values, control variables, or alarms optimized for telecontrol systems
- Automatic transmission of alarms per email or text message
- Time synchronization based on NTP (Network Time Protocol) or via the SINAUT system
- Data buffering of up to 16,000 data frames prevents data loss in the event of temporary connection failures
- Secure communication via VPN connections based on IPSec
- Access protection via Stateful Inspection Firewall
- Support of SINEMA Remote Connect with autoconfiguration
- Fast and simple diagnostics via clear LED indicators, STEP 7 and web browser
- Compact industrial enclosure in S7-1200 design for mounting on a DIN rail

The integrated Ethernet interface and the option of using the TS modules provide flexible connection options for the CP. The following TS modules are available:

- TS module RS232
- TS module MODEM
- TS module ISDN

Ordering data

Article No.

CP 1243-8 IRC communications processor **6GK7243-8RX30-0XE0**

Communications processor for connecting a SIMATIC S7-1200 via the SINAUT ST7 telecontrol protocol to higher-level ST7 stations or to an ST7 control center, or a DNP3 or IEC-capable control center via a corresponding DNP3 or IEC 60870-5-104 open telecontrol protocols

Accessories

SINAUT engineering software V5.5 + SP3 **6NH7997-0CA55-0AA0**

On CD, consisting of:

- SINAUT ST7/DNP3 configuration and diagnostic software for STEP 7 V5.6
- SINAUT TD7 block library
- Electronic manual in German and English

SINAUT engineering software V5.5 Upgrade from V5.0, V5.1, V5.2, V5.3 or V5.4 **6NH7997-0CA55-0GA0**

TeleService module

Connection to TS Adapter IE Basic/Advanced or CP 1243-8 IRC. Power supply via TS Adapter IE Basic/Advanced or CP 1243-8 IRC.

TS module RS 232 **6ES7972-0MS00-0XA0**

TS module modem **6ES7972-0MM00-0XA0**

TS module ISDN **6ES7972-0MD00-0XA0**

CSM 1277 compact switch module **6GK7277-1AA10-0AA0**

Unmanaged switch for connecting a SIMATIC S7-1200 and up to three further nodes to Industrial Ethernet with 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, LED diagnostics, S7-1200 module including electronic device manual on CD-ROM

¹⁾ Please note country approvals under: <http://www.siemens.com/mobilenetwork-approvals>.

Technical specifications

| | |
|--|--|
| Article number | 6GK7243-8RX30-0XE0 |
| product type designation | CP 1243-8 IRC |
| transfer rate | |
| transfer rate | |
| • at the 1st interface | 10 ... 100 Mbit/s |
| • at the 2nd interface | 0.3 ... 115.2 kbit/s |
| interfaces | |
| number of interfaces acc. to Industrial Ethernet | 1 |
| number of electrical connections | |
| • at the 1st interface acc. to Industrial Ethernet | 1 |
| • for power supply | 1 |
| type of electrical connection | |
| • at the 1st interface acc. to Industrial Ethernet | RJ45 port |
| type of electrical connection | |
| • at interface 2 for external data transmission | Interface to the TS Module |
| • for power supply | 3-pole terminal block |
| supply voltage, current consumption, power loss | |
| type of voltage of the supply voltage | DC |
| supply voltage 1 from backplane bus | 5 V |
| supply voltage external | 24 V |
| supply voltage external | 19.2 ... 28.8 V |
| supply voltage external at DC rated value | 24 V |
| supply voltage external at DC rated value | 19.2 ... 28.8 V |
| consumed current | |
| • from backplane bus at DC at 5 V typical | 0.25 A |
| • from external supply voltage at DC at 24 V typical | 0.1 A |
| power loss [W] | 2.4 W; 1.25 W from S7-1200 backplane without TS module. 2.4 W from 24 V DC external with TS module |
| ambient conditions | |
| ambient temperature | |
| • for vertical installation during operation | -20 ... +60 °C |
| • for horizontally arranged busbars during operation | -20 ... +70 °C |
| • during storage | -40 ... -70 °C |
| • during transport | -40 ... +70 °C |
| relative humidity | |
| • at 25 °C without condensation during operation maximum | 95 % |
| protection class IP | IP20 |

| | |
|--|--|
| Article number | 6GK7243-8RX30-0XE0 |
| product type designation | CP 1243-8 IRC |
| design, dimensions and weights | |
| module format | Compact module S7-1200 single width |
| width | 30 mm |
| height | 110 mm |
| depth | 75 mm |
| net weight | 0.122 kg |
| fastening method | |
| • 35 mm top hat DIN rail mounting | Yes |
| • S7-300 rail mounting | No |
| • wall mounting | Yes |
| product features, product functions, product components general | |
| number of units | |
| • per CPU maximum | 1 |
| • note | One CP pluggable on left side of CPU, one TS Module pluggable left side of CP. |
| performance data open communication | |
| number of possible connections for open communication | |
| • by means of T blocks maximum | like CPU |
| performance data S7 communication | |
| number of possible connections for S7 communication | |
| • maximum | Configured S7-Connection for S7-Communication |
| • with PG connections maximum | 2 |
| • with OP connections maximum | 1 |
| service | |
| • SINAUT ST7 via S7 communication | Yes |
| performance data IT functions | |
| number of possible connections | |
| • as email client maximum | 1 |

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CP 1243-8 IRC

Technical specifications

| | |
|--|--|
| Article number | 6GK7243-8RX30-0XE0 |
| product type designation | CP 1243-8 IRC |
| performance data telecontrol | |
| suitability for use | |
| • node station | No |
| • substation | Yes |
| • TIM control center | No |
| • note | Ethernet and TS Module can be operated in parallel |
| control center connection | control center with ST7 function supported |
| • by means of a permanent connection | |
| protocol is supported | |
| • DNP3 | Yes |
| • IEC 60870-5 | Yes |
| • SINAUT ST7 protocol | Yes |
| product function data buffering if connection is aborted | Yes; DNP3, IEC60870-5: 64000 events, SINAUT ST7: 16000 telegrams |
| number of data points per station maximum | 500 |
| transmission format | |
| • for SINAUT ST7 protocol with multi-master polling 10-bit | Yes |
| • for SINAUT ST7 protocol with polling or spontaneous 10-bit or 11-bit | Yes |
| operating mode for scanning of data transmission | |
| • with dedicated line/radio link with SINAUT ST7 protocol | Polling |
| • with dial-up network with SINAUT ST7 protocol | spontaneous |
| hamming distance | |
| • for SINAUT ST7 protocol | 4 |
| performance data teleservice | |
| diagnostics function online diagnostics with SIMATIC STEP 7 product function | Yes |
| • program download with SIMATIC STEP 7 | Yes |
| • remote firmware update | Yes |
| product functions management, configuration, engineering | |
| protocol is supported | |
| • SNMP v3 | Yes |
| • DCP | Yes |
| configuration software | |
| • required | SINAUT ES V5.5 and STEP7 V13 SP1 or higher |
| • for PG configuring required SINAUT ST7 configuration software for PG | Yes |

| | |
|--|---|
| Article number | 6GK7243-8RX30-0XE0 |
| product type designation | CP 1243-8 IRC |
| product functions diagnostics | |
| product function web-based diagnostics | Yes |
| product functions security | |
| firewall version | stateful inspection |
| operating mode Virtual Private Network (VPN) | Yes |
| product function with VPN connection | IPsec, SINEMA RC |
| type of encryption algorithms with VPN connection | AES-256, AES-192, AES-128, 3DES-168, DES-56 |
| type of authentication procedure with VPN connection | Preshared key (PSK), X.509v3 certificates |
| type of hashing algorithms with VPN connection | MD5, SHA-1 |
| number of possible connections with VPN connection | 8 |
| product function | |
| • password protection for teleservice access | No |
| • encrypted data transmission | Yes |
| • MSC client via GPRS modem with MSC capability | Yes |
| protocol | |
| • is supported MSC protocol | Yes |
| • with Virtual Private Network MSC is supported | TCP/IP |
| key length for MSC with Virtual Private Network | 128 bit |
| number of possible connections | |
| • as MSC client with VPN connection | 1 |
| • as MSC server with VPN connection | 0 |
| product functions time | |
| protocol is supported | |
| • NTP | Yes |
| time synchronization | |
| • from NTP-server | Yes |
| • from control center | Yes |
| accessories | |
| accessories | TS Module RS232 or TS Module MODEM or TS Module ISDN or TS Module GSM pluggable |

3

Overview



The SIMATIC RF120C is a communications module for connecting the SIMATIC identification systems directly to the SIMATIC S7-1200. The readers of the RF200/300/1000 RFID systems as well as the MV300/400/500 optical readers can be operated on the SIMATIC RF120C.

Integration into the TIA Portal and the uniform plug-in connection systems permit fast and simple commissioning.

Ordering data

Article No.

SIMATIC RF120C communications module

Integrated in the S7-1200 PLC for connection of a reader

6GT2002-0LA00

Accessories for all readers**Reader cable for SIMATIC RF200 / RF300 / MV400**

PUR material, trailable, straight reader connector

2 m

6GT2091-4LH20

5 m

6GT2091-4LH50

10 m

6GT2091-4LN10

Connecting cable for SIMATIC RF1000

Prefabricated RS232, between RF1040R or RF1070R and RF120C; black, length 2 m

6GT2891-6UH20

Connecting cable for SIMATIC MV320

Pre-assembled, between RF120C and MV320, coiled, length 5 m, usable length 1.6 to 4 m

6GT2191-1BH50

Accessories for extended use**Extension cable for all readers**

PUR material, trailable.

2 m, straight plug

6GT2891-4FH20

5 m, straight plug

6GT2891-4FH50

10 m, straight plug

6GT2891-4FN10

20 m, straight plug

6GT2891-4FN20

50 m, straight plug

6GT2891-4FN50

2 m, plug angled at reader

6GT2891-4JH20

5 m, plug angled at reader

6GT2891-4JH50

10 m, plug angled at reader

6GT2891-4JN10

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

SIMATIC RF120C

Technical specifications

| | |
|---|------------------------------|
| Article number | 6GT2002-0LA00 |
| product type designation | RF120C communications module |
| transfer rate | |
| transfer rate at the point-to-point connection serial maximum | 115.2 kbit/s |
| interfaces | |
| design of the interface for point-to-point connection | RS422/RS232 |
| number of readers connectable | 1 |
| type of electrical connection | |
| • of the backplane bus | S7-1200 backplane bus |
| • for supply voltage | Screw terminals |
| design of the interface to the reader for communication | sub-D, 9-pin, female |
| mechanical data | |
| material | Xantar MX 1094 |
| color | Ti-grey 24L01 |
| tightening torque of the screw for securing the equipment maximum | 0.45 N·m |
| supply voltage, current consumption, power loss | |
| supply voltage | |
| • at DC rated value | 24 V |
| • at DC | 20 ... 30 V |
| consumed current at DC at 24 V | |
| • without connected devices typical | 0.03 A |
| • with connected devices maximum | 1 A |
| ambient conditions | |
| ambient temperature | |
| • during operation | 0 ... 55 °C |
| • during storage | -40 ... +70 °C |
| • during transport | -40 ... +70 °C |
| protection class IP | IP20 |
| shock resistance | According to IEC 61131-2 |
| shock acceleration | 300 m/s ² |
| vibrational acceleration | 100 m/s ² |

| | |
|--|---|
| Article number | 6GT2002-0LA00 |
| product type designation | RF120C communications module |
| design, dimensions and weights | |
| width | 30 mm |
| height | 100 mm |
| depth | 75 mm |
| net weight | 0.15 kg |
| fastening method | S7-1200 rack |
| wire length for RS 422 interface maximum | 1 000 m |
| product features, product functions, product components general | |
| display version | 4 LEDs for reader connection, 1 LED for device status |
| product function addressable transponder file handler | No |
| protocol is supported | |
| • S7 communication | Yes |
| product functions management, configuration, engineering | |
| type of programming | ID profile, library with functions |
| type of computer-switched communication | acyclic communication |
| standards, specifications, approvals | |
| certificate of suitability | CE, FCC, cULus, KCC, C-Tick, FM |
| certificate of suitability | |
| • IECEX | Yes |
| • for IECEX as marking | Ex: II 3G Ex nAA IIC T4 Gc |
| MTBF | 196 y |

3

Overview



- For fast, high-performance serial data exchange via point-to-point coupling
- Implemented protocols: ASCII, USS drive protocol, Modbus RTU
- Additional protocols can also be loaded
- Simple parameterization with STEP 7 Basic

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CM 1241 communications module

(Extended temperature range and exposure to media)

Ambient temperature -40 ... +70° C

Communications module for point-to-point connection, with one RS 232 interface

Communications module for point-to-point connection, with one RS 485 interface

Suitable for areas with extreme exposure to media (conformal coating)

Communications module for point-to-point connection, with one RS 232 interface

Communications module for point-to-point connection, with one RS 485 interface

Accessories**6AG1241-1AH32-2XB0****6AG1241-1CH32-2XB0****6AG1241-1AH32-4XB0****6AG1241-1CH32-4XB0**

See SIMATIC S7-1200 communications module CM 1241, page 3/128

Technical specifications

| Article number | 6AG1241-1AH32-4XB0 | 6AG1241-1AH32-2XB0 | 6AG1241-1CH32-4XB0 | 6AG1241-1CH32-2XB0 |
|---|---|---|---|---|
| Based on | 6ES7241-1AH32-0XB0 SIPLUS S7-1200 CM 1241 RS232 | 6ES7241-1AH32-0XB0 SIPLUS S7-1200 CM1241 RS232 | 6ES7241-1CH32-0XB0 SIPLUS S7-1200 CM 1241 RS422/485 | 6ES7241-1CH32-0XB0 SIPLUS S7-1200 CM 1241 RS422/485 |
| Ambient conditions | | | | |
| Ambient temperature during operation | | | | |
| • min. | -20 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C | -20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C |
| • max. | 60 °C; = Tmax | 70 °C; = Tmax | 60 °C; = Tmax | 70 °C; Tmax > 60 °C, derating: Max. one module may be configured; this module must be the last module on the CM bus; minimum clearance on the left side of at least 45 mm |
| Altitude during operation relating to sea level | | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | | |
| Coolants and lubricants | | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS communication

SIPLUS CM 1241 communications modules

Technical specifications

| Article number | 6AG1241-1AH32-4XB0 | 6AG1241-1AH32-2XB0 | 6AG1241-1CH32-4XB0 | 6AG1241-1CH32-2XB0 |
|---|---|---|---|---|
| Based on | 6ES7241-1AH32-0XB0 SIPLUS S7-1200 CM 1241 RS232 | 6ES7241-1AH32-0XB0 SIPLUS S7-1200 CM1241 RS232 | 6ES7241-1CH32-0XB0 SIPLUS S7-1200 CM 1241 RS422/485 | 6ES7241-1CH32-0XB0 SIPLUS S7-1200 CM 1241 RS422/485 |
| Use in stationary industrial systems | | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * | Yes; Class 3S4 incl. sand, dust; * |
| Use on ships/at sea | | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

Overview

- For fast, high-performance serial data exchange via point-to-point connection
- Implemented protocols: ASCII, USS drive protocol, Modbus RTU
- Additional protocols can be loaded later
- Simple parameterization with STEP 7 Basic
- Can be plugged directly into the CPU

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS CB 1241 RS485 communication board**

for point-to-point connection, with 1 RS485 interface

Accessories**6AG1241-1CH30-5XB1**

See SIMATIC CB 1241 RS485 communication board page 3/130

Technical specifications

| | |
|---|---|
| Article number | 6AG1241-1CH30-5XB1 |
| Based on | 6ES7241-1CH30-1XB0 SIPLUS S7-1200 CB 1241 RS485 |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C |
| • max. | 60 °C; = Tmax |
| Altitude during operation relating to sea level | |
| • Installation altitude above sea level, max. | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | |
| Coolants and lubricants | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * |

| | |
|---|---|
| Article number | 6AG1241-1CH30-5XB1 |
| Based on | 6ES7241-1CH30-1XB0 SIPLUS S7-1200 CB 1241 RS485 |
| Use on ships/at sea | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS communication

SIPLUS CM 1242-5 communications modules

Overview



| DP-M | DP-S | FMS | PG/OP | S7 |
|------|------|-----|-------|----|
| | ● | | | |

The SIPLUS CM 1242-5 communications module is used to connect a SIPLUS S7-1200 controller to PROFIBUS as a DP slave and has the following characteristics:

- PROFIBUS DPV1 slave in accordance with IEC 61158
- Module replacement without programming device supported
- Power is supplied via the backplane bus so that no extra cabling is required
- Support of all standard baud rates from 9.6 kbps to 12 Mbps
- Compact industry-standard enclosure in S7-1200 design for mounting on a DIN rail
- Fast commissioning thanks to easy configuration using STEP 7 without additional programming overhead

The CM 1242-5 is intended for use in factory automation. Low-cost PROFIBUS-based automation solutions can be created on the basis of S7-1200 for optimal production.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

SIPLUS S7-1200 CM 1242-5

| | |
|--|---|
| Article No. | 6AG1-242-5DX30-2XE0 |
| Article No. based on | 6GK7-242-5DX30-0XE0 |
| Ambient temperature range | -25 ... +55 °C |
| Ambient conditions | Suitable for exceptional exposure to media (e.g. sulfur chlorine atmosphere). |
| Technical specifications | The technical data of the standard product applies except for the ambient conditions. |
| Ambient conditions | |
| Relative humidity | 100%, condensation/frost permissible. No commissioning if condensation present. |
| Biologically active substances, compliance with EN 60721-3-3 | Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation! |
| Chemically active substances, compliance with EN 60721-3-3 | Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation! |
| Mechanically active substances, compliance with EN 60721-3-3 | Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation! |
| Air pressure (depending on the highest positive temperature range specified) | 1 080 ... 795 hPa (-1 000 ... +2 000 m) see ambient temperature range 795 ... 658 hPa (+2 000 ... +3 500 m) derating 10 K 658 ... 540 hPa (+3 500 ... +5 000 m) derating 20 K |

For technical documentation on SIPLUS, see:
<http://www.siemens.com/siplus-extreme>

Ordering data

Article No.

SIPLUS communications module CM 1242-5

(Extended temperature range and exposure to media)


Communications module for electrical connection of SIMATIC S7-1200 to PROFIBUS as a DPV1 slave

6AG1242-5DX30-2XE0

Accessories

See SIMATIC S7-1200 CM 1242-5 communications module, page 3/131

Overview

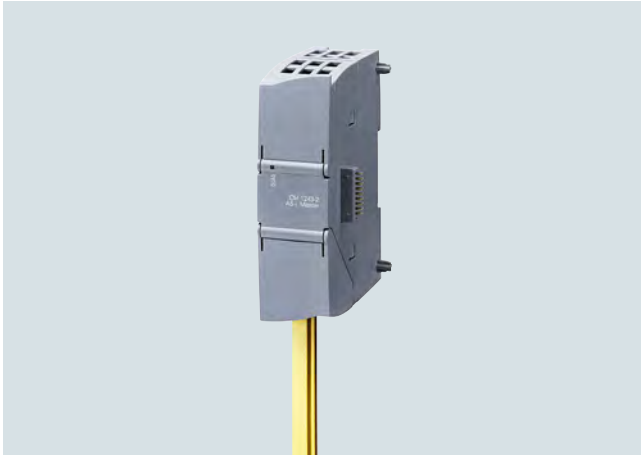

The CM 1243-2 communications module is the AS-Interface master for the SIMATIC S7-1200 and has the following features:

- As many as 62 AS-Interface slaves can be connected
- Integrated analog value transmission
- Supports all AS-Interface master functions according to the AS-Interface Specification V3.0
- Indication of the operating state on the front of the device via LED
- Indication of operating mode, AS-Interface voltage faults, configuration faults and I/O faults via LEDs behind the front panel
- Compact enclosure in the design of the SIMATIC S7-1200
- Suitable for AS-Interface with 30 V voltage and AS-i Power24V: In combination with the optional DCM 1271 data decoupling module, a standard 24 V power supply unit can be used
- Configuration and diagnostics via the TIA Portal

Installation

The CM 1243-2 communications module is positioned to the left of the S7-1200 CPU and linked to the S7-1200 via lateral contacts.

It incorporates:

- Terminals for two AS-i cables (internally jumpered) via two screw terminals each
- One terminal for connection to the functional ground
- LEDs for indication of the operating state and fault statuses of the connected slaves

The screw terminals (included in the scope of supply) can be removed to facilitate installation

Function

The CM 1243-2 supports all specified functions of the AS-Interface Specification V3.0.

The values of the digital AS-i slaves can be addressed via the process image of the S7-1200. During configuration of the slaves in the TIA Portal, the values of the analog AS-i slaves can also be accessed directly in the process image.

It is also possible to exchange all data of the AS-i master and the connected AS-i slaves with the S7-1200 via the data record interface.

Changeover of the operating mode, automatic application of the slave configuration and the re-addressing of a connected AS-i slave can be implemented via the control panel of the CM 1243-2 in the TIA Portal.

The optional DCM 1271 data decoupling unit has an integrated detection unit for detecting ground faults on the AS-Interface cable. The integrated overload protection also disconnects the AS-Interface cable if the drive current required exceeds 4 A. For more information on DCM 1271, see page 3/135

Notes on security

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions constitute one element of such a concept.

For more information about industrial security, please visit <http://www.siemens.com/industrialsecurity>.

Configuration

The TIA Portal enables user-friendly configuration and diagnostics of the AS-i master and any connected slaves.

Alternatively, you can also apply the AS-Interface ACTUAL configuration at the "touch of a button" via the control panel integrated in the TIA Portal/STEP 7.

When operating on a S7-1200 CPU with firmware V4.0 or higher, firmware V1.1 (or higher) is required for the CM 1243-2 module.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CM 1243-2 communications module

6AG1243-2AA30-7XB0

(Extended temperature range and exposure to media)

- AS-Interface master for SIMATIC S7-1200
- Corresponds to AS-Interface Specification V3.0
- With screw terminals, removable terminals (included in the scope of supply)
- Dimensions (W × H × D/ mm)
30 × 100 × 75

Accessories

See S7-1200 CM 1243-2 communications module page 3/134

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS communication

SIPLUS CM 1243-5 communications modules

Overview



| DP-M | DP-S | FMS | PG/OP | S7 |
|------|------|-----|-------|----|
| ● | | | ● | ● |

The CM 1243-5 communications module is used to connect a SIMATIC S7-1200 controller to PROFIBUS as a DP master and has the following characteristics:

- PROFIBUS DPV1 master in accordance with IEC 61158
- Support of up to 16 PROFIBUS DP slaves
- Communication with other S7 controllers based on S7 communication
- Allows the connection of programming devices and operator panels with a PROFIBUS interface to S7-1200
- Module replacement without programming device supported
- Support of all standard baud rates from 9.6 kbps to 12 Mbps
- Compact industry-standard enclosure in S7-1200 design for mounting on a DIN rail
- Fast commissioning thanks to easy configuration using STEP 7 without additional programming overhead

The CM 1243-5 is intended for use in factory automation. Low-cost PROFIBUS-based automation solutions can be created on the basis of S7-1200 for optimal production.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

SIPLUS S7-1200 CM 1243-5

| | |
|--|---|
| Article No. | 6AG1-243-5DX30-2XE0 |
| Article No. based on | 6GK7-243-5DX30-0XE0 |
| Ambient temperature range | -25 ... +70 °C |
| Ambient conditions | Suitable for exceptional exposure to media (e.g. sulfur chlorine atmosphere). |
| Technical specifications | The technical data of the standard product applies except for the ambient conditions. |
| Ambient conditions | |
| Relative humidity | 100%, condensation/frost permissible. No commissioning if condensation present. |
| Biologically active substances, compliance with EN 60721-3-3 | Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation! |
| Chemically active substances, compliance with EN 60721-3-3 | Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation! |
| Mechanically active substances, compliance with EN 60721-3-3 | Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation! |
| Air pressure (depending on the highest positive temperature range specified) | 1 080 ... 795 hPa (-1 000 ... +2 000 m) see ambient temperature range 795 ... 658 hPa (+2 000 ... +3 500 m) derating 10 K 658 ... 540 hPa (+3 500 ... +5 000 m) derating 20 K |

For technical documentation on SIPLUS, see:
<http://www.siemens.com/siplus-extreme>

Ordering data

Article No.

SIPLUS CM 1243-5 communications module

(Extended temperature range and exposure to media)

Communications module for electrical connection of SIMATIC S7-1200 to PROFIBUS as a DPV1 master

6AG1243-5DX30-2XE0

Accessories

See SIMATIC S7-1200 CM 1243-5 communications module, page 3/137

Overview

The CP 1243-1 communications processor is used for connecting the SIMATIC S7-1200 to telecontrol centers via remote networks and telecontrol protocols (DNP3, IEC 60870-5-104, TeleControl Basic), and for safe communication via IP-based networks.

The CP has the following features:

- Ethernet-based connection to TeleControl Server Basic, e.g. via Internet
- Data transfer of measured values, control variables, or alarms optimized for telecontrol systems
- Automatic sending of alert emails
- Data buffering of up to 64,000 values ensures a secure database even with temporary connection failures
- Secure communication via VPN connections based on IPSec
- Access protection via Stateful Inspection Firewall
- Support of SINEMA Remote Connect with autoconfiguration
- Clearly laid out LED signaling for fast and easy diagnostics
- Compact industrial enclosure in S7-1200 design for mounting on a standard mounting rail
- Fast commissioning thanks to easy configuration using STEP 7

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS CP 1243-1 communications module**

(Extended temperature range and exposure to environmental substances)

Communications processor for connecting SIMATIC S7-1200 as an additional Ethernet interface and for connection to control centers via telecontrol protocols (DNP3, IEC 60870, TeleControl Basic), security (firewall, VPN)

6AG1243-1BX30-2AX0**Accessories**

See communications processor SIMATIC S7-1200 CP 1243-1, page 3/141

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS communication

SIPLUS CP 1243-1 communications modules**Technical specifications**

| | |
|--|--|
| Article number | 6AG1243-1BX30-2AX0 |
| Based on | 6GK7243-1BX30-0XE0 |
| product type designation | SIPLUS S7-1200 CP 1243-1 |
| ambient conditions | |
| ambient temperature | |
| • for vertical installation during operation | -40 ... +60 °C |
| • for horizontally arranged busbars during operation | -40 ... +70 °C |
| • during storage | -40 ... +70 °C |
| • during transport | -40 ... +70 °C |
| installation altitude at height above sea level maximum | 5 000 m |
| ambient condition relating to ambient temperature - air pressure - installation altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| relative humidity | |
| • with condensation acc. to IEC 60068-2-38 maximum | 100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation |
| chemical resistance to commercially available cooling lubricants | Yes; incl. airborne diesel and oil droplets |
| resistance to biologically active substances | |
| • conformity acc. to EN 60721-3-3 | Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request |
| • conformity acc. to EN 60721-3-6 | Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna) |

| | |
|--|---|
| Article number | 6AG1243-1BX30-2AX0 |
| Based on | 6GK7243-1BX30-0XE0 |
| product type designation | SIPLUS S7-1200 CP 1243-1 |
| resistance to chemically active substances | |
| • conformity acc. to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation. |
| • conformity acc. to EN 60721-3-6 | Yes |
| resistance to mechanically active substances | |
| • conformity acc. to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation. |
| • conformity acc. to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation. |
| coating for equipped printed circuit board acc. to EN 61086 | Yes; Class 2 for high availability |
| type of coating protection against pollution according to EN 60664-3 | Yes; Protection of the type 1 |
| type of test of the coating acc. to MIL-I-46058C | Yes; Coating discoloration during service life possible |
| product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies acc. to IPC-CC-830A | Yes; Conformal coating, class A |
| protection class IP | IP20 |

Overview

- Unmanaged switch for connecting a SIPLUS S7-1200 controller to an Industrial Ethernet network with a line, tree or star topology
- Multiplication of Ethernet interfaces on a SIPLUS S7-1200 controller for additional connection of up to three programming devices, operator controls, and further Ethernet nodes
- Simple, space-saving mounting on the SIPLUS S7-1200 mounting rail
- Low-cost solution for implementing small, local Ethernet networks
- Problem-free connection using RJ45 plugs
- Simple and fast status display via LEDs on the device
- Integral autocrossover function permits use of uncrossed connecting cables

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

SIPLUS NET CSM 1277

| | |
|-----------------------------|----------------------------|
| Article No. | 6AG1 277-1AA10-4AA0 |
| Article No. based on | 6GK7 277-1AA10-0AA0 |

| | |
|---------------------------|--------------|
| Ambient temperature range | 0 ... +60 °C |
|---------------------------|--------------|

Ordering data**Article No.****SIPLUS NET CSM 1277 compact switch module**

(Extended temperature range and exposure to media)

Unmanaged switch for connecting a SIPLUS S7-1200 controller and up to three further nodes to Industrial Ethernet with 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, LED diagnostics, S7-1200 module including electronic device manual on CD-ROM

6AG1277-1AA10-4AA0**Accessories**

See CSM 1277 unmanaged, page page 3/139


SIMATIC S7-1200 Basic Controllers

I/O modules

Connection system

System cabling for SIMATIC S7-1500 IO (25 mm), ET 200SP, S7-1200 and LOGO!

Overview

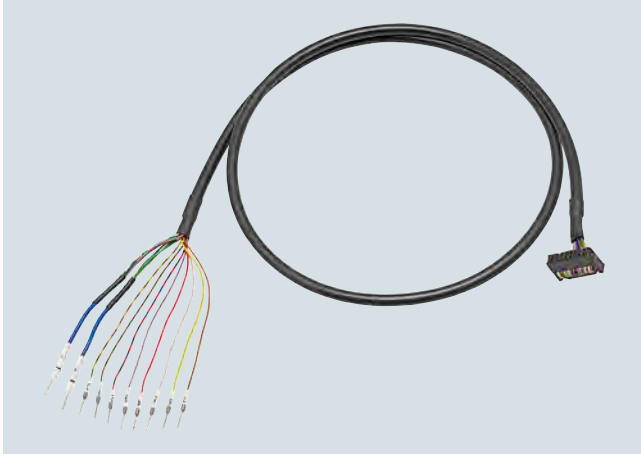

SIMATIC TOP connect universal connecting cable

The wiring of the

- SIMATIC S7-1500 IO (25 mm)
- SIMATIC ET 200SP
- SIMATIC S7-1200
- LOGO!

with the sensors/actuators is a significant factor with respect to time/cost overhead during configuration, control cabinet design, procurement and ease of servicing. The SIMATIC TOP connect system cabling makes connection easy, fast and secure.


Design

The unshielded universal connection cable is offered for a wide range of control cabinet concepts.

It comprises:

- 16-pin round cable with a core diameter of 0.14 mm², pre-assembled with wire end ferrules for connection to the controller:
 - labeled with "0" ... "7" for the control inputs/outputs
 - labeled with "M" for mass
 - labeled with "L+" for 24 V DC potential


- 16-pin IDC connector (insulation displacement) for connection to the SIMATIC TOP connect terminal modules for 8 I/Os:
 - 3-wire connection using the appropriate terminal module for quick, error-free, wiring
 - Galvanic isolation and adaptation using a coupling relay for easy implementation of potential groups in the system
 - High output current (up to 4 A), even for higher switching frequencies, using an optocoupler module (overload and short-circuit proof)
 - Implementation of isolating terminals using switch modules enabling individual signals to be measured
 - Channel-wise protection of I/Os using a fuse module with a thermal fuse

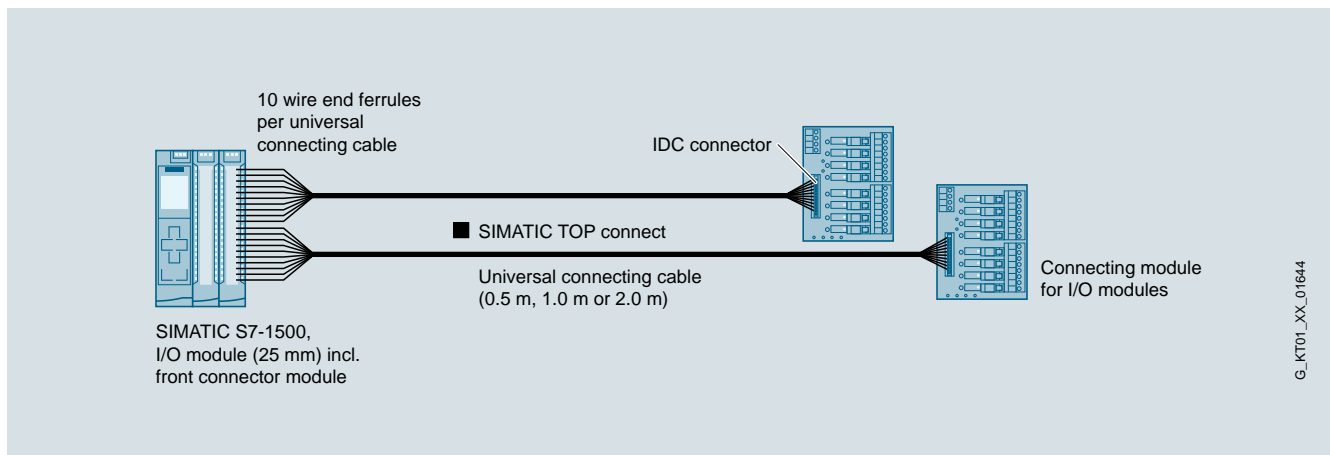

SIMATIC TOP connect universal connection cable

System cabling for SIMATIC S7-1500 IO (25 mm), ET 200SP, S7-1200 and LOGO!

Overview Universal connecting cable

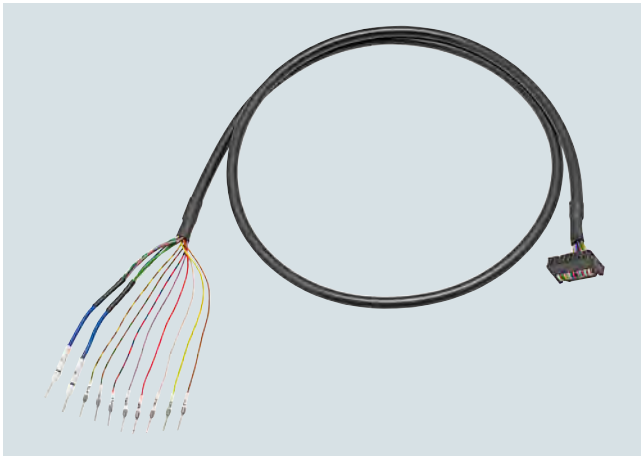

SIMATIC TOP connect universal connecting cable

The universal connecting cable constitutes the link between the standard connection of the SIMATIC S7-1500 IO (25 mm), SIMATIC ET 200SP, SIMATIC S7-1200 or LOGO! and the SIMATIC TOP connect terminal module. It transmits 8 signals and the supply voltage. The connecting cable is available in lengths of 0.5 m / 1.0 m / 2.0 m. the maximum technically feasible length is 30 m.

Ordering data

Article No.

Universal connecting cable for SIMATIC S7-1500 IO (25 mm), SIMATIC ET 200SP, SIMATIC S7-1200 and LOGO!

16 x 0.14 mm² unshielded

- 0.5 m
- 1.0 m
- 2.0 m

6ES7923-0BA50-0FB0

6ES7923-0BB00-0FB0

6ES7923-0BC00-0FB0

Overview Terminal modules

The terminal modules are used instead of conventional terminal blocks and act as the interface between the controller and signals from the field. All digital modules with 8 I/Os can be used.

Ordering data

Article No.

Terminal module TP1

For 1-wire connection, for 16-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0AA20-0AC0

6ES7924-0AA20-0AA0

6ES7924-0AA20-0BC0

6ES7924-0AA20-0BA0

Terminal module TP3

For 3-wire connection, for 16-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs
- Push-in terminals with LEDs and one isolating terminal per channel
- Screw-type terminals with LEDs and one isolating terminal per channel
- Push-in terminals with LEDs and fuse per channel
- Screw-type terminals with LEDs and fuse per channel

6ES7924-0CA20-0AC0

6ES7924-0CA20-0AA0

6ES7924-0CA20-0BC0

6ES7924-0CA20-0BA0

6ES7924-0CH20-0BC0

6ES7924-0CH20-0BA0

6ES7924-0CL20-0BC0

6ES7924-0CL20-0BA0

Terminal module TPRo

Relay module for 8 outputs, relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BD20-0BC0

6ES7924-0BD20-0BA0

Terminal module TPRI

Relay module for 8 inputs (1230 V AC), relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BE20-0BC0

6ES7924-0BE20-0BA0

Terminal module TPRI

Relay module for 8 inputs (110 V AC), relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BG20-0BC0

6ES7924-0BG20-0BA0

Terminal module TP0o

Optocoupler module for 8 outputs (max. 24 V DC/4 A)

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BF20-0BC0

6ES7924-0BF20-0BA0

SIMATIC S7-1200 Basic Controllers

I/O modules

Fail-safe I/O modules

SM 1226 fail-safe digital input**Overview**

- Digital inputs as supplement to the integral I/O of the CPUs
- Integrated into the overall automation for the implementation of safety-related requirements
- With integrated safety functions
- Communication with fail-safe CPUs via PROFIsafe mechanisms
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional inputs
- Operable exclusively in the central system

Ordering data**Article No.****SM 1226 fail-safe digital input signal module****6ES7226-6BA32-0XB0**

16 inputs, 24 V DC
(SIL 2/category 3/PL d) or
8 inputs 24 V DC (SIL 3/category 3
or category 4/PL e)
or a combination of both

Accessories**Terminal block (spare part)**

With 11 screws, tin-coated; 4 units

6ES7292-1AL30-0XA0**Front flap set (spare part)**

For modules with a width of 70 mm

6ES7291-1BB30-0XA0**STEP 7 Safety Advanced V17****Task:**

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O

Requirement:

STEP 7 Professional V17

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

Floating license for 1 user;
license key on USB flash drive

6ES7833-1FA17-0YA5

Floating license for 1 user;
license key for download¹⁾;
Email address required for delivery

6ES7833-1FA17-0YH5**STEP 7 Safety Basic V17****Task:**

Engineering tool for configuring fail-safe user programs for SIMATIC S7-1200 FC

Requirement:

STEP 7 Basic V17 and higher

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

Floating license for 1 user;
license key on USB flash drive

6ES7833-1FB17-0YA5

Floating license for 1 user;
license key for download¹⁾;
email address required for delivery

6ES7833-1FB17-0YH5

¹⁾ For up-to-date information and download availability, see:
<http://www.siemens.com/tia-online-software-delivery>

Technical specifications

| | |
|--|---|
| Article number | 6ES7226-6BA32-0XB0 Digital Input SM 1226, F-DI 16x 24VDC |
| General information | |
| Product type designation | SM 1226, F-DI 16x24 V DC |
| Supply voltage | |
| Rated value (DC) | 24 V |
| Input current | |
| from backplane bus 5 V DC, max. | 155 mA; Current consumption (SM Bus, 5 V DC): 155 mA |
| Digital inputs | |
| <ul style="list-style-type: none"> from load voltage L+ (without load), max. | 130 mA; 130 mA + 6 mA / input used + any Vs1/Vs2 current used |
| Digital inputs | |
| Number of digital inputs | 16; 16 (1oo1) or 8 (1oo2); Note: You can individually assign each pair of inputs "a.x" and "b.x" as a single (1oo2)-channel or as 2 separate (1oo1)-channels |
| horizontal installation | |
| - up to 50 °C, max. | 16; 16 inputs at 55 °C horizontal |
| vertical installation | |
| - up to 40 °C, max. | 16; 16 inputs at 45 °C vertical |
| Input voltage | |
| <ul style="list-style-type: none"> for signal "0" for signal "1" | -30 V DC to +5 V DC 15 V DC to 30 V DC |
| Input current | |
| <ul style="list-style-type: none"> for signal "0", max. (permissible quiescent current) | 0.5 mA |
| Input delay (for rated value of input voltage) | |
| for standard inputs | |
| - parameterizable | Yes; 0.8 / 1.6 / 3.2 / 6.4 / 12.8 ms |
| Diagnostics indication LED | |
| <ul style="list-style-type: none"> for status of the inputs | Yes |

| | |
|---|--|
| Article number | 6ES7226-6BA32-0XB0 Digital Input SM 1226, F-DI 16x 24VDC |
| Standards, approvals, certificates | |
| CE mark | Yes |
| cULus | Yes |
| FM approval | Yes |
| Highest safety class achievable in safety mode | |
| <ul style="list-style-type: none"> Performance level according to ISO 13849-1 SIL acc. to IEC 61508 | 1-channel, Category 3, PL d; 2-channel, Category 3 or 4, PL e SIL 2 (single-channel), SIL 3 (two-channel) |
| Ambient conditions | |
| Ambient temperature during operation | |
| <ul style="list-style-type: none"> min. max. | 0 °C 55 °C |
| Mechanics/material | |
| Enclosure material (front) | |
| <ul style="list-style-type: none"> Plastic | Yes |
| Dimensions | |
| Width | 70 mm |
| Height | 100 mm |
| Depth | 75 mm |
| Weights | |
| Weight, approx. | 250 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

Fail-safe I/O modules

SM 1226 fail-safe digital output

Overview



- Digital outputs as a supplement to the integral I/O of the CPUs
- Integrated into the overall automation for the implementation of safety-related requirements
- With integrated safety functions
- Communication with fail-safe CPUs via PROFIsafe mechanisms
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional outputs
- Operable exclusively in the central system

Ordering data

Article No.

SM 1226 fail-safe digital output signal module **6ES7226-6DA32-0XB0**

4 outputs; 24 V DC, switching to P/M potential

Accessories

Terminal block (spare part)

With 11 screws, tin-coated; 4 units

6ES7292-1AL30-0XA0

Front flap set (spare part)

For modules with a width of 70 mm

6ES7291-1BB30-0XA0

STEP 7 Safety Advanced V17

Task:

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco

Requirement:

STEP 7 Professional V17

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

Floating license for 1 user;
license key on USB flash drive

6ES7833-1FA17-0YA5

Floating license for 1 user;
license key for download¹⁾;
Email address required for delivery

6ES7833-1FA17-0YH5

STEP 7 Safety Basic V17

Task:

Engineering tool for configuring fail-safe user programs for SIMATIC S7-1200 FC

Requirement:

STEP 7 Basic V17 and higher

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

Floating license for 1 user;
license key on USB flash drive

6ES7833-1FB17-0YA5

Floating license for 1 user;
license key for download¹⁾;
email address required for delivery

6ES7833-1FB17-0YH5

¹⁾ For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

Technical specifications

| | |
|--|---|
| Article number | 6ES7226-6DA32-0XB0 Digital Output SM 1226, F-DQ 4x 24VDC |
| General information | |
| Product type designation | SM 1226 F-DQ 4x 24 VDC |
| Input current | |
| from backplane bus 5 V DC, max. | 125 mA |
| Digital outputs | |
| • from load voltage L+, max. | 170 mA |
| Digital outputs | |
| Number of digital outputs | 4 |
| • in groups of | 1 |
| Short-circuit protection | Yes |
| Switching capacity of the outputs | |
| • with resistive load, max. | 30 Hz |
| • on lamp load, max. | 10 Hz |
| Output voltage | |
| • Rated value (DC) | 24 V |
| Output current | |
| • for signal "1" rated value | 2 A |
| • for signal "0" residual current, max. | P-switch: 0.5 mA, maximum; M-switch: 0.5 mA, maximum |
| Diagnostics indication LED | |
| • for status of the outputs | Yes |

| | |
|---|---|
| Article number | 6ES7226-6DA32-0XB0 Digital Output SM 1226, F-DQ 4x 24VDC |
| Standards, approvals, certificates | |
| CE mark | Yes |
| cULus | Yes |
| FM approval | Yes |
| Highest safety class achievable in safety mode | |
| • Performance level according to ISO 13849-1 | Category 4, PL e |
| • SIL acc. to IEC 61508 | SIL 3 |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | 0 °C |
| • max. | 55 °C |
| Mechanics/material | |
| Enclosure material (front) | |
| • Plastic | Yes |
| Dimensions | |
| Width | 70 mm |
| Height | 100 mm |
| Depth | 75 mm |
| Weights | |
| Weight, approx. | 270 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

Fail-safe I/O modules

SM 1226 fail-safe relay output**Overview**

- Relay outputs as a supplement to the integral I/O of the CPUs
- Integrated into the overall automation for the implementation of safety-related requirements
- With integrated safety functions
- Communication with fail-safe CPUs via PROFIsafe mechanisms
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional outputs
- Operable exclusively in the central system

Ordering data**Article No.**

SM 1226 fail-safe relay output signal module **6ES7226-6RA32-0XB0**

2 relay outputs

Accessories**Terminal block (spare part)**

With 11 screws, tin-coated, coded; 4 units

6ES7292-1AL40-0XA0**Front flap set (spare part)**

For modules with a width of 70 mm

6ES7291-1BB30-0XA0**STEP 7 Safety Advanced V17****Task:**

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco

Requirement:

STEP 7 Professional V17

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

Floating license for 1 user; license key on USB flash drive

6ES7833-1FA17-0YA5Floating license for 1 user; license key for download¹⁾; Email address required for delivery**6ES7833-1FA17-0YH5****STEP 7 Safety Basic V17****Task:**

Engineering tool for configuring fail-safe user programs for SIMATIC S7-1200 FC

Requirement:

STEP 7 Basic V17 and higher

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

Floating license for 1 user; license key on USB flash drive

6ES7833-1FB17-0YA5Floating license for 1 user; license key for download¹⁾; email address required for delivery**6ES7833-1FB17-0YH5**

¹⁾ For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

Technical specifications

| | |
|---------------------------------------|---|
| Article number | 6ES7226-6RA32-0XB0 Digital Output SM 1226, F-DQ 2x Relay |
| General information | |
| Product type designation | SM 1226, F-DQ 2x relay/5 A |
| Input current | |
| from backplane bus 5 V DC, max. | 120 mA |
| Digital outputs | |
| • from load voltage L+, max. | 300 mA |
| Digital outputs | |
| Number of digital outputs | 2 |
| Short-circuit protection | No |
| Output voltage | |
| • Rated value (DC) | 5 V DC to 30 V DC |
| • Rated value (AC) | 5 V AC to 250 V AC |
| Relay outputs | |
| • Number of relay outputs | 2; 2 circuits per output |
| Switching capacity of contacts | |
| - with inductive load, max. | 0.1 Hz, accordance with IEC 60947-5-1, DC-13; 2 Hz, accordance with IEC 60947-5-1, AC-15 |
| - with resistive load, max. | 2 Hz |
| Diagnostics indication LED | |
| • for status of the outputs | Yes |

| | |
|---|---|
| Article number | 6ES7226-6RA32-0XB0 Digital Output SM 1226, F-DQ 2x Relay |
| Standards, approvals, certificates | |
| CE mark | Yes |
| cULus | Yes |
| FM approval | Yes |
| Highest safety class achievable in safety mode | |
| • Performance level according to ISO 13849-1 | Category 4, PL e |
| • SIL acc. to IEC 61508 | SIL 3 |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | 0 °C |
| • max. | 55 °C |
| Mechanics/material | |
| Enclosure material (front) | |
| • Plastic | Yes |
| Dimensions | |
| Width | 70 mm |
| Height | 100 mm |
| Depth | 75 mm |
| Weights | |
| Weight, approx. | 300 g |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS Fail-safe digital inputs and outputs

SIPLUS SM 1226 fail-safe digital input

Overview



- Digital inputs as supplement to the integral I/O of the CPUs
- Integrated into the overall automation for the implementation of safety-related requirements
- With integrated safety functions
- Communication with fail-safe CPUs via PROFIsafe mechanisms
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional inputs
- Operable exclusively in the central system

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SM 1226 fail-safe digital input signal module

(Extended temperature range and environmental stress)

16 inputs, 24 V DC (SIL 2/category 3/PL d) or 8 inputs 24 V DC (SIL 3/category 3 or category 4/PL e) or a combination of both

Accessories

6AG1226-6BA32-5XB0

See SIMATIC SM 1226 fail-safe digital input signal module, page 3/164

Technical specifications

| | |
|---|---|
| Article number | 6AG1226-6BA32-5XB0 |
| Based on | 6ES7226-6BA32-0XB0 SIPLUS S7-1200 SM 1226 F-DI 16x24VDC |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -25 °C; = Tmin |
| • max. | 55 °C; = Tmax |
| Altitude during operation relating to sea level | |
| • Installation altitude above sea level, max. | 2 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) |
| Relative humidity | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | |
| Coolants and lubricants | |
| - Resistant to commercially available coolants and lubricants | Yes |
| Use in stationary industrial systems | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust; * |
| Use on ships/at sea | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS Fail-safe digital inputs and outputs

SIPLUS SM 1226 fail-safe digital output

Overview



- Digital outputs as a supplement to the integral I/O of the CPUs
- Integrated into the overall automation for the implementation of safety-related requirements
- With integrated safety functions
- Communication with fail-safe CPUs via PROFIsafe mechanisms
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional outputs
- Operable exclusively in the central system

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SM 1226 fail-safe digital output module

4 outputs; 24 V DC, switching to P/M potential

Accessories

6AG1226-6DA32-5XB0

See SIMATIC SM 1226 fail-safe digital output signal module, page 3/166

Technical specifications

| | |
|---|---|
| Article number | 6AG1226-6DA32-5XB0 |
| Based on | 6ES7226-6DA32-0XB0 SIPLUS S7-1200 SM 1226 F-DQ 4x24VDC |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -25 °C; = Tmin |
| • max. | 55 °C; = Tmax |
| Altitude during operation relating to sea level | |
| • Installation altitude above sea level, max. | 2 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) |
| Relative humidity | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | |
| Coolants and lubricants | |
| - Resistant to commercially available coolants and lubricants | Yes |
| Use in stationary industrial systems | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust; * |
| Use on ships/at sea | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS Fail-safe digital inputs and outputs

SIPLUS SM 1226 fail-safe relay output**Overview**

- Relay outputs as a supplement to the integral I/O of the CPUs
- Integrated into the overall automation for the implementation of safety-related requirements
- With integrated safety functions
- Communication with fail-safe CPUs via PROFIsafe mechanisms
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional outputs
- Operable exclusively in the central system

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS SM 1226 fail-safe relay output signal module****6AG1226-6RA32-5XB0**

2 relay outputs

Accessories

See SIMATIC SM 1226 fail-safe relay output signal module, page 3/168

Technical specifications

| | |
|---|---|
| Article number | 6AG1226-6RA32-5XB0 |
| Based on | 6ES7226-6RA32-0XB0 SIPLUS S7-1200 SM 1226 F-DQ 2xRelay |
| Ambient conditions | |
| Ambient temperature during operation | |
| • min. | -25 °C; = Tmin |
| • max. | 55 °C; = Tmax |
| Altitude during operation relating to sea level | |
| • Installation altitude above sea level, max. | 2 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) |
| Relative humidity | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | |
| Coolants and lubricants | |
| - Resistant to commercially available coolants and lubricants | Yes |
| Use in stationary industrial systems | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust; * |
| Use on ships/at sea | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A |

Overview



In terms of design and functionality, the SIMATIC PM 1207 single-phase load power supply (PM = power module) with automatic range selection of the input voltage is an optimal match to the SIMATIC S7-1200 PLC. It provides the supply to CPUs with 24 V input as well as to signal modules, and to 24 V loads connected to the modules. Comprehensive certifications such as UL and DNV GL enable universal use.

Ordering data

Article No.

SIMATIC S7-1200 PM 1207

Input: 120/230 V AC
Output: 24 V DC/2.5 A

6EP1332-1SH71

Technical specifications

| | |
|--|---|
| Article number | 6EP1332-1SH71 |
| Product | S7-1200 PM1207 |
| Power supply, type | 24 V/2.5 A |
| Input | |
| Input | 1-phase AC |
| • Note | Automatic range selection |
| supply voltage | |
| • 1 at AC rated value | 120 V |
| • 2 at AC rated value | 230 V |
| input voltage | |
| • 1 at AC | 85 ... 132 V |
| • 2 at AC | 176 ... 264 V |
| Wide-range input | No |
| Overvoltage resistance | 2.3 × Vin rated, 1.3 ms |
| Mains buffering | at Vin = 93/187 V |
| Mains buffering at Iout rated, min. | 20 ms; at Vin = 93/187 V |
| Rated line frequency 1 | 50 Hz |
| Rated line frequency 2 | 60 Hz |
| Rated line range | 47 ... 63 Hz |
| input current | |
| • at rated input voltage 120 V | 1.2 A |
| • at rated input voltage 230 V | 0.67 A |
| Switch-on current limiting (+25 °C), max. | 13 A |
| duration of inrush current limiting at 25 °C | |
| • maximum | 3 ms |
| I ² t, max. | 0.5 A ² ·s |
| Built-in incoming fuse | T 3, 15 A/250 V (not accessible) |
| Protection in the mains power input (IEC 898) | Recommended miniature circuit breaker: 16 A characteristic B or 10 A characteristic C |
| Output | |
| Output | Controlled, isolated DC voltage |
| Rated voltage U _{out} DC output voltage at output 1 at DC rated value | 24 V |
| Total tolerance, static ± | 3 % |
| Static mains compensation, approx. | 0.1 % |
| Static load balancing, approx. | 0.2 % |
| Residual ripple peak-peak, max. | 150 mV |
| Spikes peak-peak, max. (bandwidth: 20 MHz) | 240 mV |
| product function output voltage adjustable | No |
| Output voltage setting | - |
| Status display | Green LED for 24 V OK |
| On/off behavior | No overshoot of Vout (soft start) |
| Startup delay, max. | 6 s; 2 s at 230 V, 6 s at 120 V |
| Voltage rise, typ. | 10 ms |
| Rated current value Iout rated | 2.5 A |

SIMATIC S7-1200 Basic Controllers

Power supplies

1-phase, 24 V DC (for S7-1200)

Technical specifications

| | |
|---|---|
| Article number | 6EP1332-1SH71 |
| Product | S7-1200 PM1207 |
| Power supply, type | 24 V/2.5 A |
| Current range | 0 ... 2.5 A |
| supplied active power typical | 60 W |
| short-term overload current | |
| • on short-circuiting during the start-up typical | 6 A |
| • at short-circuit during operation typical | 6 A |
| duration of overloading capability for excess current | |
| • on short-circuiting during the start-up | 100 ms |
| • at short-circuit during operation | 100 ms |
| Parallel switching for enhanced performance | Yes |
| Numbers of parallel switchable units for enhanced performance | 2 |
| Efficiency | |
| Efficiency at U_{out} rated, I_{out} rated, approx. | 83 % |
| Power loss at U_{out} rated, I_{out} rated, approx. | 12 W |
| Closed-loop control | |
| Dynamic mains compensation (U_{in} rated ± 15 %), max. | 0.3 % |
| Dynamic load smoothing (I_{out} : 50/100/50 %), $U_{out} \pm$ typ. | 3 % |
| Load step setting time 50 to 100%, typ. | 5 ms |
| Load step setting time 100 to 50%, typ. | 5 ms |
| setting time maximum | 5 ms |
| Protection and monitoring | |
| Output overvoltage protection | < 33 V |
| Current limitation, typ. | 2.65 A |
| property of the output short-circuit proof | Yes |
| Short-circuit protection | Constant current characteristic |
| enduring short circuit current RMS value | |
| • typical | 2.7 A |
| Overload/short-circuit indicator | - |
| Safety | |
| Primary/secondary isolation | Yes |
| galvanic isolation | Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178 |
| Protection class | Class I |
| leakage current | |
| • maximum | 3.5 mA |
| Degree of protection (EN 60529) | IP20 |

| | |
|--|---|
| Article number | 6EP1332-1SH71 |
| Product | S7-1200 PM1207 |
| Power supply, type | 24 V/2.5 A |
| Approvals | |
| CE mark | Yes |
| UL/cUL (CSA) approval | cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950-1, CSA C22.2 No. 60950-1) File E151273 |
| Explosion protection | ATEX (EX) II 3G Ex nA II T4; cULus (ISA 12.12.01, CSA C22.2 No.213) Class I, Div. 2, Group ABCD, T4, File E330455 |
| certificate of suitability NEC Class 2 | No |
| FM approval | Class I, Div. 2, Group ABCD, T4 |
| CB approval | Yes |
| certificate of suitability EAC approval | Yes |
| Marine approval | ABS, BV, DNV GL, LRS, NK |
| EMC | |
| Emitted interference | EN 55022 Class B |
| Supply harmonics limitation | not applicable |
| Noise immunity | EN 61000-6-2 |
| environmental conditions | |
| ambient temperature | |
| • during operation | 0 ... 60 °C |
| - Note | with natural convection |
| • during transport | -40 ... +85 °C |
| • during storage | -40 ... +85 °C |
| Humidity class according to EN 60721 | Climate class 3K3, 5 ... 95% no condensation |
| Mechanics | |
| Connection technology | screw-type terminals |
| Connections | |
| • Supply input | L, N, PE: 1 screw terminal each for 0.5 ... 2.5 mm ² |
| • Output | L+, M: 2 screw terminals each for 0.5 ... 2.5 mm ² |
| • Auxiliary | - |
| width of the enclosure | 70 mm |
| height of the enclosure | 100 mm |
| depth of the enclosure | 75 mm |
| required spacing | |
| • top | 20 mm |
| • bottom | 20 mm |
| • left | 0 mm |
| • right | 0 mm |
| Weight, approx. | 0.3 kg |
| product feature of the enclosure housing can be lined up | Yes |
| Installation | Snaps onto DIN rail EN 60715 35x7.5/15, wall mounting |
| MTBF at 40 °C | 1 492 537 h |
| other information | Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified) |

Overview



- Stabilized power supply for SIPLUS S7-1200
- In the S7-1200 design
- Input 120/230 V AC, output 24 V DC, 2.5 A (derating: 1.5 A above 60 °C)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

| SIPLUS power supply PM 1207 | | |
|--|--|---------------------|
| Article No. | 6AG1 332-1SH71-4AA0 | 6AG1 332-1SH71-7AA0 |
| Article No. based on | 6EP1 332-1SH71 | |
| Ambient temperature range | 0 ... +60° C | -40 ... +70° C |
| Conformal coating | Coating of the printed circuit boards and the electronic components | |
| Technical specifications | The technical data of the standard product applies except for the ambient conditions. | |
| Ambient conditions | | |
| Relative humidity | 100%, condensation/frost permissible. No commissioning if condensation present. | |
| Biologically active substances, compliance with EN 60721-3-3 | Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation! | |
| Chemically active substances, compliance with EN 60721-3-3 | Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation! | |
| Mechanically active substances, compliance with EN 60721-3-3 | Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation! | |
| Air pressure (depending on the highest positive temperature range specified) | 1 080 ... 795 hPa (-1 000 ... +2 000 m) see ambient temperature range 795 ... 658 hPa (+2 000 ... +3 500 m) derating 10 K 658 ... 540 hPa (+3 500 ... +5 000 m) derating 20 K | |

For technical documentation on SIPLUS, see:
<http://www.siemens.com/siplus-extreme>

SIMATIC S7-1200 Basic Controllers

SIPLUS power supplies

1-phase, 24 V DC (for SIPLUS S7-1200)

Ordering data**Article No.****SIPLUS S7-1200 PM 1207
power supply**(Extended temperature range
and exposure to media)Input 120/230 V AC,
output 24 V DC, 2.5 A;
derating from +55 °C to +70 °C
to 1.2 A output currentAmbient temperature
-25 ... +70 °CAmbient temperature
0 ... +60 °C**6AG1332-1SH71-7AA0****6AG1332-1SH71-4AA0****Technical specifications**

| | SIPLUS PM 1207 |
|---|--|
| Article No. | 6AG1332-1SH71-7AA0 6AG1332-1SH71-4AA0 |
| Article No. based on | 6EP1332-1SH71 |
| Input voltage, nominal value | 120/230 V AC (auto-switching) |
| • Range | 85 ... 132 V/176 ... 264 V AC |
| Mains buffering | > 20 ms (at 93/187 V) |
| Line frequency, nominal | 50/60 Hz |
| • Range | 47 ... 63 Hz |
| Input current, nominal value | 1.2/0.67 A |
| • Inrush current (25 °C) | < 13 A |
| • Recommended circuit-breaker | 16 A Charact. B, 10 A Charact. C |
| Output voltage, nominal value | 24 V DC |
| • Tolerance | ± 3% |
| • Residual ripple | < 150 mVpp |
| • Adjustment | No |
| Output current, nominal value | 2.5 A (derating: 1.5 A above 60 °C) |
| Efficiency at nominal values, approx. | 83% |
| Parallel operation | Yes, 2 units |
| Electronic short-circuit protection | Yes, automatic restart |
| Radio interference suppression (EN 55022) | Class B |
| Operating display | Green LED for "24 V o.k." |
| Supply-harmonics limitation (EN 61000-3-2) | Not applicable |
| Degree of protection (EN 60529) | IP20 |
| Protection class | Class 1 |
| Electric isolation | SELV acc. to EN 60950 and EN 50178 |
| Ambient temperature | 0 ... +60 °C -40 ... +70 °C |
| Transport and storage temperature | -40 ... +85 °C |
| Installation | DIN rail EN 60715 35x7.5/15 |
| Dimensions (W x H x D) in mm | 70 x 100 x 75 |
| Weight, approx. | 0.3 kg |
| Certifications | CE |

Overview**Basic Panels (2nd Generation)**

SIMATIC HMI Basic Panels (2nd Generation) with their fully developed HMI basic functions are the ideal entry-level series for simple HMI applications.

The device family offers panels with 4", 7", 9" and 12" displays, as well as combined key and touch operation.

The innovative high-resolution widescreen displays with 64 000 colors are also suitable for upright installation, and they can be dimmed down to 100%. The innovative operator interface with improved usability opens up a diverse range of options thanks to new controls and graphics. The new USB interface enables the connection of keyboard, mouse or barcode scanner, and supports the simple archiving of data on a USB flash drive as well as the manual backup and restoring of the complete panel.

The integrated Ethernet or RS 485/422 interface (version-specific) enables simple connection to the controller.

<http://www.siemens.com/basic-panels>

Ordering data**Article No.**

| Ordering data | Article No. |
|---|---|
| SIMATIC HMI Basic Panels (2nd Generation) | |
| Key and touch devices | |
| SIMATIC HMI KTP400 Basic Key/touch-screen operation; 4" TFT widescreen display, 65 536 colors, PROFINET interface | 6AV2123-2DB03-0AX0 |
| SIMATIC HMI TP400 Basic Keyless Touch screen operation; 4" TFT widescreen display, 65 536 colors, PROFINET interface | 6AV2143-6DB00-0AA0 |
| SIMATIC HMI KTP700 Basic Key/touch-screen operation; 7" TFT display, 65 536 colors, PROFINET interface | 6AV2123-2GB03-0AX0 |
| SIMATIC HMI KTP700 Basic DP Key/touch-screen operation; 7" TFT display, 65 536 colors, PROFIBUS interface | 6AV2123-2GA03-0AX0 |
| SIMATIC HMI TP700 Basic Keyless Touch screen operation; 7" TFT display, 65 536 colors, PROFINET interface | 6AV2143-6GB00-0AA0 |
| SIMATIC HMI KTP900 Basic Key/touch-screen operation; 9" TFT display, 65 536 colors, PROFINET interface | 6AV2123-2JB03-0AX0 |
| SIMATIC HMI TP900 Basic Keyless Touch screen operation; 9" TFT display, 65 536 colors, PROFINET interface | 6AV2143-6JB00-0AA0 |
| SIMATIC HMI KTP1200 Basic Key/touch-screen operation; 12" TFT display, 65 536 colors, PROFINET interface | 6AV2123-2MB03-0AX0 |
| SIMATIC HMI KTP1200 Basic DP Key/touch-screen operation; 12" TFT display, 65 536 colors, PROFIBUS interface | 6AV2123-2MA03-0AX0 |
| Starter kits | |
| Starter kit LOGO! + KP300 Basic mono PN | 6AV2132-0HA00-0AA1 |
| Starter kit LOGO! + KTP400 Basic | 6AV2132-0KA00-0AA1 |
| Starter kit LOGO! + KTP700 Basic Starter kits with a LOGO! consist of: • the respective SIMATIC HMI Basic Panel SIMATIC HMI KP300 Basic mono PN SIMATIC HMI KTP400 Basic SIMATIC HMI KTP700 Basic • LOGO! 12/24 RCE • LOGO! POWER 24 V 1,3 A • LOGO! SOFT COMFORT V7 • WINCC BASIC (TIA Portal) • Ethernet CAT5 cable, 2 m | 6AV2132-3GB00-0AA1 |
| Documentation Additional information on the manual for the Basic Panels is available on the Internet at: | http://support.automation.siemens.com |
| Accessories | See Catalog ST 80 / ST PC or Industry Mall |

SIMATIC S7-1200 Basic Controllers

Operator control and monitoring
Comfort Panels

Comfort Panels Standard devices

Overview



SIMATIC HMI Comfort Panels - Standard devices

- Excellent HMI functionality for demanding applications
- Widescreen TFT displays with 4", 7", 9", 12", 15", 19" and 22" diagonals (all 16 million colors) with up to 40% more visualization area as compared to the predecessor devices
- Integrated high-end functionality with archives, scripts, PDF/Word/Excel viewer, Internet Explorer, Media Player and Web Server
- Dimmable displays from 0 to 100% via PROFlenergy, via the HMI project or via a controller
- Modern industrial design, cast aluminum fronts for 7" upwards
- Upright installation for all touch devices
- Data security in the event of a power failure for the device and for the SIMATIC HMI memory card
- Innovative service and commissioning concept
- Maximum performance with short screen refresh times
- Suitable for extremely harsh industrial environments thanks to extended approvals such as ATEX 2/22 and marine approvals
- All versions can be used as an OPC UA client or as a server
- Key-operated devices with LED in every function key and new text input mechanism, similar to the keypads of mobile phones
- All keys have a service life of 2 million operations
- Configuring with the WinCC engineering software of the TIA Portal engineering framework

Note:

A 7" and a 15" Comfort Outdoor version are available. These devices have been specially designed for outdoor applications in difficult environments. Best display quality, even under sunlight, UV-resistant fronts and much more.

For more information, please go to:

<http://www.siemens.com/comfort-panels>

Ordering data

Article No.

| | |
|--|--|
| SIMATIC HMI Comfort Panels | |
| Key and touch devices | |
| SIMATIC HMI KTP400 Comfort | 6AV2124-2DC01-0AX0 |
| Key/touch-screen operation; 4" widescreen display | |
| Touch devices | |
| SIMATIC HMI TP700 Comfort | 6AV2124-0GC01-0AX0 |
| Touch-screen operation; 7" widescreen display | |
| SIMATIC HMI TP900 Comfort | 6AV2124-0JC01-0AX0 |
| Touch-screen operation; 9" widescreen display | |
| SIMATIC HMI TP1200 Comfort | 6AV2124-0MC01-0AX0 |
| Touch-screen operation; 12" widescreen display | |
| SIMATIC HMI TP1500 Comfort | 6AV2124-0QC02-0AX1 |
| Touch-screen operation; 15" widescreen display | |
| SIMATIC HMI TP1900 Comfort | 6AV2124-0UC02-0AX1 |
| Touch-screen operation; 19" widescreen display | |
| SIMATIC HMI TP2200 Comfort | 6AV2124-0XC02-0AX1 |
| Touch-screen operation; 22" widescreen display | |
| Key devices | |
| SIMATIC HMI KP400 Comfort | 6AV2124-1DC01-0AX0 |
| Key operation; 4" widescreen display | |
| SIMATIC HMI KP700 Comfort | 6AV2124-1GC01-0AX0 |
| Key operation; 7" widescreen display | |
| SIMATIC HMI KP900 Comfort | 6AV2124-1JC01-0AX0 |
| Key operation; 9" widescreen display | |
| SIMATIC HMI KP1200 Comfort | 6AV2124-1MC01-0AX0 |
| Key operation; 12" widescreen display | |
| SIMATIC HMI KP1500 Comfort | 6AV2124-1QC02-0AX1 |
| Key operation; 15" widescreen display | |
| Accessories | See Catalog ST 80 / ST PC or Industry Mall |

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Basic Panels (2nd Generation)

Overview



With their fully developed HMI basic functions, 2nd Generation SIPLUS Basic Panels are the ideal entry-level series for simple HMI applications.

The device family offers panels with 4", 7", 9" and 12" displays, as well as combined key and touch operation.

The innovative high-resolution widescreen displays with 64 000 colors are also suitable for upright installation, and they can be dimmed down to 100%. The innovative operator interface with improved usability opens up a diverse range of options thanks to new controls and graphics. The new USB interface enables the connection of keyboard, mouse or barcode scanner, and supports the simple archiving of data on a USB flash drive.

The integrated Ethernet or RS 485/422 interface (version-specific) enables simple connection to the controller.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Technical documentation on SIPLUS can be found here: <http://www.siemens.com/siplus-extreme>

Ordering data

Article No.

SIPLUS HMI Basic Panels, Key and Touch

SIPLUS HMI KTP400 Basic

6AG1123-2DB03-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C

SIPLUS HMI KTP700 Basic

6AG1123-2GB03-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +50 °C

SIPLUS HMI KTP700 Basic DP

6AG1123-2GA03-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +50 °C

SIPLUS HMI KTP900 Basic

6AG1123-2JB03-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +50 °C

SIPLUS HMI KTP1200 Basic

6AG1123-2MB03-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -10 ... +50 °C

SIPLUS HMI KTP1200 Basic DP

6AG1123-2MA03-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -10 ... +50 °C

Accessories

See Catalog ST 80 / ST PC or Industry Mall

Technical specifications

| Article number | 6AG1123-2DB03-2AX0 | 6AG1123-2GB03-2AX0 | 6AG1123-2GA03-2AX0 |
|---|---|---|---|
| Based on | 6AV2123-2DB03-0AX0 SIPLUS HMI KTP400 BASIC | 6AV2123-2GB03-0AX0 SIPLUS HMI KTP700 BASIC | 6AV2123-2GA03-0AX0 SIPLUS HMI KTP700 BASIC DP |
| Ambient conditions | | | |
| Suited for indoor use | | Yes | Yes |
| Suited for outdoor use | | No | No |
| Ambient temperature during operation | | | |
| • Operation (vertical installation) | | | |
| - For vertical installation, min. | -20 °C; = Tmin | -20 °C | -20 °C; = Tmin |
| - For vertical installation, max. | 60 °C; = Tmax | 50 °C | 50 °C |
| Altitude during operation relating to sea level | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning when condensation present), vertical mounting position |

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Basic Panels (2nd Generation)

Technical specifications

| Article number | 6AG1123-2DB03-2AX0 | 6AG1123-2GB03-2AX0 | 6AG1123-2GA03-2AX0 |
|---|---|---|---|
| Based on | 6AV2123-2DB03-0AX0 SIPLUS HMI KTP400 BASIC | 6AV2123-2GB03-0AX0 SIPLUS HMI KTP700 BASIC | 6AV2123-2GA03-0AX0 SIPLUS HMI KTP700 BASIC DP |
| Resistance | | | |
| Coolants and lubricants | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |
| Article number | 6AG1123-2JB03-2AX0 | 6AG1123-2MB03-2AX0 | 6AG1123-2MA03-2AX0 |
| Based on | 6AV2123-2JB03-0AX0 SIPLUS HMI KTP900 BASIC | 6AV2123-2MB03-0AX0 SIPLUS HMI KTP1200 BASIC | 6AV2123-2MA03-0AX0 SIPLUS HMI KTP1200 BASIC DP |
| Ambient conditions | | | |
| Suited for indoor use | Yes | Yes | Yes |
| Suited for outdoor use | No | No | No |
| Ambient temperature during operation | | | |
| • Operation (vertical installation) | | | |
| - For vertical installation, min. | -20 °C | -10 °C; = Tmin | -10 °C; = Tmin |
| - For vertical installation, max. | 50 °C | 50 °C | 50 °C |

Technical specifications

| Article number | 6AG1123-2JB03-2AX0 | 6AG1123-2MB03-2AX0 | 6AG1123-2MA03-2AX0 |
|--|--|--|--|
| Based on | 6AV2123-2JB03-0AX0 SIPLUS HMI KTP900 BASIC | 6AV2123-2MB03-0AX0 SIPLUS HMI KTP1200 BASIC | 6AV2123-2MA03-0AX0 SIPLUS HMI KTP1200 BASIC DP |
| Altitude during operation relating to sea level <ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude | 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity <ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation | 100 %; RH incl. condensation/frost (no commissioning when condensation present), vertical mounting position |
| Resistance | | | |
| Coolants and lubricants <ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Basic Panels (1st Generation)

Overview



- Ideal entry-level series of 3.8" to 15" for operating and monitoring compact machines and systems
- Clear process representation through the use of full-graphic displays
- Intuitive operation via touch and tactile function keys
- Equipped with all the necessary basic functions such as reporting, recipe management, curve representation, vector graphics, and language selection
- Easy connection to the controller via integrated Ethernet interface or a separate version with RS 485/422

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Technical documentation on SIPLUS can be found here:
<http://www.siemens.com/siplus-extreme>

Ordering data

Article No.

SIPLUS HMI KP300 Basic mono PN

6AG1647-0AH11-2AX0

For areas with extreme exposure to media (conformal coating);
 ambient temperature -25 ... +60 °C

SIPLUS HMI KTP400 Basic mono PN

6AG1647-0AA11-2AX0

For areas with extreme exposure to media (conformal coating);
 ambient temperature -10 ... +60 °C

Accessories

See Catalog ST 80 / ST PC or Industry Mall

Technical specifications

| Article number | 6AG1647-0AH11-2AX0 | 6AG1647-0AA11-2AX0 |
|---|---|---|
| Based on | 6AV6647-0AH11-3AX0 SIPLUS HMI KP300 BASIC MONO PN 3,6" | 6AV6647-0AA11-3AX0 SIPLUS KTP400 BASIC MONO PN 3,8" |
| Ambient conditions | | |
| Suited for indoor use | Yes | Yes |
| Suited for outdoor use | No | No |
| Ambient temperature during operation | | |
| • Operation (vertical installation) | | |
| - For vertical installation, min. | -25 °C | -10 °C |
| - For vertical installation, max. | 60 °C | 60 °C |
| Altitude during operation relating to sea level | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | |
| Coolants and lubricants | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | |
| Remark | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Comfort Panels Standard

Overview



- Excellent HMI functionality for demanding applications
- Widescreen TFT displays with 4", 7", 9", 12", 15", 19" and 22" diagonals (all 16 million colors) with up to 40% more visualization area as compared to the predecessor devices
- Integrated high-end functionality with archives, scripts, PDF/Word/Excel viewer, Internet Explorer, Media Player
- Dimmable displays from 0 to 100% via PROFIenergy, via the HMI project or via a controller
- Modern industrial design, cast aluminum fronts for 7" upwards
- Upright installation for all touch devices
- Optimal selection option: seven touch and five key versions are available
- Data security in the event of a power failure for the device and for the SIMATIC HMI memory card
- Innovative service and commissioning concept through second SD card (automatic backup)
- Easy project transfer via standard cable (standard Ethernet cable, standard USB cable)
- Maximum performance with short screen refresh times
- Suitable for extremely harsh industrial environments thanks to extended approvals such as ATEX 2/22
- Wide range of communication options: PROFIBUS and PROFINET onboard; 2x PROFINET with integrated switch for 7" models or larger; plus 1 additional PROFINET with Gigabit support for 15" models or larger
- All variants can be used as an OPC UA client or as an OPC DA server
- Key-operated devices with LED in every function key and new text input mechanism, similar to the keypads of mobile phones
- Key-operated devices with stamped keys for optimum tactile feedback
- All keys have a service life of 2 million operations
- Configuring with the WinCC engineering software of the TIA Portal

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

| | |
|--|--|
| SIPLUS HMI Comfort Panels, Keys and Touch | |
| SIPLUS HMI KTP400 Comfort | 6AG1124-2DC01-4AX0 |
| SIPLUS HMI Comfort Panels, Touch | |
| SIPLUS HMI TP700 Comfort | 6AG1124-0GC01-4AX0 |
| SIPLUS HMI TP900 Comfort | 6AG1124-0JC01-4AX0 |
| SIPLUS HMI TP1200 Comfort | 6AG1124-0MC01-4AX0 |
| SIPLUS HMI TP1500 Comfort | 6AG1124-0QC02-4AX1 |
| SIPLUS HMI TP1900 Comfort | 6AG1124-0UC02-4AX1 |
| SIPLUS HMI TP2200 Comfort | 6AG1124-0XC02-4AX1 |
| SIPLUS HMI Comfort Panels, Keys | |
| SIPLUS HMI KP400 Comfort | 6AG1124-1DC01-4AX0 |
| SIPLUS HMI KP700 Comfort | 6AG1124-1GC01-4AX0 |
| SIPLUS HMI KP900 Comfort | 6AG1124-1JC01-4AX0 |
| SIPLUS HMI KP1200 Comfort | 6AG1124-1MC01-4AX0 |
| SIPLUS HMI KP1500 Comfort | 6AG1124-1QC02-4AX1 |
| Accessories | See Catalog ST 80 / ST PC or Industry Mall |

Technical specifications

| Article number | 6AG1124-2DC01-4AX0 | 6AG1124-0GC01-4AX0 | 6AG1124-0JC01-4AX0 | 6AG1124-0MC01-4AX0 |
|---|---|---|---|---|
| Based on | 6AV2124-2DC01-0AX0 SIPLUS HMI KTP400 COMFORT | 6AV2124-0GC01-0AX0 SIPLUS HMI TP700 COMFORT | 6AV2124-0JC01-0AX0 SIPLUS HMI TP900 COMFORT | 6AV2124-0MC01-0AX0 SIPLUS HMI TP1200 COMFORT |
| Ambient conditions | | | | |
| Suited for indoor use | Yes | Yes | Yes | Yes |
| Suited for outdoor use | No | No | No | No |
| Ambient temperature during operation | | | | |
| • Operation (vertical installation) | | | | |
| - For vertical installation, min. | 0 °C; = Tmin | 0 °C; = Tmin | 0 °C; = Tmin | 0 °C; = Tmin |
| - For vertical installation, max. | 50 °C; = Tmax | 50 °C; = Tmax | 50 °C; = Tmax | 50 °C; = Tmax |
| Altitude during operation relating to sea level | | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | | |
| Coolants and lubricants | | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Comfort Panels Standard

Technical specifications

| Article number | 6AG1124-2DC01-4AX0 | 6AG1124-0GC01-4AX0 | 6AG1124-0JC01-4AX0 | 6AG1124-0MC01-4AX0 | |
|---|---|---|---|---|--|
| Based on | 6AV2124-2DC01-0AX0 SIPLUS HMI KTP400 COMFORT | 6AV2124-0GC01-0AX0 SIPLUS HMI TP700 COMFORT | 6AV2124-0JC01-0AX0 SIPLUS HMI TP900 COMFORT | 6AV2124-0MC01-0AX0 SIPLUS HMI TP1200 COMFORT | |
| Conformal coating | | | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection | |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | |
| Article number | 6AG1124-1DC01-4AX0 | 6AG1124-1GC01-4AX0 | 6AG1124-1JC01-4AX0 | 6AG1124-1MC01-4AX0 | 6AG1124-1QC02-4AX1 |
| Based on | 6AV2124-1DC01-0AX0 SIPLUS HMI KP400 COMFORT | 6AV2124-1GC01-0AX0 SIPLUS HMI KP700 COMFORT | 6AV2124-1JC01-0AX0 SIPLUS HMI KP900 COMFORT | 6AV2124-1MC01-0AX0 SIPLUS HMI KP1200 COMFORT | 6AV2124-1QC02-0AX1 SIPLUS HMI KP1500 Comfort |
| Ambient conditions | | | | | |
| Suited for indoor use | Yes | Yes | Yes | Yes | Yes |
| Suited for outdoor use | No | No | No | No | No |
| Ambient temperature during operation | | | | | |
| • Operation (vertical installation) | | | | | |
| - For vertical installation, min. | 0 °C; = Tmin | 0 °C; = Tmin | 0 °C; = Tmin | 0 °C; = Tmin | 0 °C |
| - For vertical installation, max. | 50 °C; = Tmax | 50 °C; = Tmax | 50 °C; = Tmax | 50 °C; = Tmax | 50 °C; (55 °C, see entry ID: 64847814) |
| Altitude during operation relating to sea level | | | | | |
| • Installation altitude above sea level, max. | 5 000 m | 5 000 m | 5 000 m | 5 000 m | 5 000 m |
| • Ambient air temperature-barometric pressure-altitude | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | | | |
| • With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | | | |
| Coolants and lubricants | | | | | |
| - Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | | | |
| - to biologically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request |
| - to chemically active substances according to EN 60721-3-3 | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-3 | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3S4 incl. sand, dust, * |

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Comfort Panels Standard

3

Technical specifications

| Article number | 6AG1124-1DC01-4AX0 | 6AG1124-1GC01-4AX0 | 6AG1124-1JC01-4AX0 | 6AG1124-1MC01-4AX0 | 6AG1124-1QC02-4AX1 |
|---|---|---|---|---|---|
| Based on | 6AV2124-1DC01-0AX0 SIPLUS HMI KP400 COMFORT | 6AV2124-1GC01-0AX0 SIPLUS HMI KP700 COMFORT | 6AV2124-1JC01-0AX0 SIPLUS HMI KP900 COMFORT | 6AV2124-1MC01-0AX0 SIPLUS HMI KP1200 COMFORT | 6AV2124-1QC02-0AX1 SIPLUS HMI KP1500 Comfort |
| Use on ships/at sea | | | | | |
| - to biologically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request |
| - to chemically active substances according to EN 60721-3-6 | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * | Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * |
| - to mechanically active substances according to EN 60721-3-6 | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | | | |
| - Against chemically active substances acc. to EN 60654-4 | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) | Yes; Class 3 (excluding trichlorethylene) |
| - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | | | |
| - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | | | |
| • Coatings for printed circuit board assemblies acc. to EN 61086 | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability | Yes; Class 2 for high reliability |
| • Protection against fouling acc. to EN 60664-3 | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection | Yes; Type 1 protection |
| • Military testing according to MIL-I-46058C, Amendment 7 | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life | Yes; Discoloration of coating possible during service life |
| • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A | Yes; Conformal coating, Class A |
| Article number | 6AG1124-0QC02-4AX1 | 6AG1124-0UC02-4AX1 | 6AG1124-0XC02-4AX1 | | |
| Based on | 6AV2124-0QC02-0AX1 SIPLUS HMI TP1500 Comfort | 6AV2124-0UC02-0AX1 SIPLUS HMI TP1900 Comfort | 6AV2124-0XC02-0AX1 SIPLUS HMI TP2200 Comfort | | |
| Ambient conditions | | | | | |
| Suited for indoor use | Yes | Yes | Yes | | |
| Suited for outdoor use | No | No | No | | |
| Ambient temperature during operation | | | | | |
| • Operation (vertical installation) | | | | | |
| - For vertical installation, min. | 0 °C | 0 °C; = Tmin | 0 °C; = Tmin | | |
| - For vertical installation, max. | 50 °C; (55 °C, see entry ID: 64847814) | 45 °C; = Tmax | 45 °C; = Tmax | | |

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Comfort Panels Standard

Technical specifications

| Article number | 6AG1124-0QC02-4AX1 | 6AG1124-0UC02-4AX1 | 6AG1124-0XC02-4AX1 |
|---|--|--|---|
| Based on | 6AV2124-0QC02-0AX1 SIPLUS HMI TP1500 Comfort | 6AV2124-0UC02-0AX1 SIPLUS HMI TP1900 Comfort | 6AV2124-0XC02-0AX1 SIPLUS HMI TP2200 Comfort |
| Altitude during operation relating to sea level | | | |
| <ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude | 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) | 5 000 m Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) |
| Relative humidity | | | |
| <ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) | 100 %; RH incl. condensation/frost (no commissioning under condensation conditions) |
| Resistance | | | |
| Coolants and lubricants | | | |
| <ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air | Yes; Incl. diesel and oil droplets in the air |
| Use in stationary industrial systems | | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * | Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * |
| Use on ships/at sea | | | |
| <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * | Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * |
| Usage in industrial process technology | | | |
| <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) | Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) |
| Remark | | | |
| <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! | * The supplied plug covers must remain in place over the unused interfaces during operation! |
| Conformal coating | | | |
| <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A | Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A |

Overview

SIMATIC S7-1200 Starter Kits make it quick and easy to implement simple automation tasks. The various packages allow flexible and efficient implementation of different tasks, from engineering with the TIA Portal, to the integration of HMI Panels, all the way to solutions for fail-safe applications.

The following are available:

- Starter Kit CPU 1212C AC/DC/relay;
Complete offer SIMATIC S7-1200, starter box, consisting of: CPU 1212C AC/DC/relay, simulator, STEP 7 BASIC, manual CD, SIMATIC OPC UA S7-1200 Basic Runtime license, info material, in Systainer
- SIMATIC S7-1200 + KP300 Basic Starter Kit;
Consisting of:
CPU 1212C AC/DC/relay, HMI KP300 Basic mono PN, input simulator, STEP 7 Basic, manual CD, SIMATIC OPC UA S7-1200 Basic Runtime license, Systainer
- SIMATIC S7-1200 + KTP400 Basic Starter Kit;
Consisting of:
CPU 1212C AC/DC/relay, HMI KTP400 Basic, input simulator, STEP 7 Basic, manual CD, SIMATIC OPC UA S7-1200 Basic Runtime license, Systainer
- SIMATIC S7-1200 + KTP700 Basic Starter Kit;
Consisting of:
CPU 1212C AC/DC/relay, HMI KTP700 Basic, input simulator, STEP 7 Basic, manual CD, SIMATIC OPC UA S7-1200 Basic Runtime license, Systainer
- SIMATIC S7-1200 Fail-Safe Starter Kit
 - With CPU 1212 FC DC/DC/relay;
also includes:
F-digital input SM 1226 16 x 24 V DC,
F-digital output SM 1226 4 x 24 V DC, input simulator, STEP 7 Basic and STEP 7 Safety Basic V16, SIMATIC OPC UA S7-1200 Basic, info material; in Systainer
 - With CPU 1214 FC DC/DC/relay;
also includes:
F-digital input SM 1226 16 x 24 V DC,
F-digital output SM 1226 4 x 24 V DC, input simulator, STEP 7 Safety Basic, SIMATIC OPC UA S7-1200 Basic, info material; in Systainer

Ordering data

Article No.

Starter Kit CPU 1212C AC/DC/relay

6ES7212-1BE34-4YB0

Complete offer SIMATIC S7-1200, starter box, consisting of:
CPU 1212C AC/DC/relay, simulator, STEP 7 BASIC, manual CD, SIMATIC OPC UA S7-1200 Basic Runtime license, info material, in Systainer

SIMATIC S7-1200 + KP300 Basic Starter Kit

6AV6651-7HA02-3AA4

Consisting of:
CPU 1212C AC/DC/relay, HMI KP300 Basic mono PN, input simulator, STEP 7 Basic, manual CD, SIMATIC OPC UA S7-1200 Basic Runtime license, Systainer

SIMATIC S7-1200 + KTP400 Basic Starter Kit

6AV6651-7KA02-3AA4

Consisting of:
CPU 1212C AC/DC/relay, HMI KTP400 Basic, input simulator, STEP 7 Basic, manual CD, SIMATIC OPC UA S7-1200 Basic Runtime license, Systainer

SIMATIC S7-1200 + KTP700 Basic Starter Kit

6AV6651-7DA02-3AA4

Consisting of:
CPU 1212C AC/DC/relay, HMI KTP700 Basic, input simulator, STEP 7 Basic, manual CD, SIMATIC OPC UA S7-1200 Basic Runtime license, Systainer

SIMATIC S7-1200 Fail-Safe Starter Kit

6ES7212-1HF41-4YB1

With CPU 1212 FC DC/DC/relay;
also includes:
F-digital input SM 1226 16 x 24 V DC,
F-digital output SM 1226 4 x 24 V DC, input simulator, STEP 7 Basic and STEP 7 Safety Basic V16, SIMATIC OPC UA S7-1200 Basic, info material; in Systainer

6ES7212-1HF42-4YB1

With CPU 1214 FC DC/DC/relay;
also includes:
F-digital input SM 1226 16 x 24 V DC,
F-digital output SM 1226 4 x 24 V DC, input simulator, STEP 7 Safety Basic, SIMATIC OPC UA S7-1200 Basic, info material; in Systainer

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

6ES7212-1HF42-4YB1

SIMATIC S7-1200 Basic Controllers

Add-on products from third-party manufacturers

SIMATIC S7-1200 CM CANopen

Overview



Note

The CM CANopen module is an HMS Industrial Networks product and can only be obtained through HMS.

The following description contains information on supplementary products that are manufactured and marketed, not by Siemens, but by third-parties outside the Siemens group ("external companies"). These external companies organize the manufacture, sale and delivery of their products independently. Their own terms and conditions of business and delivery apply.

Responsibility for these supplementary products and for the associated information presented here rests exclusively with the respective external company. Unless compulsory by law, Siemens assumes no liability and makes no guarantee for supplemental products of external companies. Please refer also to the note on "Exemption from liability/Use of hyperlinks" (see "More information").

Overview

An interface module is available for operating the SIMATIC S7-1200 on CANopen. It can be used together with system and IO components of the S7-1200 automation system.

CiA and CANopen are registered Community Trademarks of CAN in Automation e.V.

Application

CANopen is a widely used industrial bus system and can be used for a variety of different applications. The module allows simple and cost-effective connection of CANopen applications to SIMATIC.

- Control of hydraulic valves/axes in vehicles
- Control of motors in packaging machines or conveyors
- Capturing of angular encoder positions in wind turbines
- Capturing of control devices on machines, e.g. joysticks
- Capturing the measured data of path encoders, inclinometers or angular encoders, e.g. for tower cranes and gantry cranes

The CM CANopen module has the following properties:

- Interface module for CANopen (master/slave) for SIMATIC S7-1200
- Connection of up to 16 CANopen slave stations in the master mode
- 256 bytes of input data and 256 bytes of output data per module
- Connection of up to 3 modules per CPU
- 3 LEDs for module, network and I/O status diagnostics
- Possible integration of the module into the hardware catalog of the TIA Portal configuration suite
- Supports Transparent CAN 2.0A for processing customer-specific protocols
- CANopen implementation according to communication profiles CiA 301 Rev. 4.2 and CiA 302 Rev. 4.1 (master)

More information

The CANopen bus can be configured via any commercially available CANopen configuration tool. HMS Industrial Networks also supplies suitable "CM CANopen Configuration Studio" software with the product. The configuration is saved directly on the module by means of a USB connection. Routing via PROFIBUS/PROFINET is not possible.

Preprogrammed function blocks are available for easier PLC programming in the TIA Portal.

For further information, please contact HMS Industrial Networks directly:

<http://www.ixxat.com/cm-canopen>

Ordering and Support

Please note that ordering and support for the module are exclusively carried out via HMS Industrial Networks. Please contact HMS Industrial Networks directly should you have any questions concerning this module. The relevant contact details can be found on the Internet at

<http://www.ixxat.com/cm-canopen>

Exemption from liability/Use of hyperlinks

Siemens has prepared this description with great care. It is not possible, however, for Siemens to verify that the data supplied by external companies is complete, correct or up to date. The possibility that individual items of information might be incorrect, incomplete, or not up-to-date cannot therefore be ruled out. Unless compulsory by law, Siemens accepts no liability for the usability of the data or of the product for the user per se.

This article contains third-party Web addresses. Siemens is not responsible for the contents of these Web sites, nor does Siemens adopt these Web sites and their contents, as Siemens does not control the presented information and cannot be held responsible for the content and information they contain. You therefore use these links at your own risk.