

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow transmitters / SITRANS FM MAG 6000 I and 6000 I Ex

##### Overview



The SITRANS FM MAG 6000 I/MAG 6000 I Ex de transmitter is designed for the demands in the process industry. The robust die-cast aluminum housing provides superb protection, even in the most harsh industrial environments. Full input and output functionality is given even in the Ex version.

##### Benefits

- Full range of Ex-rated flowmeters with intrinsically safe rated input and outputs
- For compact or remote installation
- HART, FOUNDATION Fieldbus H1, DeviceNet, PROFIBUS PA and DP, Modbus RTU/RS 485 add-on communication modules available
- Superior signal resolution for optimum turn down ratio
- Digital signal processing with many possibilities
- Automatic reading of SENSORPROM data for easy commissioning
- User configurable operation menu with password protection
  - 3 lines, 20 characters display in 11 languages
  - Flow rate in various units
  - Totalizer for forward, reverse and net flow as well as much more information available
- Multiple functional outputs for process control, minimum configuration with analogue, pulse/frequency and relay output (status, flow direction, limits)
- Comprehensive self-diagnostic for error indication and error logging
- Batch control
- Conforming to NAMUR recommendations NE 21, NE 32, NE 43, NE 53 and NE 70
- Self verification

##### Design

The transmitter is designed for either compact or remote installation in non-hazardous or hazardous areas (compact mounted transmitter to be ordered together with the sensor).

##### Function

The following functions are available:

- Flow rate
- 2 measuring ranges
- 2 totalizers
- Low flow cut-off
- Flow direction
- Error system
- Operating time
- Uni-/bidirectional flow
- Limit switches and pulse output
- Batch control

The MAG 6000 I/6000 I Ex de is a microprocessor-based transmitter with a built-in alphanumeric display in several languages. The transmitters evaluate the signals from the associated electromagnetic sensors and also fulfil the task of a power supply unit which provides the magnet coils with a constant current.

Further information on connection, mode of operation and installation can be found in the data sheets for the sensors.

##### *Displays and keypads*

Operation of the transmitter can be carried out using:

- Keypad and display unit
- HART communicator
- PC/laptop and SIMATIC PDM software via HART communication
- PC/laptop and SIMATIC PDM software using PROFIBUS or Modbus communication

**Selection and ordering data**

		Article No. 7ME6930-
<b>SITRANS FM Transmitter MAG 6000 I</b> Remote with standard wall mounting bracket, local display, die cast aluminum		2 B A ● ● - 1 ● A 7
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
<b>Supply voltage</b>		2
Standard transmitter: 18 ... 90 V DC; 115 ... 230 V AC, 50 ... 60 Hz		4
Ex transmitter: 18 ... 30 V DC		5
Ex transmitter: 115 ... 230 V AC, 50 ... 60 Hz		
<b>Ex approval</b>		0
Standard sensor: FM Class I, Div 2, CSA Class I, Div 2		1
Standard sensor: no approval for use in hazardous areas		2
Ex sensor: Hazardous area (ATEX 2 GD; FM Class I, Zone 1; CSA Class I, Zone 1)		
<b>Communication</b>		A
None		B
HART		F
PROFIBUS PA Profile 3		G
PROFIBUS DP Profile 3 (not for Ex version)		E
Modbus RTU/RS 485 (not for Ex version)		J
FOUNDATION Fieldbus H1		
<b>Cable gland entries</b>		0
Metric		2
½" NPT		

1) Product Variation Request (PVR).

Order code	
<b>Further design</b>	
Please add "-Z" to Article No. and specify Order code(s) and plain text	
Tag name plate, stainless steel (specify in plain text)	Y17
Tag name plate, plastic (self-adhesive)	Y18
Special version (specify in plain text)	Y99

**Communication modules for MAG 6000 I (All standard outputs can still be used)**

Description	Article No.	
HART (only for MAG 6000 I/Ex)	FDK:085U0321	
Modbus RTU/RS 485 <sup>1)</sup>	FDK:085U0234	
PROFIBUS PA Profile 3	FDK:085U0236	
PROFIBUS DP Profile 3 <sup>1)</sup>	FDK:085U0237	
DeviceNet <sup>1)</sup>	FDK:085U0229	
FOUNDATION Fieldbus H1	A5E02054250	

1) Not for Ex versions

**Accessories for MAG 6000 I/6000 I Ex**


Description	Article No.	
<b>Standard coil or electrode cable</b> 3 x 1.5 mm <sup>2</sup> /18 gage, single shielded with PVC jacket Temperature range: -30 ... +70 °C (-22 ... +158 °F)		
• 5 m (16.5 ft)	A5E02296523	
• 10 m (33 ft)	FDK:083F0121	
• 20 m (65 ft)	FDK:083F0210	
• 30 m (98 ft)	A5E02297309	
• 40 m (131 ft)	FDK:083F0211	
• 50 m (164 ft)	A5E02297317	
• 60 m (197 ft)	FDK:083F0212	

## Flow Measurement

### SITRANS FM (electromagnetic)

#### Flow transmitters / SITRANS FM MAG 6000 I and 6000 I Ex

##### Selection and ordering data (continued)

Description	Article No.	
• 100 m (328 ft)	FDK:083F0213	
• 150 m (492 ft)	FDK:083F3052	
• 200 m (656 ft)	FDK:083F3053	
• 500 m (1640 ft)	FDK:083F3054	
<b>Special electrode cable (empty pipe detection or low conductivity)</b> 3 x 0.25 mm <sup>2</sup> , double shielded with PVC jacket Temperature range: -30 ... +70 °C (-22 ... +158 °F)		
• 10 m (33 ft)	FDK:083F3020	
• 20 m (65 ft)	FDK:083F3095	
• 40 m (131 ft)	FDK:083F3094	
• 60 m (197 ft)	FDK:083F3093	
• 100 m (328 ft)	FDK:083F3092	
• 150 m (492 ft)	FDK:083F3056	
• 200 m (656 ft)	FDK:083F3057	
• 500 m (1640 ft)	FDK:083F3058	
<b>Cable kit including standard coil cable and special electrode cable</b> Standard coil cable: 3 x 1.5 mm <sup>2</sup> / 18 gage, single shielded with PVC jacket Special electrode cable: 3 x 0.25 mm <sup>2</sup> , double shielded with PVC jacket) Temperature range: -30 ... +70 °C (-22 ... +158 °F)		
• 5 m (16.5 ft)	A5E02296329	
• 10 m (33 ft)	A5E01181647	
• 15 m (49 ft)	A5E02296464	
• 20 m (65 ft)	A5E01181656	
• 25 m (82 ft)	A5E02296490	
• 30 m (98 ft)	A5E02296494	
• 40 m (131 ft)	A5E01181686	
• 50 m (164 ft)	A5E02296498	
• 60 m (197 ft)	A5E01181689	
• 100 m (328 ft)	A5E01181691	
• 150 m (492 ft)	A5E01181699	
• 200 m (656 ft)	A5E01181703	
• 500 m (1640 ft)	A5E01181705	
<b>Low noise electrode coax cable for low conductivity and high vibration levels</b> 3 x 0.13 mm <sup>2</sup> . Temperature range -25 °C ... +85 °C (-13 °F ... +185 °F)		
• 2 m (6.6 ft)	A5E02272692	
• 5 m (16.5 ft)	A5E02272723	
• 10 m (33 ft)	A5E02272730	

##### Spare parts

Description	Article No.	
Display unit	FDK:085U3122	

**Selection and ordering data (continued)**

Description	Article No.	
Accessory bag including cable gland inserts and connectors for sensor cables	FDK:085U3144	
Display lid (non-Ex, Ex) in die-cast aluminum, with corrosion resistant coating (min. 60 µm)	7ME5933-0AC01	
Blind lid for sensor cables connection compartment (only remote version) in die-cast aluminum, with corrosion resistant coating (min. 60 µm) incl. O-ring seal	7ME5933-0AC02	
Blind lid (mains supply, input/outputs) in die-cast aluminum, with corrosion resistant coating (min. 60 µm)	7ME5933-0AC03	
Safety clamp	7ME5933-0AC06	
Standard wall-mounting bracket, stainless steel AISI 316L/1.4404	7ME5933-0AC04	
Special wall-mounting bracket, BI 2.5 DIN 59382 X6Cr17	7ME5933-0AC05	

**Complete spare part PCB unit**

Description	Article No.	
MAG 6000 I std. (not for Ex), 18 ... 30 V DC; 115 ... 230 V AC Spare PCBA	FDK:085U3123	
MAG 6000 I Ex d 115 ... 230 V AC Spare PCBA only for use with Ex approved sensor and explosion protection "Increased safety" (Ex e)	A5E01013127	
MAG 6000 I Ex d 18 ... 30 V DC Spare PCBA only for use with Ex approved sensor and explosion protection "Increased safety" (Ex e)	A5E01013340	

Please use online Product selector to get latest updates.

# Flow Measurement

## SITRANS FM (electromagnetic)

### Flow transmitters / SITRANS FM MAG 6000 I and 6000 I Ex

#### Selection and ordering data (continued)

Product selector link:

<http://www.pia-portal.automation.siemens.com>

#### Technical specifications

##### MAG 6000 I and MAG 6000 I Ex

<b>Mode of operation</b>	Electromagnetic with pulsed constant field
Measuring principle	Detection of empty pipe (special cable required in remote mounted installation)
Empty pipe	Depend on sensor size
Excitation frequency	> $1 \times 10^{14}$ Ω
Electrode input impedance	
<b>Input</b>	
Digital input	11 ... 30 V DC, $R_i = 4.4 \text{ k}\Omega$
• Activation time	50 ms
• Current	$I_{11 \text{ V DC}} = 2.5 \text{ mA}, I_{30 \text{ V DC}} = 7 \text{ mA}$
<b>Output</b>	
Current output	4 ... 20 mA (active/passive)
• Signal range	< 560 Ω
• Load	0.1 ... 30 s, adjustable
Digital output	0 ... 10 kHz, 50 % duty cycle (uni-/bidirectional)
• Frequency	0.1 ... 30 s, adjustable
• Time constant	3 ... 30 V DC, max. 110 mA (30 mA Ex version), $200 \Omega \leq R_i \leq 10 \text{ k}\Omega$ (powered from connected equipment)
• Pulse (passive)	0.1 ... 30 s, adjustable
• Time constant	
Relay output	Changeover relay, same as current output
• Time constant	
• Load	42 V AC/2 A, 24 V DC/1 A
<b>Low flow cut off</b>	0 ... 9.9 % of maximum flow
<b>Galvanic isolation</b>	All inputs and outputs are galvanic isolated.
<b>Max. measuring error</b>	
MAG 6000 I/MAG 6000 I Ex (incl. sensor)	± 0.2 % ± 1 mm/s
<b>Rated operation conditions</b>	
Ambient temperature	
• Operation	
- MAG 6000 I <sup>2)</sup>	-20 ... +60 °C (-4 ... +140 °F)
- MAG 6000 I Ex <sup>2)</sup>	-20 ... +60 °C (-4 ... 140 °F)
• Storage	-40 ... +70 °C (-40 ... +158 °F)
Mechanical load	18 ... 1000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36
	Transmitter: 1.14 g RMS
Degree of protection	IP67/NEMA 4X to IEC 529 and DIN 40050 (1 mH <sub>2</sub> O 30 min.)
EMC performance	<ul style="list-style-type: none"> <li>• IEC/EN 61326-1 (all environments)</li> <li>• IEC/EN 61326-2-5</li> <li>• NAMUR NE 21</li> </ul>
<b>Display and keypad</b>	
Totalizer	Two eight-digit counters for forward, net or reverse flow
Display	Background illumination with alphanumeric text, 3 x 20 characters to indicate flow rate, totalized values, settings and faults; Reverse flow indicated by negative sign
Keypad	Capacitive touch keypad with LED light for feedback indication
Time constant	Time constant as current output time constant

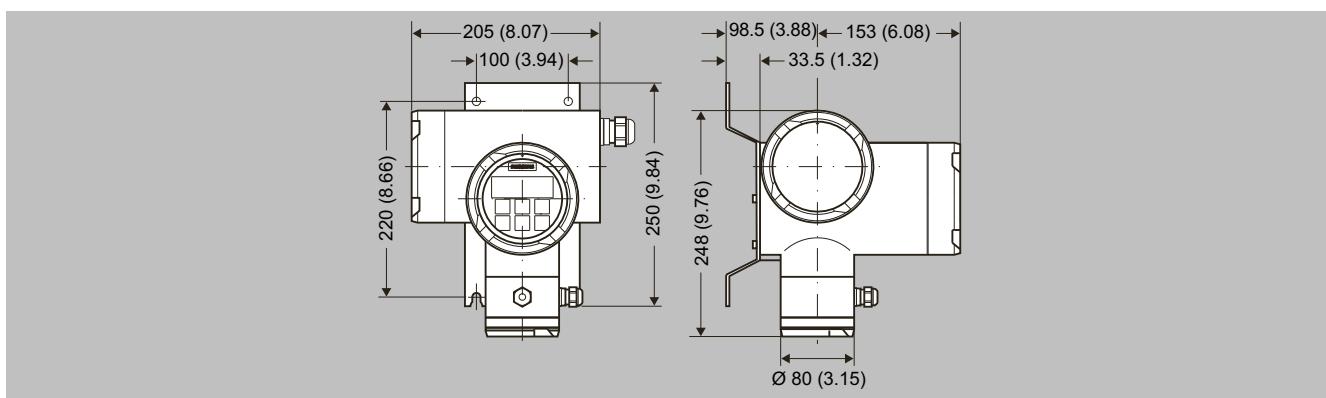
#### Technical specifications (continued)

##### MAG 6000 I and MAG 6000 I Ex

<b>Design</b>	Die-cast aluminum, with corrosion resistant Basic Polyester powder coating (min. 60 µm) Wall mounting bracket enclosed for remote version
Enclosure material	See dimensional drawings
Dimensions	See dimensional drawings
Weight	
<b>Power supply</b>	<ul style="list-style-type: none"> <li>• Standard transmitter: 18 ... 90 V DC; 115 ... 230 V AC, 50 ... 60 Hz</li> <li>• Ex transmitter: 18 ... 30 V DC</li> <li>• Ex transmitter: 115 ... 230 V AC; 50 ... 60 Hz</li> </ul>
Power consumption	<ul style="list-style-type: none"> <li>• 230 V AC: 20 VA</li> <li>• 24 V DC: 9.6 W, <math>I_N = 0.4 \text{ A}, I_{ST} = 1 \text{ A (3 ms)}</math></li> </ul>
<b>Certificates and approvals</b>	
General purpose	<ul style="list-style-type: none"> <li>• CE (LVD, EMC, PED, RoHS)</li> </ul>
Hazardous areas	<ul style="list-style-type: none"> <li>• ATEX, IECEx, FM, CSA, EAC Ex, NEPSI           <ul style="list-style-type: none"> <li>- Zone 1 Ex d e [ia] ia IIC T6 Gb</li> </ul> </li> <li>• ATEX, IECEx, CSA           <ul style="list-style-type: none"> <li>- Zone 21 Ex tD A21 IP67 T85 °C</li> </ul> </li> <li>• FM           <ul style="list-style-type: none"> <li>- XP IS Class I Div. 1 Groups A, B, C, D</li> <li>- DIP Class II+III Div. 1 Groups E, F, G</li> </ul> </li> </ul>
Others	<ul style="list-style-type: none"> <li>• CPA (China)</li> <li>• EAC (Russia, Belarus, Kazakhstan)</li> <li>• KCs (South Korea)</li> </ul>
<b>Cable entries</b>	
MAG 6000 I	<ul style="list-style-type: none"> <li>• Power supply and outputs 2 × M20 (HART)/M25 (PROFIBUS) or 2 × ½" NPT (HART)</li> <li>• Sensor connection 2 × M16 or 2 × ½" NPT</li> </ul>
MAG 6000 I Ex ATEX 2G D	<ul style="list-style-type: none"> <li>• Power supply and outputs 2 × M20</li> <li>• Sensor connection 2 × M16</li> </ul>
<b>Communication</b>	
Standard versions	HART, Modbus RTU/RS 485, FOUNDATION Fieldbus H1, DeviceNet, PROFIBUS PA, PROFIBUS DP add-on modules
Ex versions	HART, PROFIBUS PA (not for Ex version)

<sup>1)</sup> Applicable for: Compact mounted MAG 6000 I Ex on MAG 3100, sizes DN 15 ... 300 (½" ... 12").

<sup>2)</sup> With HART communication max. ambient temperature 50 °C (122 °F).

**Dimensional drawings**

SITRANS FM transmitter MAG 6000 I with wall-mounting bracket, dimensions in mm (inch)